VK Leading Light

2024 2025
TECHNICAL
OUTDOOR + LED LAMPS

VK Leading Light

Since 1978

Technical Lighting

Indoor & Outdoor

BEWA

THE

A
Short
Photographic

ARE OF

VIEWS

A light chronicle

Beware of the views. You think you know light,
we think we know light; but light never ceases to amaze us in every way possible.
The works seen inside this edition demonstrate this, by transforming and sculpting everything into whimsical landscapes, into memorable scenes,
and into unassailable goddesses. So, beware of the views

Story of
Light
by VK Leading Light






A short journey of observation and meditation, highlighting the deeper essence of things. The hitherto, remote

Everything on display here are aware of their temporary

Until they all disappear and become light again. The trip to

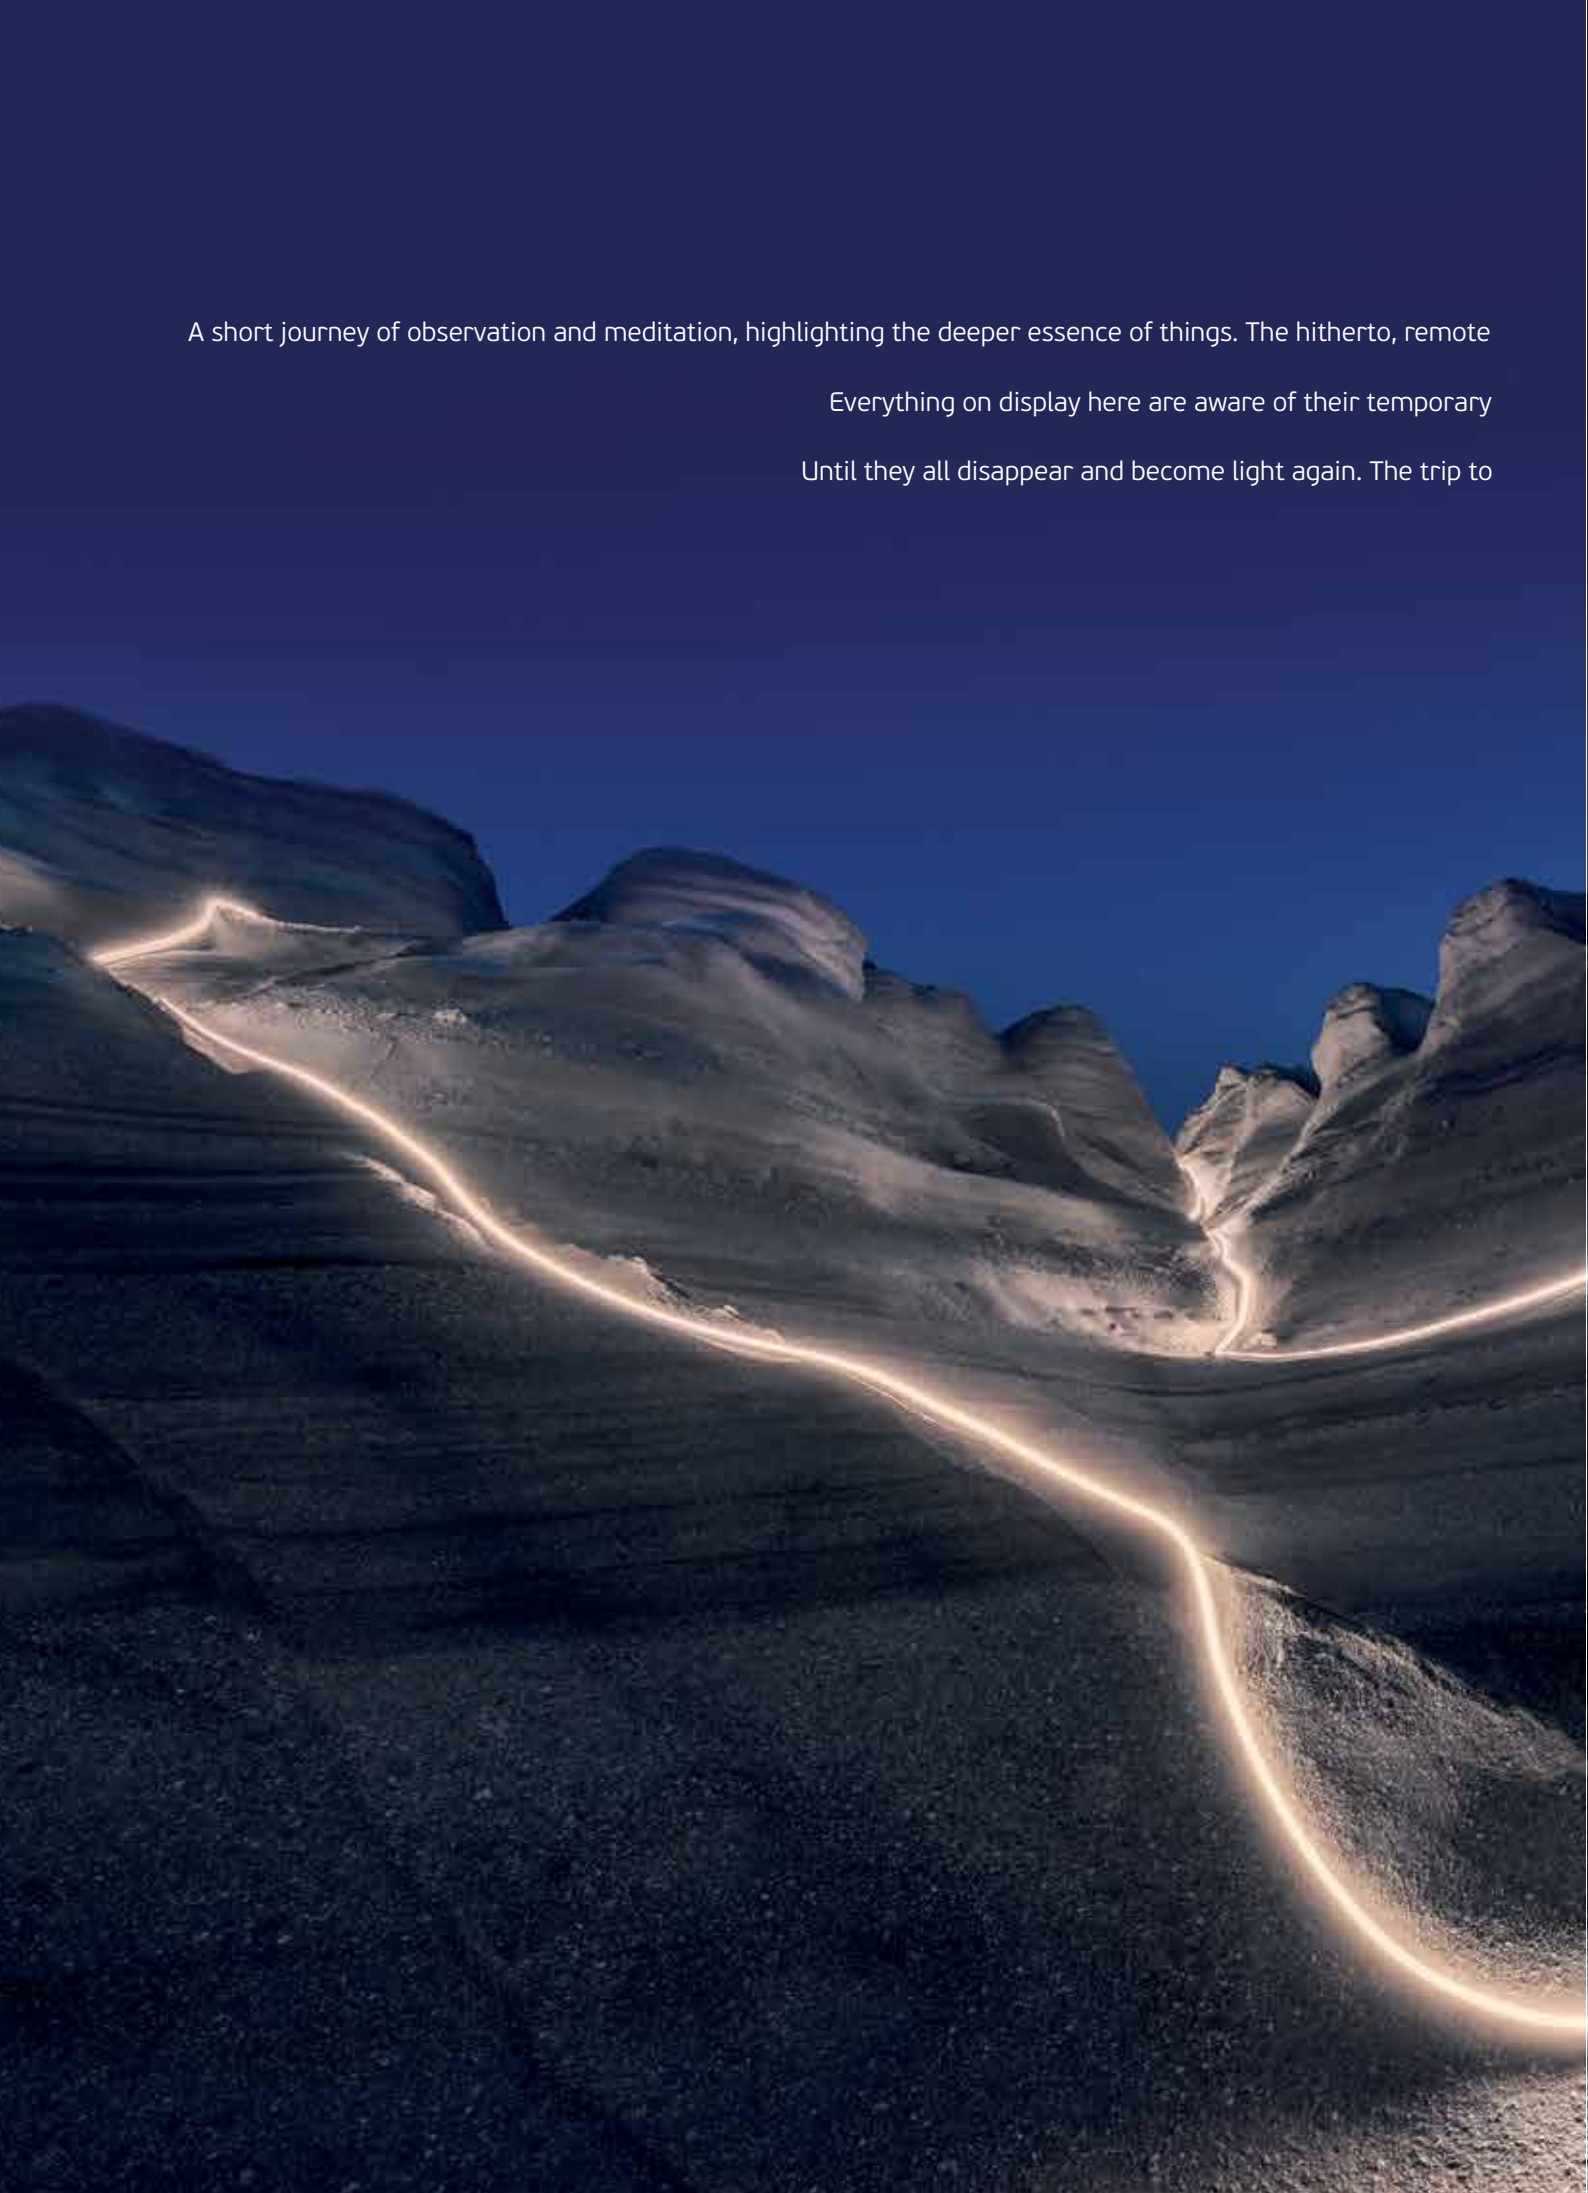


acquaintance with light, finds its true meaning here. Where light and time are born, reflected, and diffused together.

nature and have certainly benefited from the lessons of Time.

Sarakiniko, deep and lethargic, a short journey to the ocean of our desires

The trip to Sarakiniko

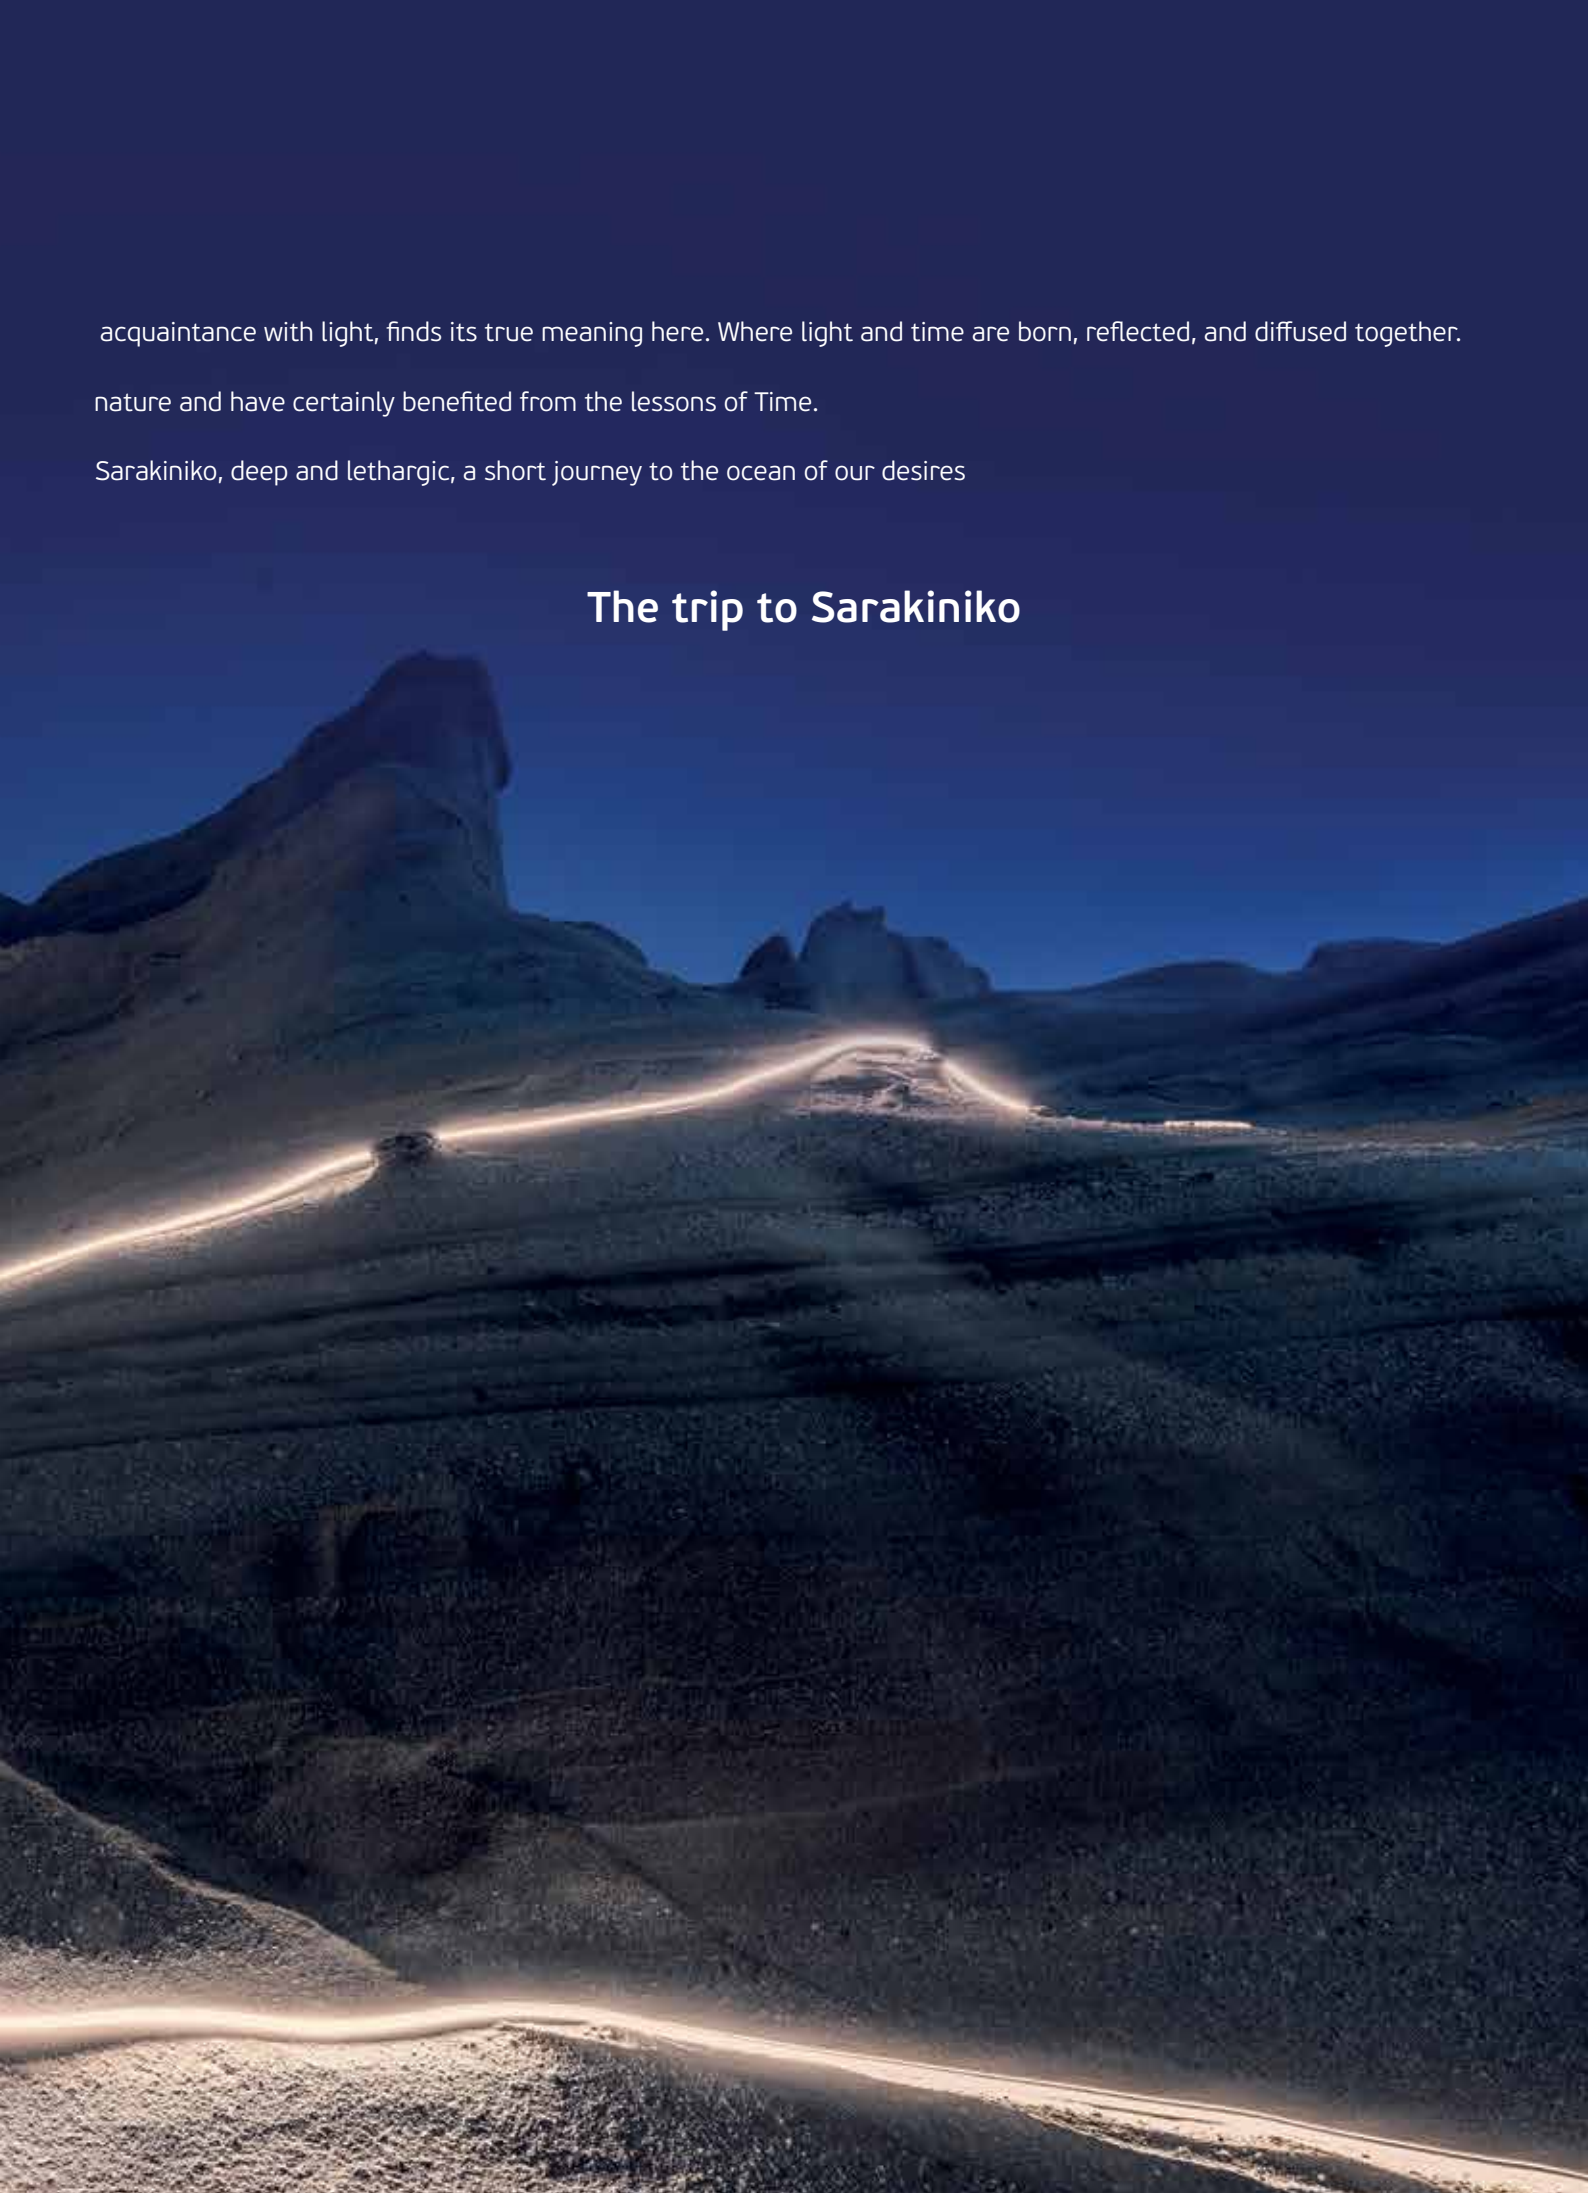

VK Leading Light

Since 1978

A: 8 Aristotelous St, Tavros, 177 78 Athens, Greece
T: +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075
F: +30 210 99 58 374
E: info@vkleadinglight.gr
W: vkleadinglight.gr

Working Hours Monday - Friday 8:00 - 18:00

Saturday 9:00 - 14:00

index

INDEX

High quality, flexible Led, silicone phototube, Ledstrips

Pages 36-107

40 VK/24/2110W/180/6

41 VK/24/2835W/168/10

VK/24/3838W/RGB/144/10

42 VK/24/2835W/240/30

VK/24/3838W/RGB/240/30

43 VK/24/2835W/168/6

VK/24/3838W/RGB/120/6

44 VK/24/2110W/AL/6

VK/24/2835W/AL/10

VK/24/2835W/FLEX/AL/10

45 VK/24/2835W/AL/30

VK/24/2835W/FLEX/AL/30

VK/24/2835W/AL/6

VK/24/2835W/FLEX/AL/6

46 VK/24/2835W/140/11

47 VK/24/2835W/140/19

48 VK/24/5050W/RGB/96/19

50 VK/08/11/AL

51 VK/08/19/AL

52 VK/24/2835W/240

53 VK/24/2835W/ACCESS

56 VK/24/2835S/.../120

VK/24/2835S/RGB/60

57 VK/24/COB/.../512

58 VK/24/2835/.../240/42W

59 VK/24/2835/.../320

60 VK/24/2216/.../60

61 VK/24/2216/.../120

62 VK/24/2216/.../180

63 VK/24/2216/.../240

64 VK/24/2216W/.../60

65 VK/24/2216W/.../120

66 VK/24/2216W/.../180

67 VK/24/2216W/.../240

68 VK/12/3528/60

69 VK/24/3528/60

70 VK/12/3528/96

71 VK/24/3528/96

72 VK/12/3528/120

73 VK/24/3528/120

74 VK/12/5050/60

75 VK/24/5050/60

76 VK/24/2835/240

77 VK/24/2835/120

78 VK/12/3528J/60

79 VK/24/3528J/60

80 VK/24/5050J/30

VK/12/5050J/30

82 VK/24/3528J/96

VK/12/3528J/96

84 VK/24/3528J/120

VK/12/3528J/120

86 VK/24/5050J/60

87 VK/12/5050J/60

88 VK/24/3528W/60

VK/12/3528W/60

90 VK/24/3528W/96

91 VK/12/3528W/96

92 VK/24/3528W/120

93 VK/12/3528W/120

94 VK/24/5050W/60

VK/12/5050W/60

96 VK/24/5050/CCT/60

97 VK/FUT092

VK/FUT039S

98 VK/5050/RGB/30

99 VK/5050/RGB/60

100 VK/24/3838/RGB/240

VK/24/3838W/RGB/240

102 VK/24/5050/RGBW/60

VK/24/5050J/RGBW/60

104 VK/12/5050/MC/30

VK/12/5050W/MC/30

105 VK/12/MC/25M

VK/12/MC/100M

VK/12/MC/AMP

106 BA-M-CX-G5
BA-L-CX-G5

Led strips profiles IP20/IP65

Pages 108-127

110 VK/18

VK/19

111 VK/16

VK/17

112 VK/11

VK/13

VK/14


113 VK/15

VK/23

114 VK/09

115

VK/10

VK/21

VK/20
116

VK/22

VK/24

VK/25
117

VK/PROF/SRK

VK/PROF/RES

VK/PROF/CON/I

VK/PROF/CON/L
118

VK/PROF/CON/L/3D

VK/26

VK/27
120

VK/00/AL

VK/01/SLIM/AL

VK/01/DEEP/SLIM/AL
121

VK/K01/SLIM
122

VK/01/AL

VK/12/AL

VK/D1/AL
123

VK/03/SLIM/AL

VK/D2/AL

VK/02/AL

VK/K01

VK/K01/NEON

VK/K01U
124

VK/04R/AL

VK/04/AL

VK/06/AL
125

VK/09034
126

VK/K04

VK/01R/DEEP/ TRIMLESS/AL

VK/07R/ TRIMLESS/AL
127

VK/K01

VK/K07

Drivers for Led strips 24V/12V

Pages 128-149

130

VK/LRS-50

VK/LRS-100

VK/LRS-150

VK/LRS-200
131

VK/LRS-350

VK/HDR-60

VK/HDR-100
132

VK/15-25-36

VK/60-75-100-200
133

VK/150-200
134

VK/250-350

VK/600

VK/LV12

VK/LV26

VK/LV36

VK/LV50
135

VK/LV75

VK/LV100

VK/LV120

VK/LV150
136

VK/LV60W24CG

VK/LV100W24CG

VK/LV150W24CG

VK/LV250W24CG
137

VK/LV60W24CG/DA

VK/LV100W24CG/DA

VK/LV150W24CG/DA

VK/LV250W24CG/DA
138

VK/APV-16

VK/APV-25
139

VK/LPV-20

VK/LPV-35

VK/LPV-60

VK/LPV-100

VK/LPV-150
140

VK/10E

VK/30E

VK/45E

VK/60E
141

VK/100E
143

VK/150E

VK/200E

VK/10082

VK/10083

VK/10084

VK/10085
VK/10086
144

VK/LVD50

VK/LVD75

VK/LVD100

VK/LVD120

INDEX

145

VK/LV150

VK/10076/PD

VK/CV/DIM/DALI

VK/10077/DIN
146

VK/ELG-100-24DA

VK/ELG-150-24DA

VK/10081 /0-10V
148

LD-250W-RF

DM-400B-RF

DM-DGL/B
149

RF-CTRL

VK/53008/D

GALAXY

DIM MCU

Controllers/Dimming/DMX

Pages 150-170

152

VK/FUT095

VK/FUT092
153

VK/FUT006
154

VK/FUT/TR/RCS

VK/FUT/TR/BAT
156

VK/FUT036S

VK/FUT037S

VK/FUT038S
157

VK/FUT039S

VK/FUT035
158

VK/FUT037S/ PLUS

VK/TRI-CI
160

VK/P/24506

VK/P/24606
161

VK/10074/DMX

VK/10075/DMX
162

VK/DIM500-PWM

A40PLKE1090B

A40PLKE2050B
163

VK/10080/RP
164

VK/10078/RP

VK/RP308

Oti Dali 50W/ Oti Dali 80W

Oti Dali 160W

Oti Dali 210W
165

VK/10079/DALI

VK/10073/DALI

VK/DALI/PCU/TW
166

VK/LC350PWM

VK/LC700PWM
167

VK/L3-5-360

VK/CT309RF

VK/LC350

VK/LC500

VK/LC630

VK/LC700
168

A40PBX100D0B-150D0B

A40SLBOX60DB

A40PBF060D0B-100D0B
169

A40DALI1103B
170

A40PBX200D0B

VK/GU10-E27/ EME/3A

VK/GU10-E27/ EME/6A

Recessed Downlights Led

Pages 172-181

176

VK/04612
177

VK/04612/2
178

VK/04612/TL
180

VK/04147

VK/04148
181

VK/04226

Recessed Dark downlights Led

Pages 182-217

184

VK/04345

185

VK/04346

186

VK/04339


VK/04340

188

VK/04616


VK/04617

190

VK/04610/W-CB/W

192

VK/04611

194

VK/04440


VK/04492

195

VK/04445


VK/04493

196

VK/04446


VK/04447


VK/04448

198

VK/04449


VK/04450

200

VK/04299


VK/04299/2

202

VK/04218


VK/04219

203

VK/04220


VK/04221

204

VK/04265

206

VK/04261

208

VK/04264

210

VK/04263

211

VK/04262

212

VK/04436


VK/04437


VK/04438


VK/04439

214

VK/04429

216

VK/04146


VK/04222

Square Dark downlights Led

Pages 218-227

220

VK/04267/6


VK/04267/9


VK/04267/12

222

VK/04266TR/3


VK/04266TR/6

224

VK/04441

VK/04442

VK/04443

226

VK/04618

VK/04618/2

227

VK/04618/5

VK/04618/10

VK/04618/15

Recessed Led

Pages 228-239

230

VK/04127

VK/04126

232

VK/04128

VK/04097

234

VK/04124

VK/04125

VK/04108

235

VK/04123

236

VK/04290

VK/04291

VK/04292

237

VK/04083/W

VK/04084/W

238

VK/04145

INDEX

Led Downlights waterproof

Pages 240-249

242

VK/04613

244

VK/04435/38


VK/04435/68-83-98

246

VK/04614


VK/04615

248

VK/04149


VK/04150

Recessed Spots for GU10/MR16

Pages 250-281

252

VK/03009G


VK/03010G

253

VK/03008G


VK/03011G

254

VK/03068


VK/03069


VK/03070


VK/03071

256

VK/03299G

258

VK/03306

260

VK/03307

262

VK/03308

264

VK/03015G


VK/03014G

265

VK/03014G/2


VK/03014G/3

266

VK/03113G


VK/03114G

267

VK/03065G

268

VK/03012G


VK/03013G

269

VK/03012G/HQ

270

VK/03192G


VK/03191G

272

VK/03304G


VK/03305G

274

VK/03193G


VK/03194G

275

VK/03292G

276

VK/03291G


VK/03293G

278

VK/03294G


VK/03184

VK/03185

280

VK/03115

VK/03116

281

VK/03116/2

VK/03116/3

Recessed Trimless Spots MR16 IP65

Pages 282-289

284

VK/03290

285

VK/03287

286

VK/03195/W

VK/03058/W

287

VK/03034

VK/03035

288

VK/03059

VK/03208

VK/03332

289

VK/03196

VK/03197

Gypsum Spots

Pages 290-301

292 VK/09004 VK/09002 VK/09029

293 VK/09003 VK/09001 VK/09006

294 VK/09072

295 VK/09075

296 VK/09005

VK/09081

297 VK/09060 VK/09061 VK/09062

298 VK/09008 VK/09007 VK/09078

299 VK/09030 VK/09009 VK/09080

300 VK/09077

301 VK/09031 VK/09032 VK/09033

Led panels

Pages 302-337

304 VK/04019/W

305 VK/04019/MF

VK/04019/RF

306 VK/04041/W VK/04051/W

307 VK/04051/MF VK/04041/MF VK/04051/RF VK/04041/RF

308 VK/04019/W/C/54/45

VK/04041/W/C/54/45

309 XITANIUM 45W...

EASYAIR OCCU...

310 VK/04424/W

311 VK/04424/MF

VK/04019/RF

312 VK/04426/W

313 VK/04426/MF

VK/04041/RF

314 VK/04019/W/RC

VK/LVD/PANEL

OTi DALI 35/LT2

VK/LV40W/PANEL/DALI

315 VK/04019/SRK VK/04041/SRK

316 VK/04072 VK/04073 VK/04048 VK/04074 VK/04049

318 VK/04050 VK/04017 VK/04075 VK/04076 VK/04077 VK/04078 VK/04079 VK/04080 VK/04018

320 VK/04015

VK/04014

322 VK/04287

324 VK/04286

326 VK/04289, VK/04288

328 VK/04289/2, VK/04288/2

330 VK/04556 -VK/04560

332 VK/04347/CE/.../45-95

334 VK/04347/33-43-53

335 VK/04347/73-103

336 VK/04348/.../35-55

INDEX

3 Phase Track Lights

Pages 338-395

340

VK/19B


VK/32B/L1


VK/32B/R1

341

VK/28B/L


VK/28B/R


VK/24B/L


VK/24B/R

342

VK/30B


VK/25B


VK/26B

343

VK/34B


VK/85


VK/38B


VK/37D


VK/35B

344

VK/29B


VK/87


VK/FLAPS

345

VK/19R


VK/24R

346

VK/25R


VK/28R


VK/29R


VK/30R


VK/32R


VK/35R

348

VK/19DA


VK/24DA/.../L


VK/24DA/.../R


VK/28DA/.../L


VK/28DA/.../R


VK/32DA/.../L


VK/32DA/.../R

349

VK/26DA


VK/34DA


VK/30DA


VK/29DA


VK/25DA


VK/85DA


VK/35DA

VK/19DA/COV

350

VK/04572/TR

352

VK/04428/TR

VK/04428/REF

354

VK/04119 12°

VK/04119 24°

355

VK/04120 12°

VK/04120 24°

356

VK/04121 12°

VK/04121 24°

357

VK/04228

VK/LENSE

VK/ANTIGLARE-NET

358

VK/04020

359

VK/04021

360

VK/04022

361

VK/04117

VK/04118

362

VK/04116

VK/04122

363

VK/04107

VK/04081

364

VK/04453/TR

365

VK/04082

366

VK/04452/TR

367

VK/04431,
VK/04432

368

VK/03303/TR

369

VK/03190TR

370

VK/04197TR/S

VK/03093TR

371

VK/03198TR

VK/04196TR

372

VK/04350G/TR

VK/04043TR

373

VK/03094TR

VK/04197TR/L

374

VK/04052TR/2/S

VK/04071G

375

VK/04052TR/S

VK/04052TR/L

376

VK/03109TR

VK/03045

377

VK/03025

VK/03183TR

378

VK/04198TR

VK/04199TR

379

VK/04053TR/L

VK/04053TR/2/S

380

VK/04071G/R111

VK/04071E

381

VK/03045/S

VK/04053TR/S

382

VK/04477/TR

384

VK/04350/TR

386

VK/04350/TR/D

387

VK/04350/
HONEYCOMB

388

VK/04352/TR

390

VK/04352/TR/D

391

VK/04352/
HONEYCOMB

392

VK/04354/TR

394

VK/04354/TR/D

395

VK/04354/ HONEYCOMB

Ento, Led Round Magnetic Track 48V Dali

Pages 396-421

398

VK/04623/TR/R

400

VK/04623/TR/S

402

VK/04623/TR/PC

404

VK/04623/ TR/ICON


VK/04623/ TR/S/CON


VK/04623/ TR/SRK/S

406

VK/04624/TR/DA

408

VK/04625/TR/DA

410

VK/04626/TR/DA

412

VK/04627/TR/DA

414

VK/04628/TR/DA

416

VK/04629/TR/DA

418

VK/04630/TR/DA

420

VK/04631/TR/PE/DA

Eiva, LED Magnetic Track Lights 48V. Slim. Dali.

Pages 422-453

424

VK/04583/TR/S


VK/04586/TR/S


VK/04588/TR/TL

426

VK/04598/TR/R

428

VK/04584 / TR/CON/LH


VK/04585 / TR/CON/LV


VK/04587 / TR/CON/LH


VK/04599 / TR/CON/LV

429

VK/04589 / TR/CON/LH/B


VK/04590 / TR/CON/LV/B


VK/04591 / TR/PC/R/B


VK/04592 / TR/PC/S/B

430

VK/04593 / TR/CC/B


VK/04595 / TR/PP/B


VK/04596 / TR/PP/100/B


VK/04597 / TR/PP/200/B

431

VK/04594/ TR/SRK/1.5

432

VK/04600/TR/DA

434

VK/04601/ TR/DA/13


VK/04601/ TR/DA/22

436

VK/04602/ TR/DA/13


VK/04602/ TR/DA/22

438

VK/04603/TR/DA

440

VK/04604/TR/DA

VK/04605/TR/DA

442

VK/04604/TR/DA

VK/04605/TR/DA

443

VK/04604/ TR/RING

VK/04605/ TR/RING

444

VK/04604/ TR/DA

446

VK/04605/ TR/DA

VK/04606/TR/DA

448

VK/04607/ TR/DA/100

VK/04607/ TR/DA/120

450

VK/04608/ TR/DA/75

VK/04609/ TR/DA

INDEX

Kona, LED Magnetic Track Lights 48V. Dali. On-off. 0-10

Pages 454-487

456

VK/04360TR/S

VK/04360TR/R

VK/04360TR/TL
458

VK/04363/S/B/LR

VK/04363/S/B/IC

VK/04363/S/B/OC
459

VK/04363/RC/B/LR

VK/04363/RC/B/IC

VK/04363/RC/B/OC
460

VK/04363/TL/B/LR

VK/04363/TL/B/IC/LR

VK/04363/TL/B/OC/LR
461

VK/04361/B

VK/04364/B/PC/2

VK/04364/B/PC
462

VK/04365/B

VK/04360/SRK
463

VK/LV100W48CG

VK/LV150W48CG

VK/LV250W48CG
464

VK/04366/B/6


VK/04366/B/12

VK/04366/B/18
466

VK/04367/B/6

VK/04367/B/12

VK/04372/B
468

VK/04368/B/9

VK/04368/B/15

VK/04368/B/25
469

VK/04369/B
470

VK/04370/B/13

VK/04370/B/20
472

VK/04371/B/20

VK/04371/B/28
474

VK/04373/B

VK/04374/B

VK/04375/B
475

VK/04376/B/12
476

VK/04376/B/HC/15

VK/04377/B/HC/18

VK/04377/B/HC/25
478

VK/04378/B/ZM

VK/04379/B/ZM

VK/04380/B/ZM
479

VK/04381/B/ZM
480

VK/04433/TR
482

VK/04382/CE/B

Bisqit, LED Magnetic Track Lights 48V. Ultra Slim (Zigbee)

Pages 488-521

490

VK/04478
491

VK/04479

VK/04480

VK/04481
492

VK/04482

VK/04483

VK/04484
493

VK/04490
494

VK/04488
496

VK/04460/.../6
498

VK/04467/.../6
500

VK/04468/.../6
502

VK/04460/.../12
504

VK/04467/.../12
506

VK/04468/.../12
510

VK/04469/.../S

VK/04469/.../S/2
511

VK/04469/.../L

VK/04469/.../L/2
512

VK/04470/.../S

VK/04470/.../L
513

VK/04471
514

VK/04472

VK/04472/.../2
515

VK/04473

VK/04489
516

VK/04474
518

VK/04475
520

VK/04476

Kopi, LED Magnetic Track Lights 24V.

Pages 522-543

524

VK/04203TR/S


VK/04203TR/R

526

VK/04215TR/S/L-R/B


VK/04214TR/S/INN/B


VK/04214TR/S/OUT/B

527

VK/04213TR/R/L-R/B


VK/04212TR/R/INN/B


VK/04212TR/R/OUT/B

528

VK/04216TR/R/CON/B


VK/04216TR/P/CON/B

529

VK/04217TR/PC/B


VK/04218TR/COV/B


VK/04203TR/SRK

530

VK/LPV-60


VK/LPV-100


VK/LPV-150

532

VK/04207TR/LIN37


VK/04207TR/LIN56


VK/04207TR/LIN74

534

VK/04204TR/3


VK/04204TR/6


VK/04204TR/12

535

VK/04205TR/6


VK/04206TR

536

VK/04208TR/SP


VK/04209TR/SP


VK/04210TR/SP

537

VK/04208TR/SP/3

538

VK/04210TR/PE


VK/04211TR/PE

Mute, Acoustic Led Lights

Pages 544-559

548

VK/04561/45

550

VK/04562/120

554

VK/04563/132

558

VK/04564

Led Linear Lights

Pages 560-593

562

VK/04462

566

VK/04157

568

VK/04157/CE


VK/04157/SRK

570

VK/04463

574

VK/04156

576

VK/04156/CE

VK/04156/SRK

578

VK/04158

580

VK/04158/CE

VK/04158/SRK

582

VK/04634

586

VK/04159

590

VK/04461

592

VK/04160

INDEX

Tubes & Squares

Pages 594-671

596

VK/04342/CE


VK/04344/CE

598

VK/04341/CE


VK/04343/CE

600

VK/04301


VK/04303

602

VK/04302


VK/04304

604

VK/04268CE


VK/04269CE

606

VK/04167CE


VK/04168CE

607

VK/04169CE


VK/04170CE

608

VK/04300

610

VK/02235


VK/02236

612

VK/09036 - VK/09038

614

VK/09039

616

VK/03087CE/13


VK/03087CE/20


VK/03087CE/30

618

VK/03091CE/25


VK/03091CE/50

620

VK/03140CE


VK/03140/R

621

VK/03139CE


VK/03139/R

622

VK/03084CE


VK/03006

624

VK/03056


VK/04062CE

625

VK/04052CE/S


VK/04052CE/L

626

VK/03005


VK/03081CE

627

VK/03082CE


VK/03054

628

VK/03055

629

VK/03083CE

630

VK/03057

VK/03190CE

VK/03190

631

VK/04194CE

632

VK/04195CE

VK/03090CE

634

VK/03110CE

VK/03302G/CE

636

VK/03095CE

637

VK/03108CE

638

VK/03309/CE

640

VK/03111CE

VK/03111CE/2

641

VK/03111CE/3

642

VK/03107CE

VK/03107CE/2

643

VK/03107CE/3

644

VK/04053CE/S

VK/04053CE/L

645

VK/03109CE

646

VK/03097CE

VK/03093WA

VK/04052WA

647

VK/04350G/WA

VK/04053WA

648

VK/04350G/PE

VK/04350G/CE

649

VK/04477/WA

652

VK/04350/CE/.../15

654

VK/04350/CE/D/.../15

656

VK/04352/CE/.../17

658

VK/04352/CE/D/.../17

660

VK/04354/CE/.../18

662

VK/04354/CE/D/.../18

664

VK/04350/PE/.../15

666

VK/04350/PE/D/.../15

668

VK/04352/PE/.../17

670

VK/04352/PE/D/.../17

Natu, Outdoor lights

Pages 672-693

674 VK/02213/WD/W/60

VK/02213/WD/W/30

676 VK/02214/WD/60

VK/02214/WD/30

678 VK/02212/WD

680 VK/01117/WD

VK/01116/WD

682 VK/02083/WD

684 VK/02210/WD

686 VK/02082/WD

688 VK/02081/WD

690 VK/02211/WA/WD

VK/02155/WA/WD

692 VK/02215/WD/W

Terra, Outdoor lights

Pages 694-717

696 VK/02201/G

VK/02202/G

698 VK/02193/G

VK/02194/G

699 VK/02195/G

VK/02196/G

700 VK/02203/G

VK/02204/G

VK/02205/G

702 VK/02198/G

704 VK/02197/G/

706 VK/02199/G

708 VK/02200/G

710 VK/02142

712 VK/02132

714 VK/02131

716 VK/02206/G

VK/02207/G

VK/02208/G

Portable

Pages 718-747

720 VK/02216/20

722 VK/02216/30

724 VK/02217/20

726 VK/02217/30

728 VK/03214

730 VK/03141

732 VK/03247

734 VK/02154

736 VK/02154/PEN

738 VK/03210/W

740 VK/03211/B

VK/02218/120

742 VK/03209/B

744 VK/03213/B

746 VK/03212/W

INDEX

Outdoor lights

Pages 748-1019

750 VK/02109 VK/02110 752 VK/02108 754 VK/02055 756 VK/02248 758 VK/02178 VK/02179 VK/02180 760 VK/02111 VK/02147

762 VK/02106 764 VK/04138 766 VK/04139 VK/02107 768 VK/02105 VK/02083 770 VK/02082 VK/02081 772 VK/02047 VK/02048

773 VK/02192 774 VK/02234 776 VK/02080 VK/02085 778 VK/02112 780 VK/02092 VK/02087 782 VK/02089 VK/02090 784 VK/02049

786 VK/02115 VK/02091 787 VK/02051 VK/02088 788 VK/02095 VK/02054 789 VK/02053 790 VK/02074 792 VK/02046 794 VK/02086

796 VK/02155 VK/02156 798 VK/02125 VK/02127 800 VK/02126 802 VK/02224 804 VK/02133 806 VK/02176 808 VK/02175 810 VK/04179WA

811 VK/02045 VK/02044 812 VK/02116 VK/02093 814 VK/02075 VK/02050 816 VK/02076 VK/02043 818 VK/02058 VK/02094

820 VK/02148 VK/02149 821 VK/02057 VK/02056 822 VK/02146 823 VK/02145 VK/02144 824 VK/02027 826 VK/02017 VK/02018

828 VK/02019 VK/02020 829 VK/02021 VK/02022 VK/02023 830 VK/02024 VK/02025 VK/02026 832 VK/02067 VK/02068

833 VK/02069 VK/02070 834 VK/02007 VK/02013 836 VK/01121/WA 838 VK/01095 840 VK/01114 VK/01115 841 VK/01112 VK/01113

842 VK/01057 VK/01056 843 VK/01068 VK/01067 844 VK/01059 VK/01058 845 VK/01065 VK/01064 846 VK/01079 VK/01080

INDEX

847 VK/01090
848 VK/01086
849 VK/01037/S
850 VK/01082
851 VK/01083
854 VK/02169/CE/.../85-185
856 VK/02152CE
858 VK/02151CE
860 VK/04451
862 VK/02222
864 VK/02221
866 VK/02220
868 VK/02219
870 VK/02065
872 VK/02066
873 VK/02062
874 VK/02063
876 VK/02064
878 VK/02061
880 VK/02079
881 VK/02078
882 VK/01077
884 VK/01078
888 VK/02077
890 VK/01106
892 VK/01061
894 VK/01060
896 VK/03301G
898 VK/03300G
899 VK/01069
900 VK/01066
902 VK/02232
904 VK/02231
906 VK/02099
908 VK/02124
910 VK/02097
912 VK/02098
914 VK/02102
916 VK/02101
918 VK/02104
920 VK/02103
921 VK/02229/60
924 VK/02229/20
926 VK/02230
928 VK/02140
930 VK/02181
932 VK/02173
934 VK/02100
936 VK/02135
938 VK/02134
940 VK/01085
942 VK/01091/75
944 VK/01091/35
946 VK/02170
950 VK/02114
952 VK/02113
954 VK/02042
956 VK/02223
958 VK/02130/.../46
960 VK/02174
962 VK/02128
964 VK/02123
966 VK/02177
970 VK/02171
972 VK/02172
974 VK/02096
975 VK/02130
976 VK/02136
978 VK/02225
980 VK/02226
982 VK/02227
VK/02228
VK/02129/1
VK/02129/2
VK/02129/4
VK/02117
VK/02118
VK/02118/RGB
VK/01096
VK/01097
VK/01052
VK/01054
VK/01054/70
VK/01053
VK/01055
VK/01055/70
VK/02167/S/8
VK/02167/S/14
VK/02167/S/38
VK/02167/S/73
VK/02167/S/108
VK/02008
VK/02009
VK/02010
VK/02011
VK/02014R

INDEX


VK/02015R

984

VK/02016R

986

VK/02137/30


VK/02137/50


VK/02137/100

988

VK/02120

990

VK/02084


VK/02122

992

VK/02138/G/RGB


VK/02139/G/RGB

994

VK/02160

998

VK/02166

1000

VK/02247/CCT

1002

VK/02246/CCT

1004

VK/02240/B/CCT,
VK/02241/B/CCT,
VK/02242/B/CCT

1005

VK/02243/B/CCT,
VK/02244/B/CCT,
VK/02245/B/CCT

1006

VK/02250/B/D/MS


VK/02251/B/D/MS

1007

VK/02252/B/D/S


VK/02253/B/D/S

1008

VK/02254/B/RGB

1010

VK/02237,
VK/02238,
VK/02239

1012

VK/02012


VK/02012/RGB


VK/05016

1014

VK/04420
VK/04420/WA
VK/04420/SRK

1018

VK/02168

Led lamps, Modules, drivers & accessories

Pages 1020-1090

1022



VK/05169


VK/05170


VK/05171

1023


VK/05172


VK/05173


VK/05174

1024


VK/05155


VK/05160


VK/05156

1025


VK/05157

1026


VK/05158


VK/05159


VK/05103/CL


VK/05124/CL


VK/05103/MK


VK/05122/MK


VK/05122/ST


VK/05122/PCT

1027


VK/05104/CL


VK/05120/CL

1028


VK/05104/MK


VK/05120/MK


VK/05105/CL


VK/05121/CL


VK/05105/MK


VK/05121/MK


VK/05121/ST


VK/05121/PCT

1029


VK/05106/CL


VK/05121/CL

1030


VK/05106/MK


VK/05121/MK


VK/05121/ST


VK/05121/PCT


VK/05107



VK/05126

1031


VK/05109/CL


VK/05110/CL


VK/05110/MK


VK/05109/ST

1032

VK/05110/ST

VK/05123/CL

VK/05123/A

VK/05123/DG

1033

VK/05123/MK

VK/05123/ST

VK/05123/PCT

1034

VK/05108/CL

VK/05108/A

VK/05108/DG

1035

VK/05108/MK

VK/05108/ST

VK/05108/PCT

1036

VK/05177

VK/05177/D

VK/05168/D

VK/05083

1037

VK/05178

VK/05178/D

VK/05084

1038

VK/05179

VK/05179/D

VK/05085

1039

VK/05088

VK/05054

VK/05054/B

1040

VK/05111

VK/05125

VK/05132

1041

VK/05113

1042

VK/05062

VK/05055

VK/05051

VK/05052

VK/05139D

1043

VK/05073/EI

VK/05073/E

VK/05074

1044

VK/05096

1045

VK/05016

1046

VK/05063

VK/05133/MSQ

VK/05147

1047

VK/05064

VK/05077

VK/05138

VK/05095

1048

VK/05165

VK/05127

VK/05127/D

1049

VK/05011

VK/05067

VK/05066

VK/05066/D

VK/05128

1050

VK/05129

VK/05034

VK/05018

VK/05019

1051

VK/05130

INDEX


VK/05131


VK/05166


VK/05020

1052



VK/05021


VK/05167


VK/05022

1053


VK/05181/78


VK/05182/118

1054


VK/05180/G


VK/05119G

1055


VK/05065G


VK/05065G/D

1056


VK/05094G

1057


VK/05148G


VK/05161G


VK/05162G

1058


VK/05093G


VK/05092G


VK/05075G

1059


VK/05097G


VK/05184G


VK/05184


VK/05162


VK/05163

1060


VK/05112G


VK/05112GD

1061


VK/05112D


VK/LVD1215

1062


VK/05146G


VK/05145/E

1063


VK/05140/E


VK/05141/E

1064


VK/05089


VK/05090


VK/05091

1065


VK/05164
VK/05098

1066


VK/05059/1


VK/05060/1


VK/05059/2


VK/05060/2

VK/05061/2

VK/S14D

VK/S14S

1067

VK/05099

VK/05100

VK/05101

1068

VK/05134/60

VK/05135/90

VK/05136/120

VK/05137/150

1069

VK/05134/60/2

VK/05135/90/2

VK/05136/120/2

VK/05137/150/2

1070

VK/T8 PINK

1071

VK/05143/60

VK/05144/120

VK/05183/150

1074

VK/PL-CN35-COB 600 G2

1075

VK/OT FIT 8/180 CS I MINI

VK/OT FIT 8/180 CS PC

VK/OTi DALI 10/700 NFC DIM

1076

VK/PL-CN50-COB 1.400 G2

BLACK COVER FOR COIN 50 COB G2

1077

VK/ELEMENT 12/220-240/300 G3

VK/ELEMENT 15/220-240/350 G3

VK/OT FIT 18/220-240/450 CS PC

IT DALI 12/220... 240/300 CS

OTi DALI 15/220-240/1A0 NFC

1078

VK/PL-CN111-COB-2800-G2

1079

VK/ELEMENT 28/220-240/700 G3

VK/OT FIT 30/220-240/700 CS PC

IT DALI 30/220... 240/700 CS

VK/OTi DALI 25/220-240/700 NFC L

1080

VK/PL-CN111-COB-4300-G2

BLACK COVER FOR COIN50 COB G2

1081

ELEMENT 42/220-240/1050 G3

OT FIT 40/220-240/1A0 PC SC

IT DALI 42/220... 240/1A0 CS

OTi DALI 35/220-240/1A0 NFC TW

1082

0299

XR-E54

1086

VK/Fortimo/ 0.5FT/.../G6

VK/Fortimo/ 1FT/.../G6

VK/Fortimo/ 2FT/.../G6

1087

VK/8183/56

VK/7183/111

1088

VK/XITANIUM/35W

VK/XITANIUM/60W

VK/XITANIUM/100W

1089

VK/XITANIUM/150W

VK/XITANIUM/ 35W/DALI/DIM

VK/XITANIUM/ 60W/DALI/DIM

VK/XITANIUM/ 100W/DALI/DIM

VK/XITANIUM/ 150W/DALI/DIM

1090

VK/COV/14/56

VK/END/14/TR

VK/HOLD/14/W

VK/FIXEL/P2F

notes

υπόμνημα, σημειώσεις

Symbols

IP20	IP protection class (indoor)	MAX 1.2m	maximum height		on front side radiant lamp
IP44	IP protection class (outdoor)	Adjustable	adjustable downward radiating luminaire		on both sides radiant lamp (top & bottom)
IP45	IP protection class (outdoor)		gypsum lamps paintable		wall lamp with light beam down
IP54	IP protection class (outdoor)	LED	luminaire type - LED either halogen useable		ceiling downward radiant luminaire
IP65	IP protection class (outdoor)	-20°C 40°C	indicates temperature		upward radiant luminaire
IP68	IP protection class (outdoor)	A+	indicates energy efficiency Class		pendant radiant lamp

IP Rate

Αναλυτική επεξήγηση του βαθμού στεγανότητας IPXX

Σίγουρα έχετε δει σε διάφορα φωτιστικά να αναφέρεται κάποιος βαθμός προστασίας IP, όπως IP54, IPX8 κ.λπ. Οι αριθμοί αυτοί υποδηλώνουν μια συγκεκριμένη πιστοποίηση για το φωτιστικό, στο κατά πόσον αυτό είναι αδιάβροχο και προστατευμένο. Για παράδειγμα, ένα φωτιστικό μπορεί να είναι αδιάβροχο όταν ψιχαλίζει, αλλά να μην είναι αδιάβροχο όταν αυτό πέσει/βυθιστεί στο νερό.
Με την κατάλληλη πιστοποίηση, ο καταναλωτής είναι σε θέση να γνωρίζει ακριβώς τον βαθμό αδιαβροχοποίησης του φωτιστικού που αγοράζει και όχι εάν είναι αδιάβροχο, γενικά και αόριστα.
Ο έλεγχος της πιστοποίησης πραγματοποιείται σε εργαστήρια, σύμφωνα με συγκεκριμένες διαδικασίες, οι οποίες ακολουθούν το πρότυπο IEC 60529, ώστε να είναι πάντα οι ίδιες, ανεξαρτήτως του προϊόντος ή του κατασκευαστή. Η κωδικοποίηση IPXX, που ακολουθείται πιο συχνά, έχει 2 ψηφία, τα οποία παίρνουν συγκεκριμένες τιμές και ενημερώνουν τον καταναλωτή για την πιστοποίηση που φέρει το προϊόν.

Συγκεκριμένα

Α. Το πρώτο Χ πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο στερεών σωματιδίων. Παίρνει τιμές από 0-6, όπως αναλύεται παρακάτω:
0 = Καμία προστασία.
1 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 50,00 χιλιοστών.
2 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 12,00 χιλιοστών.
3 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 2,50 χιλιοστών.
4 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω του 1,00 χιλιοστού.
5 = Προστασία από την ποσότητα της σκόνης όπου θα ήταν ικανή να επηρεάσει τη φυσιολογική λειτουργία της συσκευής.
6 = Δεν μπαίνει καθόλου σκόνη.

Β. Το δεύτερο Χ πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο νερού. Παίρνει τιμές από 0-8, όπως αναλύεται παρακάτω.
0 = Καμία προστασία.
1 = Προστασία από σταγόνες νερού που πέφτουν κατακόρυφα.
2 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 15 μοίρες ως προς την κατακόρυφο.
3 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 60 μοίρες ως προς την κατακόρυφο.
4 = Προστασία από νερό που ψεκάζεται από πάσα κατεύθυνση.
5 = Προστασία από πίδακες νερού που πέφτουν υπό χαμηλή πίεση, από πάσα κατεύθυνση.
6 = Προστασία από πίδακες νερού που πέφτουν υπό υψηλή πίεση.
7 = Προστασία από το νερό, σε βύθισμα βάθους από 15 εκατοστά έως ένα μέτρο, έως και 30 λεπτά.
8 = Προστασία από το νερό, σε βύθισμα για μεγάλες χρονικές περιόδους, υπό δοσμένη πίεση.

	dimmable		guarandy		neckline of article
	no dimmable		beam angle		neckline of article
	average service life in hours		grounding		indicates the installation depth
	average service life in clicks		incl. motion sensor		WiFi control
	chip on board				indicates rechargable battery
	max. load on the article				adaptor

IP Rate

Analytical explanation of IPXX protection degree

You have certainly seen in some luminaires the reference to some degree of IP protection, such as IPX54, IPX8 etc. These numbers imply a specific certification for the luminaire, whether it is waterproof and protected. For example, a luminaire may be waterproof when it is under drizzling rain, but may not be when dropped/sinked into the water.
With the proper certification, the consumer is able to know the exact degree of water resistance of the luminaire he is buying, not only if it's water resistant, in general.
The certification testing is carried out in laboratories, followed by specific procedures, according to the International Standard IEC 60529, which (procedures) are always the same, regardless of the product or the manufacturer. The most frequently followed IPXX encoding has 2 digits, which get specific values and inform the consumer of the certification that the product carries.

More specifically

A. The first digit (X) of the IP code indicates the degree of protection of the product against solid particles intruding into an enclosure. It takes values from 0-6, as analyzed below:
0 = No special protection.
1 = Protection from entry by solid particles with a diameter of thickness greater than 50,00mm.
2 = Protection from entry by solid particles with a diameter of thickness greater than 12,00mm.
3 = Protection from entry by solid particles with a diameter of thickness greater than 2,50mm.
4 = Protection from entry by solid particles with a diameter of thickness greater than 1,00mm.
5 = Protection from the amount of dust that would interfere with the operation of the equipment.
6 = Dust tight.

B. The second digit (X) of the IP code indicates the degree of protection of the product inside an enclosure against the harmful entry of various forms of moisture. It takes values from 0-8, as analyzed below:
0 = No special protection.
1 = Protection against vertically falling drops of water.
2 = Protection against direct sprays of water up to 15 degrees from vertical angle.
3 = Protection against direct sprays of water up to 60 degrees from vertical angle.
4 = Protection against water splashed from all directions.
5 = Protection against low pressure jets of water from all directions.
6 = Protection against powerful jets of water.
7 = Protection against the effect of immersion between 15,00cm and 1,00m for up to 30 minutes.
8 = Protection against long periods of immersion under pressure.

Κλάση I & II

Κλάση I

Αυτές οι συσκευές πρέπει να έχουν το σασί τους συνδεδεμένο με ηλεκτρική γείωση (ΗΠΑ: γείωση) με ξεχωριστό καλώδιο γείωσης (χρώματος πράσινου/κίτρινου στις περισσότερες χώρες, πράσινου στις ΗΠΑ, τον Καναδά και την Ιαπωνία). Η σύνδεση γείωσης επιτυγχάνεται με ένα καλώδιο τριών αγωγών, το οποίο τυπικά τελειώνει με υποδοχή εναλλασσόμενου ρεύματος (AC) τριών (3) ακίδων, που συνδέεται σε αντίστοιχη έξοδο εναλλασσόμενου ρεύματος. Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει σε έκθεση σε επικίνδυνη τάση, ώστε να προκληθεί ηλεκτροπληξία και ότι σε περίπτωση βλάβης, η τροφοδοσία θα αφαιρεθεί αυτόματα [μερικές φορές αναφέρεται ως αυτόματη αποσύνδεση τροφοδοσίας (ADS)].
Ένα σφάλμα στη συσκευή που προκαλεί την επαφή ενός ενεργού αγωγού με το περίβλημα, θα προκαλέσει τη ροή ρεύματος στον αγωγό γείωσης. Εάν είναι αρκετά μεγάλο, αυτό το ρεύμα θα σβήσει μία συσκευή υπερβολικής τάσης ρεύματος [ασφάλεια ή διακόπτης κυκλώματος (CB)] και θα αποσυνδέσει την παροχή. Ο χρόνος αποσύνδεσης πρέπει να είναι αρκετά γρήγορος ώστε να μην επιτρέπεται η έναρξη της μαρμαρυγής εάν ένα άτομο έρχεται σε επαφή με το περίβλημα τη δεδομένη στιγμή. Αυτή τη φορά και η τρέχουσα διαβάθμιση με τη σειρά της επιτρέπει τη μέγγιστη αντίσταση γείωσης. Για να παρέχεται συμπληρωματική προστασία έναντι σφαλμάτων υψηλής σύνθεσης αντίστασης, είναι σύνηθες να συνιστούμε μία συσκευή υπολειπόμενου ρεύματος (RCD), γνωστή και ως διακόπτης προστασίας υπολειπόμενου ρεύματος (RCCB), διακόπτης κυκλώματος βλάβης γείωσης (GFCI), ή διακόπτης προστασίας από υπολειμματικό ρεύμα με ενσωματωμένη προστασία υπέρτασης ρεύματος (RCBO), ο οποίος θα διακόψει την παροχή ηλεκτρικού ρεύματος στη συσκευή εάν τα ρεύματα στους δύο πόλους της παροχής δεν είναι ίσα και αντίθετα.


Κλάση II

Μια ηλεκτρική συσκευή "Κλάσης II" ή με διπλή μόνωση, είναι εκείνη που έχει σχεδιαστεί κατά τέτοιο τρόπο, ώστε να μην απαιτεί τη σύνδεση ασφαλείας σε ηλεκτρική γείωση.
Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει στην έκθεση σε επικίνδυνη τάση ώστε να προκληθεί ηλεκτροπληξία και ότι αυτό θα πρέπει να επιτυγχάνεται δίχως να στηρίζεται σε γειωμένο μεταλλικό περίβλημα. Αυτό συνήθως επιτυγχάνεται τουλάχιστον εν μέρει με την ύπαρξη τουλάχιστον δύο στρώσεων μονωτικού υλικού μεταξύ των ενεργών τμημάτων και του χρήστη, ή με τη χρήση ενισχυμένης μόνωσης.
Στην Ευρώπη, μία συσκευή με διπλή μόνωση πρέπει να φέρει την ετικέτα "Κλάση II" (Class II) ή "διπλής μόνωσης" ή να φέρει το σύμβολο διπλής μόνωσης (ένα τετράγωνο μέσα σε ένα άλλο τετράγωνο).
Τα μονωμένα τροφοδοτικά εναλλασσόμενου ρεύματος (όπως φορτιστές κινητού τηλεφώνου), τυπικά χαρακτηρίζονται ως "Κλάση II", πράγμα που σημαίνει ότι τα καλώδια εξόδου συνεχούς ρεύματος (DC) απομονώνονται από την είσοδο εναλλασσόμενου ρεύματος. Η ονομασία "Κλάση II" δεν πρέπει να συγχέεται με την ονομασία "Κλάση 2", καθώς η τελευταία δεν σχετίζεται με τη μόνωση (προέρχεται από το πρότυπο UL 1310, καθορίζοντας τα όρια μέγιστης τάσης/ρεύματος/ισχύος).

Colour Codes

Decoding our colours


ABS
Bronze


ACOP
Antique
Copper


PCOP
Pink
Copper


BBS
Brushed
Brass


BS
Brass


MC
Brushed
Chrome


NB
Natural
Brass


BR
Rust
Brown


AL
Aluminium


C
Chrome


G
Grey


GD
Gold


COP
Copper


AN
Anthracite


TC
Terracotta


GB
Golden
Black


R
Red


GR
Green


BL
Blue


Y
Yellow


B
Black

W
White

Class I & II

Class I

These appliances must have their chassis connected to electrical earth (US: ground) by a separate earth conductor (colored green/ yellow in most countries, green in the US, Canada and Japan). The earth connection is achieved with a 3-conductor mains cable, typically ending with 3-prong AC connector which plugs into corresponding AC outlet. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that if a fault occurs the supply will be removed automatically (this is sometimes referred to as ADS = Automatic Disconnection of Supply).
A fault in the appliance which causes a live conductor to contact the casing will cause a current to flow in the earth conductor. If large enough, this current will trip an over current device [fuse or circuit breaker (CB)] and disconnect the supply. The disconnection time has to be fast enough not to allow fibrillation to start if a person is in contact with the casing at the time. This time and the current rating in turn sets a maximum earth resistance permissible. To provide supplementary protection against high-impedance faults, it is common to recommend a residual current operated circuit-breaker with integral over-current protection (RCBO), which will cut off the supply of electricity to the appliance if the currents in the two poles of the supply are not equal and opposite.

Class II

A Class II or double insulated electrical appliance, is one which has been designed in such a way that is does not require a safety connection to electrical earth (ground).
The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that is achieved without relying on an earthed metal casing. This is usually achieved at least in part by having at least two layers of insulating material between live parts and the user, or by using reinforced insulation.
In Europe, a double insulated appliance must be labelled “Class II” or double insulated or bear the double insulation symbol (a square inside another square).
Insulated AC/DC power supplies (such as cell-phone chargers), are typically designated as “Class II”, meaning that the DC output wires are isolated from the AC input. The designation “Class II” should not be confused with the designation of “Class 2”, as the latter is unrelated to insulation (it originates from standard UL 1310, setting limits on maximum output voltage/ current/ power).

Graphic Department

Graphic Designer - Photo Editing **Litsa Brami, Frosso Notara**
Photographer **Anita Szlachta**
Cover **NotoriusGrey**
Stock Images **Shutterstock**

Categories

High quality, flexible Led, silicone phototube, Ledstrips

Led strips profiles IP20, IP65

Drivers for Led strips 24V/12V

Controllers/Dimming/DMX

Recessed Downlights Led

Recessed Dark downlights Led

Square Dark downlights Led

Recessed Led

Led Downlights waterproof

Recessed Spots for GU10/MR16

Recessed Trimless Spots MR16 IP65

Gypsum Spots

Led panels

3 Phase Track Lights

Ento, Led Round Magnetic Track 48V Dali

Eiva, LED Magnetic Track Lights 48V. Slim. Dali

Kona, LED Magnetic Track Lights 48V. Dali. On-off. 0-10

Bisqit, LED Magnetic Track Lights 48V. Ultra Slim (Zigbee)

Kopi, LED Magnetic Track Lights 24V

Mute, Acoustic Led Lights

Slim Led Linear Lights

Tubes & Squares

Natu, Outdoor lights

Terra, Outdoor lights

Portable

Outdoor wall lights

Outdoor ceiling lights

Outdoor floor lights

Outdoor garden lights

Outdoor inground lights

Outdoor Wall washers LED

Led lamps & accessories





High quality, Flexible LED,
silicone phototube




Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.

Keiso Top bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.

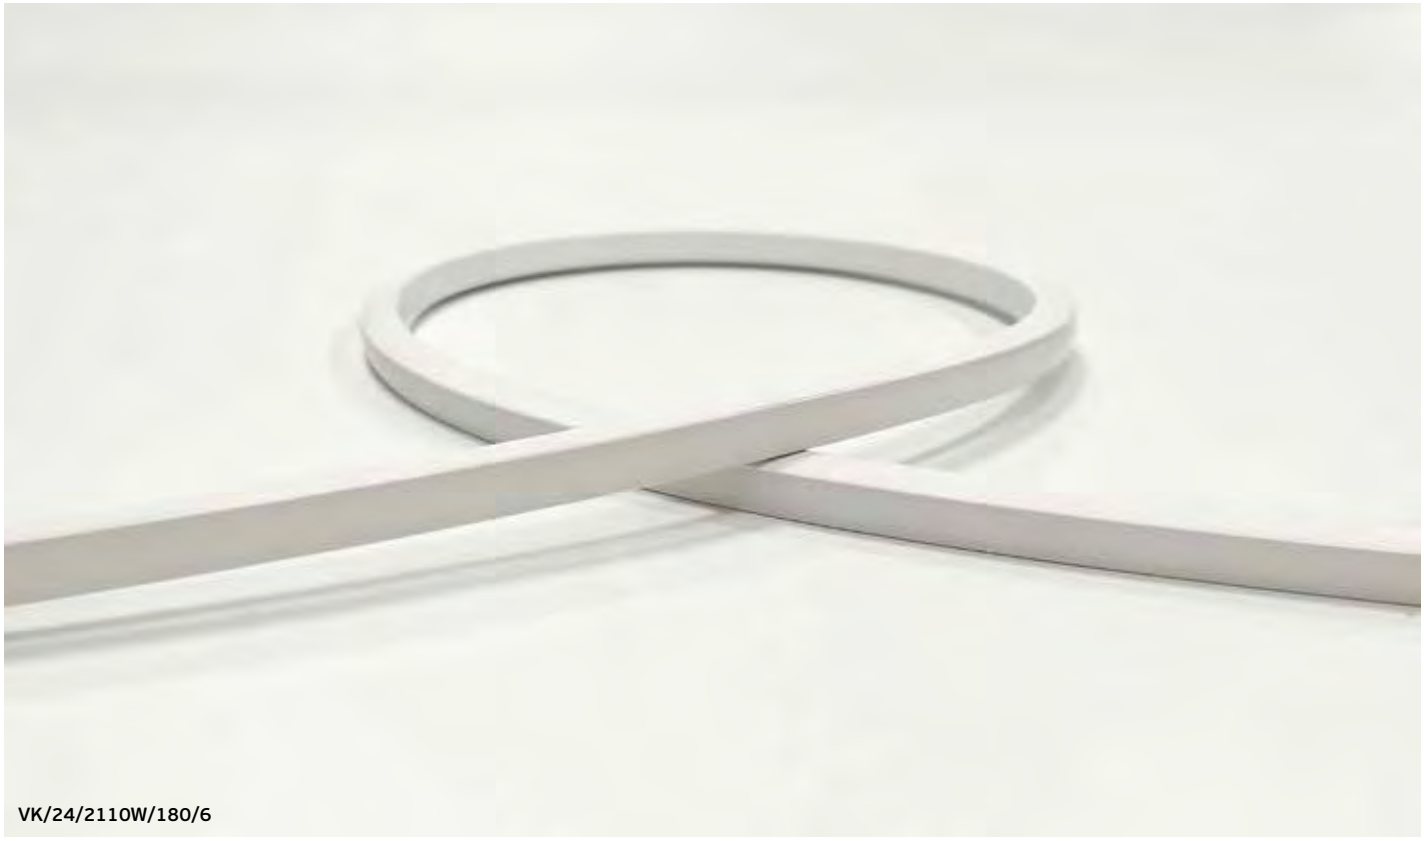

VK/24/2110W/180/6


VK/24/2110W/180/6_24V

Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-727724	**VK/24/2110W/W/180/6**	**24V**	**3000K**	**535lm/m**	**33.33mm**	**10W/m**	**5m/roll**
78001-728724	**VK/24/2110W/C/180/6**	**24V**	**4000K**	**550lm/m**	**33.33mm**	**10W/m**	**5m/roll**


Details
Led type **SMD 2110**. Led qty **180pcs/m**. **CRI>90**. Working temperature **-20°C → 45°C**. Storage temperature **0°C → 60°C**.
Lifetime **50.000hrs**. **2pcs plug out top side, 2pcs end cap without holes, 15pcs standard buckle, 1pc silicon glue including in the package.**

IP67.

5 years guarantee



Cut every 33.33mm






in the box








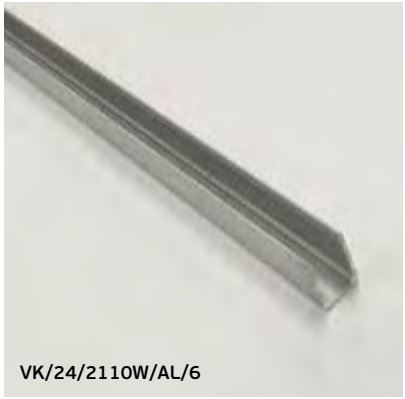

Keiso Top bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.

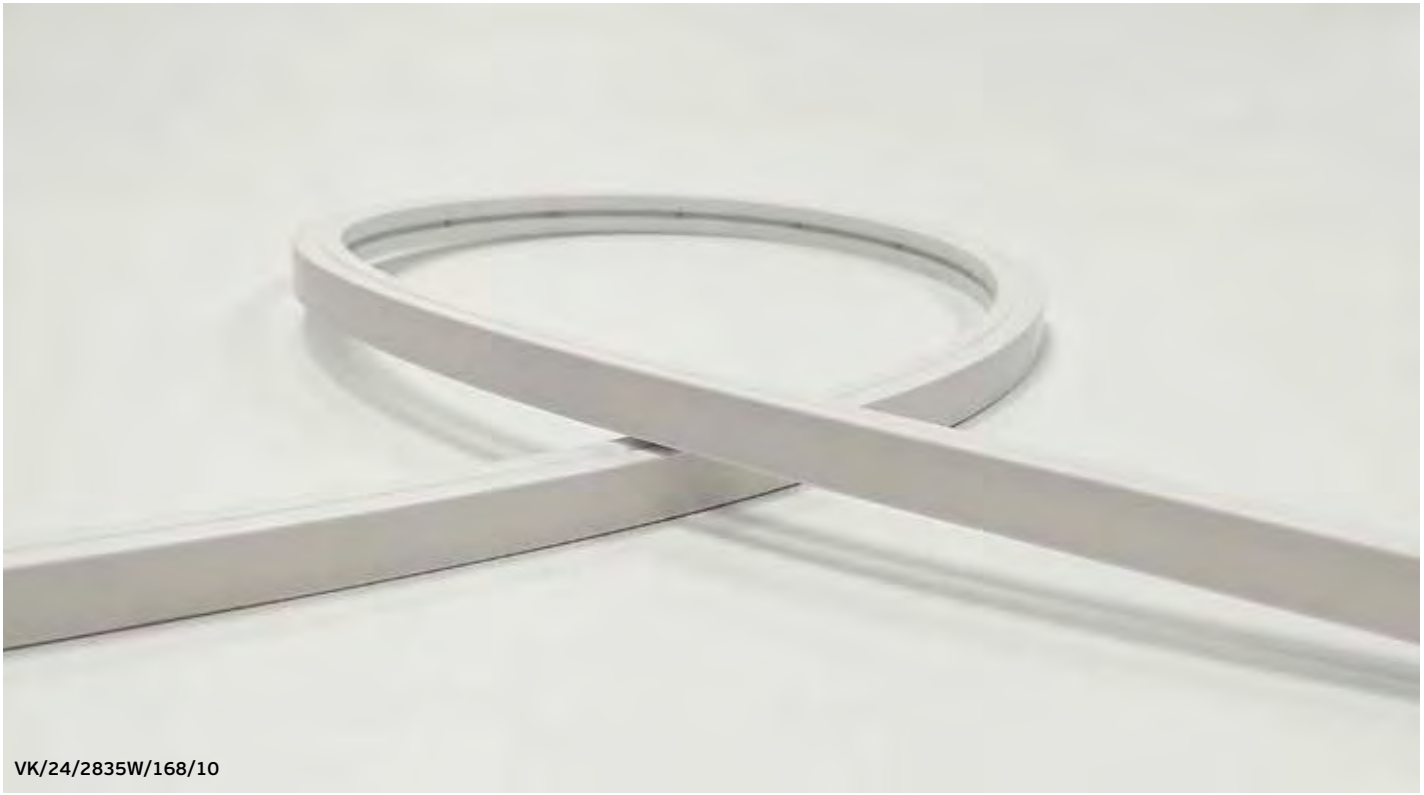

VK/24/2835W/168/10

VK/24/2835W/168/10, VK/24/3838W/RGB/144/10_24V


Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-729724	**VK/24/2835W/W/168/10**	**24V**	**3000K**	**642lm/m**	**35.71mm**	**12W/m**	**10m/roll**
78001-730724	**VK/24/2835W/C/168/10**	**24V**	**4000K**	**660lm/m**	**35.71mm**	**12W/m**	**10m/roll**
78001-731724	**VK/24/3838W/RGB/144/10**	**24V**	**RGB**	**240lm/m**	**41.67mm**	**12W/m**	**10m/roll**

Details

Led type **SMD 2835, RGB: SMD 3838**. Led qty **168pcs/m, RGB: 144pcs/m**. **CRI>90 (RGB: No CRI)**. Working temperature **-20°C → 45°C**. Storage temperature **0°C → 60°C**. Lifetime **50.000hrs**. **4pcs plug out top side, 4pcs end cap without holes, 30pcs standard buckle, 1pc silicon glue including in the package.**


IP68.

5 years guarantee



Cut every 35.71mm

RGB: Cut every 41.67mm





3000K

in the box







VK/24/2835W/AL/10



VK/24/2835W/FLEX/AL/10

Keiso Top bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.



VK/24/2835W/240/30

VK/24/2835W/240/30, VK/24/3838W/RGB/240/30_24V


Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-732724	**VK/24/2835W/W/240/30**	**24V**	**3000K**	**862lm/m**	**25mm**	**16W/m**	**5m/roll**
78001-733724	**VK/24/2835W/C/240/30**	**24V**	**4000K**	**885lm/m**	**25mm**	**16W/m**	**5m/roll**
78001-734724	**VK/24/3838W/RGB/240/30**	**24V**	**RGB**	**320lm/m**	**25mm**	**16W/m**	**5m/roll**

Details


Led type **SMD 2835, RGB: SMD 3838**. Led qty **240pcs/m**. **CRI>90 (RGB: No CRI)**. Working temperature **-20°C → 45°C**. Storage temperature **0°C → 60°C**. Lifetime **50.000hrs**. **2pcs plug out top side, 2pcs end cap without holes, 15pcs standard buckle, 1pc silicon glue including in the package.**

IP67.

5 years guarantee



Cut every 25mm





3000K

in the box









VK/24/2835W/AL/30



VK/24/2835W/FLEX/AL/30

Keiso Side bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.



VK/24/2835W/168/6

VK/24/2835W/168/6, VK/24/3838W/RGB/120/6 24V


Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-735724	**VK/24/2835W/W/168/6**	**24V**	**3000K**	**391lm/m**	**35.71mm**	**10W/m**	**10m/roll**
78001-736724	**VK/24/2835W/C/168/6**	**24V**	**4000K**	**450lm/m**	**35.71mm**	**10W/m**	**10m/roll**
78001-737724	**VK/24/3838W/RGB/120/6**	**24V**	**RGB**	**160lm/m**	**50mm**	**10W/m**	**10m/roll**

Details

Led type **SMD 2835, RGB: SMD 3838**. Led qty **168pcs/m, RGB: 120pcs/m**. **CRI>90 (RGB: No CRI)**. Working temperature **-20°C → 45°C**. Storage temperature **0°C → 60°C**. Lifetime **50.000hrs**. **4pcs plug out top side, 4pcs end cap without holes, 30pcs standard buckle, 1pc silicon glue including in the package.**


IP67.

5 years guarantee



Cut every 35.71mm

RGB: Cut every 50mm





3000K

in the box









VK/24/2835W/AL/6




VK/24/2835W/FLEX/AL/6

Keiso Profiles Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.


VK/24/2110W/AL/6

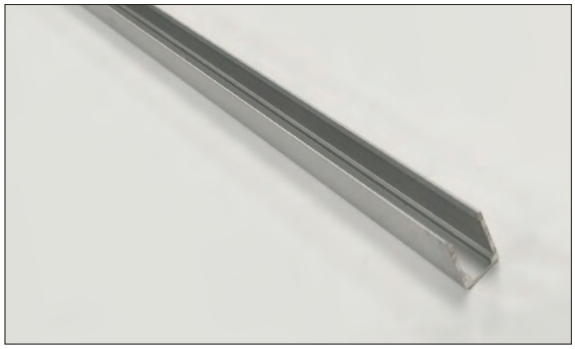


Code	Model	Box
75165-001724	**VK/24/2110W/AL/6** **Aluminium profile for Keiso 6x6mm.** **2.000x8x8.5mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2110W/.../180/6**




VK/24/2835W/AL/10

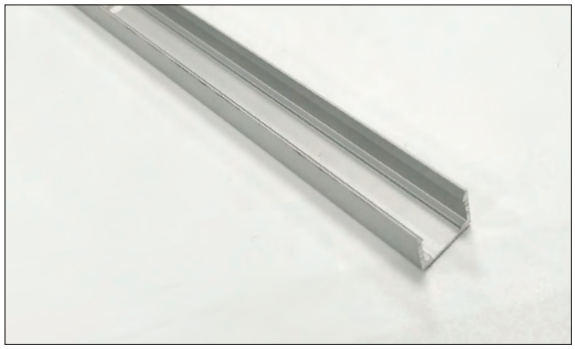


Code	Model	Box
75165-002724	**VK/24/2835W/AL/10** **Aluminium profile for Keiso 10x10mm.** **2.000x12x10mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../168/10, VK/24/3838W/.../144/10.**




VK/24/2835W/FLEX/AL/10

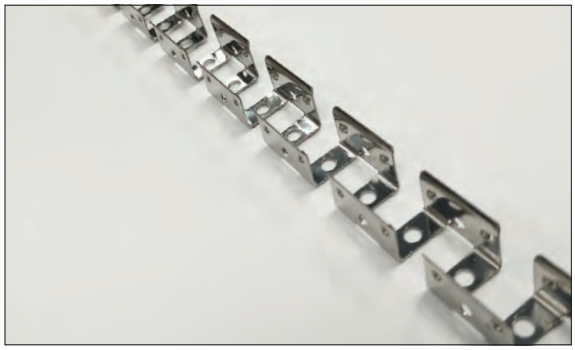

Code	Model	Box
75165-003724	**VK/24/2835W/FLEX/AL/10** **Flex Aluminium profile for Keiso 10x10mm.** **2.000x10.5x10mm**	**1pc**


Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../168/10, VK/24/3838W/.../144/10.**



Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.


VK/24/2835W/AL/30

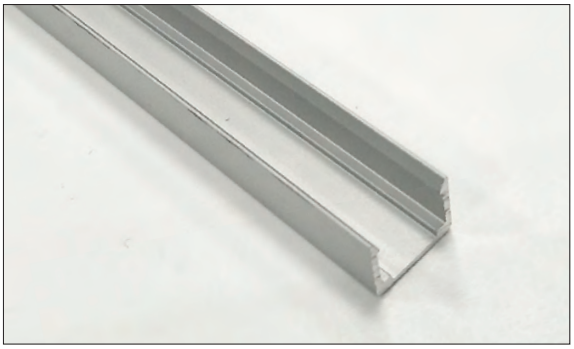


Code	Model	Box
75165-005724	**VK/24/2835W/AL/30** **Aluminium profile for Keiso 30x20mm.** **2.000x33x23mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../240/30, VK/24/3838W/.../240/30.**




VK/24/2835W/FLEX/AL/30

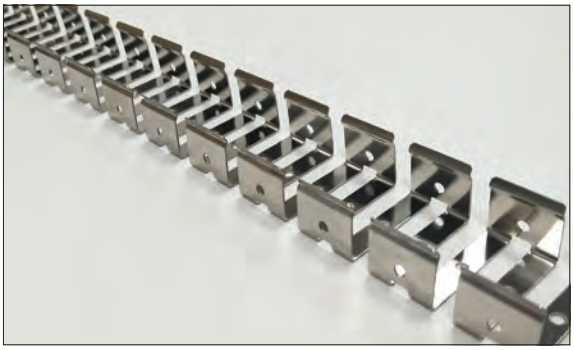


Code	Model	Box
75165-004724	**VK/24/2835W/FLEX/AL/30** **Flex Aluminium profile for Keiso 30x20mm.** **2.000x31x18mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../240/30, VK/24/3838W/.../240/30.**




VK/24/2835W/AL/6

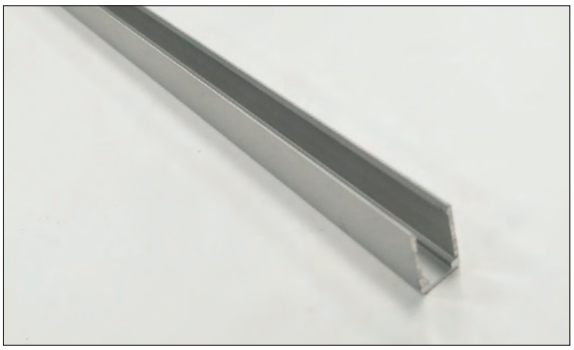

Code	Model	Box
75165-007724	**VK/24/2835W/AL/6** **Aluminium profile for Keiso 6x12mm.** **2.000x8x14mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../168/6, VK/24/3838W/.../120/6.**




VK/24/2835W/FLEX/AL/6



Code	Model	Box
75165-006724	**VK/24/2835W/FLEX/AL/6** **Flex Aluminium profile for Keiso 6x12mm.** **2.000x7x12mm**	**1pc**

Details


Charged **per meter**. Available **2m**. Material **Aluminium**. Use with **VK/24/2835W/.../168/6, VK/24/3838W/.../120/6.**



Keiso Side bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.

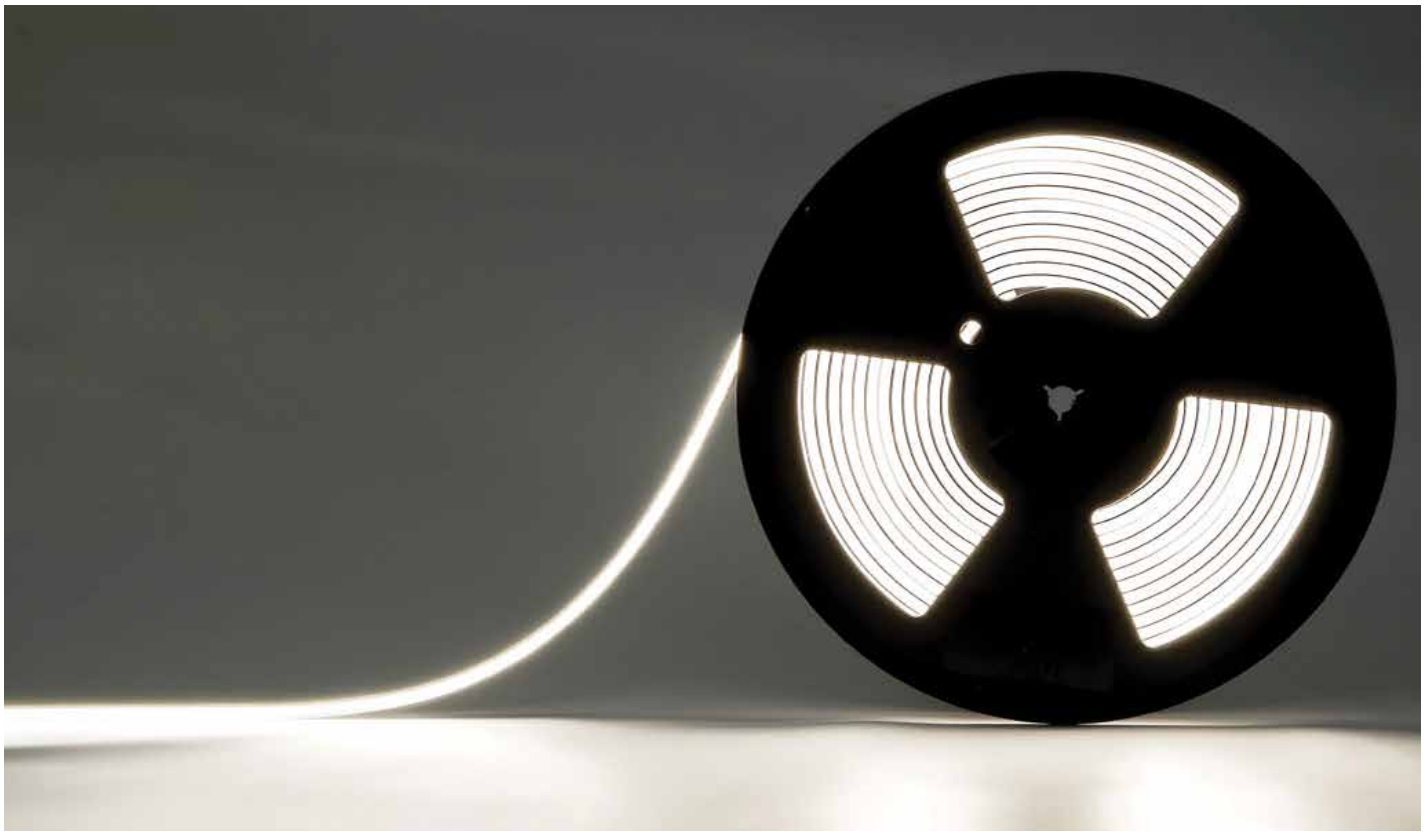


VK/24/2835W/140/11_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-635126	**VK/24/2835W/W/140/11**	**24V**	**3000K**	**560lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-636126	**VK/24/2835W/C/140/11**	**24V**	**4000K**	**660lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-637126	**VK/24/2835W/D/140/11**	**24V**	**6000K**	**750lm/m**	**CRI>80**	**9W/m**	**10m/roll**

Details

Led type **SMD 2835**. Led qty **140pcs/m**. CRI>80. Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
Lifetime **50.000hrs**. **3 years** guarantee. **Silicon, metallic brackets and end-cups including in the package**



IP68.





VK/08/11/AL


in the box



Keiso Side bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.

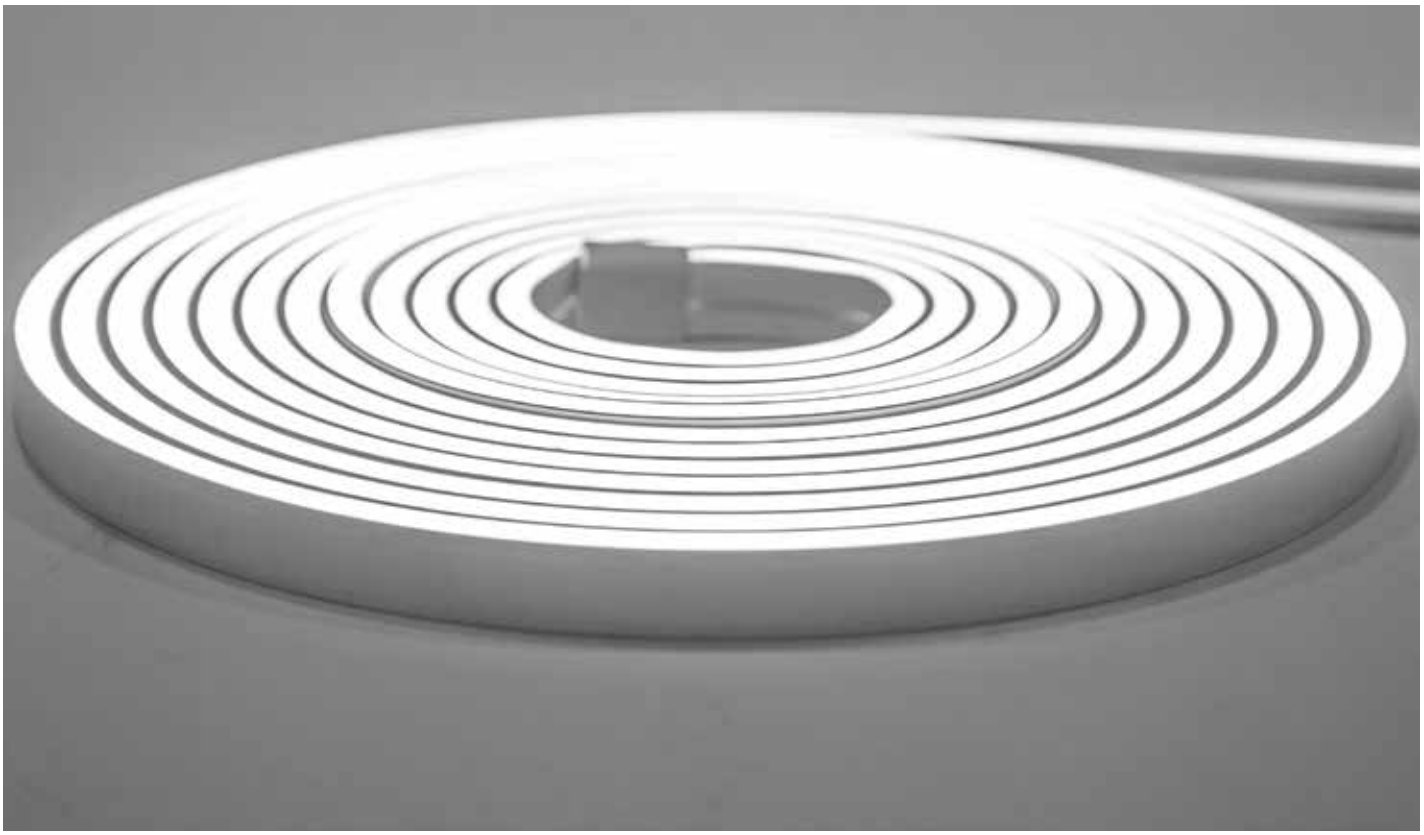


VK/24/2835W/140/19_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-638126	**VK/24/2835W/W/140/19**	**24V**	**3000K**	**550lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-639126	**VK/24/2835W/C/140/19**	**24V**	**4000K**	**650lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-640126	**VK/24/2835W/D/140/19**	**24V**	**6000K**	**740lm/m**	**CRI>80**	**9W/m**	**10m/roll**


Details

Led type **SMD 2835**. Led qty **140pcs/m**. CRI>80. Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
Lifetime **50.000hrs**. **3 years** guarantee.
Silicon, metallic brackets and end-cups including in the package



IP68.



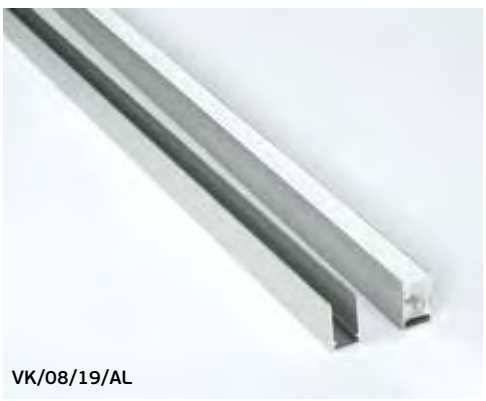

VK/08/19/AL


in the box



Keiso Side bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.

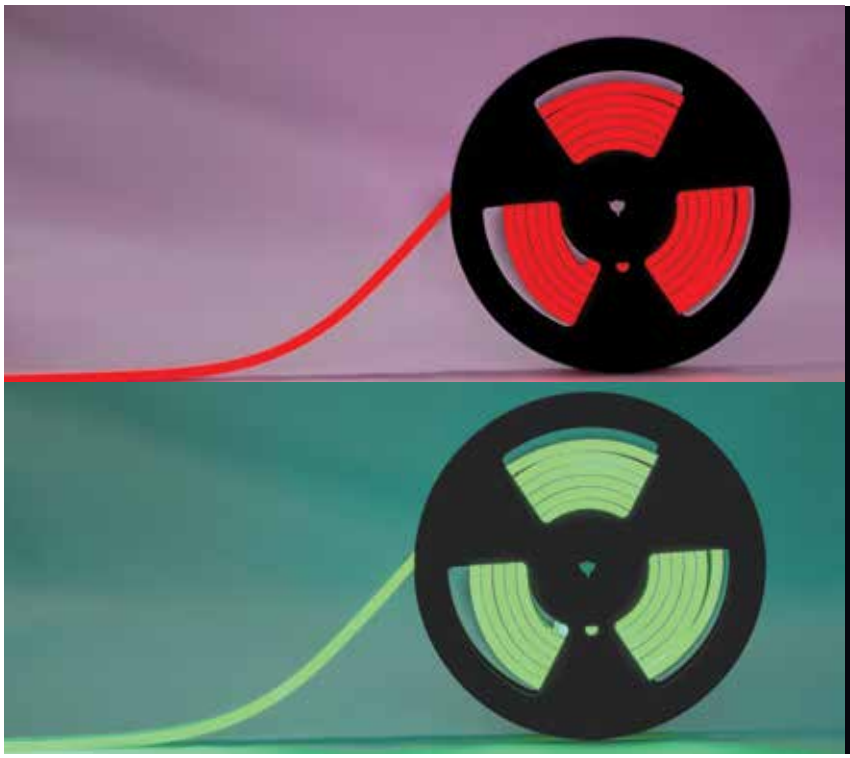




VK/24/5050W/RGB/96/19_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-641126	**VK/24/5050W/RGB/96/19**	**24V**	**RGB**	**900lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-642126	**VK/24/2835W/BL/140/19**	**24V**	**Blue**	**900lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-643126	**VK/24/2835W/R/140/19**	**24V**	**Red**	**900lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-644126	**VK/24/2835W/GR/140/19**	**24V**	**Green**	**900lm/m**	**CRI>80**	**9W/m**	**10m/roll**
78001-645126	**VK/24/2835W/Y/140/19**	**24V**	**Yellow**	**900lm/m**	**CRI>80**	**9W/m**	**10m/roll**

Details

RGB: Led type **SMD 5050**. Led qty **96pcs/m**. **Colors:** Led type **SMD 2835**. Led qty **140pcs/m**. CRI>80.
Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**. Lifetime **50.000hrs**. **2 years** guarantee.
Silicon, metallic brackets and end-cups including in the package




IP68.






VK/08/19/AL

in the box

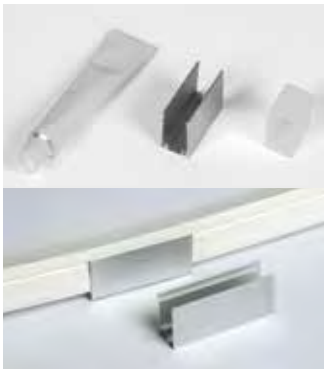

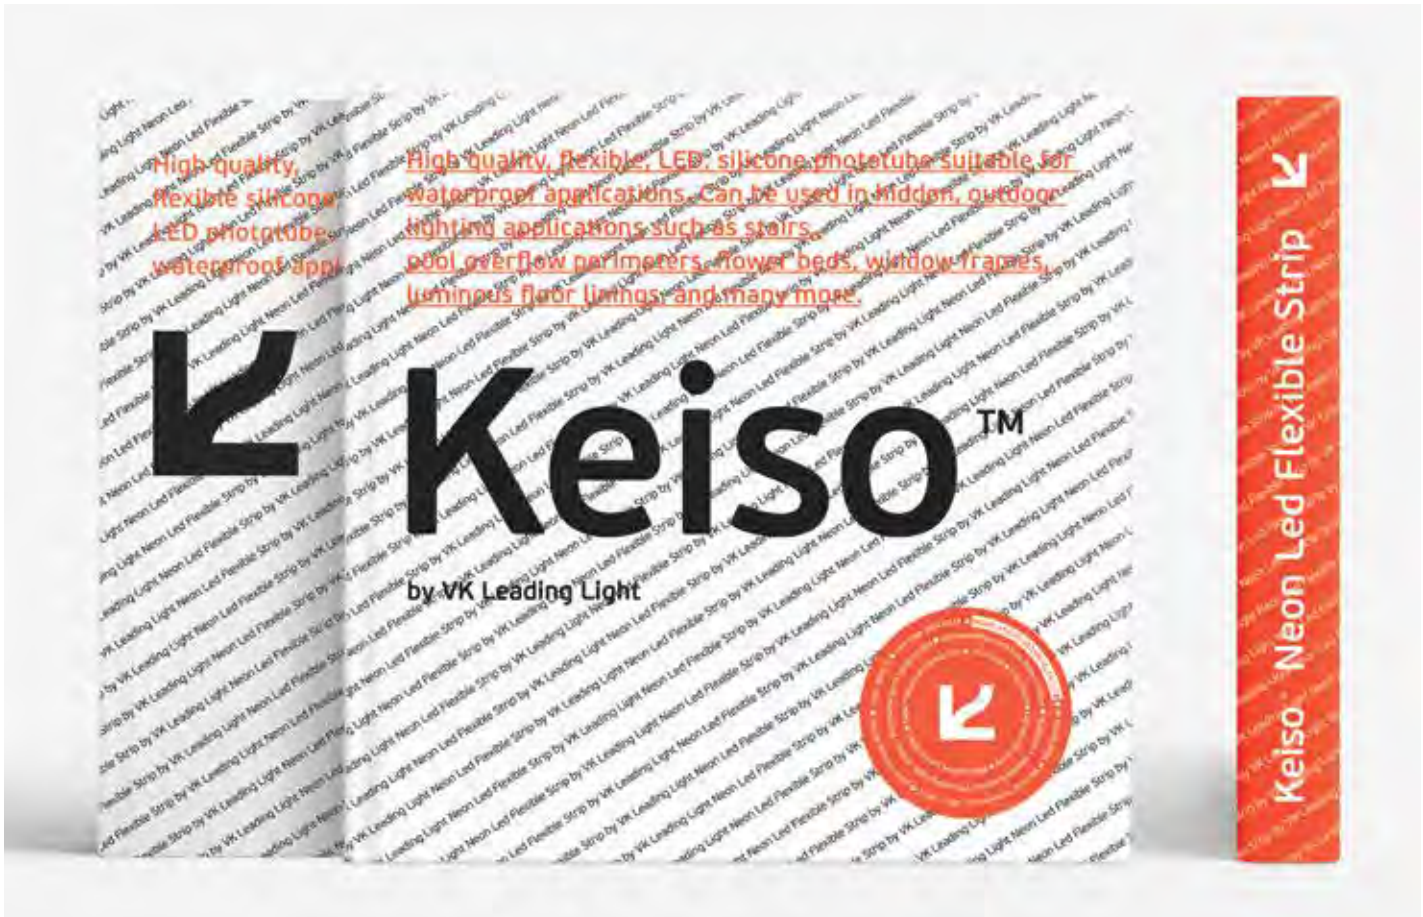


High quality, flexible, LED, silicone phototube suitable for waterproof applications. Can be used in hidden, outdoor lighting applications such as stairs, pool overflow perimeters, flower beds, window frames, luminous floor linings, and many more.
Keiso™
by VK Leading Light
Keiso · Neon Led Flexible Strip

Keiso Profiles Neoflex IP20

Ledstrips Keiso Collection


Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.

VK/08/11/AL



Code	Model	Box
75165-262264	**VK/08/11/AL** ● **Aluminium. 2.000x8.8(6.25)x17.3mm**	**100pcs**

Details
Charged **per meter**. Available **2m**. Suits with **LEDSTRIP Keiso VK/24/2835W/140/11**
Material **Aluminium**.

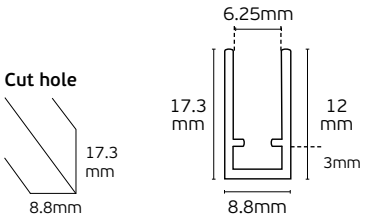



Keiso Profiles Neoflex IP20

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.


VK/08/19/AL



Code	Model	Box
75165-261264	**VK/08/19/AL** ● **Aluminium. 2.000x14.75(12.2)x25mm**	**100pcs**

Details

Charged **per meter**. Available **2m**. Suits with **LEDSTRIP Keiso VK/24/2835W/140/19**
Material **Aluminium**.

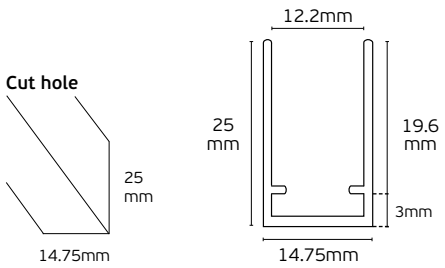



Keiso Round Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications
such as stairs, perimeter in pool overflow, flower beds, window frames,
light floor lining, and many more.



VK/24/2835W/.../240 24V


Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-699115	**VK/24/2835W/W/240**	**24V**	**3000K**	**1285.2lm/m**	**35.71mm**	**23.8W/m**	**5m/roll**
78001-695115	**VK/24/2835W/C/240**	**24V**	**4000K**	**1361.2lm/m**	**35.71mm**	**24.2W/m**	**5m/roll**

Details
Led type **SMD 2835**. Led qty **168pcs/m**. CRI>90. **Dimmable yes.** Working temperature **-25°C → 60°C**.
Storage temperature **-40°C → 80°C**. **Silicon end-cups, 10 standard buckles and many screws including in the package.**
Lifetime **50.000hrs**.

IP67.

5 years guarantee

Cut every 35.71mm



ø2.5cm



Keiso Round Neoflex Accessories


Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.


Plug out top side


End cup


Half wrap buckle (hanging)


Standard buckle



1m suspension wire kit

VK/24/2835W/ACCESSORIES

Code	Model	Descriptions	Box
78001-696115	**VK/24/2835W/EC**	**End cup**	**10pcs**
78001-700115	**VK/24/2835W/POTS**	**Plug out top side**	**10pcs**
78001-697115	**VK/24/2835W/SRK**	**Half wrap buckle (hanging)**	**10pcs**
78001-694115	**VK/24/2835W/CE**	**Standard buckle**	**10pcs**
78001-698115	**VK/24/2835W/SRK/1**	**1m suspension wire kit**	**10pcs**

Details

Accessories for Flexible Led tube.

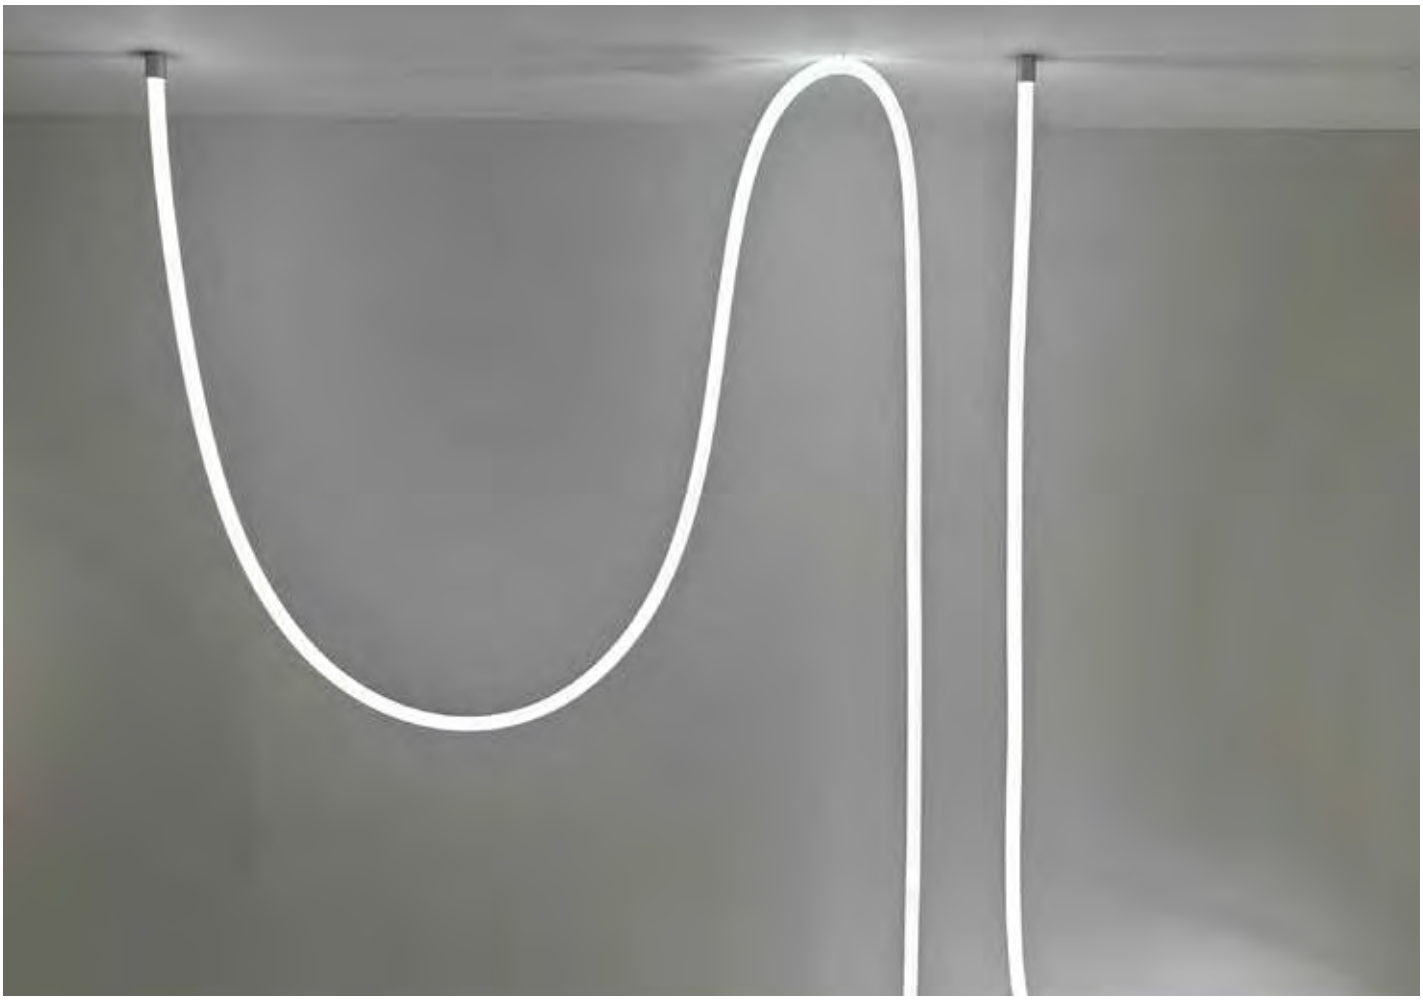


DC24V +
3M 300LSE



High quality led strips CRI>90, CRI>80

Ledstrips S-shaped. CRi>90. IP20.

Ledstrips Epistar Collection S-shaped design




VK/24/2835S/.../120, VK/24/2835S/RGB/60

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-744724	**VK/24/2835S/927/120**	**24V**	**2700K**	**1337lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-745724	**VK/24/2835S/930/120**	**24V**	**3000K**	**1339lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-746724	**VK/24/2835S/940/120**	**24V**	**4000K**	**1387lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-747724	**VK/24/2835S/RGB/60**	**24V**	**RGB**	**520lm/m**	**CRI>90**	**12W/m**	**5m/roll**


Details

Led type **SMD 2835 EPISTAR, RGB: SMD 5050 EPISTAR.** Led qty **120pcs/m, RGB: 60pcs/m. Tape 3M.**
Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.

IP20. **5 years guarantee**

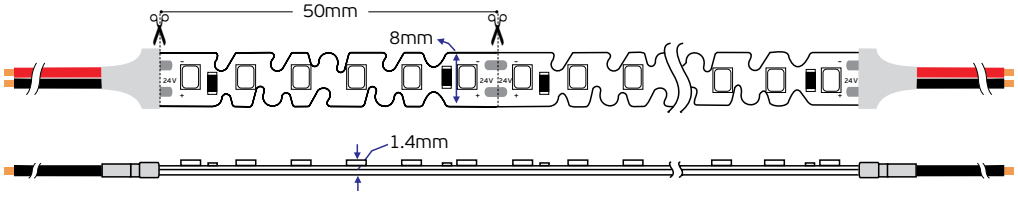

VK/24/2835S/.../120

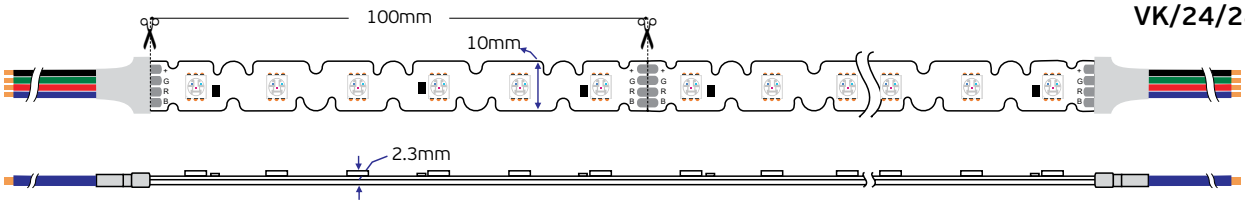

VK/24/2835S/RGB/60



VK/24/COB/.../512

Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-748724	VK/24/COB/927/512	IP20	24V	2700K	1431lm/m	CRI>90	14W/m	5m/roll
78001-749724	VK/24/COB/930/512	IP20	24V	3000K	1454lm/m	CRI>90	14W/m	5m/roll
78001-751724	VK/24/COB/940/512	IP20	24V	4000K	1480lm/m	CRI>90	14W/m	5m/roll
78001-750724	VK/24/COBW/930/512	IP66	24V	3000K	1454lm/m	CRI>90	14W/m	5m/roll
78001-752724	VK/24/COBW/940/512	IP66	24V	4000K	1480lm/m	CRI>90	14W/m	5m/roll


Details

Led type **COB** EPISTAR. Led qty **512pcs/m**. **Tape 3M.**

Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.


IP20. IP66. **5 years guarantee**

VK/24/COB/.../512

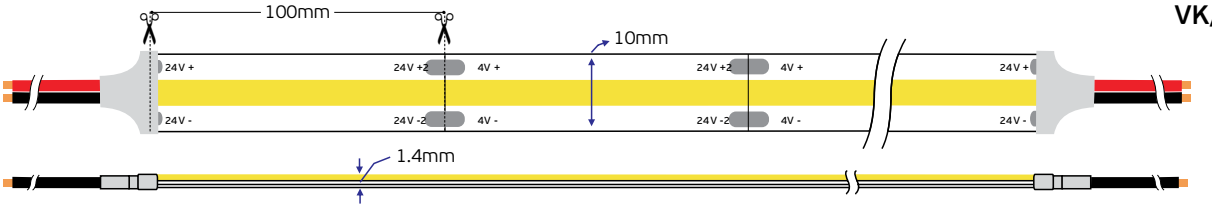

IP20

VK/24/COBW/.../512

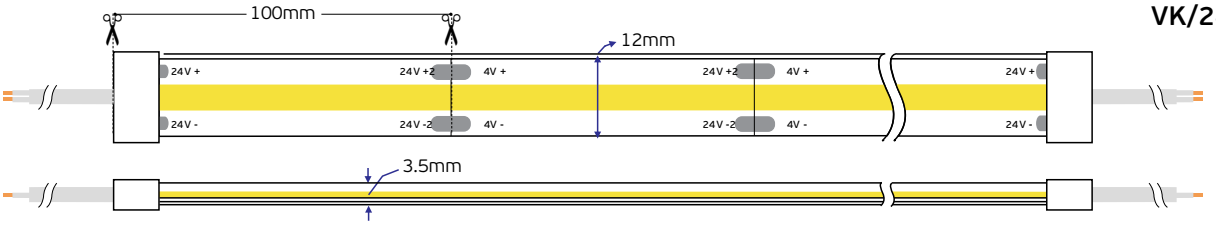

IP66

Ledstrips CRi>90. IP20.

Ledstrips Epistar Collection

IP20. 42W/m. 2700K.



VK/24/2835/.../240/42W


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-738724	**VK/24/2835/927/240/42W**	**24V**	**2700K**	**6486lm/m**	**CRI>90**	**42W/m**	**2m/roll**
78001-739724	**VK/24/2835/930/240/42W**	**24V**	**3000K**	**6569lm/m**	**CRI>90**	**42W/m**	**2m/roll**
78001-740724	**VK/24/2835/940/240/42W**	**24V**	**4000K**	**6645lm/m**	**CRI>90**	**42W/m**	**2m/roll**

Details

Led type **SMD 2835** EPISTAR. Led qty **240pcs/m**. **Tape 3M.**
Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.

IP20.

5 years guarantee

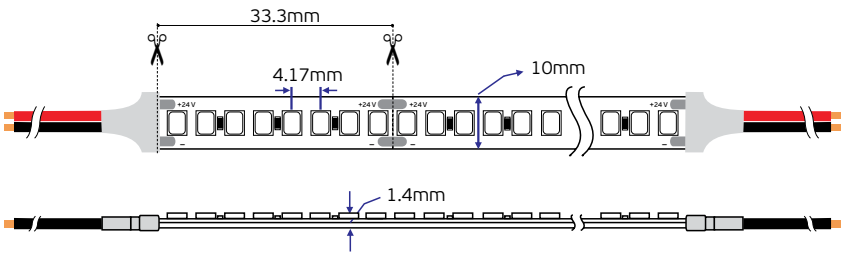

IP20. 33W/m. 3000K.



VK/24/2835/.../320


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-741724	**VK/24/2835/927/320**	**24V**	**2700K**	**4663lm/m**	**CRI>90**	**33W/m**	**5m/roll**
78001-742724	**VK/24/2835/930/320**	**24V**	**3000K**	**4716lm/m**	**CRI>90**	**33W/m**	**5m/roll**
78001-743724	**VK/24/2835/940/320**	**24V**	**4000K**	**4757lm/m**	**CRI>90**	**33W/m**	**5m/roll**

Details

Led type **SMD 2835** EPISTAR. Led qty **320pcs/m**. **Tape 3M.**
Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.

IP20.

5 years guarantee

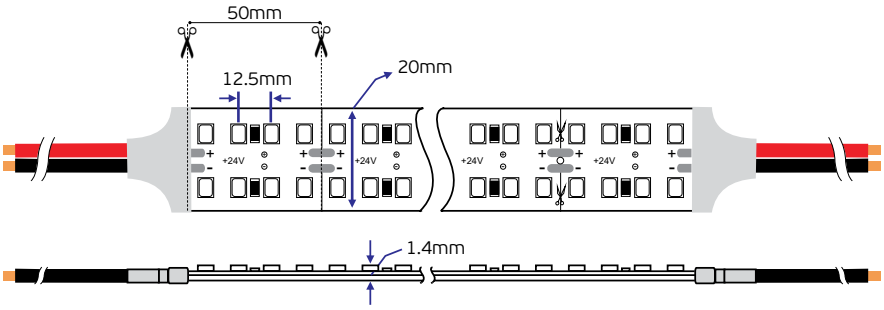

Ledstrips CRi>90. IP20.

Ledstrips Epistar Collection



VK/24/2216/.../60

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-695724	**VK/24/2216/927/60**	**24V**	**2700K**	**704lm/m**	**CRI>90**	**6W/m**	**5m/roll**
78001-696724	**VK/24/2216/930/60**	**24V**	**3000K**	**735lm/m**	**CRI>90**	**6W/m**	**5m/roll**
78001-697724	**VK/24/2216/940/60**	**24V**	**4000K**	**760lm/m**	**CRI>90**	**6W/m**	**5m/roll**

Details


Led type **SMD 2216** EPISTAR**.** Led qty **60pcs/m**. **Tape 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**.
Lifetime **50.000hrs**.

IP20.

5 years guarantee Super bright!!!





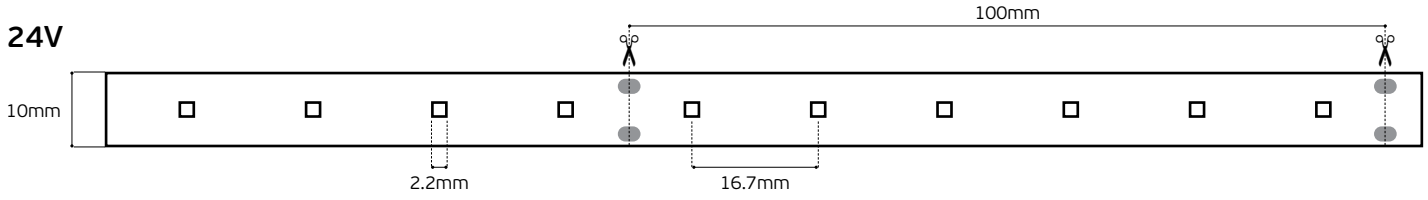

IP20. 12W/m.



VK/24/2216/.../120

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-698724	**VK/24/2216/927/120**	**24V**	**2700K**	**1.455lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-699724	**VK/24/2216/930/120**	**24V**	**3000K**	**1.485lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-700724	**VK/24/2216/940/120**	**24V**	**4000K**	**1.542lm/m**	**CRI>90**	**12W/m**	**5m/roll**

Details

Led type **SMD 2216** EPISTAR. Led qty **120pcs/m**. **Tape on back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.


IP20.

5 years guarantee Super bright!!!





24V

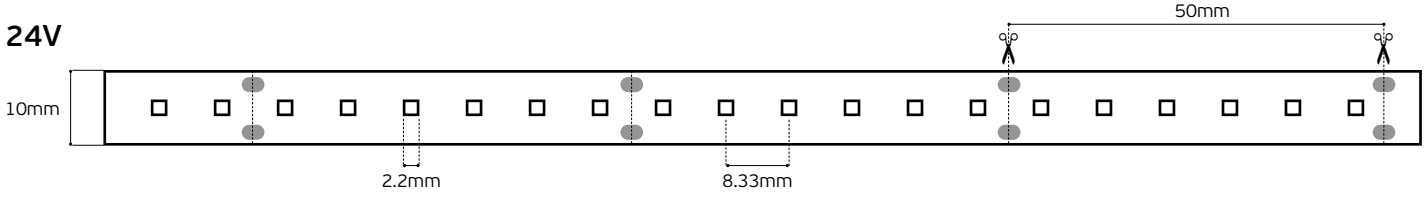

Ledstrips CRi>90. IP20.

Ledstrips Epistar Collection

IP20. 18W/m.



VK/24/2216/.../180

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-701724	**VK/24/2216/927/180**	**24V**	**2700K**	**2.187lm/m**	**CRI>90**	**18W/m**	**5m/roll**
78001-702724	**VK/24/2216/930/180**	**24V**	**3000K**	**2.244lm/m**	**CRI>90**	**18W/m**	**5m/roll**
78001-703724	**VK/24/2216/940/180**	**24V**	**4000K**	**2.291lm/m**	**CRI>90**	**18W/m**	**5m/roll**

Details

Led type **SMD 2216** EPISTAR. Led qty **180pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.


IP20.

5 years guarantee Super bright!!!





24V

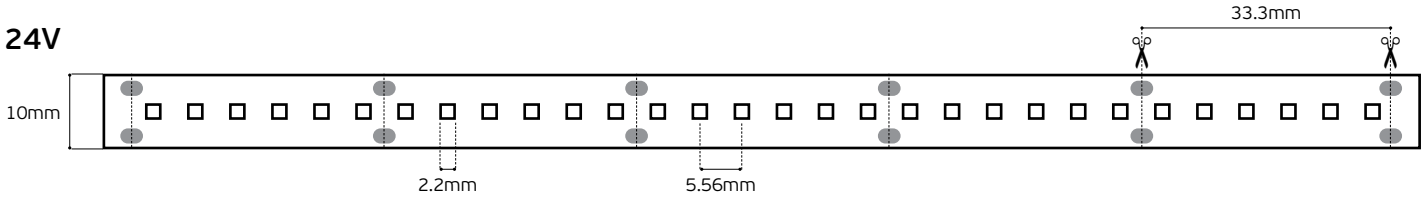



VK/24/2216/.../240


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-704724	**VK/24/2216/927/240**	**24V**	**2700K**	**2.931lm/m**	**CRI>90**	**24W/m**	**5m/roll**
78001-705724	**VK/24/2216/930/240**	**24V**	**3000K**	**3.016lm/m**	**CRI>90**	**24W/m**	**5m/roll**
78001-706724	**VK/24/2216/940/240**	**24V**	**4000K**	**3.066lm/m**	**CRI>90**	**24W/m**	**5m/roll**


Details

Led type **SMD 2216** EPISTAR. Led qty **240pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**.
Lifetime **50.000hrs**.


IP20.

5 years guarantee Super bright!!!

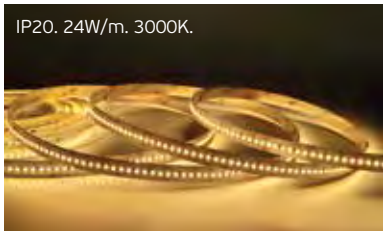

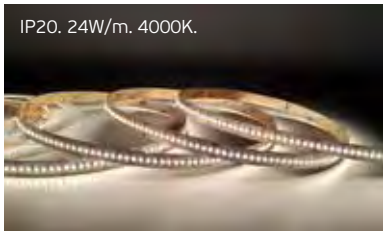

24V

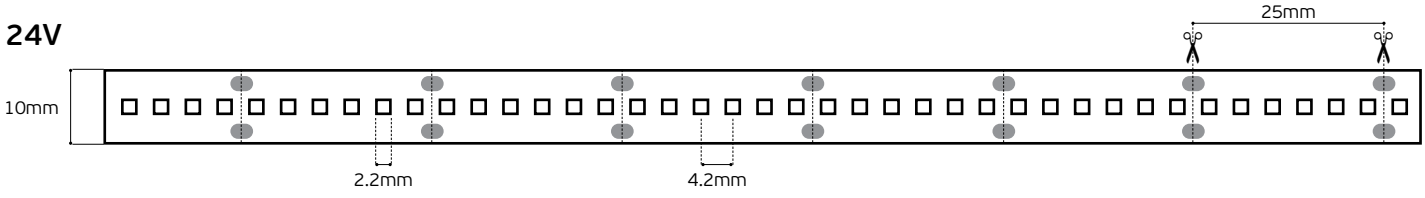

Ledstrips CRi>90. IP66.

Ledstrips Epistar Collection



VK/24/2216W/.../60

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-710724	**VK/24/2216W/927/60**	**24V**	**2700K**	**697lm/m**	**CRI>90**	**6W/m**	**5m/roll**
78001-711724	**VK/24/2216W/930/60**	**24V**	**3000K**	**719lm/m**	**CRI>90**	**6W/m**	**5m/roll**
78001-712724	**VK/24/2216W/940/60**	**24V**	**4000K**	**748lm/m**	**CRI>90**	**6W/m**	**5m/roll**

Details

Led type **SMD 2216** EPISTAR. Led qty **60pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**.
Lifetime **50.000hrs**.


IP66.

5 years guarantee Super bright!!!





24V

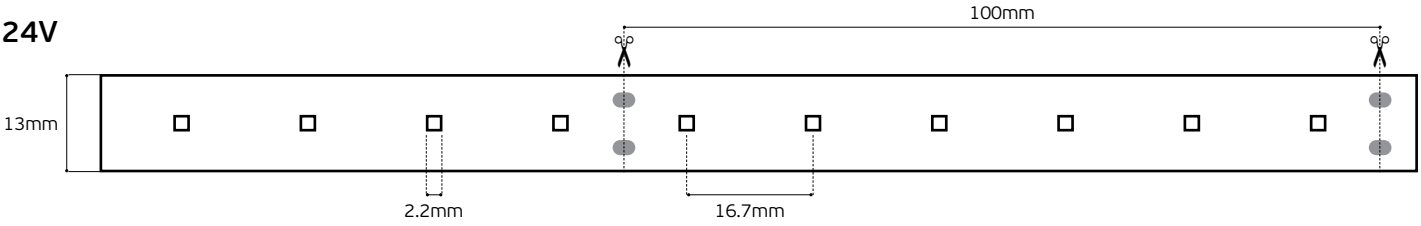

IP66. 12W/m.



VK/24/2216W/.../120

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-713724	**VK/24/2216W/927/120**	**24V**	**2700K**	**1.403lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-714724	**VK/24/2216W/930/120**	**24V**	**3000K**	**1.484lm/m**	**CRI>90**	**12W/m**	**5m/roll**
78001-715724	**VK/24/2216W/940/120**	**24V**	**4000K**	**1.550lm/m**	**CRI>90**	**12W/m**	**5m/roll**

Details

Led type **SMD 2216** EPISTAR. Led qty **120pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**.
Lifetime **50.000hrs**.


IP66.

5 years guarantee Super bright!!!





24V

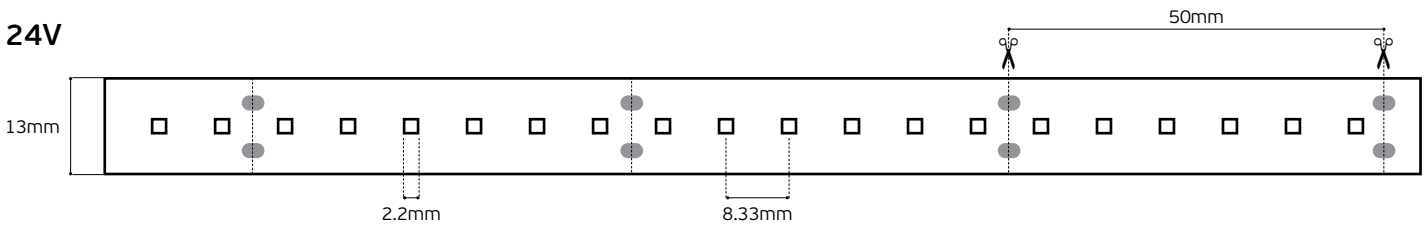

Ledstrips CRi>90. IP66.

Ledstrips Epistar Collection

IP66. 18W/m.



VK/24/2216W/.../180

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-716724	**VK/24/2216W/927/180**	**24V**	**2700K**	**2.115lm/m**	**CRI>90**	**18W/m**	**5m/roll**
78001-717724	**VK/24/2216W/930/180**	**24V**	**3000K**	**2.210lm/m**	**CRI>90**	**18W/m**	**5m/roll**
78001-718724	**VK/24/2216W/940/180**	**24V**	**4000K**	**2.274lm/m**	**CRI>90**	**18W/m**	**5m/roll**


Details

Led type **SMD 2216** EPISTAR. Led qty **180pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.


IP66.

5 years guarantee Super bright!!!



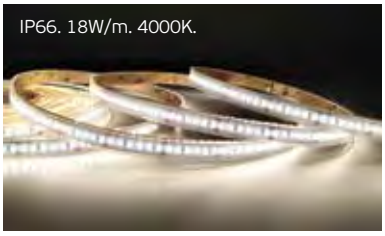

24V

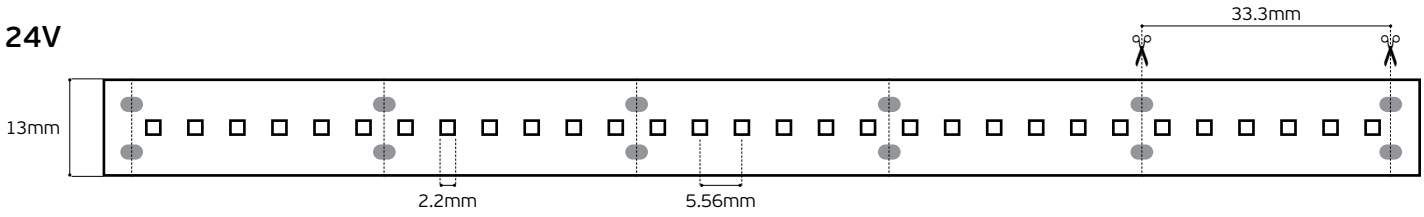

IP66. 24W/m.



VK/24/2216W/.../240

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-719724	**VK/24/2216W/927/240**	**24V**	**2700K**	**2.857lm/m**	**CRI>90**	**24W/m**	**5m/roll**
78001-720724	**VK/24/2216W/930/240**	**24V**	**3000K**	**2.984lm/m**	**CRI>90**	**24W/m**	**5m/roll**
78001-721724	**VK/24/2216W/940/240**	**24V**	**4000K**	**3.017lm/m**	**CRI>90**	**24W/m**	**5m/roll**


Details

Led type **SMD 2216** EPISTAR. Led qty **240pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**.
Lifetime **50.000hrs**.


IP66.

5 years guarantee Super bright!!!



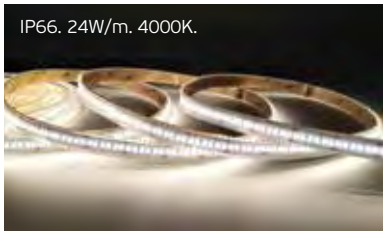

24V

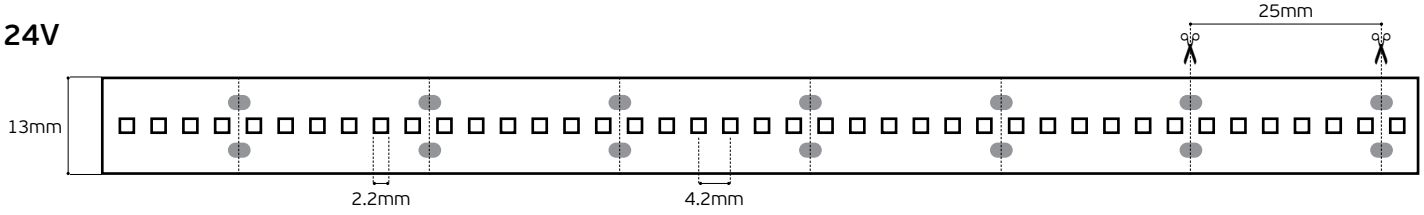

Ledstrips CRi>80. IP20.

Ledstrips CRi>80 Collection



VK/12/3528/60_12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-243123	**VK/12/3528/WW/60**	**12V**	**2700K**	**629lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-034719	**VK/12/3528/W/60**	**12V**	**3000K**	**641lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-244123	**VK/12/3528/C/60**	**12V**	**4000K**	**750lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-033719	**VK/12/3528/D/60**	**12V**	**6000K**	**712lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-104719	**VK/12/3528/BL/60**	**12V**	**Blue**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-105719	**VK/12/3528/R/60**	**12V**	**Red**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-106719	**VK/12/3528/Y/60**	**12V**	**Yellow**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-107719	**VK/12/3528/GR/60**	**12V**	**Green**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-249123	**VK/12/3528/A/60**	**12V**	**Amber**	**600lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-250123	**VK/12/3528/P/60**	**12V**	**Purple**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

12V

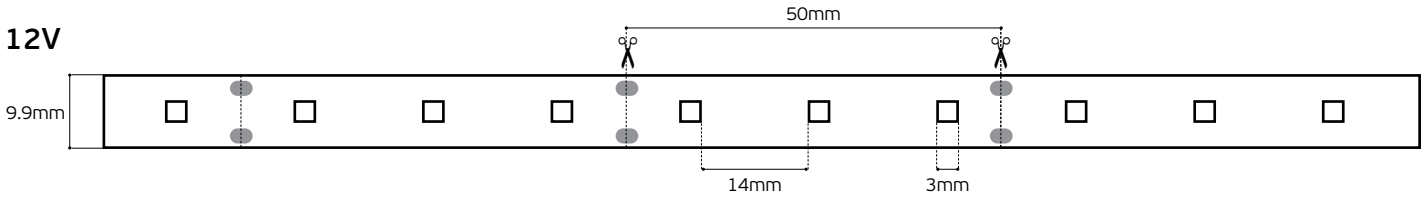



VK/24/3528/60_24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-245123	**VK/24/3528/WW/60**	**24V**	**2700K**	**586lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-051719	**VK/24/3528/W/60**	**24V**	**3000K**	**674lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-238123	**VK/24/3528/C/60**	**24V**	**4000K**	**724lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-052719	**VK/24/3528/D/60**	**24V**	**6000K**	**728lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-626126	**VK/24/3528/BL/60**	**24V**	**Blue**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

24V

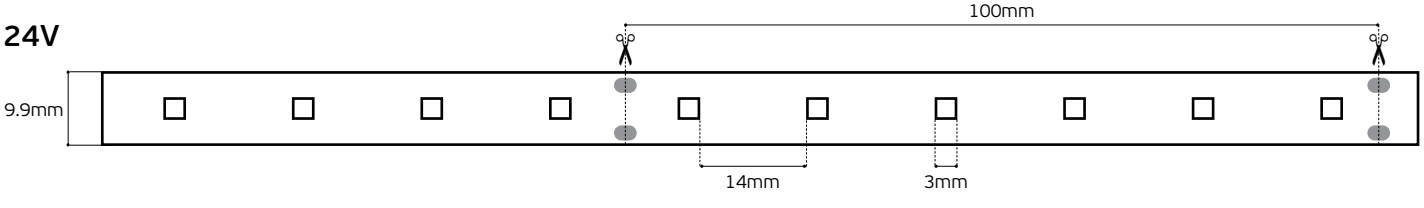

Ledstrips CRi>80. IP20.

Ledstrips CRi>80 Collection



VK/12/3528/96 12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-145719	**VK/12/3528/WW/96**	**12V**	**2700K**	**946lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-109719	**VK/12/3528/W/96**	**12V**	**3000K**	**1.024lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-161719	**VK/12/3528/C/96**	**12V**	**4000K**	**1.143lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-110719	**VK/12/3528/D/96**	**12V**	**6000K**	**1.161lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-611719	**VK/12/3528/BL/96**	**12V**	**Blue**	**770lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

12V

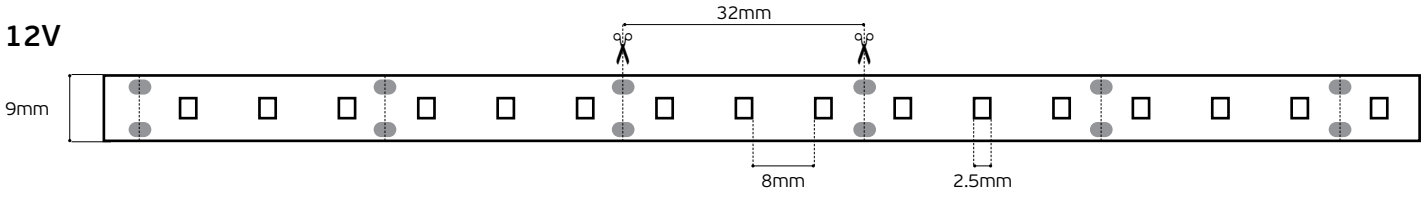



VK/24/3528/96_24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-147719	**VK/24/3528/WW/96**	**24V**	**2700K**	**1.001lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-111719	**VK/24/3528/W/96**	**24V**	**3000K**	**1.074lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-237123	**VK/24/3528/C/96**	**24V**	**4000K**	**1.178lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-099719	**VK/24/3528/D/96**	**24V**	**6000K**	**1.099lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-646126	**VK/24/3528/BL/96**	**24V**	**Blue**	**770lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

24V

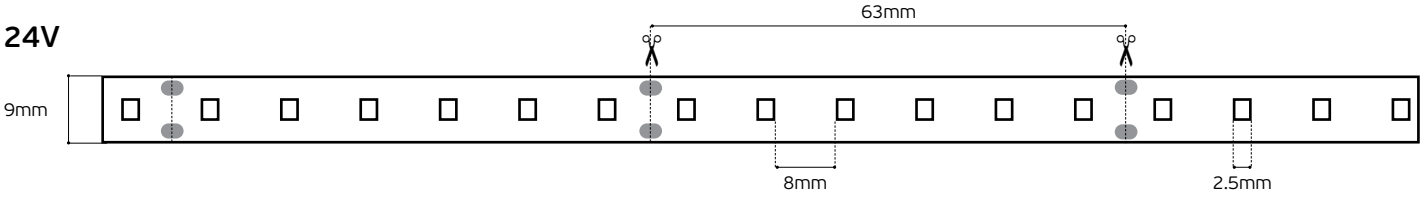

Ledstrips CRi>80. IP20.

Ledstrips CRi>80 Collection



VK/12/3528/120 12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-162719	**VK/12/3528/WW/120**	**12V**	**2700K**	**1.214lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-072719	**VK/12/3528/W/120**	**12V**	**3000K**	**1.295lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-163719	**VK/12/3528/C/120**	**12V**	**4000K**	**1.288lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-101719	**VK/12/3528/D/120**	**12V**	**6000K**	**1.404lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-647126	**VK/12/3528/BL/120**	**12V**	**Blue**	**970lm/m**	**CRI>80**	**9.68W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

12V

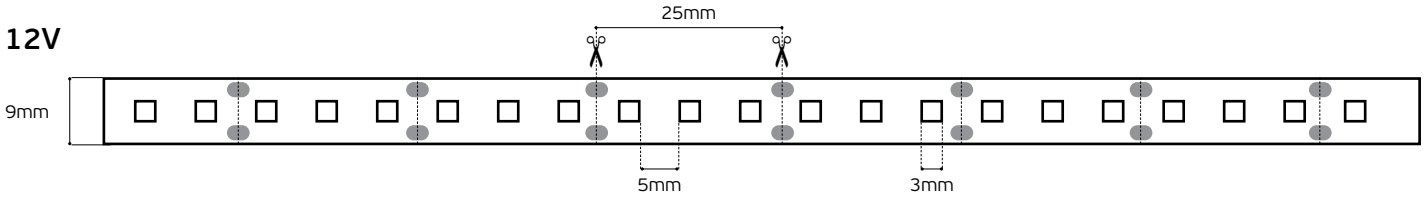



VK/24/3528/120_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-164719	**VK/24/3528/WW/120**	**24V**	**2700K**	**1.084lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-079719	**VK/24/3528/W/120**	**24V**	**3000K**	**1.208lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-240123	**VK/24/3528/C/120**	**24V**	**4000K**	**1.139lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-080719	**VK/24/3528/D/120**	**24V**	**6000K**	**1.125lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-606719	**VK/24/3528/WD/120**	**24V**	**3000K-6000K**	**970lm/m**	**CRI>80**	**9.68W/m**	**5m/roll**
78001-648126	**VK/24/3528/BL/120**	**24V**	**Blue**	**970lm/m**	**CRI>80**	**9.68W/m**	**5m/roll**


Details

Led type **SMD 2835**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

LED's/m
120pcs


IP20.

24V

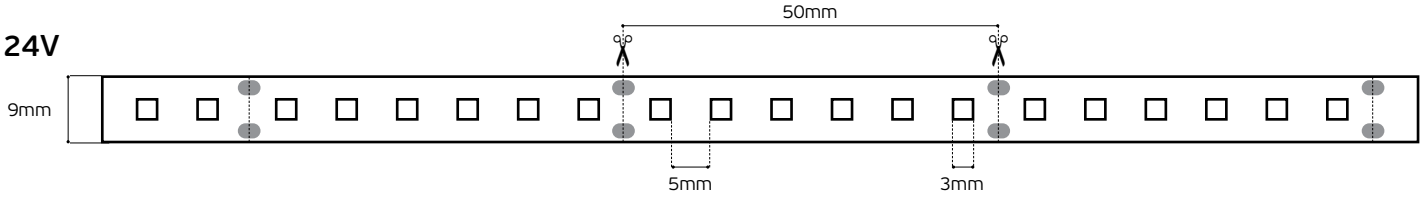

Ledstrips CRi>80. IP20.

Ledstrips CRi>80 Collection

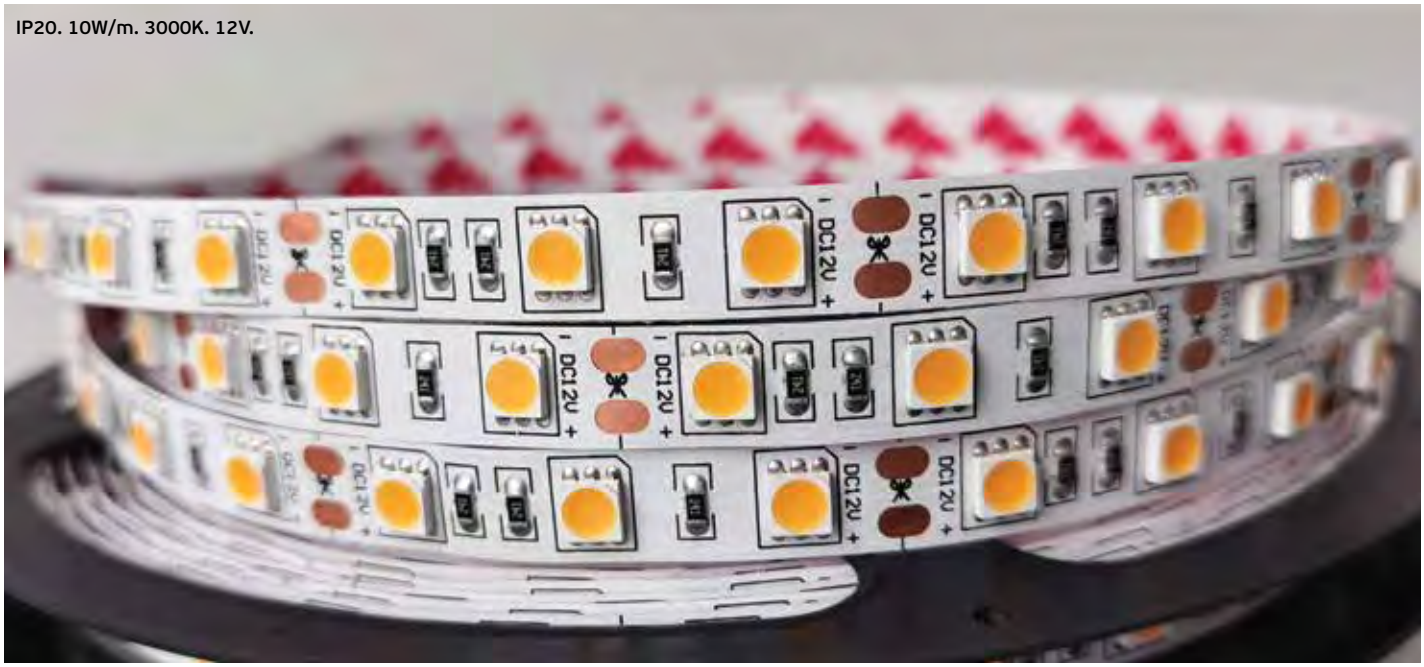

VK/12/5050/60 12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-246123	**VK/12/5050/WW/60**	**12V**	**2700K**	**954lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-038719	**VK/12/5050/W/60**	**12V**	**3000K**	**991lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-247123	**VK/12/5050/C/60**	**12V**	**4000K**	**1.164lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-037719	**VK/12/5050/D/60**	**12V**	**6000K**	**1.086lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-112719	**VK/12/5050/BL/60**	**12V**	**Blue**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-113719	**VK/12/5050/R/60**	**12V**	**Red**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-114719	**VK/12/5050/Y/60**	**12V**	**Yellow**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-115719	**VK/12/5050/GR/60**	**12V**	**Green**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-251123	**VK/12/5050/A/60**	**12V**	**Amber**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-252123	**VK/12/5050/P/60**	**12V**	**Purple**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**


Details

Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

12V

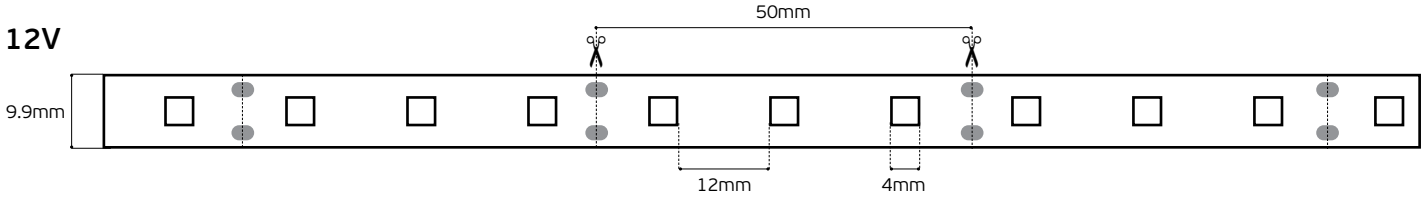

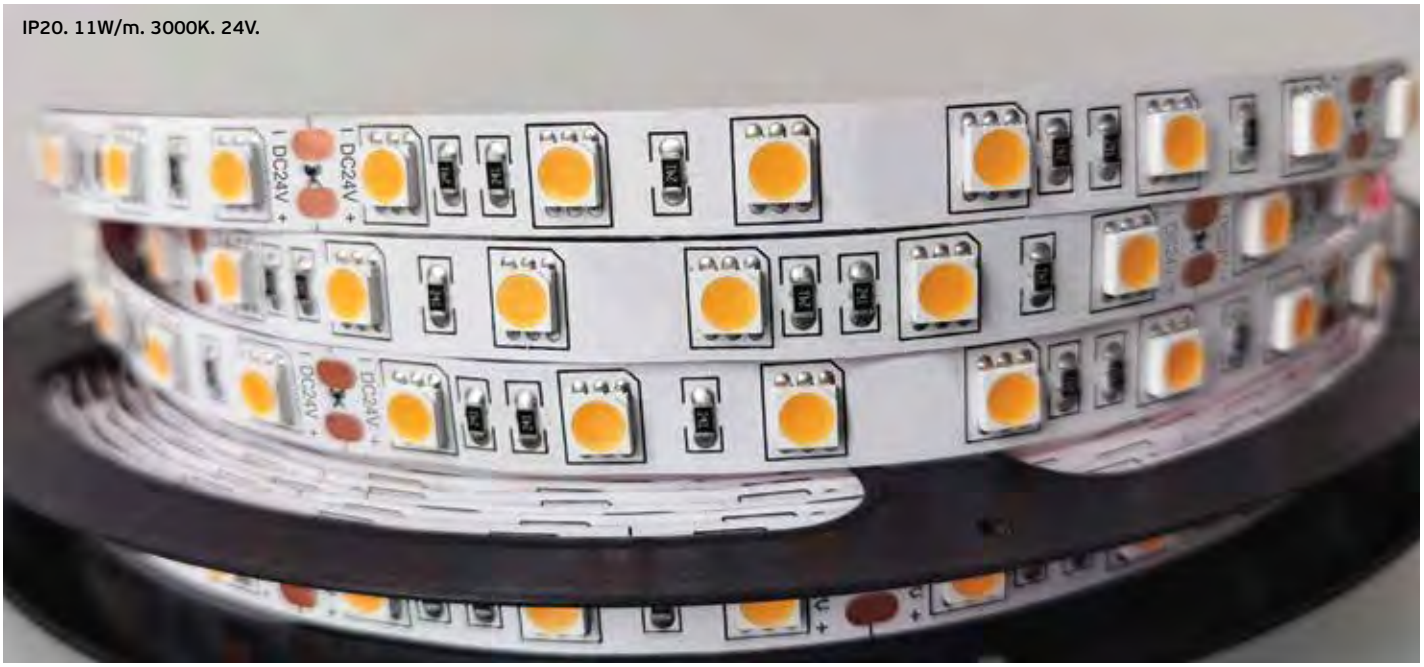

VK/24/5050/60 24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-248123	**VK/24/5050/WW/60**	**24V**	**2700K**	**855lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-056719	**VK/24/5050/W/60**	**24V**	**3000K**	**1.048lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-239123	**VK/24/5050/C/60**	**24V**	**4000K**	**1.231lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-053719	**VK/24/5050/D/60**	**24V**	**6000K**	**1.141lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-607719	**VK/24/5050/WD/60**	**24V**	**3000-6000K**	**1.440lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-649126	**VK/24/5050/BL/60**	**24V**	**Blue**	**1.440lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**

Details

Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.


IP20.

24V

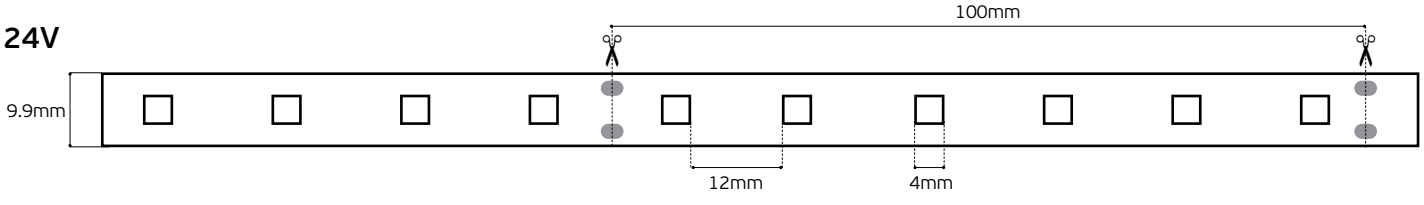

Ledstrips CRi>80. IP20.

Ledstrips CRi>80 Collection

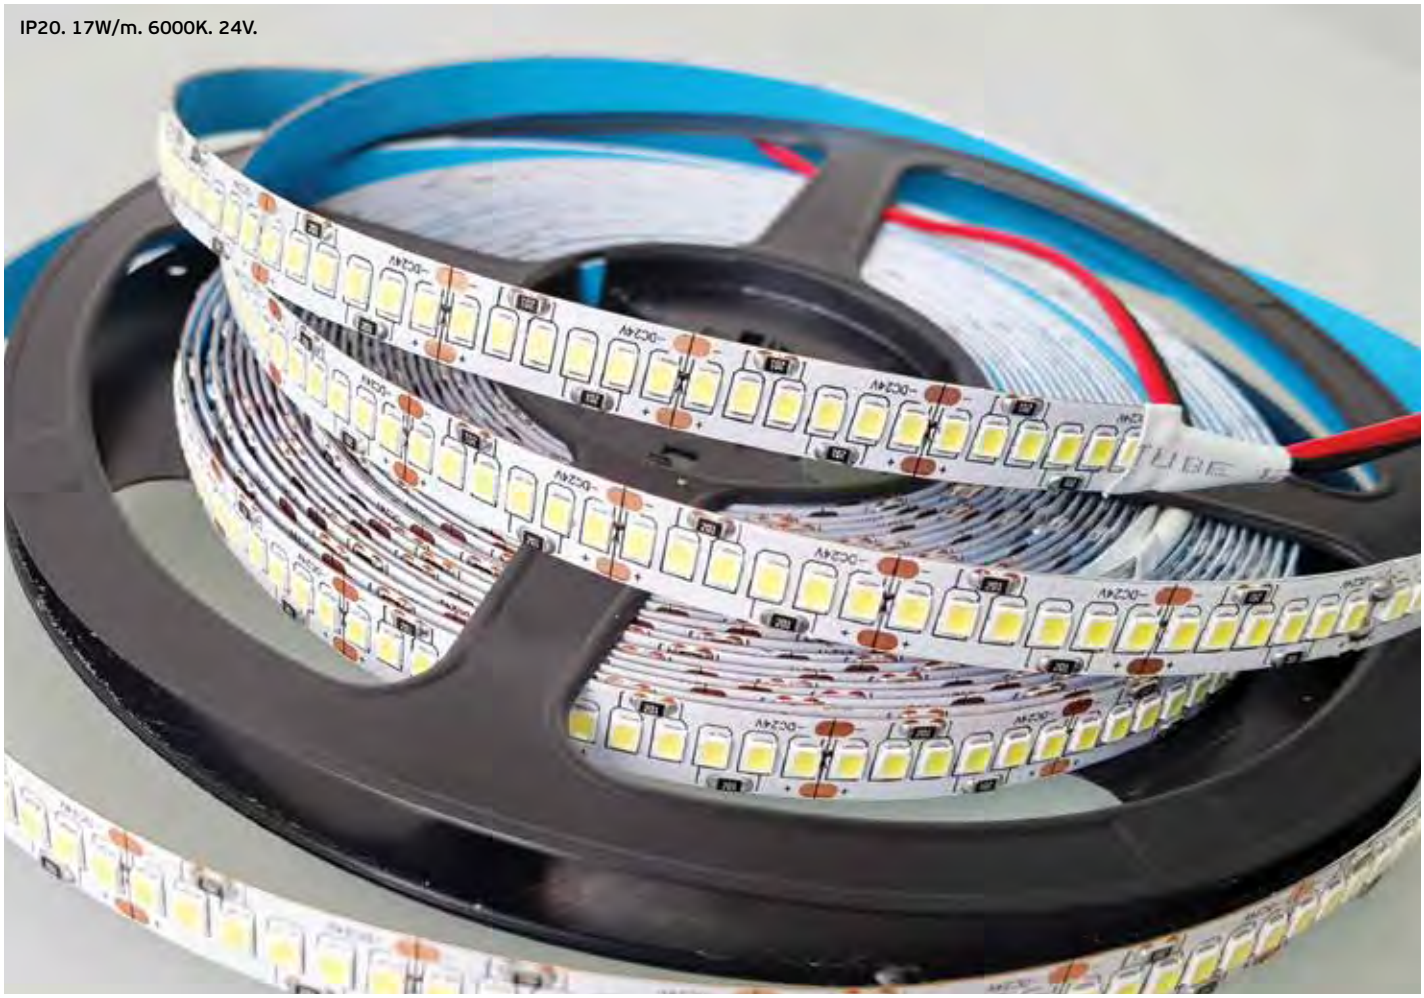

VK/24/2835/240 24V SUPER BRIGHT!!!


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-622126	**VK/24/2835/WW/240**	**24V**	**2700K**	**2.208lm/m**	**CRI>80**	**18W/m**	**5m/roll**
78001-623126	**VK/24/2835/W/240**	**24V**	**3000K**	**1.924lm/m**	**CRI>80**	**17W/m**	**5m/roll**
78001-624126	**VK/24/2835/C/240**	**24V**	**4000K**	**2.134lm/m**	**CRI>80**	**18W/m**	**5m/roll**
78001-625126	**VK/24/2835/D/240**	**24V**	**6000K**	**1.920lm/m**	**CRI>80**	**17W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **240pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20.

24V

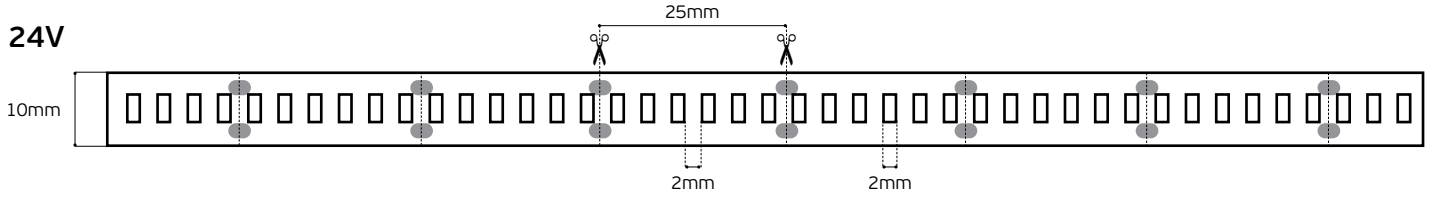



VK/24/2835/120 24V SUPER BRIGHT!!! SUPER SLIM!!!

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-670126	**VK/24/2835/WW/120/4MM**	**24V**	**2700K**	**969lm/m**	**CRI>90**	**9.69W/m**	**5m/roll**
78001-650126	**VK/24/2835/W/120/4MM**	**24V**	**3000K**	**969lm/m**	**CRI>90**	**9.69W/m**	**5m/roll**
78001-627126	**VK/24/2835/C/120/4MM**	**24V**	**4000K**	**969lm/m**	**CRI>90**	**9.69W/m**	**5m/roll**


Details

Led type **SMD 2835**. Led qty **120pcs/m**. CRI>90. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.

IP20.

5 **years guarantee** Super bright!!!

24V

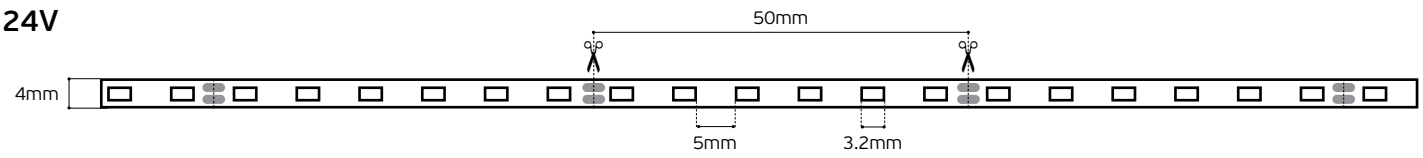

Ledstrips CRi>80. IP55.

Ledstrips CRi>80, Collection



VK/12/3528J/60_12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-253123	**VK/12/3528J/WW/60**	**12V**	**2700K**	**586lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-041719	**VK/12/3528J/W/60**	**12V**	**3000K**	**674lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-254123	**VK/12/3528J/C/60**	**12V**	**4000K**	**724lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-040719	**VK/12/3528J/D/60**	**12V**	**6000K**	**728lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-049719	**VK/12/3528J/BL/60**	**12V**	**Blue**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-116719	**VK/12/3528J/R/60**	**12V**	**Red**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-117719	**VK/12/3528J/Y/60**	**12V**	**Yellow**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-118719	**VK/12/3528J/GR/60**	**12V**	**Green**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-255123	**VK/12/3528J/A/60**	**12V**	**Amber**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-256123	**VK/12/3528J/P/60**	**12V**	**Purple**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

12V

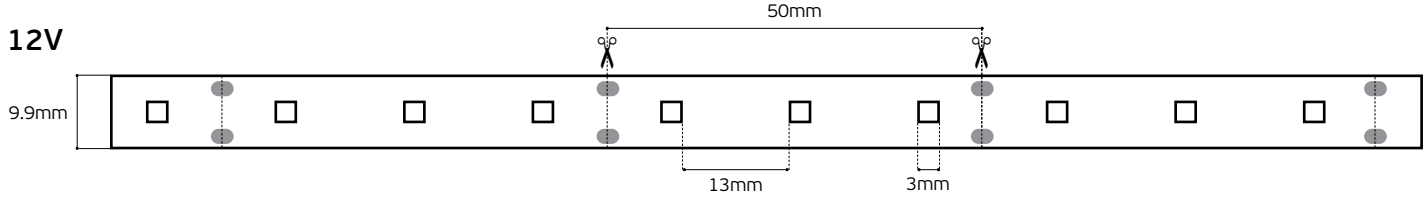



VK/24/3528J/60_24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-257123	**VK/24/3528J/WW/60**	**24V**	**2700K**	**586lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-058719	**VK/24/3528J/W/60**	**24V**	**3000K**	**674lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-258123	**VK/24/3528J/C/60**	**24V**	**4000K**	**724lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-057719	**VK/24/3528J/D/60**	**24V**	**6000K**	**728lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-651126	**VK/24/3528J/BL/60**	**24V**	**Blue**	**480lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

24V

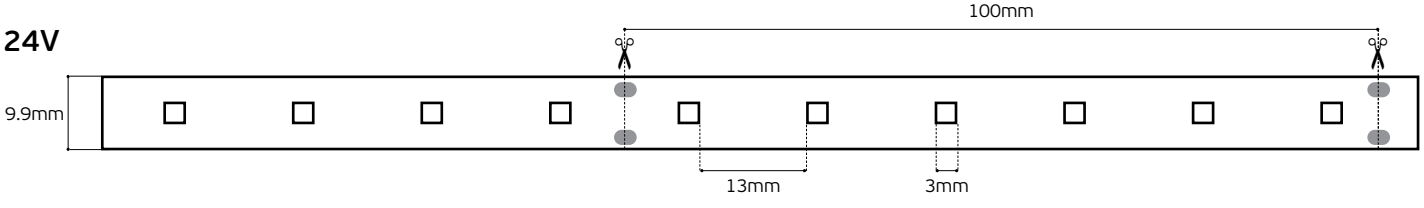

Ledstrips CRi>80. IP55.


Ledstrips CRi>80, Collection

VK/24/5050J/30_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-600719	**VK/24/5050J/W/30**	**24V**	**3000K**	**488lm/m**	**CRI>80**	**6W/m**	**5m/roll**
78001-059719	**VK/24/5050J/D/30**	**24V**	**6000K**	**763lm/m**	**CRI>80**	**7W/m**	**5m/roll**

Details
Led type **SMD 5050**. Led qty **30pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

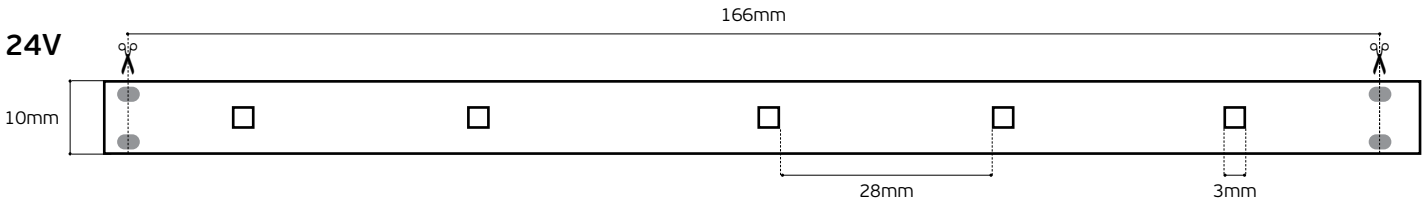


VK/12/5050J/30_12V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-043719	**VK/12/5050J/W/30**	**12V**	**3000K**	**488lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-042719	**VK/12/5050J/D/30**	**12V**	**6000K**	**763lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-050719	**VK/12/5050J/BL/30**	**12V**	**Blue**	**720lm/m**	**CRI>80**	**7.2W/m**	**5m/roll**

Details
Led type **SMD 5050**. Led qty **30pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

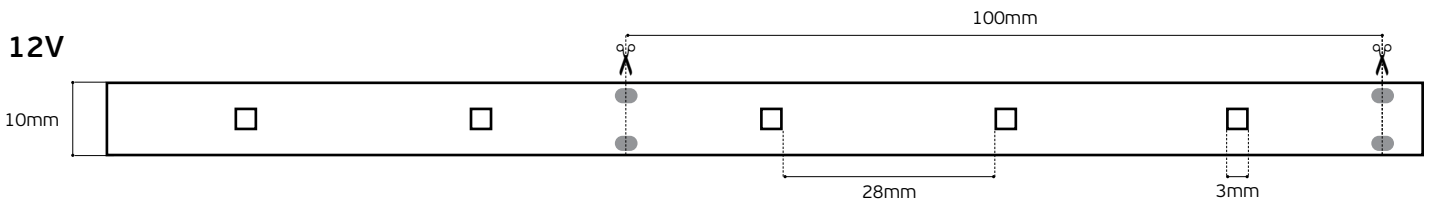

Ledstrips CRi>80. IP55.

Ledstrips CRi>80, Collection

IP55. 5W/m. 6000K. 12V.



Ledstrips CRi>80. IP55.

Ledstrips CRi>80, Collection


VK/24/3528J/96_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-156719	**VK/24/3528J/WW/96**	**24V**	**2700K**	**1.001lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-120719	**VK/24/3528J/W/96**	**24V**	**3000K**	**1.074lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-166719	**VK/24/3528J/C/96**	**24V**	**4000K**	**1.178lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-121719	**VK/24/3528J/D/96**	**24V**	**6000K**	**1.099lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-653126	**VK/24/3528J/BL/96**	**24V**	**Blue**	**768lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**

Details
Led type **SMD 2835**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

24V

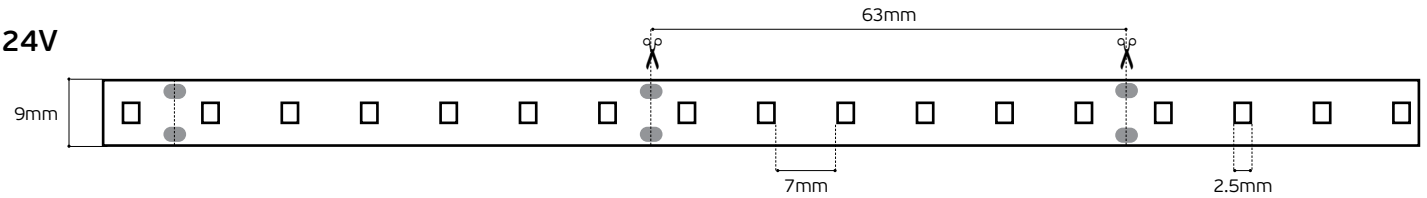


VK/12/3528J/96_12V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-155719	**VK/12/3528J/WW/96**	**12V**	**2700K**	**1.001lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-119719	**VK/12/3528J/W/96**	**12V**	**3000K**	**1.074lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-165719	**VK/12/3528J/C/96**	**12V**	**4000K**	**1.178lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-098719	**VK/12/3528J/D/96**	**12V**	**6000K**	**1.099lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-652126	**VK/12/3528J/BL/96**	**12V**	**Blue**	**768lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**

Details
Led type **SMD 2835**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

12V

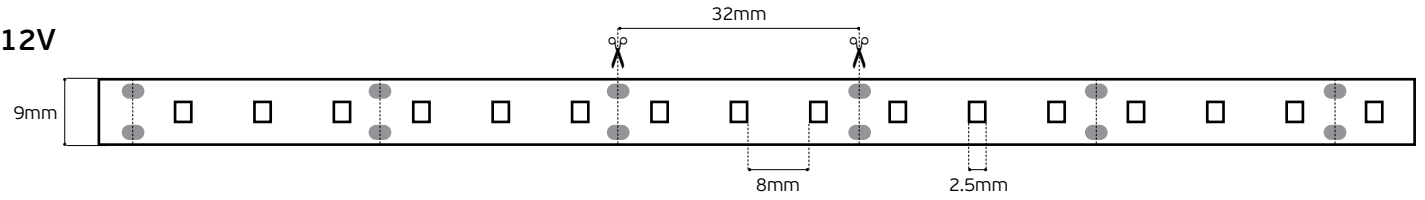

Ledstrips CRi>80. IP55.

IP55. 9W/m. 6000K. 12V.



Ledstrips CRi>80. IP55.

Ledstrips CRi>80, Collection

VK/24/3528J/120 24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-168719	**VK/24/3528J/WW/120**	**24V**	**2700K**	**982lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-103719	**VK/24/3528J/W/120**	**24V**	**3000K**	**1.054lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-169719	**VK/24/3528J/C/120**	**24V**	**4000K**	**1.107lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-102719	**VK/24/3528J/D/120**	**24V**	**6000K**	**1.089lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-655126	**VK/24/3528J/BL/120**	**24V**	**Blue**	**960lm/m**	**CRI>80**	**9.6W/m**	**5m/roll**

Details

Led type **SMD 2835**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

24V

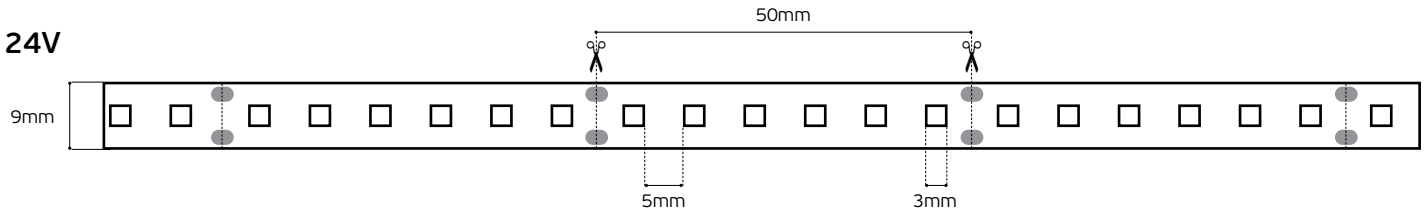

VK/12/3528J/120 12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-067719	**VK/12/3528J/WW/120**	**12V**	**2700K**	**982lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-074719	**VK/12/3528J/W/120**	**12V**	**3000K**	**1.054lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-167719	**VK/12/3528J/C/120**	**12V**	**4000K**	**1.107lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-075719	**VK/12/3528J/D/120**	**12V**	**6000K**	**1.089lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-654126	**VK/12/3528J/BL/120**	**12V**	**Blue**	**960lm/m**	**CRI>80**	**9.6W/m**	**5m/roll**

Details


Led type **SMD 2835**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

12V

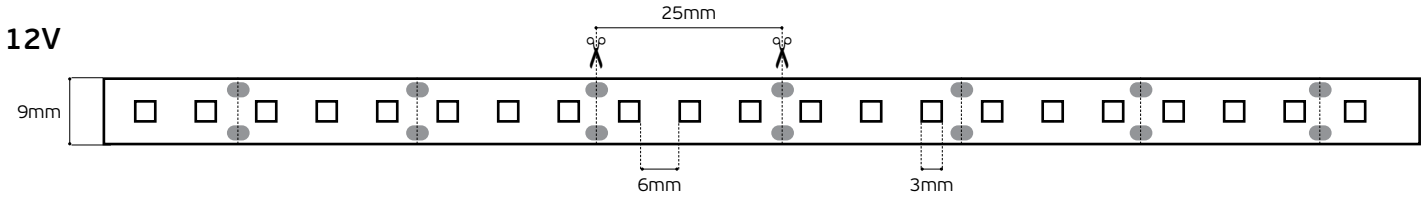

IP55. 10W/m. 4000K. 12V.

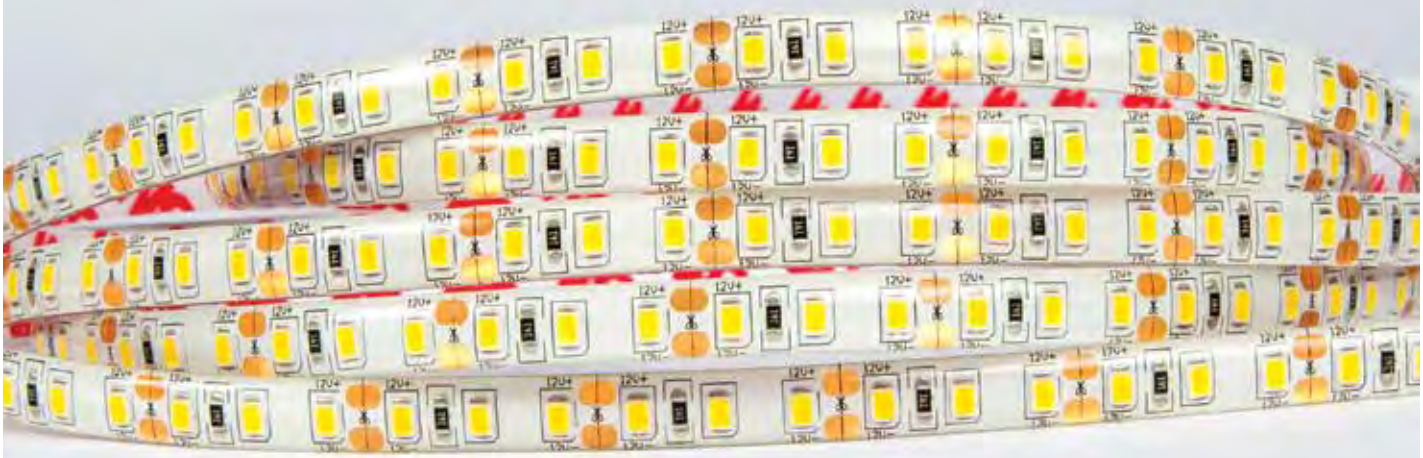

Ledstrips CRi>80. IP55.

Ledstrips CRi>80, Collection



VK/24/5050J/60_24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-263123	**VK/24/5050J/WW/60**	**24V**	**2700K**	**855lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-061719	**VK/24/5050J/W/60**	**24V**	**3000K**	**1.048lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-264123	**VK/24/5050J/C/60**	**24V**	**4000K**	**1.231lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-060719	**VK/24/5050J/D/60**	**24V**	**6000K**	**1.141lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-656126	**VK/24/5050J/BL/60**	**24V**	**Blue**	**1.440lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**

Details

Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

24V

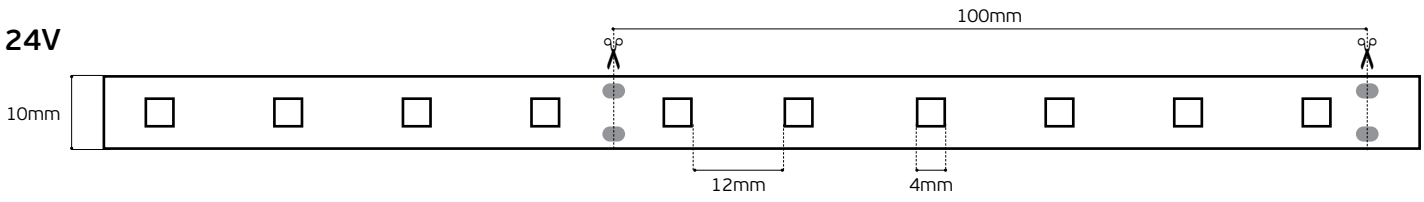

Ledstrips CRi>80. IP55.



VK/12/5050J/60_12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-259123	**VK/12/5050J/WW/60**	**12V**	**2700K**	**855lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-045719	**VK/12/5050J/W/60**	**12V**	**3000K**	**1.048m/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-260123	**VK/12/5050J/C/60**	**12V**	**4000K**	**1.231lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-044719	**VK/12/5050J/D/60**	**12V**	**6000K**	**1.141lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-100719	**VK/12/5050J/BL/60**	**12V**	**Blue**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-122719	**VK/12/5050J/R/60**	**12V**	**Red**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-123719	**VK/12/5050J/Y/60**	**12V**	**Yellow**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-124719	**VK/12/5050J/GR/60**	**12V**	**Green**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-261123	**VK/12/5050J/A/60**	**12V**	**Amber**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-262123	**VK/12/5050J/P/60**	**12V**	**Purple**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**

Details

Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP55.

12V

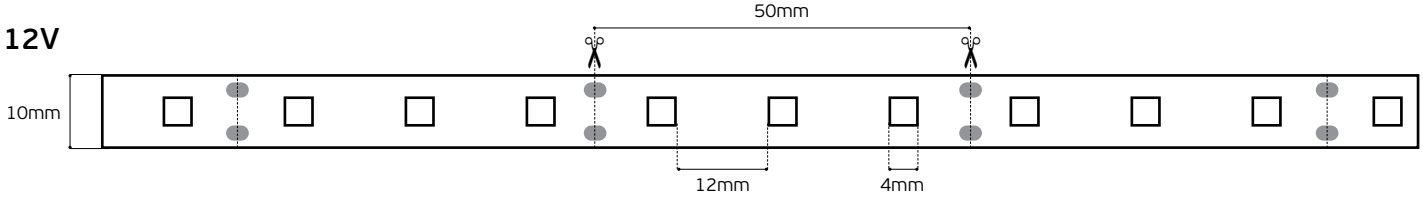

Ledstrips CRi>80. IP68.

Ledstrips CRi>80, Collection

VK/24/3528W/60_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-274123	**VK/24/3528W/WW/60**	**24V**	**2700K**	**586lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-275123	**VK/24/3528W/W/60**	**24V**	**3000K**	**674lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-276123	**VK/24/3528W/C/60**	**24V**	**4000K**	**724lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-277123	**VK/24/3528W/D/60**	**24V**	**6000K**	**728lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-278123	**VK/24/3528W/BL/60**	**24V**	**Blue**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**


Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



24V

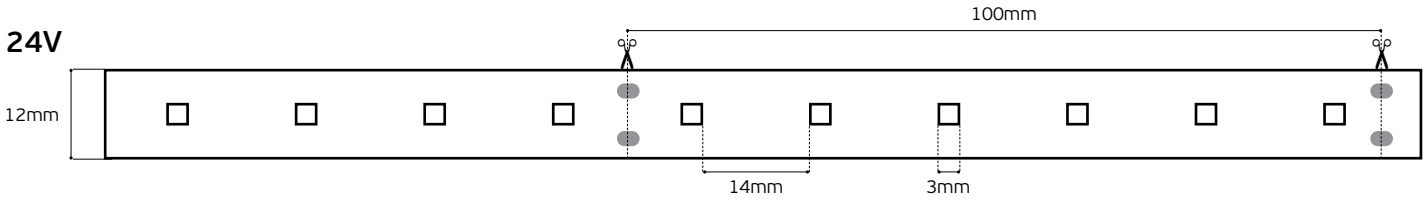

VK/12/3528W/60_12V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-241123	**VK/12/3528W/WW/60**	**12V**	**2700K**	**586lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-228123	**VK/12/3528W/W/60**	**12V**	**3000K**	**674lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-229123	**VK/12/3528W/C/60**	**12V**	**4000K**	**724lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-230123	**VK/12/3528W/D/60**	**12V**	**6000K**	**728lm/m**	**CRI>80**	**5W/m**	**5m/roll**
78001-231123	**VK/12/3528W/BL/60**	**12V**	**Blue**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-265123	**VK/12/3528W/A/60**	**12V**	**Amber**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**
78001-266123	**VK/12/3528W/P/60**	**12V**	**Purple**	**336lm/m**	**CRI>80**	**4.8W/m**	**5m/roll**


Details

Led type **SMD 2835**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



12V

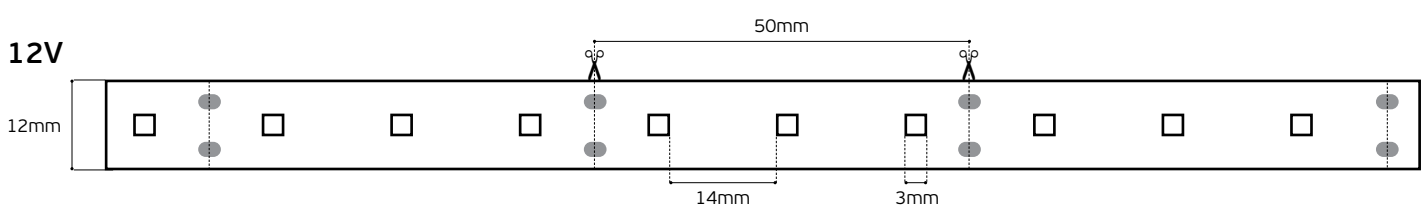

IP68. 5W/m. 12V



Ledstrips CRi>80. IP68.

Ledstrips CRi>80, Collection



VK/24/3528W/96_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-284123	**VK/24/3528W/WW/96**	**24V**	**2700K**	**1.001lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-285123	**VK/24/3528W/W/96**	**24V**	**3000K**	**1.074lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-286123	**VK/24/3528W/C/96**	**24V**	**4000K**	**1.178lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-287123	**VK/24/3528W/D/96**	**24V**	**6000K**	**1.099lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-288123	**VK/24/3528W/BL/96**	**24V**	**Blue**	**780lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**


Details

Led type **SMD 3528**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



24V

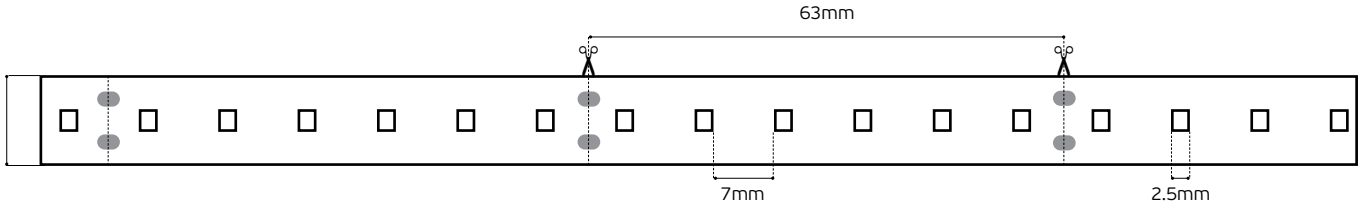



VK/12/3528W/96 12V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-657126	**VK/12/3528W/WW/96**	**12V**	**2700K**	**1.001lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-658126	**VK/12/3528W/W/96**	**12V**	**3000K**	**1.074m/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-659126	**VK/12/3528W/C/96**	**12V**	**4000K**	**1.178lm/m**	**CRI>80**	**8W/m**	**5m/roll**
78001-660126	**VK/12/3528W/D/96**	**12V**	**6000K**	**1.099lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-661126	**VK/12/3528W/BL/96**	**12V**	**Blue**	**780lm/m**	**CRI>80**	**7.68W/m**	**5m/roll**


Details

Led type **SMD 3528**. Led qty **96pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

LED's/m
96pcs

IP68.



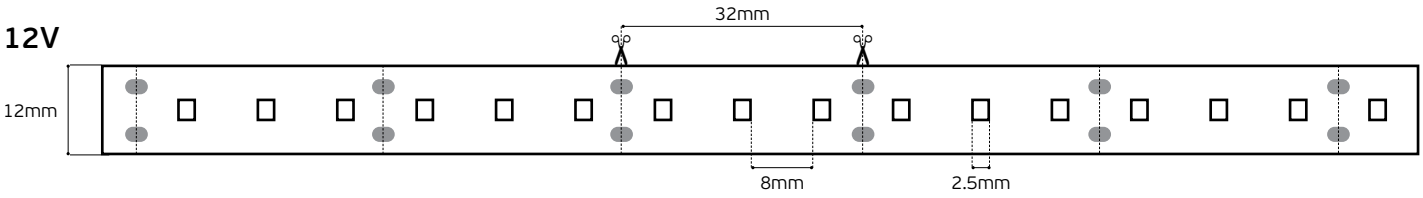

Ledstrips CRi>80. IP68.

Ledstrips CRi>80, Collection



VK/24/3528W/120_24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-289123	**VK/24/3528W/WW/120**	**24V**	**2700K**	**982lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-290123	**VK/24/3528W/W/120**	**24V**	**3000K**	**1.054lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-291123	**VK/24/3528W/C/120**	**24V**	**4000K**	**1.107lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-292123	**VK/24/3528W/D/120**	**24V**	**6000K**	**1.089lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-293123	**VK/24/3528W/BL/120**	**24V**	**Blue**	**970lm/m**	**CRI>80**	**9.68W/m**	**5m/roll**


Details

Led type **SMD 3528**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



24V

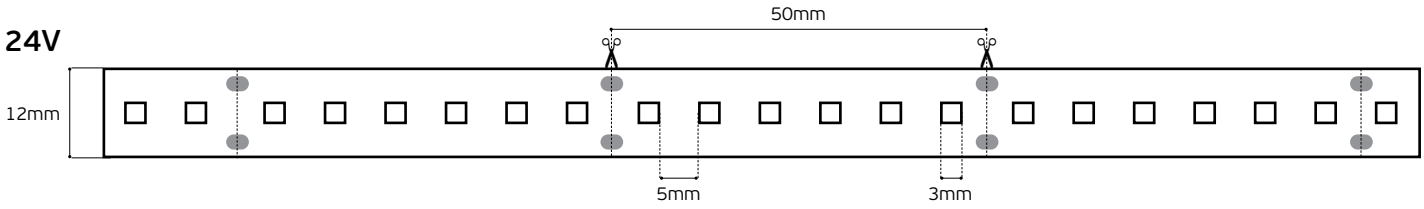

IP68. 10W/m. 12V



VK/12/3528W/120 12V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-662126	**VK/12/3528W/WW/120**	**12V**	**2700K**	**982lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-663126	**VK/12/3528W/W/120**	**12V**	**3000K**	**1.054lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-664126	**VK/12/3528W/C/120**	**12V**	**4000K**	**1.107lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-665126	**VK/12/3528W/D/120**	**12V**	**6000K**	**1.089lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-666126	**VK/12/3528W/BL/120**	**12V**	**Blue**	**970lm/m**	**CRI>80**	**9.68W/m**	**5m/roll**


Details

Led type **SMD 3528**. Led qty **120pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



12V

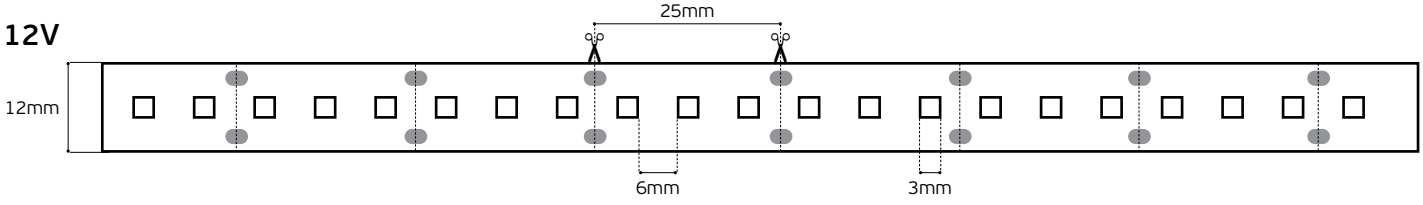

Ledstrips CRi>80. IP68.

Ledstrips CRi>80, Collection

VK/24/5050W/60_24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-279123	**VK/24/5050W/WW/60**	**24V**	**2700K**	**855lm/m**	**CRI>80**	**9W/m**	**5m/roll**
78001-280123	**VK/24/5050W/W/60**	**24V**	**3000K**	**1.048lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-281123	**VK/24/5050W/C/60**	**24V**	**4000K**	**1.231lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-282123	**VK/24/5050W/D/60**	**24V**	**6000K**	**1.141lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-283123	**VK/24/5050W/BL/60**	**24V**	**Blue**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**

Details
Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



24V

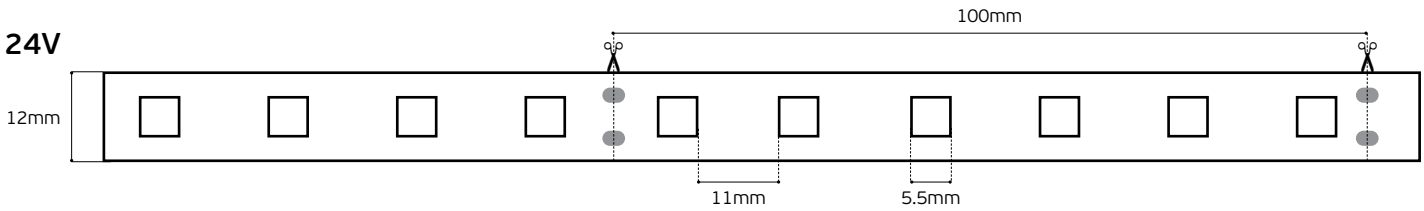

VK/12/5050W/60_12V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-242123	**VK/12/5050W/WW/60**	**12V**	**2700K**	**855lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-232123	**VK/12/5050W/W/60**	**12V**	**3000K**	**1.048lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-233123	**VK/12/5050W/C/60**	**12V**	**4000K**	**1.231lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-234123	**VK/12/5050W/D/60**	**12V**	**6000K**	**1.141lm/m**	**CRI>80**	**10W/m**	**5m/roll**
78001-235123	**VK/12/5050W/BL/60**	**12V**	**Blue**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-267123	**VK/12/5050W/A/60**	**12V**	**Amber**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**
78001-268123	**VK/12/5050W/P/60**	**12V**	**Purple**	**1.008lm/m**	**CRI>80**	**14.4W/m**	**5m/roll**

Details
Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP68.



12V

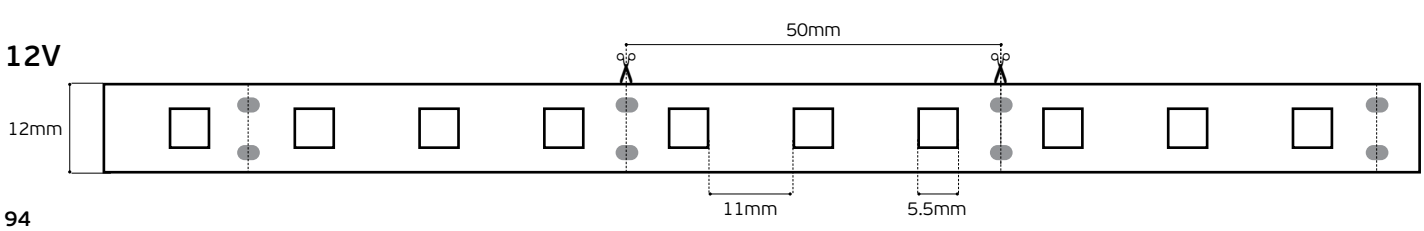

Ledstrips CRi>80. IP68.

IP68. 10W/m. 12V



Ledstrips CCT CRi>90. IP20. IP67.

Ledstrips CRi>90, Collection











VK/24/5050/CCT/60

Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-693724	**VK/24/5050/CCT/60**	**IP20**	**24V**	**2400K+6000K (RGB+WW)**	**952lm/m**	**CRI>90**	**18W/m**	**5m/roll**
78001-694724	**VK/24/5050W/CCT/60**	**IP67**	**24V**	**2400K+6000K (RGB+WW)**	**963lm/m**	**CRI>90**	**18W/m**	**5m/roll**


Details

Led type **SMD 2835**. Led qty **60pcs/m**. Tape o**n back 3M.** Working temperature **-10°C → 40°C**. Storage temperature **-20°C → 60°C**. Lifetime **50.000hrs**.


IP20. IP67.

5 years guarantee

24V

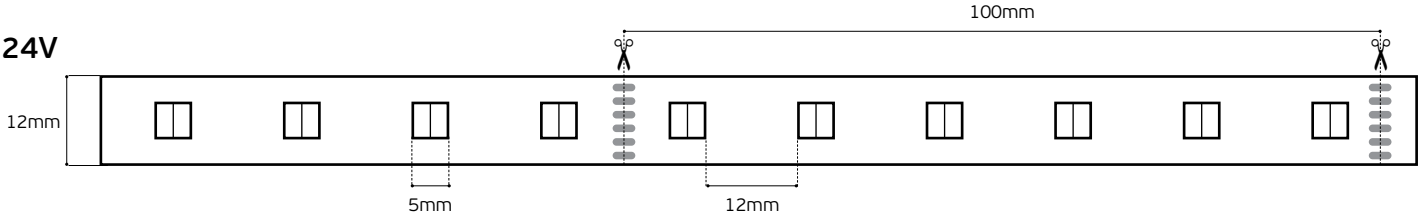





VK/FUT092 4 Zone Remote controller RGB+CCT

Code	Model	Box
90004-037698	**VK/FUT092** 2.4GHz. 3V. 6dBm. 20uA.	**1pc**

Details

Voltage **3V**.
Frequency **2.4GHz**.
Transmitting power **6dBm**.
Standby Power **20uA**.
Distance **30m**.

Material **Plastic.**
Dimmable RGB+CCT.
Working temperature **-20~60ºC.**
2 years guarantee.

RGB+CCT

IP20. 3V.



VK/FUT039S Controller RGB+CCT

Code	Model	Box
90004-039698	**VK/FUT039S** 6A/Channel. **12-24V.** Max 12A.	**1pc**

Details

Voltage **12-24V**. Output **6A/channel**. Total output **Max 12A**. **2.4G RF RGB+CCT** Distance **30m**. Material

Plastic. Dimmable RGB+CCT, 4 channels. Working temperature **-10~40ºC.**
2 years guarantee.

RGB+CCT


IP20. 12/24V.



Ledstrips RGB CRi>80. IP20. IP55. IP68.

Ledstrips CRi>80, Collection

IP20. RGB. 12V.

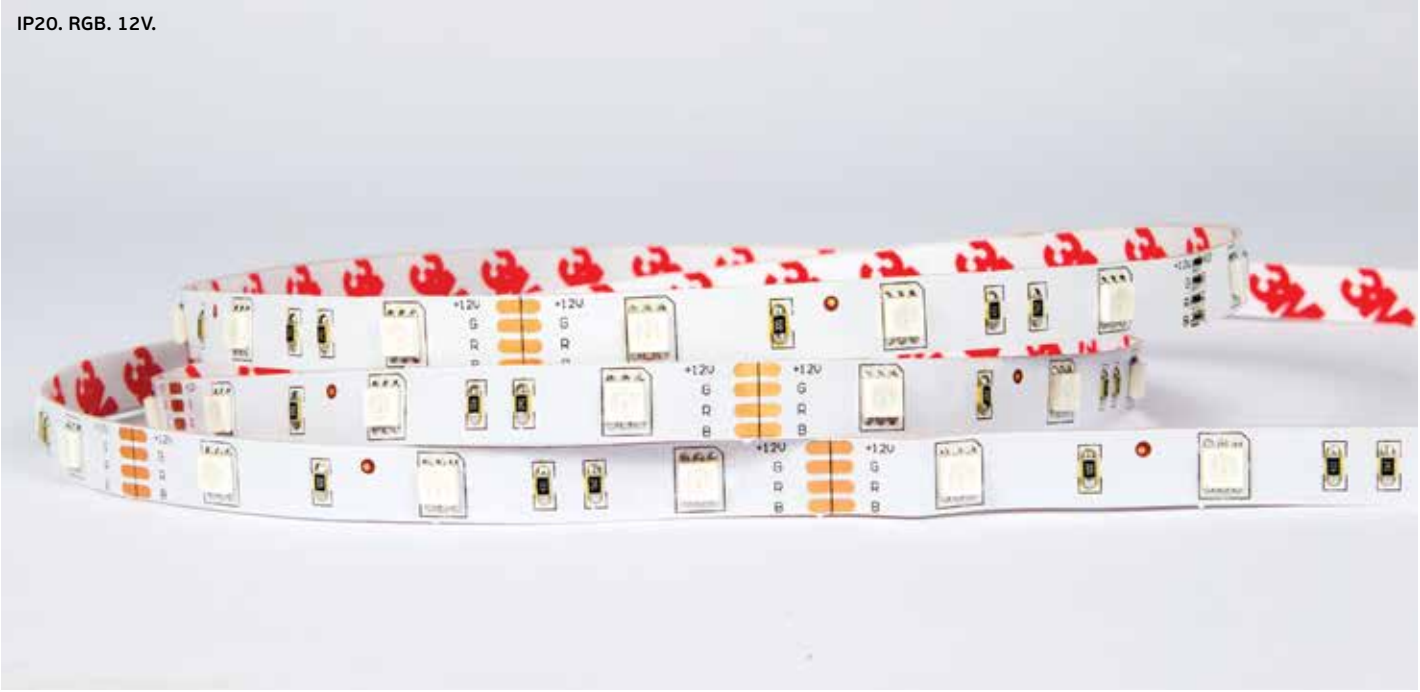

VK/5050/RGB/30 12V/24V


Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-048719	**VK/12/5050/RGB/30**	**IP20**	**12V**	**RGB**	**245lm/m**	**CRI>80**	**6W/m**	**5m/roll**
78001-081719	**VK/24/5050/RGB/30**	**IP20**	**24V**	**RGB**	**250lm/m**	**CRI>80**	**7W/m**	**5m/roll**
78001-047719	**VK/12/5050J/RGB/30**	**IP55**	**12V**	**RGB**	**250lm/m**	**CRI>80**	**6W/m**	**5m/roll**
78001-082719	**VK/24/5050J/RGB/30**	**IP55**	**24V**	**RGB**	**250lm/m**	**CRI>80**	**7W/m**	**5m/roll**

Details


Led type **SMD 5050**. Led qty **30pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20. IP55.

12V. IP20/IP55. 6W

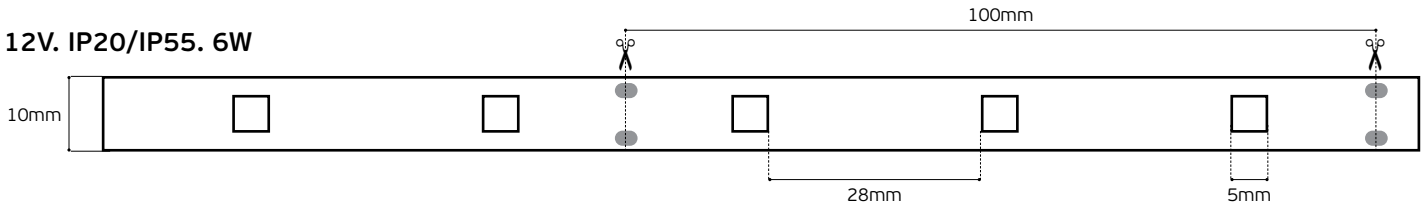

24V. IP20/IP55. 7W

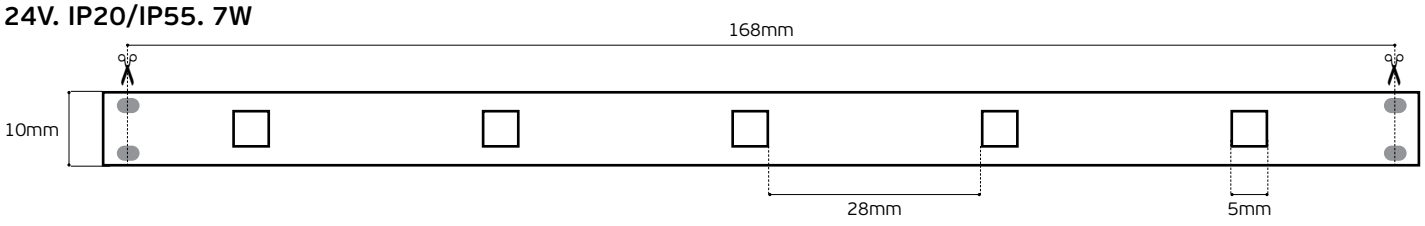

VK/5050/RGB/60 12V/24V


Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-039719	**VK/12/5050/RGB/60**	**IP20**	**12V**	**RGB**	**346lm/m**	**CRI>80**	**7W/m**	**5m/roll**
78001-076719	**VK/24/5050/RGB/60**	**IP20**	**24V**	**RGB**	**451lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-046719	**VK/12/5050J/RGB/60**	**IP55**	**12V**	**RGB**	**451lm/m**	**CRI>80**	**7W/m**	**5m/roll**
78001-083719	**VK/24/5050J/RGB/60**	**IP55**	**24V**	**RGB**	**451lm/m**	**CRI>80**	**11W/m**	**5m/roll**
78001-236123	**VK/12/5050W/RGB/60**	**IP68**	**12V**	**RGB**	**451lm/m**	**CRI>80**	**7W/m**	**5m/roll**
78001-294123	**VK/24/5050W/RGB/60**	**IP68**	**24V**	**RGB**	**451lm/m**	**CRI>80**	**11W/m**	**5m/roll**

Details


Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**.
2 years guarantee.

IP20. IP55. IP68.


12V. IP20/IP55. 7W

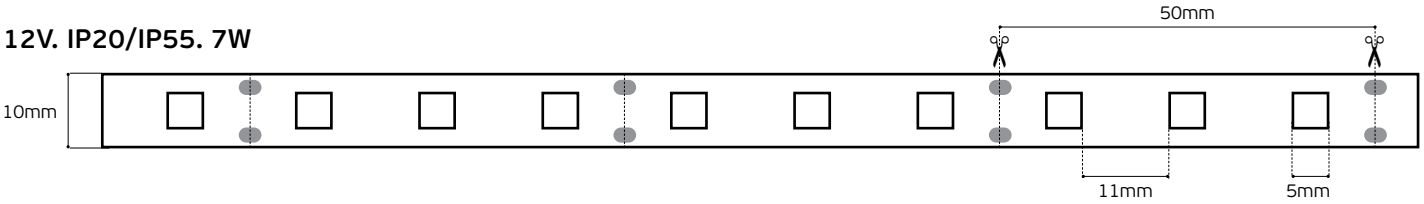


24V. IP20/IP55. 11W

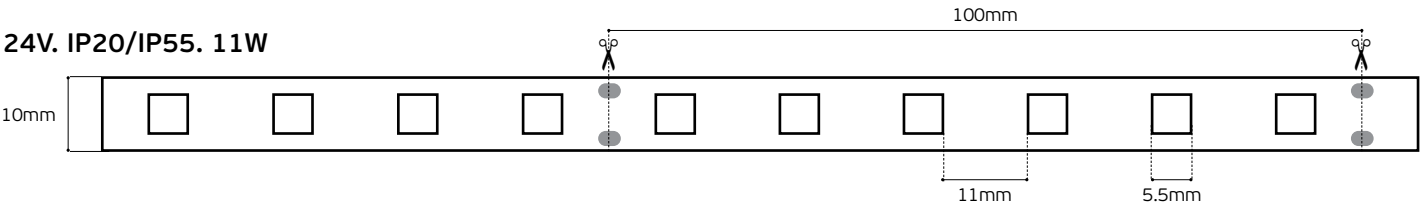

12V. IP68. 7W

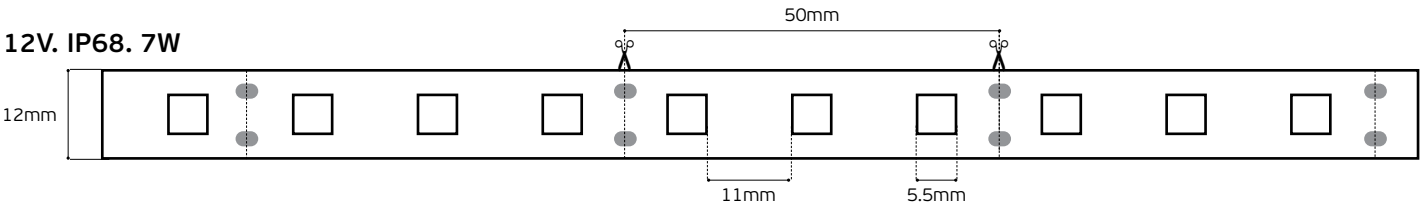

24V. IP68. 11W

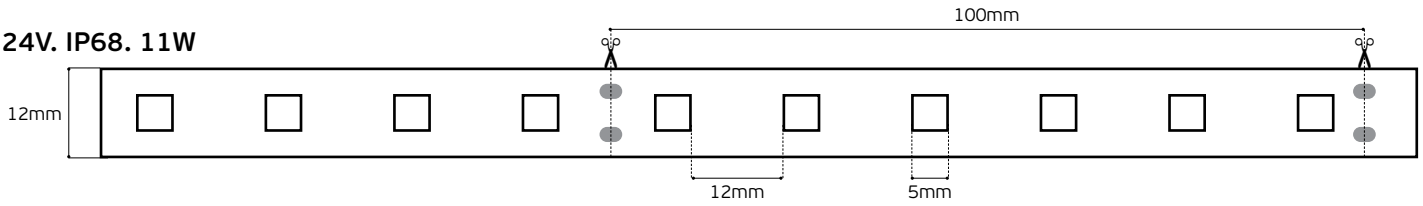








VK/FUT/TR/RCS
VK/FUT/TR/BAT



VK/FUT095

Ledstrips RGB CRi>80. IP20. IP67.

Ledstrips CRi>80, Collection

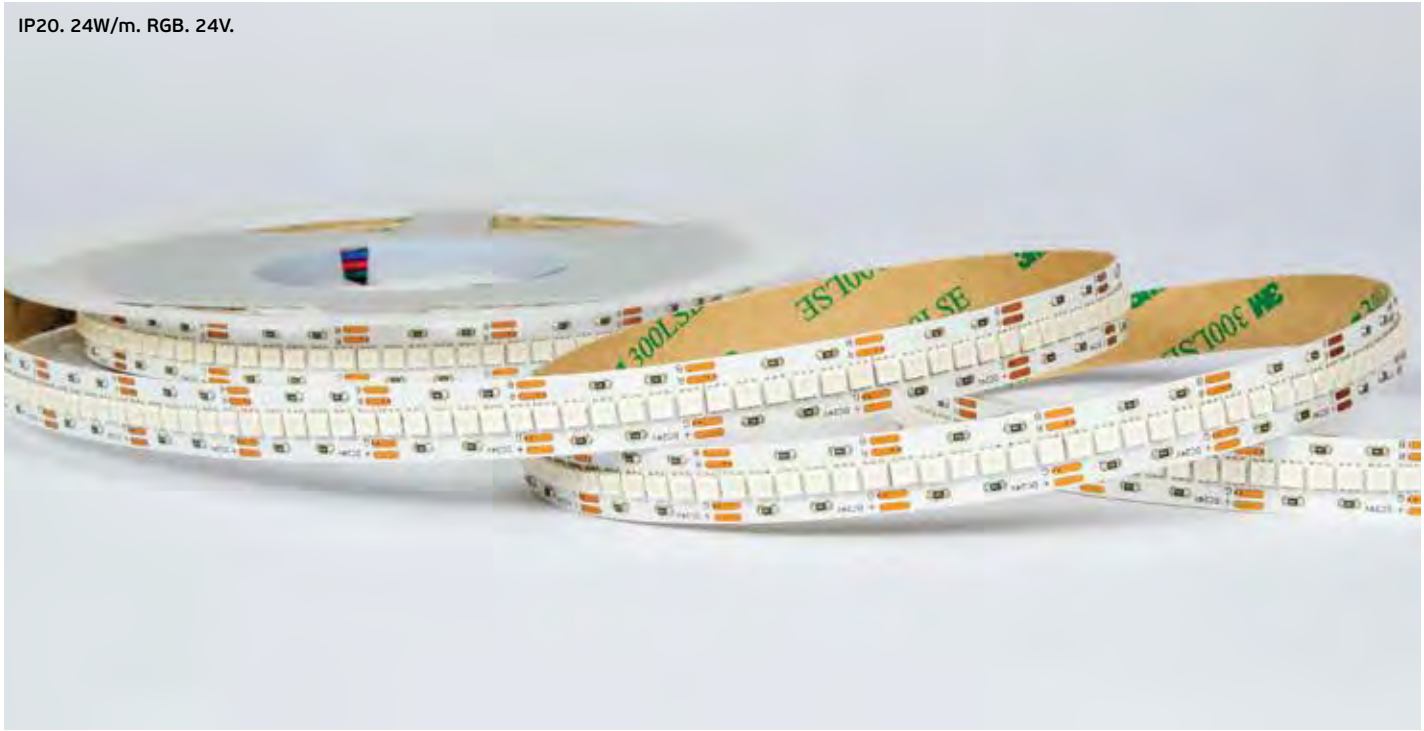

VK/24/3838/RGB/240_24V
VK/24/3838W/RGB/240_24V


Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-725724	**VK/24/3838/RGB/240**	**IP20**	**24V**	**RGB**	**867lm/m**	**CRI>80**	**24W/m**	**5m/roll**
78001-726724	**VK/24/3838W/RGB/240**	**IP67**	**24V**	**RGB**	**862lm/m**	**CRI>80**	**24W/m**	**5m/roll**

Details
Led type **SMD 3838** EPISTAR. Watt **24W/m**. Led qty **240pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**. Lifetime **50.000hrs**.

IP20. IP67.

5 years guarantee

RGB/24W 867lm/m




VK/FUT/TR/RCS
VK/FUT/TR/BAT




VK/FUT095

24V. IP20/IP67. 24W

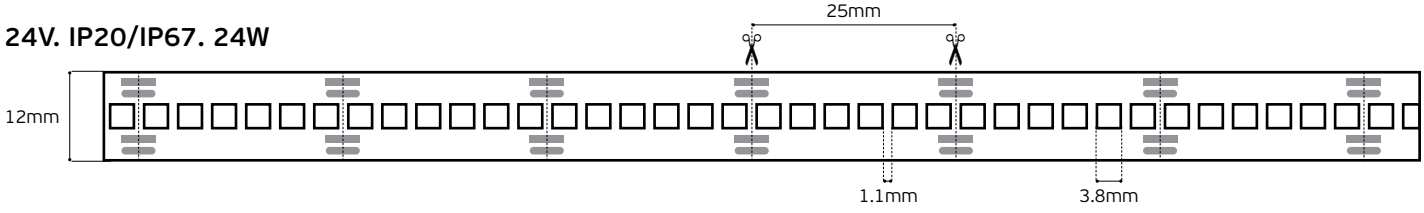



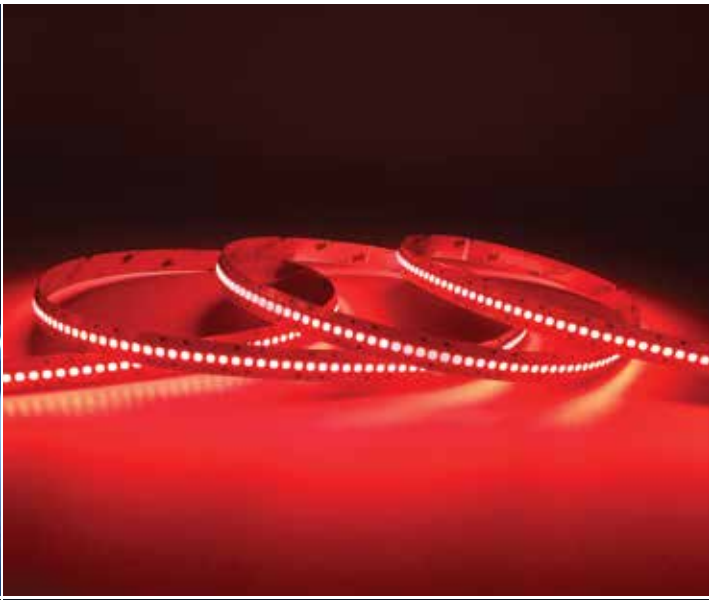





IP20. 24W/m. RGB. 24V.



Ledstrips RGB+W CRi>80. IP20. IP55.

Ledstrips CRi>80, Collection

IP20. 13W/m. RGBW. 24V




VK/24/5050/RGBW/60_24V
VK/24/5050J/RGBW/60_24V

Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-269123	**VK/24/5050/RGBW/60**	**IP20**	**24V**	**RGB+W(3000K)**	**818m/m**	**CRI>80**	**13W/m**	**5m/roll**
78001-634126	**VK/24/5050J/RGBW/60**	**IP55**	**24V**	**RGB+W(3000K)**	**818m/m**	**CRI>80**	**13W/m**	**5m/roll**

Details

Led type **SMD 5050**. Led qty **60pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**. Lifetime **50.000hrs**. **2 years** guarantee.

IP20. IP55.

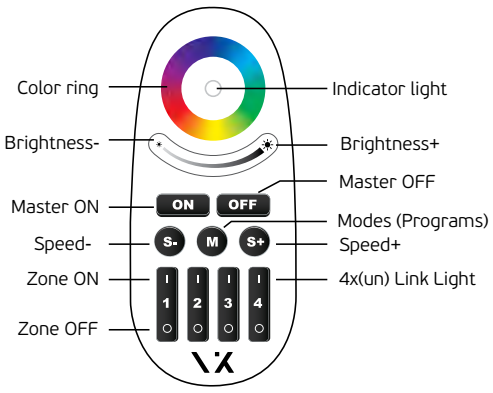


VK/FUT095




VK/FUT038S

24V. IP20/IP55. 14.4W

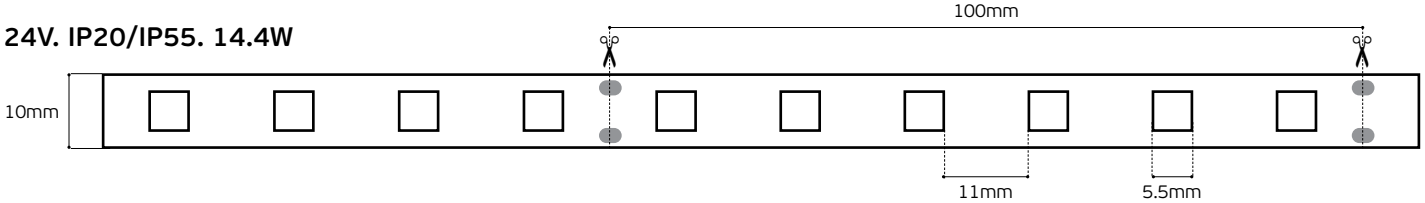



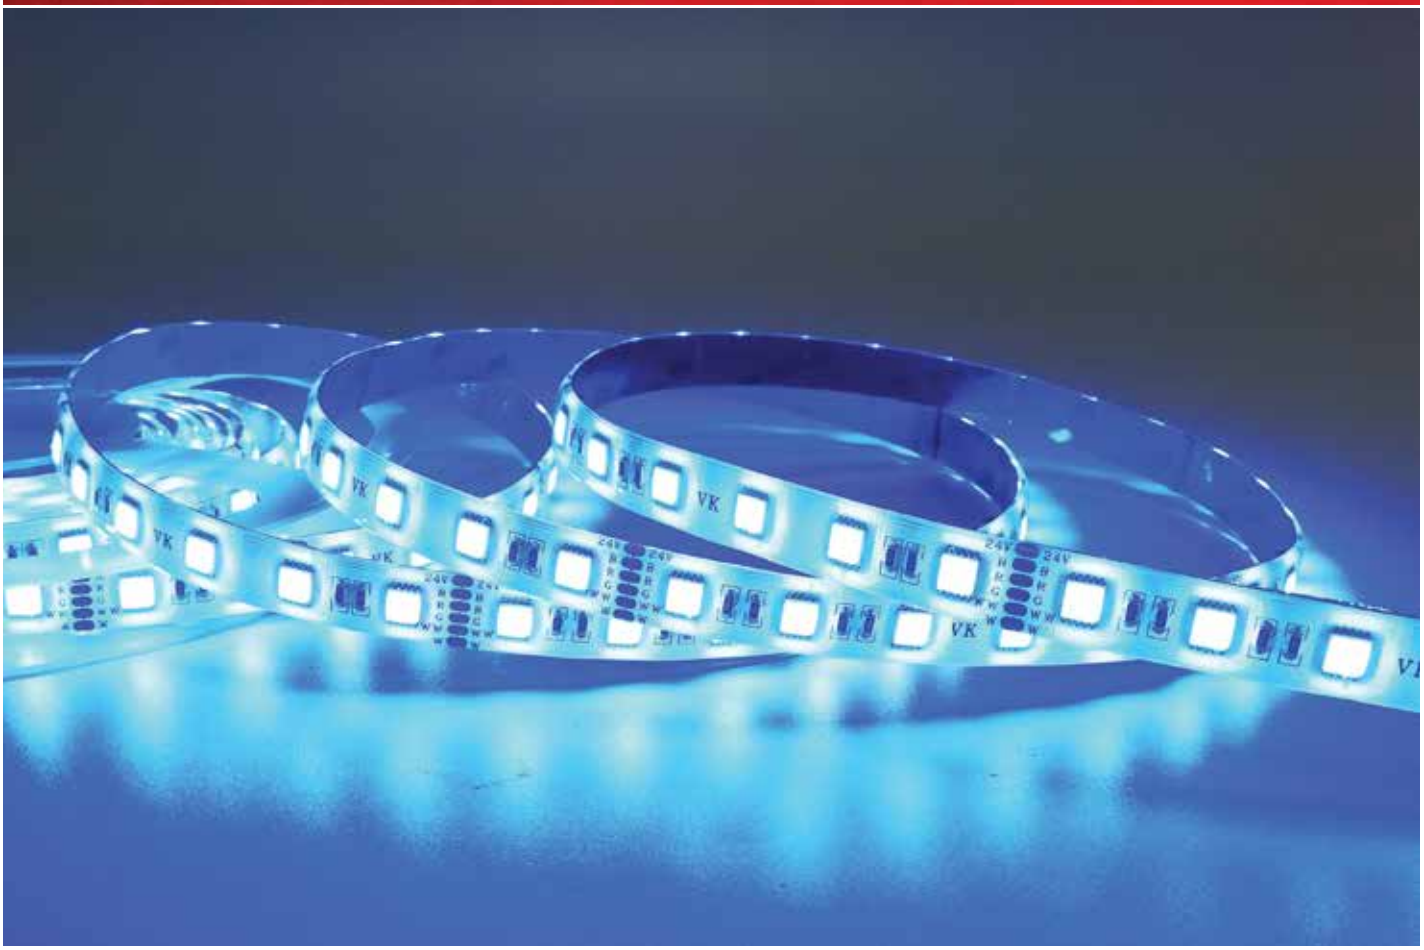

Ledstrips Multicolor CRi>80. IP20. IP65.

Ledstrips Multicolor Collection



VK/12/5050/MC/30_12V
VK/12/5050W/MC/30_12V

Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-270126	**VK/12/5050/MC/30**	**IP20**	**12V**	**MULTICOLOR**	**504lm/m**	**CRI>80**	**7.2W/m**	**5m/roll**
78001-269126	**VK/12/5050W/MC/30**	**IP65**	**12V**	**MULTICOLOR**	**504lm/m**	**CRI>80**	**7.2W/m**	**5m/roll**


Details

Led type **SMD 5050**. Watt **7.2W/m**. Led qty **30pcs/m**. CRI>80. Tape o**n back 3M.** Working temperature **-25°C → 60°C**. Storage temperature **-40°C → 80°C**. Lifetime **50.000hrs**. **2 years** guarantee.


LED's/m
30pcs

IP20. IP65.

12V. IP20. 7.2W

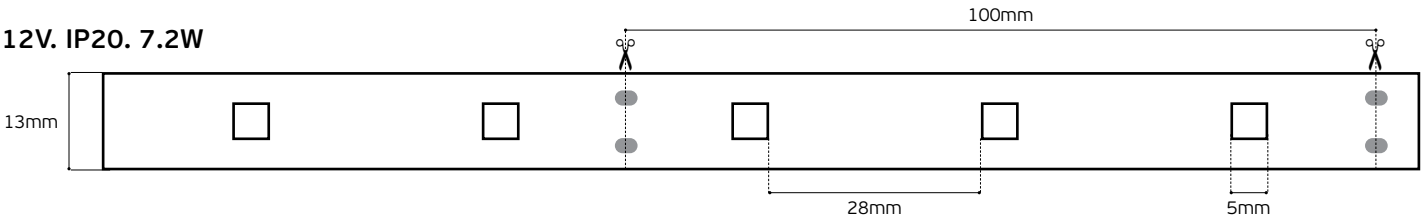

12V. IP65. 7.2W

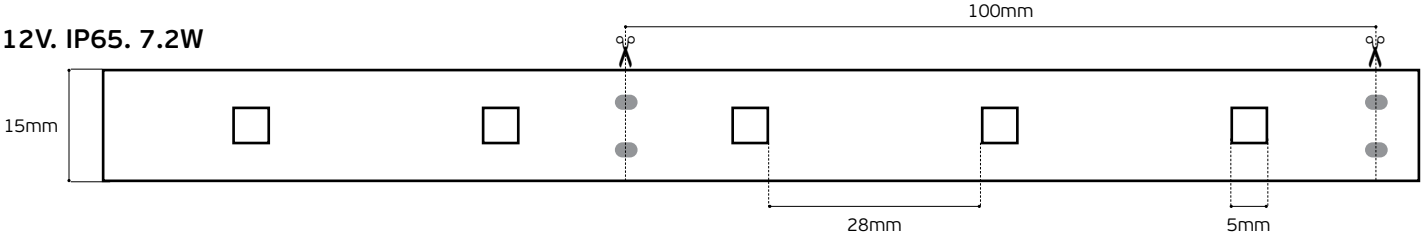



VK/12/MC/25M

VK/12/MC/25M Transmitter-remote control

Code	Model	Box
90004-029126	**VK/12/MC/25M** 12V. **25m (max range)**	**1pc**

Details

Use: **multicolor led strip max 25m.**
Each model (set) includes **a transmitter and remote control.**
Programs 180.

Dimming yes.
Play-pause.
ON/OFF.
2 years guarantee.

IP20.



VK/12/MC/100M

VK/12/MC/100M Transmitter-remote control

Code	Model	Box
90004-030126	**VK/12/MC/100M** 12V. **100m (max range)**	**1pc**

Details

Use: **multicolor led strip max 100m.**
Each model (set) includes **a transmitter and remote control.**
Programs 180.

Dimming yes.
Play-pause.
ON/OFF.
2 years guarantee.

IP20.



VK/12/MC/AMP

VK/12/MC/AMP Amplifier

Code	Model	Box
78000-647126	**VK/12/MC/AMP** 12V. 1Watt	**1pc**

Details

Use: **signal amplifier of the control.**

2 years guarantee.

IP20.

Backled Strips IP66.

Backled Strips IP66



BA-M-CX-865-G5

BA-M-CX-G5
BA-L-CX-G5


Code	Model	Type	Kelvin	Lumen/chain	Lumen/mod	Watt/chain	Watt/mod	Voltage
78001-306019	**BA-M-CX-830-G5**	**BackLed OSRAM**	**3000K**	**1360lm/chain**	**68lm/mod**	**14.40W/chain**	**0.72W/module**	**12V**
78001-307019	**BA-M-CX-840-G5**	**BackLed OSRAM**	**4000K**	**1530lm/chain**	**76.5lm/mod**	**14.40W/chain**	**0.72W/module**	**12V**
78001-308019	**BA-M-CX-865-G5**	**BackLed OSRAM**	**6500K**	**1600lm/chain**	**80lm/mod**	**14.40W/chain**	**0.72W/module**	**12V**
78001-309019	**BA-L-CX-830-G5**	**BackLed OSRAM**	**3000K**	**3000lm/chain**	**150lm/mod**	**30W/chain**	**1.5W/module**	**12V**
78001-310019	**BA-L-CX-840-G5**	**BackLed OSRAM**	**4000K**	**3240lm/chain**	**162lm/mod**	**30W/chain**	**1.5W/module**	**12V**
78001-311019	**BA-L-CX-865-G5**	**BackLed OSRAM**	**6500K**	**3240lm/chain**	**162lm/mod**	**30W/chain**	**1.5W/module**	**12V**

Details

BA-M-CX-865-G5: High module flux **OSRAM 12V**. Length **of chain 310x1.24x0.62cm**. Length **of module 6.06cm**. Number of LED modules **per chain 20 modules**. Number of LEDs **per module 3 Leds**. **CRI>80**. Working temperature **-20°C → 75°C**. Lifetime **50.000hrs**. Module pitch **15cm (max 20cm)**.


BA-L-CX-865-G5: High module flux **OSRAM 12V**. Length of chain **310x1.24x0.62cm**. Length **of module 6.06cm**. Number of LED modules **per chain 20 modules**. Number of LEDs **per module 3 Leds**. **CRI>80**. Working temperature **-25°C → 85°C**. Lifetime **50.000hrs**. Module pitch **15cm (max 20cm)**.

IP66.

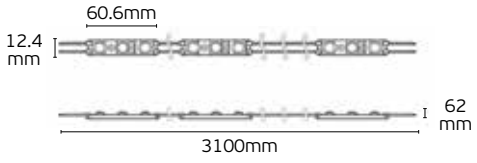

5 years guarantee



SHOP
SAMPLE TEXT

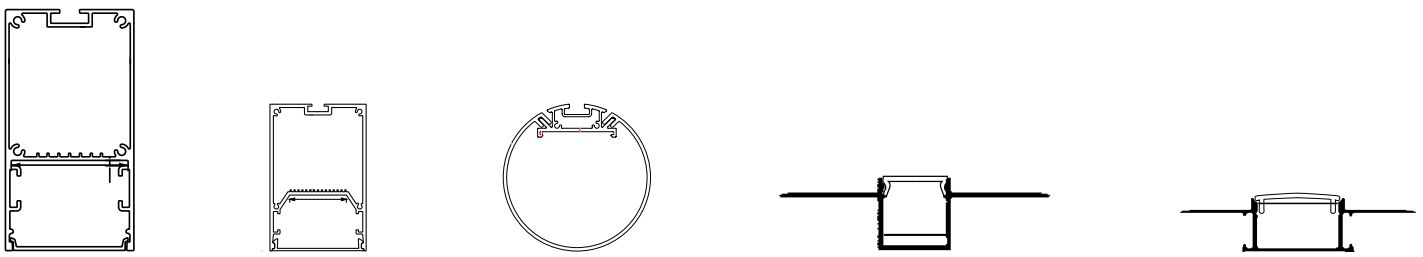



Led strips profiles IP20/IP65

VK/18

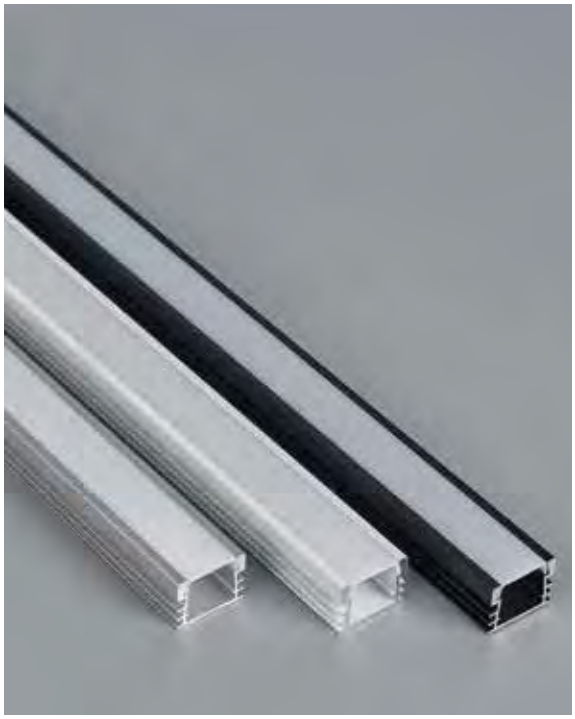



Code	Model	Box
75165-024724	**VK/18/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover & caps. 2.000x17x12.2mm**	**1pc**
75165-025724	**VK/18/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x17x12.2mm**	**1pc**
75165-026724	**VK/18/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x17x12.2mm**	**1pc**

Details


Charged **per meter**. Available **2m**. Material **Aluminium with cover, end caps and buckles**.

IP20.





VK/19

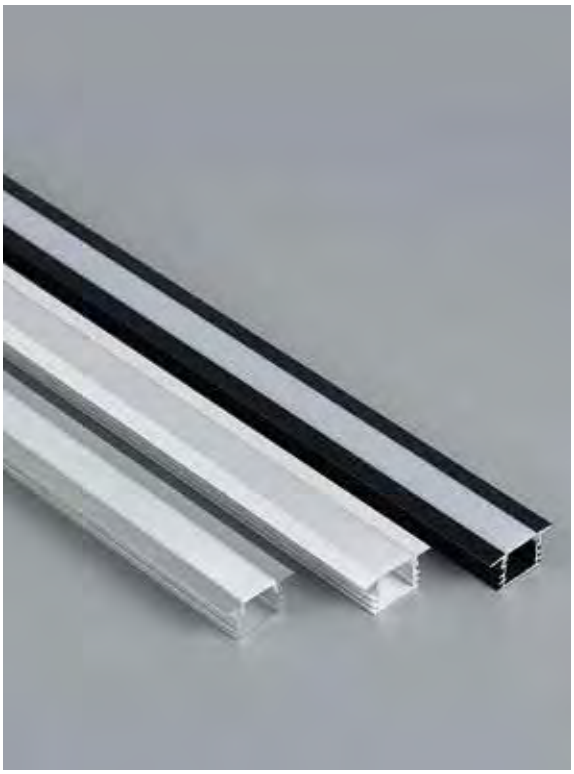

Code	Model	Box
75165-027724	**VK/19/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover & caps. 2.000x24.5(17)x12.3mm**	**1pc**
75165-028724	**VK/19/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x24.5(17)x12.3mm**	**1pc**
75165-029724	**VK/19/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x24.5(17)x12.3mm**	**1pc**


Details


Charged **per meter**. Available **2m**. Material **Aluminium with cover, end caps and buckles**.






IP20.





VK/16

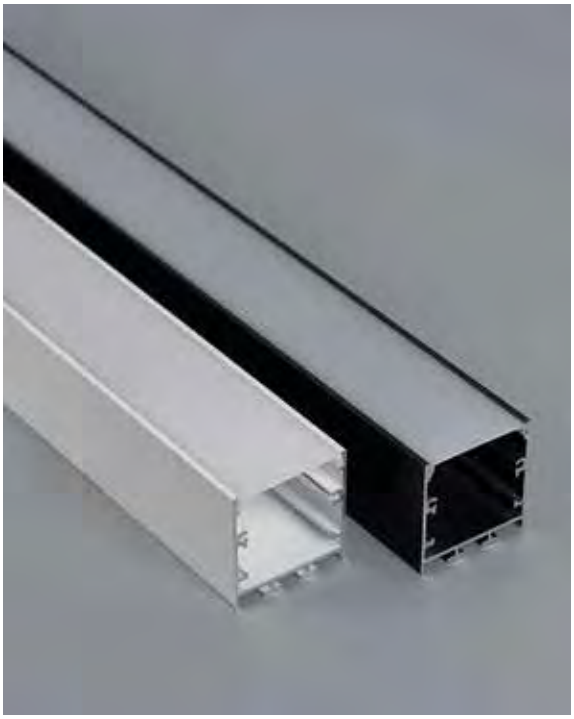


Code	Model	Box
75165-016724	**VK/16/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x35x35mm**	**1pc**
75165-018724	**VK/16/W/W/3** ○ **White. Aluminium white profile 3m with white cover & caps. 3.000x35x35mm**	**1pc**
75165-017724	**VK/16/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x35x35mm**	**1pc**
75165-019724	**VK/16/B/W/3** ● **Black. Aluminium black profile 3m with white cover & caps. 3.000x35x35mm**	**1pc**


Details

Charged **per meter**. Available **2m & 3m**. Material **Aluminium with cover, end caps and buckles**.





IP20.



VK/17




Code	Model	Box
75165-020724	**VK/17/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x50(35)x35mm**	**1pc**
75165-022724	**VK/17/W/W/3** ○ **White. Aluminium white profile 3m with white cover & caps. 3.000x50(35)x35mm**	**1pc**
75165-021724	**VK/17/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x50(35)x35mm**	**1pc**
75165-023724	**VK/17/B/W/3** ● **Black. Aluminium black profile 3m with white cover & caps. 3.000x50(35)x35mm**	**1pc**


Details

Charged **per meter**. Available **2m & 3m**. Material **Aluminium with cover & end caps**.

IP20.







Ledstrips Profiles IP20

Ledstrips accessories

VK/11




Code	Model	Box
75165-008724	**VK/11/AL/W/2** ● **Aluminium profile 2m with white cover & caps.** **2.000x49.09x48.1mm**	**1pc**


Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover, end caps and buckles**.

IP20.







VK/13




Code	Model	Box
75165-009724	**VK/13/AL/W/2** ● **Aluminium profile 2m with white cover & caps.** **2.000x73.14x87.37mm**	**1pc**


Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover, end caps and buckles**.

IP20.







VK/14




Code	Model	Box
75165-010724	**VK/14/AL/W/2** ● **Aluminium profile 2m with white cover & caps.** **2.000xø60mm**	**1pc**
75165-011724	**VK/14/AL/W/3** ● **Aluminium profile 3m with white cover & caps.** **3.000xø60mm**	**1pc**


Details

Charged **per meter**. Available **2m & 3m**. Material **Aluminium with cover, end caps and suspension**.





IP20.



VK/15




Code	Model	Box
75165-012724	**VK/15/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x52.15x66.8mm**	**1pc**
75165-014724	**VK/15/W/W/3** ○ **White. Aluminium white profile 3m with white cover & caps. 3.000x52.15x66.8mm**	**1pc**
75165-013724	**VK/15/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x52.15x66.8mm**	**1pc**
75165-015724	**VK/15/B/W/3** ● **Black. Aluminium black profile 3m with white cover & caps. 3.000x52.15x66.8mm**	**1pc**


Details

Charged **per meter**. Available **2m & 3m**. Material **Aluminium with cover, end caps and buckles**.

IP20.







VK/23




Code	Model	Box
75165-038724	**VK/23/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x72.04(66.91)x75mm**	**1pc**
75165-040724	**VK/23/W/W/3** ○ **White. Aluminium white profile 3m with white cover & caps. 3.000x72.04(66.91)x75mm**	**1pc**
75165-039724	**VK/23/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x72.04(66.91)x75mm**	**1pc**
75165-041724	**VK/23/B/W/3** ● **Black. Aluminium black profile 3m with white cover & caps. 3.000x72.04(66.91)x75mm**	**1pc**


Details

Charged **per meter**. Available **2m & 3m**. Material **Aluminium with cover, end caps & suspension.**





IP20.



VK/09





Code	Model	Box
75165-269264	**VK/09/AL/W** ● **Aluminium. Aluminium + white cover.** **200x1.44x1.49cm**	1pc
75165-271264	**VK/09/B/B** ● **Black. Black aluminium + black cover.** **200x1.44x1.49cm**	1pc


Details

Use **Recessed trimless**. Length **2m + 2 end caps**. Working temperature **-20°C → 40°C.** Material **Aluminium**.

IP20.







VK/10





Code	Model	Box
75165-270264	**VK/10/AL/W** ● **Aluminium. Aluminium + white cover.** **200x1.38x2.84cm**	**1pc**
75165-272264	**VK/10/B/B** ● **Black. Black aluminium + black cover.** **200x1.38x2.84cm**	**1pc**


Details

Use **Recessed trimless**. Length **2m + 2 end caps**. Working temperature **-20°C → 40°C.** Material **Aluminium**.

IP20.







VK/21





Code	Model	Box
75165-033724	**VK/21/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover. 2.000x16.6x70(36.40)mm**	**1pc**
75165-034724	**VK/21/W/W/2** ○ **White. Aluminium white profile 2m with white cover. 2.000x16.6x70(36.40)mm**	**1pc**
75165-035724	**VK/21/B/W/2** ● **Black. Aluminium black profile 2m with white cover. 2.000x16.6x70(36.40)mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover**.

IP20.






VK/20




Code	Model	Box
75165-030724	**VK/20/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover. 2.000x45.89x18.49mm**	**1pc**
75165-031724	**VK/20/W/W/2** ○ **White. Aluminium white profile 2m with white cover. 2.000x45.89x18.49mm**	**1pc**
75165-032724	**VK/20/B/W/2** ● **Black. Aluminium black profile 2m with white cover. 2.000x45.89x18.49mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover**.

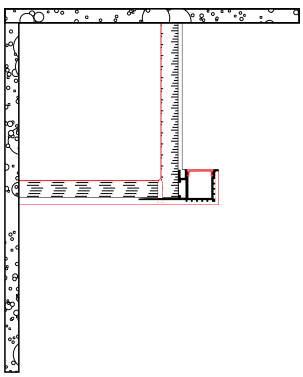

IP20.

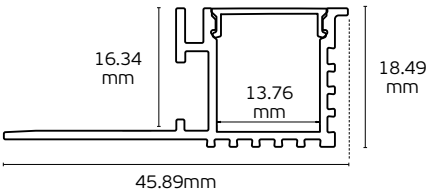

Ledstrips Profiles IP20

Ledstrips accessories

VK/22





Code	Model	Box
75165-036724	**VK/22/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x74.4(54.2)x58.59mm**	**1pc**
75165-037724	**VK/22/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x74.4(54.2)x58.59mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover & end caps**.

IP20.





VK/24





Code	Model	Box
75165-042724	**VK/24/W/W/2** ○ **White. Aluminium white profile 2m with white cover & caps. 2.000x90(48.74)x35mm**	**1pc**

Details


Charged **per meter**. Available **2m**. Material **Aluminium with cover & end caps**.

IP20.



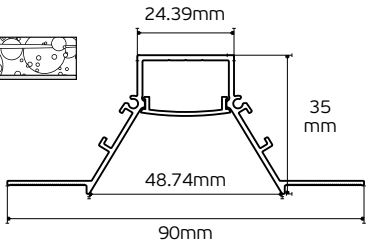

VK/25

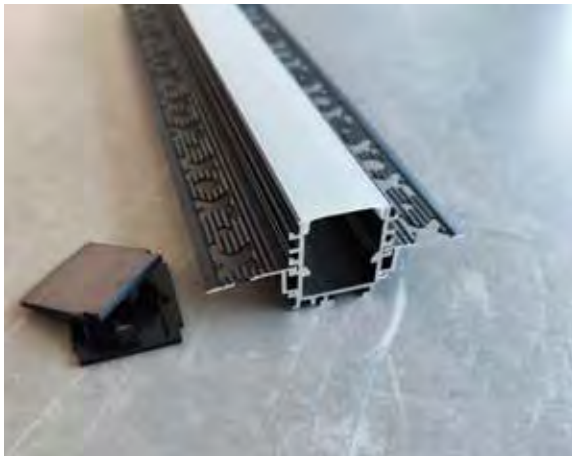



Code	Model	Box
75165-043724	**VK/25/B/W/2** ● **Black. Aluminium black profile 2m with white cover & caps. 2.000x54.9mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover & end caps**.

IP20.



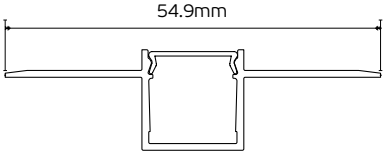

VK/PROF/SRK



Code	Model	Box
75165-049724	**VK/PROF/SRK** **Pendant suspension for profiles VK/13, VK/14, VK/15, VK/16, VK/23.**	**1pc**

Details
Available **2 pcs**. Material **Aluminium**.

IP20.

VK/PROF/RES



Code	Model	Box
75165-050724	**VK/PROF/RES** **Recessed for profiles VK/17.**	**1pc**

Details
Available **2 pcs**. Material **Aluminium**.

IP20.

VK/PROF/CON/I



Code	Model	Box
75165-051724	**VK/PROF/CON/I** **straight connector for aluminum profiles VK/13, VK/14, VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.**	**1pc**

Details
Available **1 pc**. Material **Aluminium**.

IP20.

VK/PROF/CON/L



Code	Model	Box
75165-052724	**VK/PROF/CON/L** **horizontal corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.**	**1pc**

Details
Available **1 pc**. Material **Aluminium**.

IP20.

VK/PROF/CON/L/3D



Code	Model	Box
75165-053724	**VK/PROF/CON/L/3D** **vertical corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.**	**1pc**

Details
Available **1 pc**. Material **Aluminium**.

IP20.

VK/26




Code	Model	Box
75165-044724	**VK/26/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover & silicon end caps. 2.000x25(17.5)x12.9mm**	**1pc**
75165-045724	**VK/26/W/W/2** ○ **White. Aluminium white profile 2m with white cover & silicon end caps. 2.000x25(17.5)x12.9mm**	**1pc**
75165-046724	**VK/26/B/W/2** ● **Black. Aluminium black profile 2m with white cover & silicon end caps. 2.000x25(17.5)x12.9mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover, silicon end caps & buckles.**

IP65.





VK/27




Code	Model	Box
75165-047724	**VK/27/AL/W/2** ● **Aluminium. Aluminium profile 2m with white cover & silicon end caps. 2.000x29.8x52.6mm**	**1pc**
75165-048724	**VK/27/B/W/2** ● **Black. Aluminium black profile 2m with white cover & silicon end caps. 2.000x29.8x52.6mm**	**1pc**

Details

Charged **per meter**. Available **2m**. Material **Aluminium with cover, silicon end caps, waterproof screws & buckles.**

IP65.








Ledstrips Profiles IP20

Ledstrips accessories

VK/00/AL

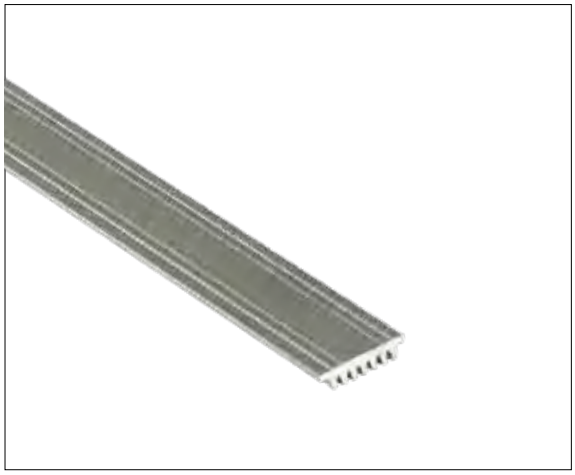


Code	Model	Box
75165-137264	**VK/00/AL** ● **Aluminium. 2.000x12x4mm**	**100pcs**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/01/SLIM/AL




Code	Model	Box
75165-162264	**VK/01/SLIM/AL** ● **Aluminium. 2.000x14x8mm**	**100pcs**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/01/DEEP/SLIM/AL




Code	Model	Box
75165-215264	**VK/01/DEEP/SLIM/AL** ● **Aluminium. 2.000x27.4x15mm**	**100pcs**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/K01/SLIM




Code	Model	Box
75165-167264	**VK/K01/SLIM/CL** ○ **Clear. 2.000x12x2.5mm**	**100pcs**
75165-168264	**VK/K01/SLIM/W** ○ **Frost. 2.000x12x2.5mm**	**100pcs**

Details

Suitable for: **VK/01/SLIM/AL**, **VK/01/DEEP/SLIM/AL.**

Material **Polycarbonate**. Charged **per meter**. Available **2m.**

IP20.





Ledstrips Profiles IP20

VK/01/AL




Code
75165-161264

Model
VK/01/AL
Aluminium. 2.000x17.4x9mm

Box
100pcs

Details
Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/12/AL




Code
75165-212264

Model
VK/12/AL
Aluminium. 2.000x17.4x12mm

Box
100pcs

Details
Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/D1/AL




Code
75165-173264

Model
VK/D1/AL
Aluminium. 2.000x21x16mm

Box
100pcs

Details
Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/03/SLIM/AL




Code
75165-166264

Model
VK/03/SLIM/AL
Aluminium. 2.000x27.4x15mm

Box
100pcs

Details
Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/D2/AL




Code
75165-165264


Model
VK/D2/AL
Aluminium. 2.000x30x16mm

Box
100pcs


Details
Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.





VK/02/AL

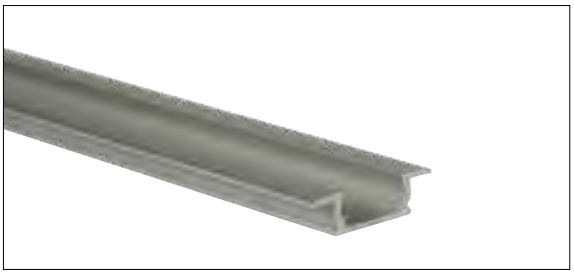


Code	Model	Box
75165-164264	**VK/02/AL** **Aluminium. 2.000x28x9mm**	**100pcs**
75165-195264	**VK/02/W** **White. 2.000x28x9mm**	**100pcs**

Details

Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/K01




Code	Model	Box
75165-039264	**VK/K01/CL** ○ **Clear. 2.000x16x4.5mm**	**100pcs**
75165-062264	**VK/K01/W** ○ **Frost. 2.000x16x4.5mm**	**100pcs**
75165-295264	**VK/K01/B** ● **Black. 2.000x16x4.5mm**	**100pcs**

Details

Suitable for: **VK/01/AL, VK/12/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.**

IP20. Material **Polycarbonate**. Charged **per meter**. Available **2m.**



VK/K01/NEON




Code	Model	Box
75165-241264	**VK/K01/NEON** ○ **Frost. 2.000x17x14mm**	**100pcs**

Details

Suitable for: **VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.**

Material **Polycarbonate**. Charged **per meter**. Available **2m.**

IP20.



VK/K01U




Code	Model	Box
75165-216264	**VK/K01U/CL** ○ **Clear. 2.000x14x10mm**	**100pcs**
75165-217264	**VK/K01U/W** ○ **Frost. 2.000x14x10mm**	**100pcs**

Details

Suitable for: **VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.**

Material **Polycarbonate**. Charged **per meter**. Available **2m.**

IP20.





With Model	*With Model*	*With Model*	*With Model*	*With Model*
VK/01/AL	**VK/02/AL**	**VK/D1/AL**	**VK/D2/AL**	**VK/03/SLIM/AL**
60°	60°	10°	10°	60°

Ledstrips Profiles IP20

Ledstrips accessories


VK/04R/AL



Code	Model	Box
75165-225264	**VK/04R/AL** ● **Aluminium. 2.000x45x13mm**	**100pcs**
75165-236264	**VK/04R/W** ○ **White. 2.000x45x13mm**	**100pcs**

Details
Charged **per meter**. Available **2m**.
Material **Aluminium**.

IP20.




VK/04/AL



Code	Model	Box
75165-224264	**VK/04/AL** ● **Aluminium. 2.000x29x12mm**	**100pcs**
75165-263264	**VK/04/W** ○ **White. 2.000x29x12mm**	**100pcs**

Details
Charged **per meter**. Available **2m**.
Material **Aluminium**.

IP20.




VK/06/AL



Code	Model	Box
75165-233264	**VK/06/AL** ● **Aluminium. 2.000x28x19.5mm**	**100pcs**

Details
Charged **per meter**. Available **2m**.
Material **Aluminium**.

IP20.



VK/09034




Code	Model	Box
64174-253131	**VK/09034** ○ **White. For LED STRIP.** Max 70mm width.	**4pcs**

Details

Voltage **24V**. Max watt **14.4W/m**. LED STRIP. Material **Gypsum. Possibility to paint.**

IP20




VK/K04



Code	Model	Box
75165-229264	**VK/K04/CL** ○ **Clear. 2.000x25x5mm**	**100pcs**
75165-223264	**VK/K04/W** ○ **Frost. 2.000x25x5mm**	**100pcs**

Details

Suitable for: **VK/04R/AL, VK/04/AL, VK/06/AL.**
Material **Polycarbonate**. Charged **per meter**.
Available **2m.**





VK/01R/DEEP/TRIMLESS/AL




Code	Model	Box
75165-247264	**VK/01R/DEEP/TRIMLESS/AL** ● **Aluminium. 2.000x41.4x27.2mm**	**100pcs**

Details
Charged **per meter**. Available **2m**.
Material **Aluminium**.

IP20.

1 σειρά LEDSTRIP



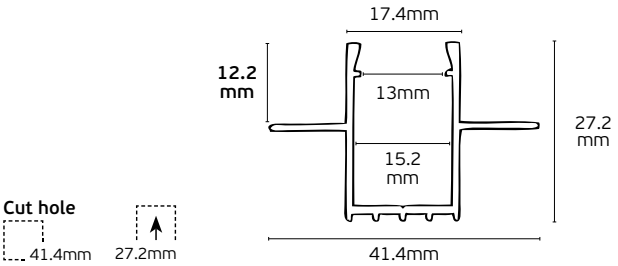

VK/07R/TRIMLESS/AL



Code	Model	Box
75165-246264	**VK/07R/TRIMLESS/AL** ● **Aluminium. 2.000x57.8x27.2mm**	**100pcs**

Details
Charged **per meter**. Available **2m**.
Material **Aluminium**.


IP20.

1 πλακέτα LED



2 σειρές LEDSTRIP



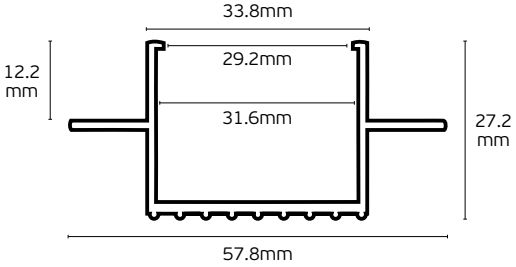



VK/K01




Code	Model	Box
75165-039264	**VK/K01/CL** ○ **Clear. 2.000x16x4.5mm**	**100pcs**
75165-062264	**VK/K01/W** ○ **Frost. 2.000x16x4.5mm**	**100pcs**

Details

Suitable for: **VK/01R/DEEP/TRIMLESS/AL.**

Material **Polycarbonate**. Charged **per meter**. Available **2m.**

IP20.



VK/K07




Code	Model	Box
75165-242264	**VK/K07/W** ○ **Frost. 2.000x36x3mm**	**100pcs**

Details

Suitable for: **VK/07R/TRIMLESS/AL.**

Material **Polycarbonate**. Charged **per meter**. Available **2m.**

IP20.




VK/250-24
Input 180-240V
Voltage 24V
Power 240w. IP20
CAUTION
LED Driver Waterproof
VK/A24-45E




Drivers for Led strips 24V/12V

Led Drivers IP20

Ledstrips drivers



VK/LRS-50-12



VK/LRS-50

Code	Model	Box
78000-673255	**VK/LRS-50- 12** 4.2A. 50W. 12V.	**60pcs**
78000-662255	**VK/LRS-50-24** 2.2A. 50W. 24V.	**60pcs**

Details


Voltage **100-240V**.
Material **Metallic.**

5 years guarantee

IP20



VK/LRS-100-12



VK/LRS-100

Code	Model	Box
78000-674255	**VK/LRS-100-12** 8.5A. 100W. 12V.	**40pcs**
78000-637734	**VK/LRS-100-24** 4.5A. 100W. 24V.	**40pcs**

Details


Voltage **100-240V**.
Material **Metallic.**

5 years guarantee

IP20



VK/LRS-150-12



VK/LRS-150

Code	Model	Box
78000-675255	**VK/LRS-150-12** 12.5A. 150W. 12V.	**30pcs**
78000-653255	**VK/LRS-150-24** 6.5A. 150W. 24V.	**30pcs**

Details


Voltage **100-240V**.
Material **Metallic.**

5 years guarantee

IP20



VK/LRS-200-12



VK/LRS-200

Code	Model	Box
78000-678255	**VK/LRS-200-12** 17A. 200W. 12V.	**15pcs**
78000-634734	**VK/LRS-200-24** 8.8A. 200W. 24V.	**15pcs**

Details


Voltage **100-240V**.
Material **Metallic.**

5 years guarantee

IP20



VK/LRS-350-12



VK/LRS-350

Code	Model	Box
78000-679255	**VK/LRS-350-12** 29A. 350W. 12V.	**15pcs**
78000-633734	**VK/LRS-350-24** 14.6A. 350W. 24V.	**15pcs**

Details


Voltage **100-240V**.
Material **Metallic.**

5 years guarantee

IP20



VK/HDR-60-24



VK/HDR-60

Code	Model	Box
78000-676255	**VK/HDR-60-24** 2.5A. 60W. 24V.	**60pcs**

Details


Voltage **100-240V**. Material **Plastic housing.** Use **Rail.**

5 years guarantee

IP20



VK/HDR-100-24



VK/HDR-100

Code	Model	Box
78000-677255	**VK/HDR-100-24** 3.83A. 100W. 24V.	**48pcs**

Details

Voltage **100-240V**. Material **Plastic housing.** Use **Rail.**

5 years guarantee

IP20



VK/HDR-60-24

Led Drivers IP20

Ledstrips drivers



VK/36-24


VK/15-25-36

Code	Model	Box
78000-639117	**VK/15-12** 1.25A. 15W. 12V. L70xW38xH30mm	**80pcs**
78000-624719	**VK/25-12** 2A. 24W. 12V. L78xW48xH21mm	**50pcs**
78000-626719	**VK/36-12** 3A. 36W. 12V. L85xW58xH34mm	**50pcs**
78000-623719	**VK/15-24** 0.62A. 15W. 24V. L85xW58xH34mm	**80pcs**
78000-625719	**VK/25-24** 1A. 24W. 24V. L85xW58xH34mm	**50pcs**
78000-627719	**VK/36-24** 1.5A. 36W. 24V. L85xW58xH34mm	**50pcs**

Details

Voltage **110-240V**.
Material **Metallic.**

Guarantee **2 years**.



IP20



VK/60-24


VK/60-75-100-120

Code	Model	Box
78000-617719	**VK/60-12** 5A. 60W. 12V. L127xW40xH36mm	**40pcs**
78000-614719	**VK/75-12** 6A. 75W. 12V. L160xW40xH33mm	**40pcs**
78000-562719	**VK/100-12** 8.5A. 100W. 12V. L188xW46xH35mm	**40pcs**
78000-621719	**VK/120-12** 10A. 120W. 12V. L188xW46xH35mm	**40pcs**
78000-618719	**VK/60-24** 2.5A. 60W. 24V. L127xW40xH36mm	**40pcs**
78000-619719	**VK/75-24** 3A. 75W. 24V. L160xW40xH33mm	**40pcs**
78000-564719	**VK/100-24** 4A. 100W. 24V. L188xW46xH35mm	**40pcs**
78000-620719	**VK/120-24** 5A. 120W. 24V. L188xW46xH35mm	**40pcs**

Details

Voltage **110-240V**.
Material **Metallic.**

Guarantee **2 years**.



IP20



VK/200-24


VK/150-200

Code	Model	Box
78000-565719	**VK/150-12** 12.5A. 150W. 12V. L200xW58xH40mm	**30pcs**
78000-567719	**VK/200-12** 16.5A. 200W. 12V. L220xW68xH40mm	**30pcs**
78000-566719	**VK/150-24** 6A. 150W. 24V. L200xW58xH40mm	**30pcs**
78000-568719	**VK/200-24** 8A. 200W. 24V. L220xW68xH40mm	**30pcs**

Details

Voltage **180-240V**.
Material **Metallic.**

Guarantee **2 years**.



IP20



VK/250-24


VK/250-350

Code	Model	Box
78000-616719	**VK/250-12** 21A. 240W. 12V. L220xW68xH40mm	**20pcs**
78000-569719	**VK/350-12** 25A. 350W. 12V. L220xW68xH40mm	**20pcs**
78000-615719	**VK/250-24** 10A. 240W. 24V. L220xW68xH40mm	**20pcs**
78000-570719	**VK/350-24** 12.5A. 350W. 24V. L220xW68xH40mm	**20pcs**

Details

Voltage **180-240V**.
Material **Metallic.**

Guarantee **2 years**.



IP20

VK/600

Code	Model	Box
78000-628719	**VK/600-12** 50A. 600W. 12V. L200xW130xH65mm	**5pcs**
78000-629719	**VK/600-24** 25A. 600W. 24V. L240xW125xH65mm	**5pcs**


Details

Voltage **170-250V**. Material **Metallic.** Guarantee **2 years**.

IP20



VK/600-12



Led Drivers IP20

Ledstrips drivers



VK/LV12-12

25mm
37mm
35mm
37mm

VK/LV12

Code	Model	Box
78000-388016	**VK/LV12-12** 1A. 12W. 12V.	**10pcs**
78000-371016	**VK/LV12-24** 0.5A. 12W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV26-12

27mm
81mm
35mm
81mm

VK/LV26

Code	Model	Box
78000-389016	**VK/LV26-12** 2.1A. 26W. 12V.	**10pcs**
78000-366016	**VK/LV26-24** 1.1A. 26W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV36-24

27mm
81mm
35mm
81mm

VK/LV36

Code	Model	Box
78000-385016	**VK/LV36-12** 3A. 36W. 12V.	**10pcs**
78000-367016	**VK/LV36-24** 1.5A. 36W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV50-12

31mm
128mm
59mm
128mm

VK/LV50

Code	Model	Box
78000-386016	**VK/LV50-12** 4.2A. 50W. 12V.	**10pcs**
78000-364016	**VK/LV50-24** 2.1A. 50W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV75-24



VK/LV75

Code	Model	Box
78000-383016	**VK/LV75-12** 6.2A. 75W. 12V.	**10pcs**
78000-365016	**VK/LV75-24** 3.1A. 75W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV100-12



VK/LV100

Code	Model	Box
78000-384016	**VK/LV100-12** 8.3A. 100W. 12V.	**10pcs**
78000-372016	**VK/LV100-24** 4.2A. 100W. 24V.	**10pcs**


Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV120-12



VK/LV120

Code	Model	Box
78000-531016	**VK/LV120-12** 10A. 120W. 12V.	**10pcs**
78000-378016	**VK/LV120-24** 5A. 120W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20



VK/LV150-12



VK/LV150

Code	Model	Box
78000-516016	**VK/LV150-12** 12.5A. 150W. 12V.	**10pcs**
78000-529016	**VK/LV150-24** 6.2A. 150W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic.** Guarantee **3 years**.

IP20

Led Drivers 24V Slim. IP20



VK/LV60W24CG

Code	Model	Box
78000-811741	**VK/LV60W24CG** **0-2.5A. 60W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.35A.
Urated=24V.
Irange=0-2.5A.

Prange=0-60W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

16mm
300mm
30mm
300mm

5 years guarantee **IP20.**



VK/LV100W24CG

Code	Model	Box
78000-813741	**VK/LV100W24CG** **0-4.17A. 100W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.6A.
Urated=24V.
Irange=0-4.17A.

Prange=0-100W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

18mm
350mm
30mm
350mm

5 years guarantee **IP20.**



VK/LV150W24CG

Code	Model	Box
78000-815741	**VK/LV150W24CG** **0-6.25A. 150W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.9A.
Urated=24V.
Irange=0-6.25A.

Prange=0-150W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

18mm
350mm
30mm
350mm

5 years guarantee **IP20.**



VK/LV250W24CG

Code	Model	Box
78000-817741	**VK/LV250W24CG** **0-10.42A. 250W**	**1pc**

Details

Voltage **220-240V**.
Iin≤1.5A.
Urated=24V.
Irange=0-10.42A.

Prange=0-250W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

22mm
400mm
40mm
400mm

5 years guarantee **IP20.**

VK/LV60W24CG/DA



Code	Model	Box
78000-812741	**VK/LV60W24CG/DA** **0-2.5A. 60W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.35A.
Urated=24V.
Irange=0-2.5A.

Prange=0-60W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

16mm
300mm
30mm
300mm

5 years guarantee DALI Dali-2 Push **IP20.**

VK/LV100W24CG/DA



Code	Model	Box
78000-814741	**VK/LV100W24CG/DA** **0-4.17A. 100W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.6A.
Urated=24V.
Irange=0-4.17A.

Prange=0-100W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

18mm
350mm
30mm
350mm

5 years guarantee DALI Dali-2 Push **IP20.**

VK/LV150W24CG/DA



Code	Model	Box
78000-816741	**VK/LV150W24CG/DA** **0-6.25A. 150W**	**1pc**

Details

Voltage **220-240V**.
Iin≤0.9A.
Urated=24V.
Irange=0-6.25A.

Prange=0-150W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

18mm
350mm
30mm
350mm

5 years guarantee DALI Dali-2 Push **IP20.**

VK/LV250W24CG/DA



Code	Model	Box
78000-818741	**VK/LV250W24CG/DA** **0-10.42A. 250W**	**1pc**

Details

Voltage **220-240V**.
Iin≤1.5A.
Urated=24V.
Irange=0-10.42A.

Prange=0-250W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.

22mm
400mm
40mm
400mm

5 years guarantee DALI Dali-2 Push **IP20.**

Led Drivers IP42/IP67

Ledstrips drivers



VK/APV-16-12





VK/APV-16

Code	Model	Box
78000-668255	**VK/APV-16-12** 1.25A. 16W. 12V.	**120pcs**
78000-669255	**VK/APV-16-24** 0.67A. 16W. 24V.	**120pcs**

Details

Voltage **100-240V**. Watt **16W**.
Material **Plastic housing.**

5 years guarantee

IP42



VK/APV-25-12





VK/APV-25

Code	Model	Box
78000-670255	**VK/APV-25-12** 2.1A. 25W. 12V.	**72pcs**
78000-671255	**VK/APV-25-24** 1.05A. 25W. 24V.	**72pcs**

Details


Voltage **100-240V**. Watt **25W**.
Material **Plastic housing.**


5 years guarantee

IP42



VK/LPV-20-12





VK/LPV-20

Code	Model	Box
78000-683255	**VK/LPV-20-12** 1.67A. 20W. 12V.	**60pcs**
78000-684255	**VK/LPV-20-24** 0.84A. 20W. 24V.	**60pcs**

Details


Voltage **90-264V**. Watt **20W**.
Material **Plastic housing.**


5 years guarantee

IP67



VK/LPV-35-24





VK/LPV-35

Code	Model	Box
78000-685255	**VK/LPV-35-12** 3A. 35W. 12V.	**40pcs**
78000-686255	**VK/LPV-35-24** 1.5A. 35W. 24V.	**40pcs**

Details


Voltage **90-264V**. Watt **35W**.
Material **Plastic housing.**


5 years guarantee

IP67



VK/LPV-60-12





VK/LPV-60

Code	Model	Box
78000-646255	**VK/LPV-60-12** 5A. 60W. 12V.	**32pcs**
78000-595663	**VK/LPV-60-24** 2.5A. 60W. 24V.	**32pcs**

Details


Voltage **100-240V**. Watt **60W**.
Material **Plastic housing.**


5 years guarantee

IP67



VK/LPV-100-12





VK/LPV-100

Code	Model	Box
78000-672255	**VK/LPV-100-12** 8.5A. 100W. 12V.	**20pcs**
78000-660255	**VK/LPV-100-24** 4.2A. 100W. 24V.	**20pcs**

Details


Voltage **100-240V**. Watt **100W**.
Material **Plastic housing.**


5 years guarantee

IP67



VK/LPV-150-12





VK/LPV-150

Code	Model	Box
78000-634255	**VK/LPV-150-12** 10A. 150W. 12V.	**20pcs**
78000-635255	**VK/LPV-150-24** 6.3A. 150W. 24V.	**20pcs**

Details

Voltage **180-305V**. Watt **150W**.
Material **Plastic housing.**

5 years guarantee

IP67

Led Drivers IP67

Ledstrips drivers



VK/A12-10E



VK/10E

Code	Model	Box
78000-589719	**VK/A12-10E** 0.83A. 10W. 12V.	**10pcs**
78000-605719	**VK/A24-10E** 0.41A. 10W. 24V.	**10pcs**

Details

Voltage **90-250V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-30E



VK/30E

Code	Model	Box
78000-590719	**VK/A12-30E** 2.5A. 30W. 12V.	**10pcs**
78000-606719	**VK/A24-30E** 1.25A. 30W. 24V.	**10pcs**


Details

Voltage **90-250V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-45E



VK/45E

Code	Model	Box
78000-591719	**VK/A12-45E** 3.75A. 45W. 12V.	**10pcs**
78000-607719	**VK/A24-45E** 1.85A. 45W. 24V.	**10pcs**

Details

Voltage **90-250V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-60E



VK/60E

Code	Model	Box
78000-592719	**VK/A12-60E** 5A. 60W. 12V.	**10pcs**
78000-608719	**VK/A24-60E** 2.5A. 60W. 24V.	**10pcs**

Details

Voltage **90-250V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-100E



VK/100E

Code	Model	Box
78000-593719	**VK/A12-100E** 8.33A. 100W. 12V.	**10pcs**
78000-609719	**VK/A24-100E** 4.16A. 100W. 24V.	**10pcs**


Details

Voltage **180-240V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-150E



VK/150E

Code	Model	Box
78000-594719	**VK/A12-150E** 12.5A. 150W. 12V.	**10pcs**
78000-610719	**VK/A24-150E** 6.5A. 150W. 24V.	**10pcs**


Details

Voltage **180-240V**. Material **Metallic.**
Guarantee **2 years**.

IP67



VK/A12-200E



VK/200E

Code	Model	Box
78000-595719	**VK/A12-200E** 16.5A. 200W. 12V.	**10pcs**
78000-611719	**VK/A24-200E** 8.3A. 200W. 24V.	**10pcs**

Details

Voltage **180-240V**. Material **Metallic.**
Guarantee **2 years**.

IP67

Dimmable Drivers





VK/10082



VK/10082

Code	Model	Box
78000-739719	**VK/10082/12** 5A. 60W. 12V. (110-240V).	**1pc**
78000-740719	**VK/10082/24** 2.5A. 60W. 24V. (110-240V).	**1pc**



VK/10083



VK/10083

Code	Model	Box
78000-741719	**VK/10083/12** 8.3A. 100W. 12V. (110-240V).	**1pc**
78000-742719	**VK/10083/24** 4.15A. 100W. 24V. (110-240V).	**1pc**




VK/10084



VK/10084

Code	Model	Box
78000-743719	**VK/10084/12** 12.5A. 150W. 12V. (170-240V).	**1pc**
78000-744719	**VK/10084/24** 6.25A. 150W. 24V. (170-240V).	**1pc**

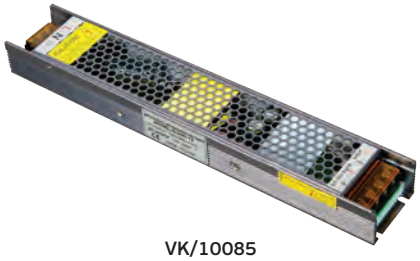

VK/10085
VK/10086



VK/10085, VK/10086

Code	Model	Box
78000-745719	**VK/10085/12** 16.6A. 200W. 12V. (170-240V).	**1pc**
78000-746719	**VK/10085/24** 8.3A. 200W. 24V. (170-240V).	**1pc**
78000-748719	**VK/10086/12** 20A. 250W. 12V. (170-240V).	**1pc**
78000-749719	**VK/10086/24** 10A. 250W. 24V. (170-240V).	**1pc**

Details

Material **Metal. Dimmable Triac 0/1-10V.** Guarantee **2 years**.


Triac 0/1-10v **IP20**

Led Drivers IP20. Dimmable.

Ledstrips drivers



VK/LVD50-24



VK/LVD50

Code	Model	Box
78000-589016	**VK/LVD50-12** 4.2A. 50W. 12V.	**10pcs**
78000-368016	**VK/LVD50-24** 2.1A. 50W. 24V.	**10pcs**


Details

Voltage 1**90-265V**. Material **Plastic. Dimmable.**
Guarantee **3 years**.

1-10V **IP20**



VK/LVD75-24



VK/LVD75

Code	Model	Box
78000-381016	**VK/LVD75-12** 6.2A. 75W. 12V.	**10pcs**
78000-369016	**VK/LVD75-24** 3.1A. 75W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic. Dimmable.**
Guarantee **3 years**.

1-10V **IP20**



VK/LVD100-24



VK/LVD100

Code	Model	Box
78000-530016	**VK/LVD100-12** 8.3A. 100W. 12V.	**10pcs**
78000-370016	**VK/LVD100-24** 4.2A. 100W. 24V.	**10pcs**


Details

Voltage 1**90-265V**. Material **Plastic. Dimmable.**
Guarantee **3 years**.

1-10V **IP20**



VK/LVD120-12



VK/LVD120

Code	Model	Box
78000-532016	**VK/LVD120-12** 10A. 120W. 12V.	**10pcs**
78000-382016	**VK/LVD120-24** 5A. 120W. 24V.	**10pcs**


Details

Voltage 1**90-265V**. Material **Plastic. Dimmable.**
Guarantee **3 years**.

1-10V **IP20**



VK/LVD150-24



VK/LV150

Code	Model	Box
78000-533016	**VK/LVD150-12** 14A. 150W. 12V.	**10pcs**
78000-515016	**VK/LVD150-24** 6.2A. 150W. 24V.	**10pcs**

Details

Voltage 1**90-265V**. Material **Plastic. Dimmable.**
Guarantee **3 years**.

1-10V **IP20**



VK/10076/PD



VK/10076/PD

Code	Model	Box
78000-744720	**VK/10076/PD** 1x10A. 120-240W. 12-24V.	**1pc**

Details

Voltage **12-24V**. Working temperature **-20°C → 50°C**. Material **Plastic. Dimmable.** Guarantee **2 years**.

1-10V **IP20**



VK/CV/DIM/DALI



VK/CV/DIM/DALI

Code	Model	Box
78000-763019	**VK/CV/DIM/DALI** Automatic reversible. 120W. 10.5-24V.	**20pcs**

Details


Voltage **10.5-24V**. OSRAM Working temperature **-20°C → 50°C**.
Material **Plastic. Dimmable.**

5 years guarantee

Dali **IP20**



VK/10077/DIN



VK/10077/DIN

Code	Model	Box
78000-745720	**VK/10077/DIN** 4ch, 5A/ch. 240-720W. 12-36V.	**1pc**

Details

Voltage **12-36V**. I-in **10A**. V-out **4x(12-36) VDC.** I-out **4x5A**. Pout 4x **60-180W**
Working temperature **-20°C → 50°C**. Material **Plastic. Dimmable.**
Guarantee **2 years**.

0/1-10V **IP20**

Led Drivers IP67. Dimmable.

Ledstrips drivers



VK/ELG-100-24DA



VK/ELG-100-24DA

Code	Model	Box
78000-666255	**VK/ELG-100-24DA** 4A. 100W. 24V.	**16pcs**

Details

Voltage **100-305V**. Material **Metallic housing.**

5 years guarantee

Dali

IP67



VK/ELG-150-24DA



VK/ELG-150-24DA

Code	Model	Box
78000-667255	**VK/ELG-150-24DA** 6.25A. 150W. 24V.	**16pcs**

Details

Voltage **100-240V**. Material **Metallic housing.**


5 years guarantee

Dali

IP67



VK/10081/0-10V




VK/10081/0-10V

Code	Model	Box
78000-599663	**VK/10081/0-10V** 16.7A. 400W. 24V.	**10pcs**

Details

Voltage **220-277V**. I-in **2.1A**. V-out **24V**. Material **Metal**. **Dimmable**.

Dimming Wiring

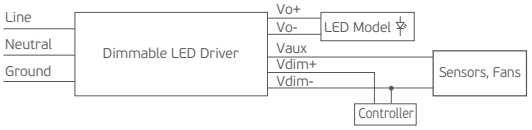

5 years guarantee

1-10V

IP67




Led Dimmers IP20.

Led dimmers



LD-250W-RF



LD-250W-RF
Dimmer button-remote controller MASTER

Code	Model	Box
12083-919002	**LD-250W-RF** **1 ch 21A. 252/504W. 12/24V.**	**1pc**


Details

Voltage **12-24V**. **252/504W**. Material **Plastic.**
Dimmable. Guarantee **2 years**.

PWM **IP20**



DM-400B-RF



DM-400B-RF
Dimmer button-remote controller MASTER

Code	Model	Box
12083-920002	**DM-400B-RF** **1 ch. 400W. 230V.**	**1pc**


Details

Voltage **230V**. **400W**. Material **Plastic.**
Dimmable. Guarantee **2 years**.

IP20.



DIM-DGL/B



DIM-DGL/B
Rail Triac-Digital Dimmer

Code	Model	Box
12084-027338	**DIM-DGL/B** **1000W. 180-230V.**	**1pc**


Details

Voltage **180-230V**. **1000W**. Material **Plastic.**
Dimmable. Guarantee **2 years**.

IP20.



RF-CTRL



RF-CTRL
Remote controller MASTER

Code	Model	Box
12083-921002	**RF-CTRL** **433.92MHz. 1 ch. 230V.**	**1pc**


Details

Voltage **230V**. Material **Plastic. Dimmable.**
Guarantee **2 years**.

IP20.



VK/53008/D



VK/53008/D
Dimmer with switch ON/OFF

Code	Model	Box
78000-646126	**VK/53008/D** **1 ch. x 8A. 12-24V.**	**10pcs**


Details

Voltage **12-24V**. Material **Plastic. Dimmable.** Guarantee **2 years**.

IP20.



GALAXY



GALAXY
Dimmer electronic

Code	Model	Box
14184-116170	**GALAXY** **Dimmer L. 230V. 1300W.**	**1pc**


Details

Voltage **230V**. Material **Plastic.** Dimmer L, C. **Dimmable.** Guarantee **2 years**.

IP20.



DIM MCU



DIM MCU
Dimmer analog OSRAM

Code	Model	Box
12084-020019	**DIM MCU** **6A. 230V.**	**1pc**

Details

Voltage **230V**. Load contact **6A**. Material **Plastic.** Guarantee **2 years**.

1-10V **IP20.**


ON
OFF



Controllers/Dimming/DMX

VK/FUT095
4 Zone Remote controller (RGBW), (RGB)


Code	Model	Box
90004-032698	**VK/FUT095** **2.4GHz. 3V. 6dBm. 20uA.**	**1pc**




Details

Voltage **3V**. Frequency **2.4GHz**.
Transmitting power **6dBm**.
Standby Power **20uA**.
Distance **30m**.
Material **Plastic.**
Dimmable RGB+W.
Working temperature **-20~60ºC.**
Guarantee **2 years**.

RGB+W **IP20.**

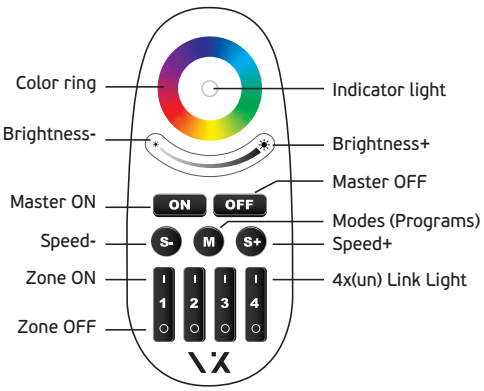



VK/FUT092
4 Zone Remote controller (RGB+CCT)


Code	Model	Box
90004-037698	**VK/FUT092** **2.4GHz. 3V. 6dBm. 20uA.**	**1pc**




Details

Voltage **3V**. Frequency **2.4GHz**.
Transmitting power **6dBm**.
Standby Power **20uA**.
Distance **30m**.
Material **Plastic.**
Dimmable RGB+CCT.
Working temperature **-20~60ºC.**
Guarantee **2 years**.

RGB+CCT **IP20.**

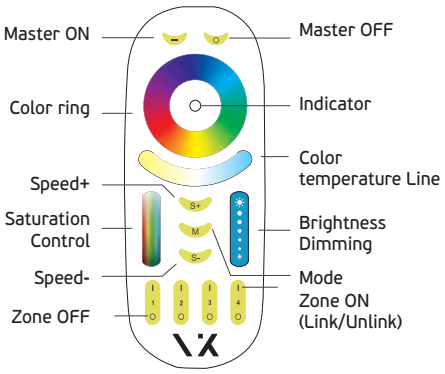



VK/FUT006
Remote controller, 1 color ledstrip





Code	Model	Box
90004-033698	**VK/FUT006** **2.4GHz. 3V. 6dBm. 20uA.**	**1pc**

Details

Voltage **3V**. Frequency **2.4GHz**.
Transmitting power **6dBm**.
Standby Power **20uA**.
Distance **30m**.
Material **Plastic.**
Dimmable W, 4 channels.
Working temperature **-20~60ºC.**
Guarantee **2 years**.

White **IP20.**

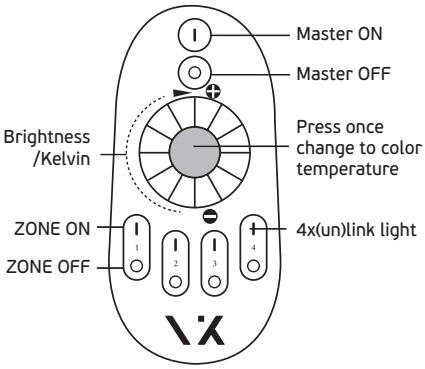








VK/FUT/TR/RCS


Code	Model	Box
78000-722126	**VK/FUT/TR/RCS** **2.4GHz. 180-240V. 6dBm. L86xW86xH31mm**	**1pc**

Details


Controller wireless (RGBW, RGB, RGB+CCT) (recessed)
Voltage **180-240V**. Frequency **2.4GHz**.
Tranmission power **6dBm**.
Working temperature **-20°C → 60°C**
Distance **30m**.
Material **Plastic.**
Dimmable RGB+W.
Guarantee **2 years**.



RGB+W **IP20.**

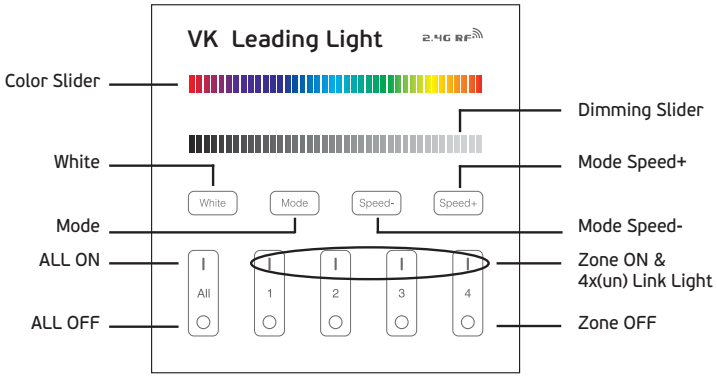

Wall installation








VK/FUT/TR/BAT


Code	Model	Box
78000-723126	**VK/FUT/TR/BAT** **2.4GHz. 3V. 6dBm. L86xW86xH16mm**	**1pc**

Details


Controller wireless (RGBW, RGB, RGB+CCT) (with batteries)
Voltage **3V**. Frequency **2.4GHz**.
Tranmission power **6dBm**.
Working temperature **-20°C → 60°C**
Distance **30m**.
Material **Plastic.**
Dimmable RGB+W.
Guarantee **2 years**.




RGB+W **IP20.**

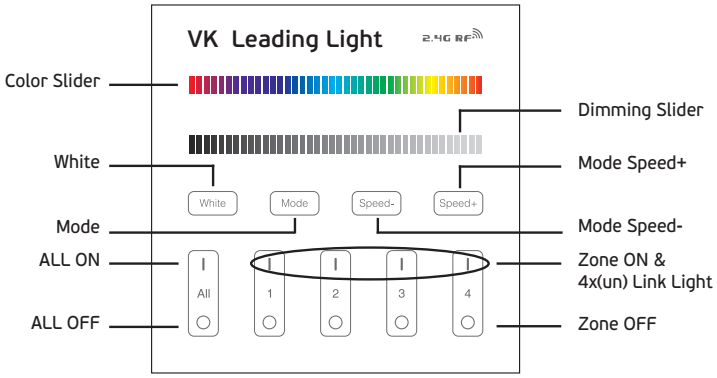

Wall installation (battery working)






VK Leading Light
2.4G RF
White
Mode
Speed-
Speed+
All
1
2
3
4

Ledstrips Receivers

Ledstrips receivers


VK/FUT036S
Controller Single Color

Code	Model	Box
90004-034698	**VK/FUT036S** **Max 12A. 12-24V.**	**1pc**




Details

Voltage **12-24V**.
Output **Max 12A**.
Total output **Max 12A**.
Distance **30m**.
Material **Plastic.**
Dimmable W, Single Color.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT006

White **IP20.**



VK/FUT037S
Controller RGB

Code	Model	Box
90004-029698	**VK/FUT037S** **6A/Channel. 12-24V. Max 12A.**	**1pc**




Details

Voltage **12-24V**.
Output **6A/channel**.
Total output **Max 12A**.
Distance **30m**.
Material **Plastic.**
Dimmable RGB, 3 channels.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT095

RGB **IP20.**



VK/FUT038S
Controller RGBW

Code	Model	Box
90004-031698	**VK/FUT038S** **6A/Channel. 12-24V. Max 12A.**	**1pc**




Details

Voltage **12-24V**.
Output **6A/channel**.
Total output **Max 12A**.
Distance **30m**.
Material **Plastic.**
Dimmable RGBW, 4 channels.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT095

RGB+W **IP20.**



VK/FUT039S
Controller RGB+CCT

Code	Model	Box
90004-039698	**VK/FUT039S** **6A/Channel. 12-24V. Max 12A.**	**1pc**




Details

Voltage **12-24V**.
Output **6A/channel**.
Total output **Max 12A**.
2.4G RF RGB+CCT
Distance **30m**.
Material **Plastic.**
Dimmable RGB+CCT, 4 channels.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT092

RGB+CCT **IP20.**




VK/FUT035
Controller Single color/dual white

Code	Model	Box
78001-631734	**VK/FUT035** **12A/Channel. 12-24V. Max 12A.**	**1pc**




Details

Voltage **12-24V**.
Output **12A/channel**.
Total output **Max 12A**.
2.4G RF Single color/dual white
Distance **30m**.
Material **Plastic.**
Dimmable RGB+CCT, 4 channels.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT006

WiFi White+CCT **IP20.**



VK/FUT037S/PLUS
3 in 1Controller RGB/RGBW/RGB+CCT

Code	Model	Box
90004-043698	**VK/FUT037S/PLUS** **6A/Channel. 12-24V. Max 12A.**	**1pc**




Details

Voltage **12-24V**.
Output **6A/channel**.
Total output **Max 12A**.
2.4G RF RGB+CCT
Distance **30m**.
Material **Plastic.**
Dimmable RGB/RGBW/RGB+CCT.
Working temperature **-10~40ºC.**
Guarantee **2 years**.



Match FUT092

WiFi RGB/RGBW/RGB+CCT **IP20.**




VK/TRI-CI
AC Triac Dimmer Wi-fi + 2.4G + Push




Code	Model	Box
78001-682734	**VK/TRI-CI** **Max 1.36A. 100-240V.**	**1pc**

Details

Input Voltage **100-240V~ 50/60Hz**.
Output Voltage **100-240V~**.
Output current **Max 1.36A**.
Output power **150W@110V, 300W@220V**.
Material **Plastic.**
Dim method **Wifi + 2.4G + Push.**
Wireless Technology **Wif-Fi IEEE 802, 11b/g/n 2.4GHz**
2.4G RF Control distance: 30m
Working temperature **-10~40°C.**
Guarantee **2 years**.


Match FUT092


Match FUT006


WiFi **IP20.**



74.5mm




47mm

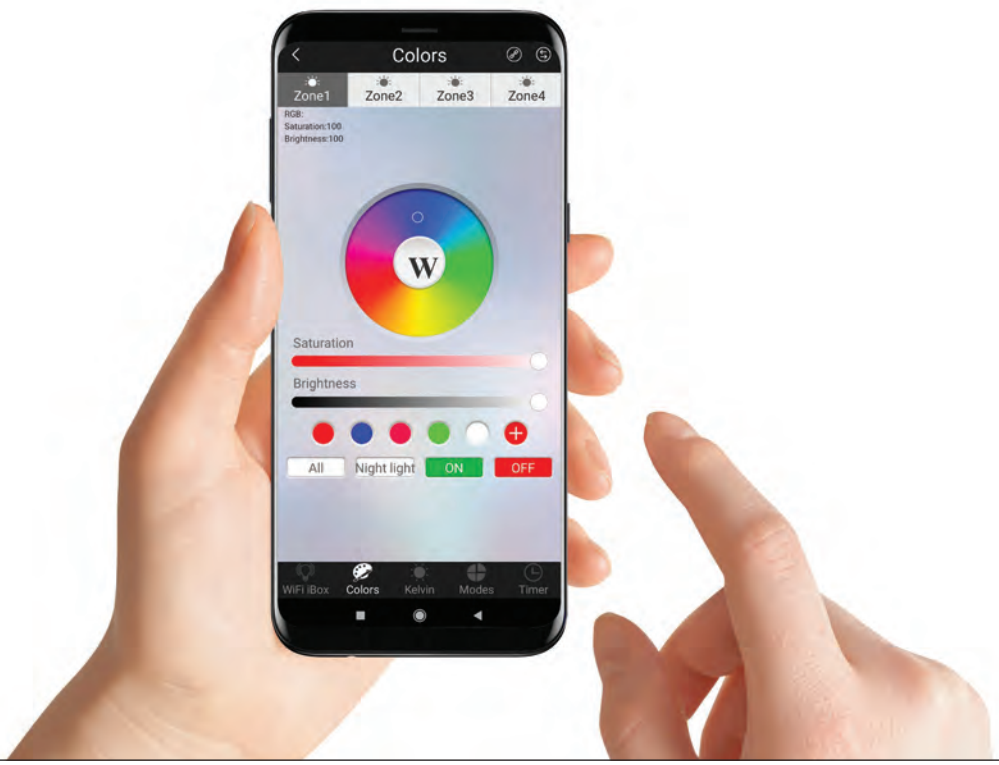




Ledstrips DMX Controllers LED Dimmable

Ledstrips DMX

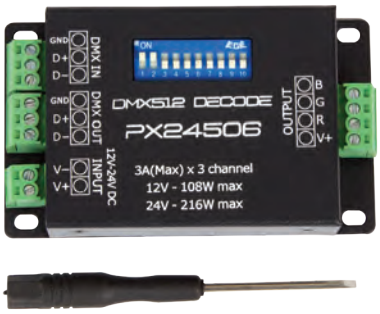

VK/P/24506
DMX Decoder



Code	Model				Box
78000-470663	**VK/P/24506**	**3 ch - 3A.**	**12/24V.**	**108/216W.**	**10pcs**


Details

Voltage **12/24V**. Output **3 channels-3A**. Watt **108/216W**. Material **Aluminium. Dimmable DMX 512.** Guarantee **2 years**.

DMX 512 **IP20.**



VK/P/24606
DMX Decoder



Code	Model				Box
78000-532663	**VK/P/24606**	**1 ch - 3A.**	**12/24V.**	**36/72W.**	**10pcs**


Details

Voltage **12/24V**. Output **1 channel-3A**. Watt **36/72W**. Material **Aluminium. Dimmable DMX 512.** Guarantee **2 years**.

DMX 512 **IP20.**



VK/10074/DMX
DMX512 Decoder




Code	Model						Box
78000-742720	**VK/10074/DMX**	**4 ch**	**5A/ch.**	**12-36VDC.**	**240-720W.**	**L178xW46xH22mm**	**1pc**

Details


Voltage **12-36VDC**. Iout **4x5A**. Iin **20.5A.** Vout **4x(12-36) VDC. Pout 4x(60-180)w.** Watt **240-720W**. Material **Plastic. Dimmable.** Guarantee **2 years**.

IP20.

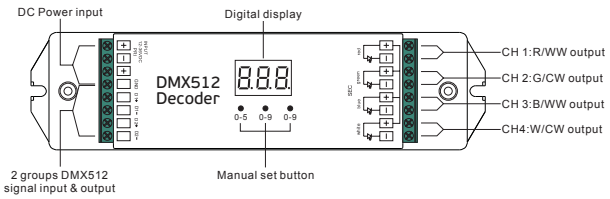



VK/10075/DMX
AC TRIAC DMX Dimmer




Code	Model						Box
78000-743720	**VK/10075/DMX**	**2 ch**	**1.2A/ch.**	**100-240VAC.**	**240-576W.**	**L170xW59xH29mm**	**1pc**

Details

Voltage **100-240VAC**. Iout **2x1.2A**. Iin **2.5A.** Vout **2x(100-240) VAC. Pout 2x(120-288)w.** Watt **240-576W**. Material **Plastic. Dimmable.** Guarantee **2 years**.

IP20.

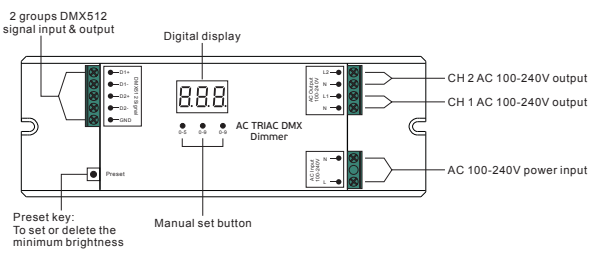

DMX Decoder/Dimmers Led Dimmable

VK/DIM500-PWM
LED dimmer triac


Code	Model	Box
12084-023016	**VK/DIM500-PWM** **230V. 500W. 230V.**	**10pcs**



Details

Voltage **230V**.
Output **230V.**
Material **Plastic.**
Dimmable.
Guarantee **3 years**.

TRIAC/PWM **IP20.**



A40PLKE1090B

Code	Model	Box
78000-697255	**A40PLKE1090B** **350mA. 11.5W. 33V. Dimmable LED Driver for High Brightness LEDs**	**1pc**



Details

Voltage **230V**.
Watt **11.5W**.
Material **Plastic.**

5 years guarantee

Cut hole
ø38mm

TRIAC/IGBT/MOSFET **IP20.**



A40PLKE2050B

Code	Model	Box
78000-698255	**A40PLKE2050B** **500mA. 10W. 20V. Dimmable LED Driver for High Brightness LEDs**	**1pc**




Details

Voltage **230V**.
Watt **10W**.
Material **Plastic.**

5 years guarantee

Cut hole
ø38mm

TRIAC/IGBT/MOSFET **IP20.**



VK/10080/RP
RGB Amplifier


Code	Model	Box
78000-598663	**VK/10080/RP** **3 ch x 10A / 1 ch x 30A. 360W/720W. 12~24VDC.**	**1pc**



Details

Voltage **3chx10A / 1chx30A**.
Output **12~24VDC.**
Watt **360W max (12V) / 720W max (24V)**.
Guarantee **3 years**.

IP20.



VK/10078/RP
Power repeater (RGBW)


Code	Model	Box
78000-746720	**VK/10078/RP** **4 ch x 5A. 240W/720W. 12~36VDC.**	**1pc**



Details

Output current **4ch, 5A/ch**.
Input Voltage **12~36VDC.**
Watt **240/720W**.
Iin **20.5A**.
Vout **4x(12-36) VDC**.
Iout **4x5A**.
Pout **4x (60-180)W.**
Guarantee **3 years**.

Function introduction

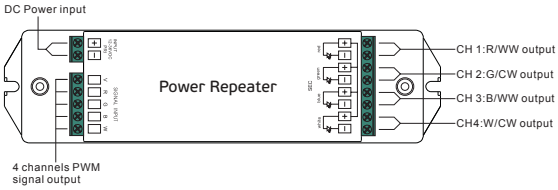

IP20.



VK/RP308
Data repeater PWM


Code	Model	Box
78000-542016	**VK/RP308** **3x8A/1x24A. 288W/576W. 12~24V. L128xW59xH31mm**	**1pc**



Details


Output current **3x8A/1x24A**.
Input Voltage **12/24V.**
Watt **288/576W**.
Material **plastic.**
Guarantee **3 years**.

PWM **IP20.**



Led Drivers Dali dim






Oti Dali 50W/ Oti Dali 80W

Code	Model					Box
78000-476019	**VK/Oti Dali 50W**	**43A**	**50W**	**OSRAM**	**4 channels**	**20pcs**
78000-473019	**VK/Oti Dali 80W**	**48A**	**80W**	**OSRAM**	**4 channels**	**20pcs**
78000-762019	**VK/Oti Dali 80W/1**	**24V**	**80W**	**OSRAM**	**1 channel**	**20pcs**

Details
Voltage **220-240V**. AC198-264V. Watt **50W/80W**. Dimmable. IP Rating **IP20**. **Working temperature -20°C → 60°C. Lifetime 50.000hrs.** Material **Plastic housing.**

IP20. **5 years guarantee**






Oti Dali 160W

Code	Model					Box
78000-472019	**VK/Oti Dali 160W**	69A	**160W**	**OSRAM**	**2 channels**	20pcs

Details
Voltage **220-240V**. AC198-264V. Watt **160W**. Dimmable. IP Rating **IP20**. **Working temperature -20°C → 60°C. Lifetime 50.000hrs.** Material **Plastic housing.**

IP20. **5 years guarantee**





Oti Dali 210W

Code	Model					Box
78000-504019	**VK/Oti Dali 210W**	**69A**	**210W**	**OSRAM**	**1-4 channels**	**6pcs**

Details
Voltage **220-240V**. AC198-264V. Watt **210W**. Dimmable. IP Rating **IP66/IP67**. **Working temperature -20°C → 60°C. Lifetime 50.000hrs.** Material **Aluminium.**

IP66/IP67. **5 years guarantee**

VK/10079/DALI



Code
78000-597663


Model
VK/10079/DALI
850-1.200mA. 40W. 220-240V.

Box
1pc


Details

Voltage **220-240V**.
Output **1 ch. 850-1.200mA**.
Vout **55Vmax**.
Pout **40W max**.
PF **>0.95**.
Material **Plastic**.
Dimmable.
Guarantee **2 years**.


DALI Wiring

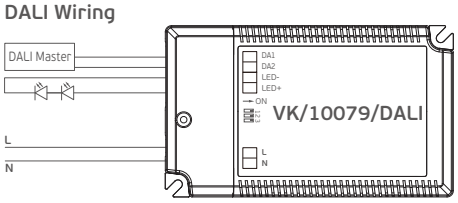

Dali **IP20.**



VK/10073/DALI
LED class 2 power supply

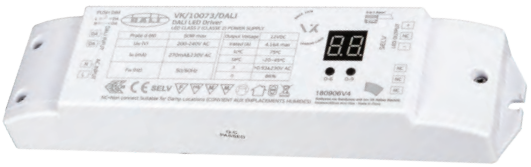


Code
78000-741720

Model
VK/10073/DALI
4.16A. max50W. 200-240V.

Box
20pcs

Details

Voltage **200-240V**.
12V DC/50Hz.
Iout **4.16A**.
Iin **270mA & 230V AC**.
Material **Plastic.**
Dimmable.
Guarantee **2 years**.

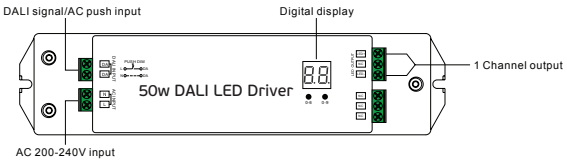

Dali **IP20.**



VK/DALI/PCU/TW



Code
78000-790019

Model
VK/DALI/PCU/TW
Dali. 230V. OSRAM

Box
24pcs


Details

Voltage **230V**.
Watt **2W**.
Working temperature **0°C → 40°C**.
Material **Plastic.**
Dimmable **yes.**
Dimming **interface DALI-2**

Length of the DALI control cable: **up to 300 m**
Automatic synchronization between the control points
App Control **No**
Max. number of connected controllers **4**

5 years guarantee

Dali **IP20.**



Led Drivers PWM Dim

VK/LC350PWM
LED Converter



Code	Model	Box
78000-420016	**VK/LC350PWM/S** **350mA. 12-48V. IP20.**	**10pcs**
78000-528016	**VK/LC350PWM/C** **350mA. 12-48V. IP66.**	**10pcs**

Details
Voltage **12-48V**. Output **350mA.** Material **Plastic. Dimmable.** Guarantee **3 years**.

PWM **IP20/IP66.**



VK/LC700PWM
LED Converter



Code	Model	Box
78000-421016	**VK/LC700PWM/S** **700mA. 12-48V. IP20.**	**10pcs**
78000-425016	**VK/LC700PWM/C** **700mA. 12-48V. IP66.**	**10pcs**

Details
Voltage **12-48V**. Output **700mA.** Material **Plastic. Dimmable.** Guarantee **3 years**.

PWM **IP20/IP66.**




VK/L3-5-360
Dim Controller Analog



Code	Model	Box
78000-557663	**VK/L3-5-360** **3 channels x 5A. 120-240W. 12-24V.**	**10pcs**

Details
Voltage **12-24V**. Output **3 channels x 5A**. Material **Aluminium. Dimmable.** Guarantee **2 years**.

1-10V **IP20.**



VK/CT309RF
Wirelles Remote controller RGB



Code	Model	Box
78000-410663	**VK/CT309RF** **3 ch x 5A. 12-24V. 180/360W.**	**10pcs**

Details
Voltage **12-24V**. Output **3 channels x 5A**. Watt **180/360W**. Material **Plastic. Dimmable RGB.** Guarantee **2 years**.

IP20.



VK/LC350
LED




Code	Model	Box
78000-541016	**VK/LC350-12** **350mA. 1-3W. 3-12V. L67xW35xH25mm**	**10pcs**
78000-590016	**VK/LC350-24** **350mA. 3-8.4W. 12-24V. L67xW35xH25mm**	**10pcs**
78000-543016	**VK/LC350-40** **350mA. 5-14W. 24-40V. L81xW35xH27mm**	**10pcs**

Details
Voltage 1**95-265V**. Watt **1-14W**. Material **Plastic.** Guarantee **3 years**.

IP20.

H mm | Lmm | Lmm | Wmm

VK/LC500
LED

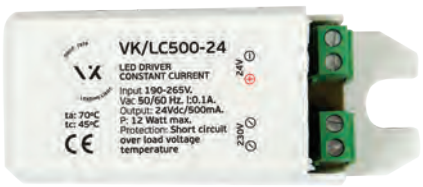

Code	Model	Box
78000-596016	**VK/LC500-24** **500mA. 6-12W. 12-24V.**	**10pcs**
78000-591016	**VK/LC500-45** **500mA. 12-22W. 24-45V.**	**10pcs**

Details
Voltage 1**95-265V**. Watt **6-22.5W**. Material **Plastic.** Guarantee **3 years**.

IP20.

27 mm | 81mm | 81mm | 35mm

VK/LC630
LED



Code	Model	Box
78000-539016	**VK/LC630-45** **630mA. 16-28W. 24-45V.**	**10pcs**

Details
Voltage 1**95-265V**. Watt **16-22.5W**. Material **Plastic.** Guarantee **3 years**.

IP20.

27 mm | 81mm | 81mm | 35mm

VK/LC700
LED



Code	Model	Box
78000-588016	**VK/LC700-12** **700mA. 1-8.4W. 3-12V. L67xW35xH25mm**	**10pcs**
78000-536016	**VK/LC700-24** **700mA. 6-16W. 12-24V. L67xW35xH25mm**	**10pcs**
78000-595016	**VK/LC700-40** **700mA. 10-28W. 24-40V. L81xW35xH27mm**	**10pcs**

Details
Voltage 1**95-265V**. Watt **1-28W**. Material **Plastic.** Guarantee **3 years**.

IP20.

H mm | Lmm | Lmm | Wmm

Drivers Led Dimmable

A40PBX100D0B-150D0B




Code	Model	Box
78000-696255	**A40PBX100D0B** **4.16A. 100W. 24V. Dimmable LED Driver DALI/0-10V/1-10V/Push**	1pc
78000-693255	**A40PBX150D0B** **6.25A. 150W. 24V. Dimmable LED Driver DALI/0-10V/1-10V/Push**	1pc

Details

Voltage **100-250V**.
Watt **100W. 150W.**
Material **Plastic.** .

5 years guarantee

Cut hole
ø80mm



DALI/PUSH
0/1-10V

IP20.

A40SLBOX60DB




Code	Model	Box
78000-694255	**A40SLBOX60DB** **2.5A. 60W. 24V. Dimmable LED Driver DALI/1-10V/Push**	1pc

Details

Voltage **100-250V**.
Watt **60W.**
Material **Plastic.** .

5 years guarantee

Cut hole
ø35mm



DALI/PUSH
0/1-10V

IP20.

A40PBF060D0B-100D0B




Code	Model	Box
78000-695255	**A40PBF060D0B** **2.5A. 60W. 24V. LED Driver DALI/Push**	1pc
78000-699255	**A40PBF100D0B** **4.16A. 100W. 24V. LED Driver DALI/Push**	1pc

Details

Voltage **100-250V**.
Watt **60W. 100W.**
Material **Plastic.** .

5 years guarantee

Cut hole
Ø63mm



DALI/PUSH

IP20.

A40DALI1103B

Code	Model	Box
78000-700255	**A40DALI1103B** **12A. 144/288W. 24V. DALI/0-10V/1-10V interface and low voltage push**	**1pc**



Details


Voltage **12-24V/DC**.
Watt **144/288W**.
Material **Plastic.**
PWM controller. .

5 years guarantee

Cut hole
Ø45mm

DALI/PUSH
0/1-10V

IP20.



A40PBX200D0B

Code	Model	Box
78000-703255	**A40PBX200D0B** **8.32A. 200W. 24V. Dimmable LED Driver DALI/Push**	**1pc**



Details

Voltage **100-250V**.
Watt **200W.**
Material **Plastic.** .

5 years guarantee

Cut hole
ø80mm

DALI/PUSH

IP20.



Emergency Battery kits Led

VK/GU10-E27/EME/3A


Code	Model	Box
78000-001724	**VK/GU10-E27/EME/3A** ● **Aluminium + white cover. Lithium-Iron 3Ah**	**1pc**



Details

Duration **1-3 hours**.
Load **3-10W max**.
Emergency Power **3-10W**.
Voltage **AC90-277V, 50Hz/60Hz**
Guarantee **2 years**

IP20.

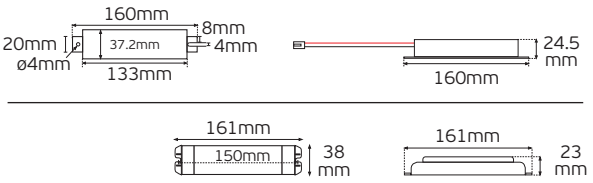

VK/GU10-E27/EME/6A


Code	Model	Box
78000-002724	**VK/GU10-E27/EME/6A** ● **Aluminium + white cover. Lithium-Iron 6Ah**	**1pc**



Details

Duration **3 hours**.
Load **7W max**.
Emergency Power **7W**.
Voltage **AC90-277V, 50Hz/60Hz**
Guarantee **2 years**

IP20.

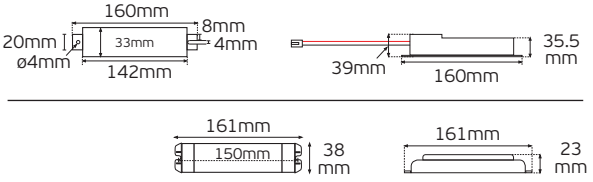





Recessed Downlights Led






Coko

Coko



VK/04612/TB-B



Cut hole





VK/04612

Code	Model	Box
64174-003776	**VK/04612/W-B/WW** ○ **White + black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-004776	**VK/04612/W-B/W** ○ **White + black**. 3000K. **610lm. 6W.** CRI>90	**1pc**
64174-005776	**VK/04612/B/WW** ● **Black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-006776	**VK/04612/B/W** ● **Black**. 3000K. **610lm. 6W.** CRI>90	**1pc**
64174-007776	**VK/04612/TB-B/WW** ● **Titanium bronze + Black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-008776	**VK/04612/TB-B/W** ● **Titanium bronze + Black**. 3000K. **610lm. 6W.** CRI>90	**1pc**



Details

Voltage **220-240V**.
Material **Aluminium+PMMA lens**.
Beam Angle **24°**.
Orizontial rotate in **355°**.
Vertical rotate in **90°**.
Type of Led bridgelux **V6-HD**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**.

5 years guarantee


Adjustable

IP20.

Coko



VK/04612/2/TB-B



Cut hole



VK/04612/2

Code	Model	Box
64174-009776	**VK/04612/2/W-B/WW** ○ **White + black**. 2700K. **1.114lm. 2x6W.** CRI>90	**1pc**
64174-010776	**VK/04612/2/W-B/W** ○ **White + black**. 3000K. **1.220lm. 2x6W.** CRI>90	**1pc**
64174-011776	**VK/04612/2/B/WW** ● **Black**. 2700K. **1.114lm. 2x6W.** CRI>90	**1pc**
64174-012776	**VK/04612/2/B/W** ● **Black**. 3000K. **1.220lm. 2x6W.** CRI>90	**1pc**
64174-013776	**VK/04612/2/TB-B/WW** ● **Titanium bronze + Black**. 2700K. **1.114lm. 2x6W.** CRI>90	**1pc**
64174-014776	**VK/04612/2/TB-B/W** ● **Titanium bronze + Black**. 3000K. **1.220lm. 2x6W.** CRI>90	**1pc**





Details

Voltage **220-240V**.
Material **Aluminium+PMMA lens**.
Beam Angle **24°**.
Orizontial rotate in **355°**.
Vertical rotate in **90°**.
Type of Led **V6-HD**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**.

5 years guarantee







IP20.

Coko



VK/04612/TL/W-B

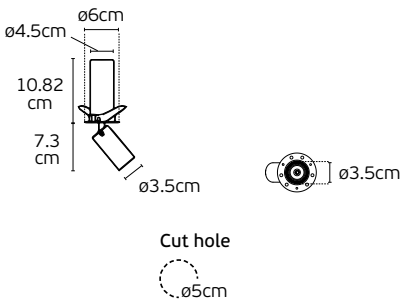

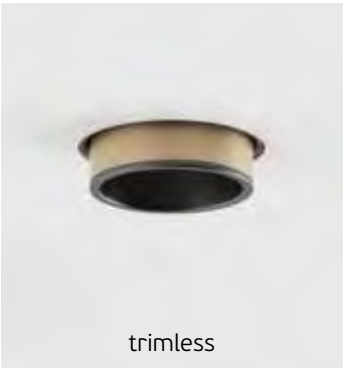

VK/04612/TL

Code	Model	Box
64174-015776	**VK/04612/TL/W-B/WW** ○ **White + black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-016776	**VK/04612/TL/W-B/W** ○ **White + black**. 3000K. **610lm. 6W.** CRI>90	**1pc**
64174-017776	**VK/04612/TL/B/WW** ● **Black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-018776	**VK/04612/TL/B/W** ● **Black**. 3000K. **610lm. 6W.** CRI>90	**1pc**
64174-019776	**VK/04612/TL/TB-B/WW** ● **Titanium bronze + Black**. 2700K. **557lm. 6W.** CRI>90	**1pc**
64174-020776	**VK/04612/TL/TB-B/W** ● **Titanium bronze + Black**. 3000K. **610lm. 6W.** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium+PMMA lens**.
Beam Angle **24°**.
Orizontial rotate in **355°**.
Vertical rotate in **90°**.
Type of Led bridgelux **V6-HD**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**.

5 years guarantee

Adjustable

IP20.



Guni




VK/04147/W




VK/04148/B

VK/04147, VK/04148

Code	Model	Box
64174-016126	**VK/04147/W/W** ○ **White+Gold**. 3000K. 560lm. **7W**. 220-240V.	**25pcs**
64174-017126	**VK/04147/B/W** ● **Black+Gold**. 3000K. 560lm. **7W**. 220-240V.	**25pc**
64174-020126	**VK/04147ND/B/W (Driver NOT included)** ● **Black**. 3000K. 560lm. 7W. **Depends on driver**.	**25pcs**
64174-018126	**VK/04148/W/W** ○ **White+Gold**. 3000K. 1.040lm. **13W**. 220-240V.	**25pcs**
64174-019126	**VK/04148/B/W** ● **Black+Gold**. 3000K. 1.040lm. **13W**. 220-240V.	**25pcs**

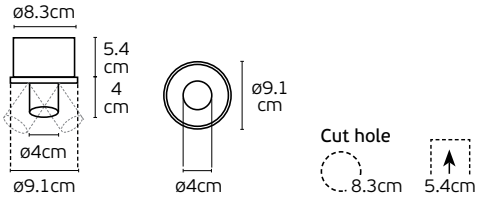

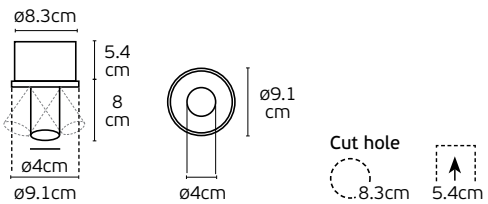

Details

AC **220-240V** Driver
(For the models that include).
Beam Angle **24°.**
Type of Led **COB**.
CRI>80.

Lifetime **50.000hrs**.
Clicks **20.000.**
Working temperature **-40°C ~ 60°C**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable

IP20.

Guni



VK/04226/W



VK/04226/B





VK/04226

Code	Model	Box
64174-311131	**VK/04226/W/W** ○ White. **3000K.** 3W. **CRI>80**	**4pcs**
64174-312131	**VK/04226/B/W** ● Black. **3000K.** 3W. **CRI>80**	**4pcs**



Details

AC Driver **220-240V (Included)**.
Watt **3W**.
Beam Angle **Diffuser light.**
Type of Led **CREE**.
No Dimmable.

Lifetime **30.000 hrs**.
Working temperature **< 45°C**.
Material **Gypsum, aluminium**.
Possibility to paint.
Guarantee **2 years**.



IP20


VK/04346/B/C
LED, Black
4000K, 12w, 38º
220-240V
Ra>80, IP20



Recessed Dark downlights Led


Presto



VK/04345/BGD

VK/04345

Code	Model	Box
64174-125721	**VK/04345/WB/W** ○ ● **White-Black sand**. 3000K. 515lm. 6W. CRI>90.	**30pcs**
64174-126721	**VK/04345/WB/C** ○ ● **White-Black sand**. 4000K. 390lm. 7W. CRI>90.	**30pcs**
64174-127721	**VK/04345/B/W** ● **Black sand**. 3000K. 515lm. 6W. CRI>90.	**30pcs**
64174-128721	**VK/04345/B/C** ● **Black sand**. 4000K. 390lm. 7W. CRI>90.	**30pcs**
64174-129721	**VK/04345/BGD/W** ● ● **Black-Gold sand**. 3000K. 515lm. 6W. CRI>90.	**30pcs**
64174-130721	**VK/04345/BGD/W** ● ● **Black-Gold sand**. 4000K. 390lm. 7W. CRI>90.	**30pcs**



Details

AC Driver **220-240V (included)**.
Type of Led **5050 with driver**.
Beam angle **35°**.
Rotation **30° & 350°**.
Dimmable **No**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.


Presto




VK/04346/B

VK/04346

Code	Model	Box
64174-131721	**VK/04346/WB/W** ○ ● **White-Black sand**. 3000K. 1265lm. 11W. CRI>90.	**20pcs**
64174-132721	**VK/04346/WB/C** ○ ● **White-Black sand**. 4000K. 897lm. 12W. CRI>90.	**20pcs**
64174-133721	**VK/04346/B/W** ● **Black sand**. 3000K. 1265lm. 11W. 35°. CRI>90.	**20pcs**
64174-134721	**VK/04346/B/C** ● **Black sand**. 4000K. 897lm. 12W. 35°. CRI>90.	**20pcs**
64174-135721	**VK/04346/BGD/W** ● ● **Black-Gold sand**. 3000K. 1265lm. 11W. CRI>90.	**20pcs**
64174-136721	**VK/04346/BGD/C** ● ● **Black-Gold sand**. 4000K. 897lm. 12W. CRI>90.	**20pcs**





Details

AC Driver **220-240V (included)**.
Type of Led **E8 with driver**.
Beam angle **35°**.
Rotation **30° & 350°**.
Dimmable **No**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.

Habi




VK/04339/W





VK/04340/B


VK/04339, VK/04340

Code	Model	Box
64174-117721	**VK/04339/W/W** ○ **White sand**. 3000K. 180lm. 2W. CRI>90.	**30pcs**
64174-118721	**VK/04339/W/C** ○ **White sand**. 4000K. 130lm. 3W. CRI>90.	**30pcs**
64174-119721	**VK/04339/B/W** ● **Black sand**. 3000K. 180lm. 2W. CRI>90.	**30pcs**
64174-120721	**VK/04339/B/C** ● **Black sand**. 4000K. 130lm. 3W. CRI>90.	**30pcs**
64174-121721	**VK/04340/W/W** ○ **White sand**. 3000K. 128lm. 3W. CRI>90.	**30pcs**
64174-122721	**VK/04340/W/C** ○ **White sand**. 4000K. 135lm. 3W. CRI>90.	**30pcs**
64174-123721	**VK/04340/B/W** ● **Black sand**. 3000K. 128lm. 3W. CRI>90.	**30pcs**
64174-124721	**VK/04340/B/C** ● **Black sand**. 4000K. 135lm. 3W. CRI>90.	**30pcs**









Details

AC Driver **100-240V (included)**.
Beam angle **8°**.
Type of Led **OSRAM.**
Dimmable **No**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium.**
Guarantee **3 years**.



IP20.




San



VK/04616/W




VK/04617/W



Cut hole





Cut hole



VK/04616, VK/04617

Code	Model	Box
64174-029776	**VK/04616/W/W** ○ **White**. 3000K. **1.508lm. 12W. 15°** CRI>90	**1pc**
64174-030776	**VK/04616/B/W** ● **Black**. 3000K. **1.508lm. 12W. 15°** CRI>90	**1pc**
64174-031776	**VK/04617/W/W** ○ **White**. 3000K. **1.508lm. 12W. 15°** CRI>90. Adjustable	**1pc**
64174-032776	**VK/04617/B/W** ● **Black**. 3000K. **1.508lm. 12W. 15°** CRI>90. Adjustable	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium, PMMA lens**.
Beam Angle **15°**.
Adjustable **VK/04617 yes**.
Dimmable **No**.

Projection angle **0~20° (VK/04617)**.
Type of Led **V8-E**.
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.

5 years guarantee


IP20.



Bole



VK/04610/W-CB/W



Cut hole



VK/04610

Code	Model	Box
64174-001776	**VK/04610/W-CB/W** ○ **Titanium-White-Chrome-black**. 3000K. **1.860lm. 15W.** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium**.
Color body **Titanium heat sink, white trim + chrome black reflector**.
Beam Angle **36°**.
Orizontial rotation **360°**.

Vertical projection angle **0°-25°**.
Type of Led bridgelux **V10-C**.
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**. Flicker **Free**.

5 years guarantee




IP20.



Blin



VK/04611/W-CB/W

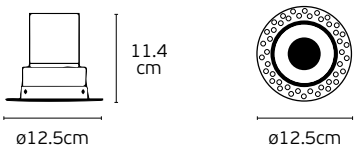

Cut hole



VK/04611

Code	Model	Box
64174-002776	**VK/04611/W-CB/W** ○ **Titanium-White-Chrome-black**. 3000K. **1.860lm. 15W.** CRI>90	**1pc**

Details

Voltage **220-240V.**
Material **Aluminium**, **PMMA lens.**
Color body **Titanium heat sink, white trim + chrome black reflector**.
Beam Angle **36°.**

Type of Led bridgelux **V10-C.**
Lifetime **50.000 hrs.**
Working temperature **< 45°C.**
Dimmable **No**. Flicker **Free**.

5 years guarantee


IP20.



Abel




VK/04440





VK/04492

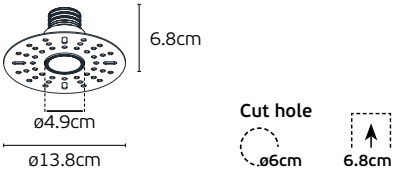

VK/04440, VK/04492

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-189721	**VK/04440/W/WW**	○White matt	2700K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-190721	**VK/04440/W/W**	○White matt	3000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-191721	**VK/04440/W/C**	○White matt	4000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-192721	**VK/04440/B/WW**	●Black matt	2700K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-193721	**VK/04440/B/W**	●Black matt	3000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-194721	**VK/04440/B/C**	●Black matt	4000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-239721	**VK/04492/W/WW**	○White sand	2700K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-240721	**VK/04492/W/W**	○White sand	3000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-241721	**VK/04492/W/C**	○White sand	4000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-242721	**VK/04492/B/WW**	●Black sand	2700K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-243721	**VK/04492/B/W**	●Black sand	3000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-244721	**VK/04492/B/C**	●Black sand	4000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs

Details


1W: Input current **300mA**, Input Voltage **DC 3V**. Driver: Input **AC100-260V 50/60Hz, Output DC 2-4V 300mA**.
CRI>**90**. Type of Led **SMD with driver**. Angle **24º**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**.
Material **Aluminium.** Installation **Recessed. 3 years guarantee**. (The cut hole also fits the light driver).
5W: Input current ≤**500mA**, Input Voltage **DC 9V**. Driver: Input **AC220-240V 50/60Hz, Output DC 9-14V 500mA**.
CRI>**90**. Type of Led SMD CREE **with driver**. Angle **12º**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**.
Material **Aluminium.** Installation **Recessed-trimless. 3 years guarantee.** (The cut hole also fits the light driver).

IP20

Abel




VK/04445

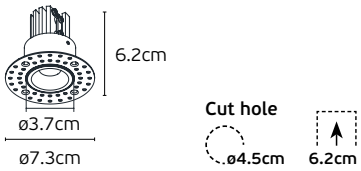



VK/04493

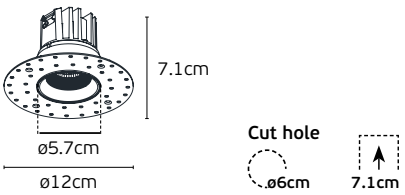

VK/04445, VK/04493

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-219721	**VK/04445/W/WW**	○ White sand	2700K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-220721	**VK/04445/W/W**	○ White sand	3000K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-221721	**VK/04445/W/C**	○ White sand	4000K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-222721	**VK/04445/B/WW**	● Black sand	2700K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-223721	**VK/04445/B/W**	● Black sand	3000K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-224721	**VK/04445/B/C**	● Black sand	4000K	5W	426lm	30°	CRI>90	Ø7.3 (ø3.7)cm	30pcs
64174-245721	**VK/04493/W/WW**	○ White sand	2700K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs
64174-246721	**VK/04493/W/W**	○ White sand	3000K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs
64174-247721	**VK/04493/W/C**	○ White sand	4000K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs
64174-248721	**VK/04493/B/WW**	● Black sand	2700K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs
64174-249721	**VK/04493/B/W**	● Black sand	3000K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs
64174-250721	**VK/04493/B/C**	● Black sand	4000K	9W	810lm	24°	CRI>90	Ø12 (ø5.7)cm	30pcs

Details

5W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-260V 50/60Hz, Output DC 30-45V 150mA**. CRI>**90**. Type of Led **COB with driver**. Angle **30°**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**. Material **Aluminium.** Installation **Recessed. 3 years guarantee**. (The cut hole also fits the light driver).
9W: Input current **250mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz, Output DC 30-50V 250mA**. CRI>**90**. Type of Led **COB with driver**. Angle **24°**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**. Material **Aluminium.** Installation **Recessed-trimless. 3 years guarantee**. (The cut hole also fits the light driver).

IP20

Eye




VK/04446/WB




VK/04447/WB




VK/04448/WB



Recessed



Trimless



Trimless

VK/04446, VK/04447, VK/04448

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-225721	**VK/04446/WB/W**	○● White+Black sand	3000K	5W	358lm	30°	CRI>90	ø6.2cm	30pcs
64174-226721	**VK/04446/WB/C**	○● White+Black sand	4000K	5W	358lm	30°	CRI>90	ø6.2cm	30pcs
64174-227721	**VK/04447/WB/W**	○● White+Black sand	3000K	5W	358lm	30°	CRI>90	ø9cm	30pcs
64174-228721	**VK/04447/WB/C**	○● White+Black sand	4000K	5W	358lm	30°	CRI>90	ø9cm	30pcs
64174-229721	**VK/04448/WB/W**	○● White+Black sand	3000K	11W	744lm	30°	CRI>90	ø16.3cm	12pcs
64174-230721	**VK/04448/WB/C**	○● White+Black sand	4000K	11W	744lm	30°	CRI>90	ø16.3cm	12pcs

Details

5W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz, Output DC 30-45V 150mA**.
11W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz, Output DC 30-45V 150mA**.
Watt **5W, 11W**. CRI>**90**. Type of Led **COB with driver**. Angle **30º**. Angle of inclination **21°, 30°, 32°**. **No Dimmable**
Lifetime **20.000 hrs**. Working temperature **< 45ºC**. Material **Aluminium.** Installation **Recessed. 3 years guarantee.**



IP20




Eye




VK/04449/WB



VK/04450/WB





VK/04449, VK/04450

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-231721	**VK/04449/WB/W**	○● White+Black sand	3000K	5W	363lm	30°	CRI>90	6x6cm	30pcs
64174-232721	**VK/04449/WB/C**	○● White+Black sand	4000K	5W	363lm	30°	CRI>90	6x6cm	30pcs
64174-233721	**VK/04450/WB/W**	○● White+Black sand	3000K	11W	803lm	30°	CRI>90	12.1x6.7cm	20pcs
64174-234721	**VK/04450/WB/C**	○● White+Black sand	4000K	11W	803lm	30°	CRI>90	12.1x6.7cm	20pcs

Details

5W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz, Output DC 30-45V 150mA**.
11W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz, Output DC 30-45V 150mA**.
Watt **5W, 11W**. CRI>**90**. Type of Led bridgelux. **COB with driver**. Angle **30º**. Angle of inclination **21º**. **No Dimmable**
Lifetime **20.000 hrs**. Working temperature **< 45ºC**. Material **Aluminium.** Installation **Recessed. 3 years** guarantee.




IP20



Suti




VK/04299/W





VK/04299/W/2


VK/04299, VK/04299/2

Code	Model	Box
64174-087721	**VK/04299/W/W** ○ **White sand**. 3000K. 551lm. 5W. CRI>90.	**30pcs**
64174-088721	**VK/04299/W/C** ○ **White sand**. 4000K. 518lm. 5W. CRI>90.	**30pcs**
64174-089721	**VK/04299/B/W** ● **Black sand**. 3000K. 551lm. 5W. CRI>90.	**30pcs**
64174-090721	**VK/04299/B/C** ● **Black sand**. 4000K. 518lm. 5W. CRI>90.	**30pcs**
64174-091721	**VK/04299/W/W/2** ○ **White sand**. 3000K. 947lm. 7W. CRI>90.	**30pcs**
64174-092721	**VK/04299/W/C/2** ○ **White sand**. 4000K. 947lm. 7W. CRI>90.	**30pcs**
64174-093721	**VK/04299/B/W/2** ● **Black sand**. 3000K. 947lm. 7W. CRI>90.	**30pcs**
64174-094721	**VK/04299/B/C/2** ● **Black sand**. 4000K. 947lm. 7W. CRI>90.	**30pcs**










Details

AC Driver **220-240V**.
Beam Angle **35°**.
Type of Led **5050**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.

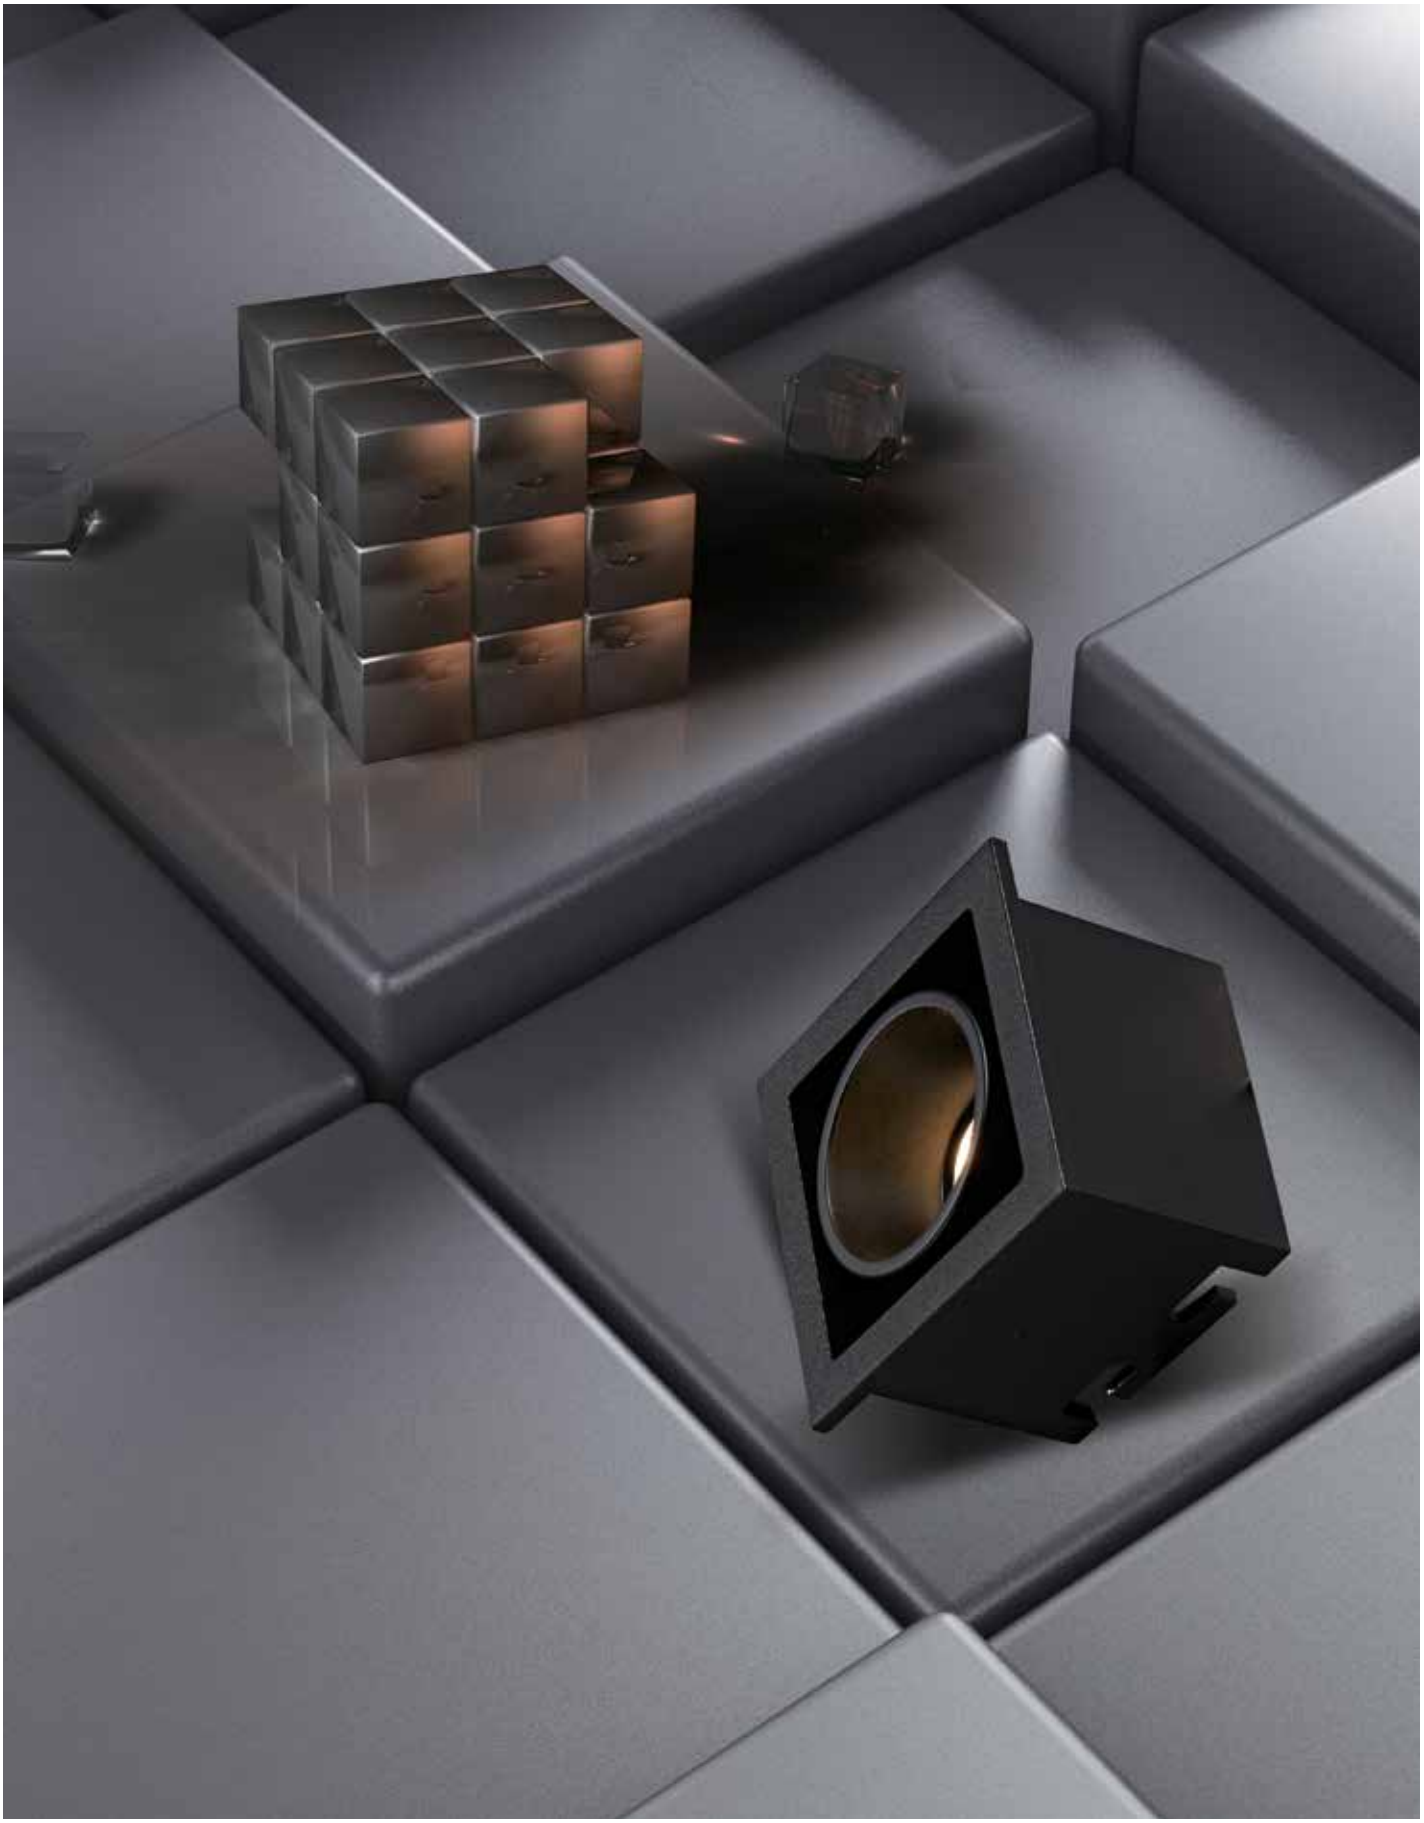

Onti




VK/04218/W





VK/04219/W


VK/04218
VK/04219

Code	Model	Box
64174-034721	**VK/04218/W/W** ○ **White sanded**. 3000K. 241lm. 2W. CRI>90	**50pcs**
64174-035721	**VK/04219/W/W** ○ **White sanded**. 3000K. 217lm. 2W. CRI>80	**50pcs**









Details

AC **100-240V Driver (Included)**.
Beam Angle **8°**.
Type of Led **CREE XP-E2**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20

Onti




VK/04220/W



VK/04221/W

VK/04220
VK/04221

Code	Model	Box
64174-036721	**VK/04220/W/W** ○ **White sanded**. 3000K. 89lm. 3W. CRI>80.	**50pcs**
64174-037721	**VK/04221/W/W** ○ **White sanded**. 3000K. 89lm. 3W. CRI>80.	**50pcs**





Details

AC **100-240V Driver (Included)**.
Beam Angle **8°**.
Type of Led **CREE XP-E2**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20


Bloc



VK/04265/B

VK/04265

Code	Model	Box
64174-057721	**VK/04265/W/W** ○ **White**. 3000K. 180lm. 3W. CRI>90.	**50pcs**
64174-058721	**VK/04265/W/C** ○ **White**. 4000K. 221lm. 2W. CRI>90.	**50pcs**
64174-055721	**VK/04265/B/W** ● **Black**. 3000K. 180lm. 3W. CRI>90.	**50pcs**
64174-056721	**VK/04265/B/C** ● **Black**. 4000K. 221lm. 2W. CRI>90.	**50pcs**



Details

AC Driver **100-240V**.
Beam Angle **15°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.






Bloc



VK/04261/B

VK/04261

Code	Model	Box
64174-041721	**VK/04261/W/W** ○ **White**. 3000K. 180lm. 2W. CRI>90. Adjustable.	**50pcs**
64174-042721	**VK/04261/W/C** ○ **White**. 4000K. 221lm. 2W. CRI>90. Adjustable.	**50pcs**
64174-039721	**VK/04261/B/W** ● **Black**. 3000K. 180lm. 2W. CRI>90. Adjustable.	**50pcs**
64174-040721	**VK/04261/B/C** ● **Black**. 4000K. 221lm. 2W. CRI>90. Adjustable.	**50pcs**




Details

AC Driver **100-240V (Included)**.
Beam Angle **15°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.

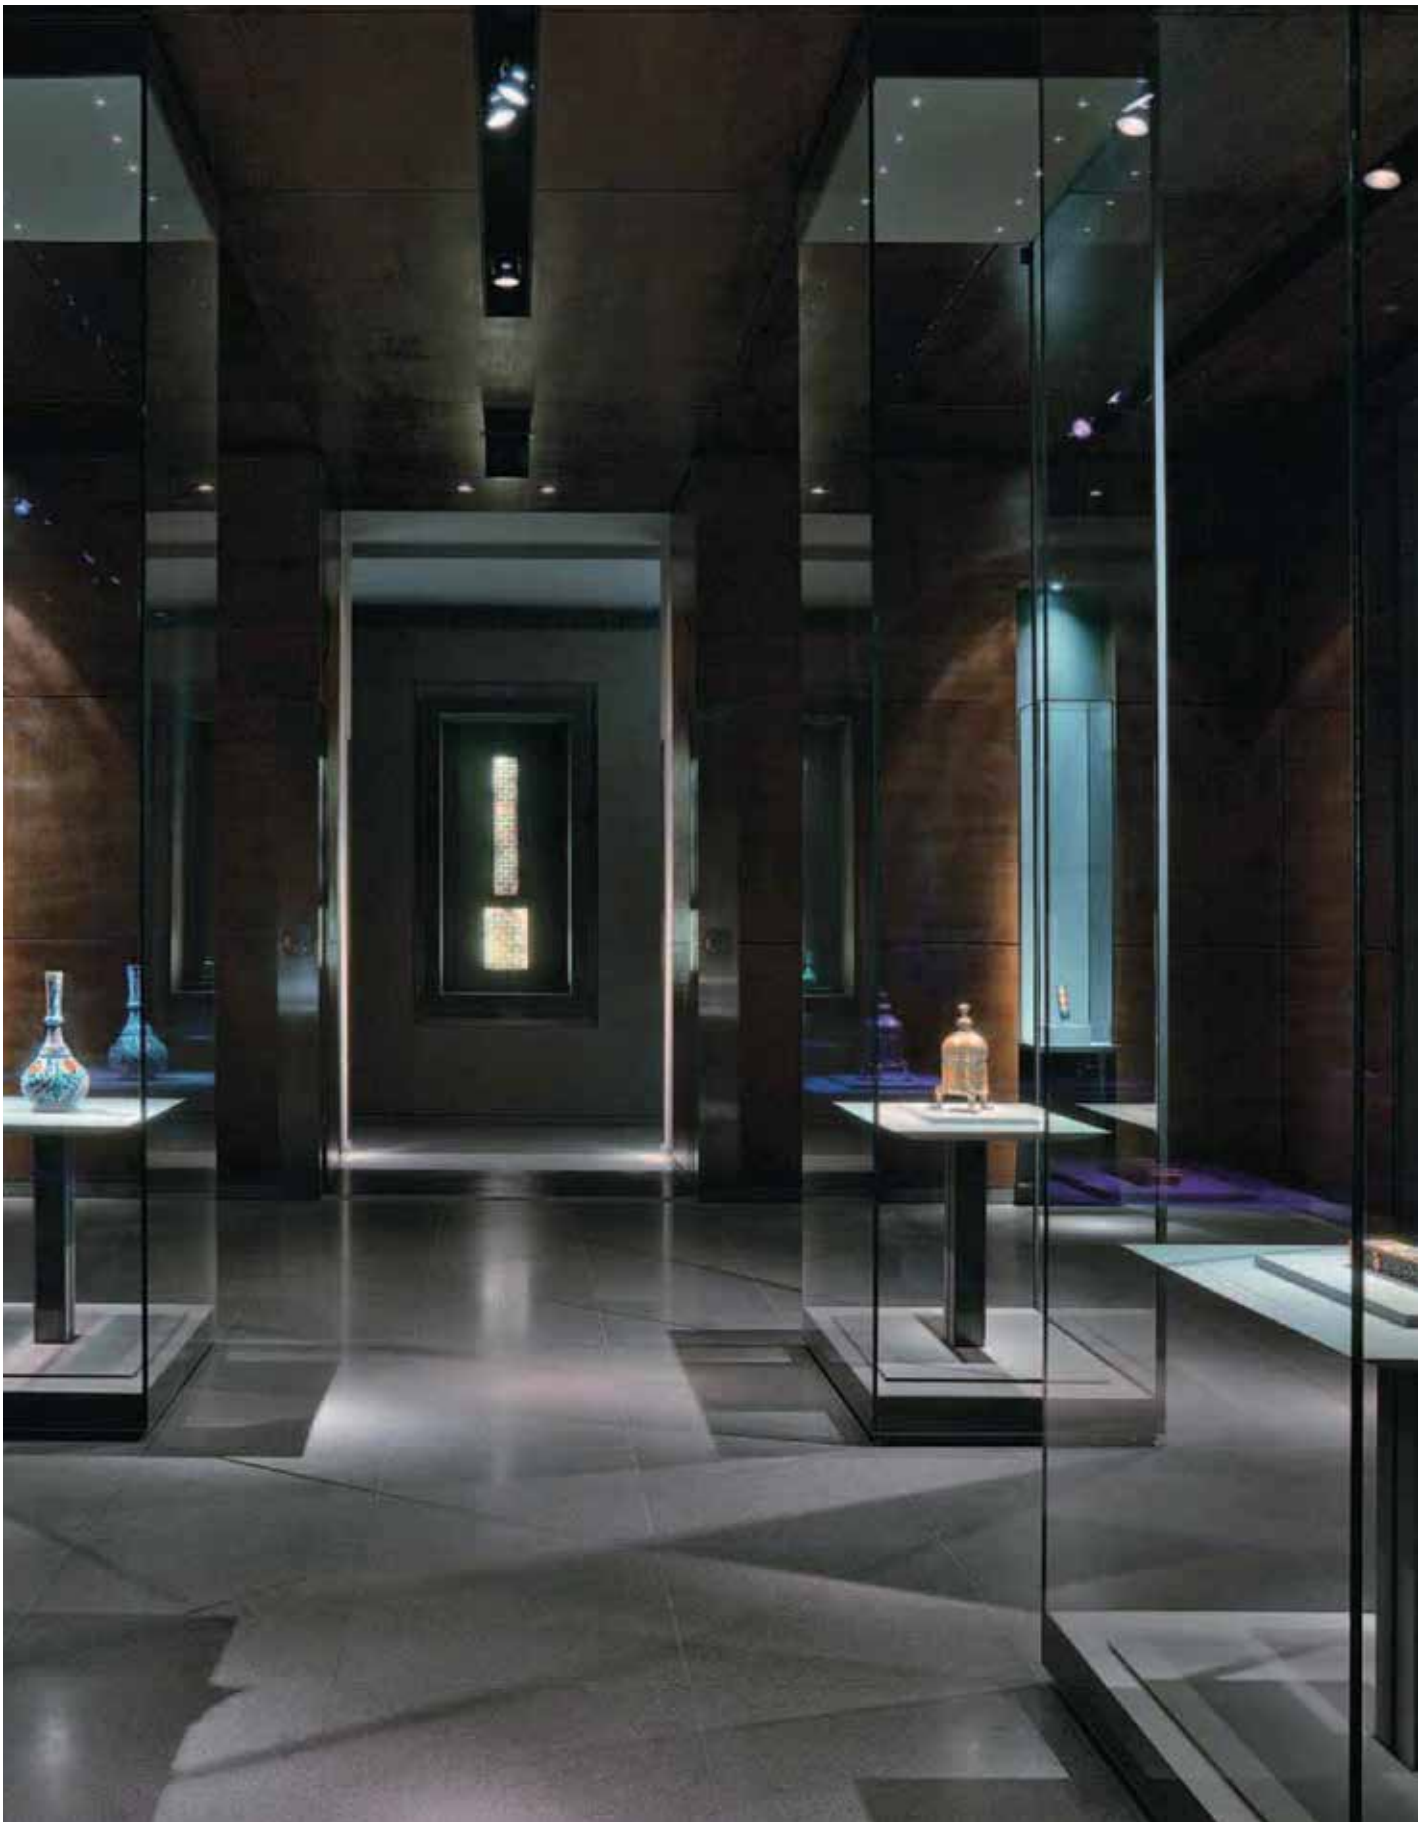

Bloc




VK/04264/B

Zoomlight

VK/04264


Code	Model	Box
64174-053721	**VK/04264/W/W** ○ **White**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-054721	**VK/04264/W/C** ○ **White**. 4000K. 221lm. 2W. CRI>90.	**50pcs**
64174-051721	**VK/04264/B/W** ● **Black**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-052721	**VK/04264/B/C** ● **Black**. 4000K. 221lm. 2W. CRI>90.	**50pcs**



Details

AC Driver **100-240V (Included)**.
Beam Angle **15°-24° Zoomlight.**
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.




Bloc



VK/04263/B

VK/04263

Code	Model	Box
64174-049721	**VK/04263/W/W** ○ **White**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-050721	**VK/04263/W/C** ○ **White**. 4000K. 221lm. 2W. CRI>90.	**50pcs**
64174-047721	**VK/04263/B/W** ● **Black**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-048721	**VK/04263/B/C** ● **Black**. 4000K. 221lm. 2W. CRI>90.	**50pcs**



Details

AC Driver **100-240V (Included)**.
Beam Angle **8°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.

Bloc




VK/04262/B

With honeycomb

VK/04262

Code	Model	Box
64174-045721	**VK/04262/W/W** ○ **White**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-046721	**VK/04262/W/C** ○ **White**. 4000K. 115lm. 3W. CRI>90.	**50pcs**
64174-043721	**VK/04262/B/W** ● **Black**. 3000K. 180lm. 2W. CRI>90.	**50pcs**
64174-044721	**VK/04262/B/C** ● **Black**. 4000K. 115lm. 3W. CRI>90.	**50pcs**



Details

AC Driver **100-240V (Included)**.
Beam Angle **15°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.



IP20.

Smol



VK/04436/W




VK/04437/W





VK/04438/W





VK/04439/W




















VK/04436, VK/04437
VK/04438, VK/04439

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-173721	**VK/04436/W/W**	○ White matt	3000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-174721	**VK/04436/W/C**	○ White matt	4000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-175721	**VK/04436/B/W**	● Black matt	3000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-176721	**VK/04436/B/C**	● Black matt	4000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-177721	**VK/04437/W/W**	○ White matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-178721	**VK/04437/W/C**	○ White matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-179721	**VK/04437/B/W**	● Black matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-180721	**VK/04437/B/C**	● Black matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-181721	**VK/04438/W/W**	○ White matt	3000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-182721	**VK/04438/W/C**	○ White matt	4000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-183721	**VK/04438/B/W**	● Black matt	3000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs
64174-184721	**VK/04438/B/C**	● Black matt	4000K	1W	65lm	24°	CRI>90	ø2.3cm	50pcs



Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-185721	**VK/04439/W/W**	○ White matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-186721	**VK/04439/W/C**	○ White matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-187721	**VK/04439/B/W**	● Black matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-188721	**VK/04439/B/C**	● Black matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs

Details


1W: Input current **300mA**, Input Voltage **DC 3V**. Driver: Input **AC100-260V 50/60Hz, Output DC 2-4V 300mA**.
Watt **1W**. CRI>**90**. Type of Led **SMD with driver**. Angle **24º**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**.
Material **Aluminium.** Installation **Recessed. 3 years** guarantee. (The cut hole also fits the light driver).

IP20

Lio



VK/04429/W



VK/04429

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-213721	VK/04429/W/WW	○White sand	2700K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-159721	VK/04429/W/W	○White sand	3000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-215721	VK/04429/W/C	○White sand	4000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-216721	VK/04429/B/WW	●Black sand	2700K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-217721	VK/04429/B/W	●Black sand	3000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-218721	VK/04429/B/C	●Black sand	4000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs

Details

Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-260V 50/60Hz, Output DC 30-45V 150mA**.
Watt **5W**. CRI>**90**. Type of Led **COB with driver**. Angle **30º**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45ºC**.
Material **Aluminium.** Installation **Recessed. 3 years** guarantee. (The cut hole also fits the light driver).



IP20




Oro




VK/04146/W



VK/04222/W





VK/04146, VK/04222

Code	Model	Box
64171-058738	**VK/04146/W/W** ○ **White.** 3000K. 160lm. 3W. 15°. CRI>80	**300pcs**
64171-057738	**VK/04146/B/W** ● **Black**. 3000K. 160lm. 3W. 15°. CRI>80	**300pcs**
64174-038721	**VK/04222/W/W** ○ **White matt**. 3000K. 241lm. 2W. 25°. CRI>90	**50pcs**

Details

VK/04146: AC **220-240V**
Driver **350mA (Included).**
VK/04222: 100-240V
driver (included)
Type of Led **CREE**.

Lifetime **17.500hrs, 30.000hrs**.
Clicks **15.000, 20.000.**
Working temperature **-25°C ~ 40°C**.
Material **Aluminium**.
Guarantee **2 years, 3 years (VK/04222/W/W).**

IP20




NEW YORK




Square Dark downlights Led


Lines



VK/04267/6, VK/04267/9

Code	Model	Box
64174-061721	**VK/04267/W/6/W** ○ **White**. 3000K. 5W. 723lm. **CRI>90.**	**30pcs**
64174-062721	**VK/04267/W/6/C** ○ **White**. 4000K. 5W. 723lm. **CRI>90.**	**30pcs**
64174-059721	**VK/04267/B/6/W** ● **Black.** 3000K. 5W. 723lm. **CRI>90.**	**30pcs**
64174-060721	**VK/04267/B/6/C** ● **Black.** 4000K. 5W. 723lm. **CRI>90.**	**30pcs**
64174-065721	**VK/04267/W/9/W** ○ **White**. 3000K. 8W. 977lm. **CRI>90.**	**20pcs**
64174-066721	**VK/04267/W/9/C** ○ **White**. 4000K. 8W. 1.105lm. **CRI>90.**	**20pcs**
64174-063721	**VK/04267/B/9/W** ● **Black.** 3000K. 8W. 977lm. **CRI>90.**	**20pcs**
64174-064721	**VK/04267/B/9/C** ● **Black.** 4000K. 8W. 1.105lm. **CRI>90.**	**20pcs**



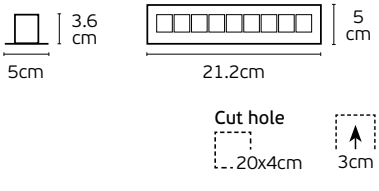


Details

AC Driver **220-240V (Included)**.
Beam Angle **15°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.


Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.

IP20.

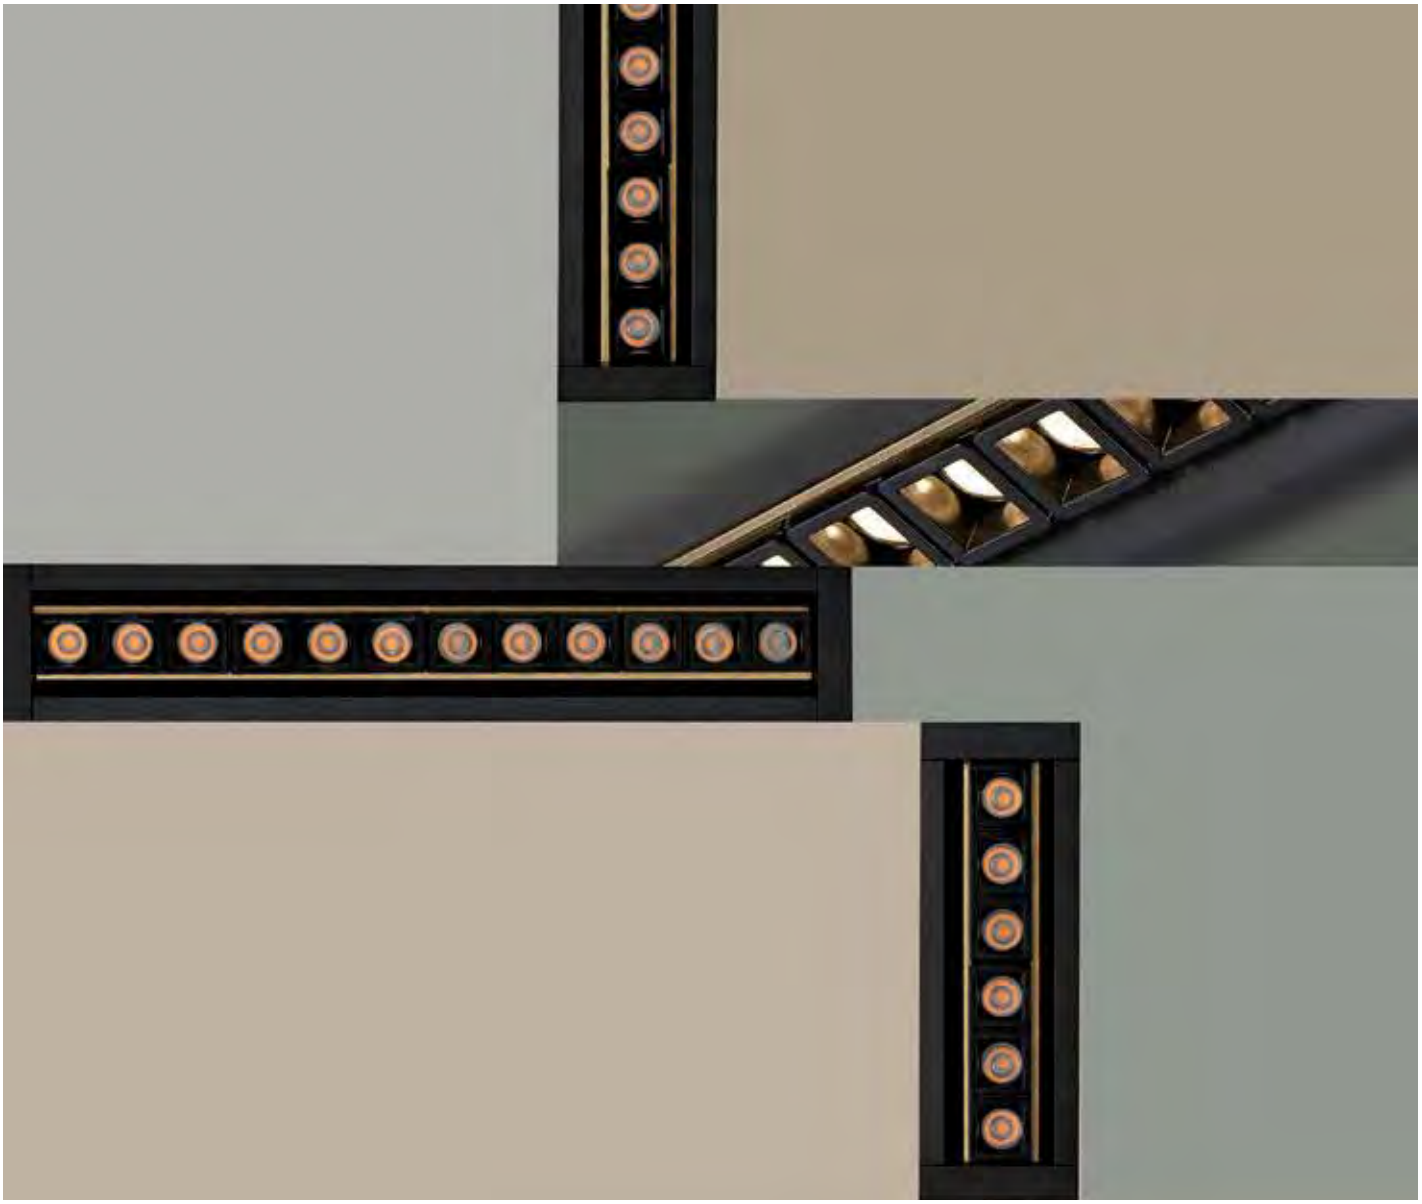

VK/04267/12

Code	Model	Box
64174-069721	**VK/04267/W/12/W** ○ **White**. 3000K. 10W. 1.349lm. **CRI>90.**	**12pcs**
64174-070721	**VK/04267/W/12/C** ○ **White**. 4000K. 10W. 1.349lm. **CRI>90.**	**12pcs**
64174-067721	**VK/04267/B/12/W** ● **Black.** 3000K. 10W. 1.349lm. **CRI>90.**	**12pcs**
64174-068721	**VK/04267/B/12/C** ● **Black.** 4000K. 10W. 1.349lm. **CRI>90.**	**12pcs**

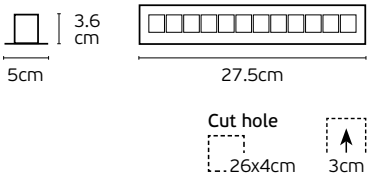

Details

AC Driver **220-240V (Included)**.
Beam Angle **15°**.
Type of Led **OSRAM**.
Lifetime **50.000hrs**.

Clicks **20.000**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.


IP20.

Boxi



VK/04266TR/3, VK/04266TR/6

Code	Model	Box
71164-054721	**VK/04266TR/W/3/W** ❍ **White**. 3000K. 4W. 535lm. CRI>90.	**30pcs**
71164-055721	**VK/04266TR/W/3/C** ❍ **White**. 4000K. 4W. 535lm. CRI>90.	**30pcs**
71164-052721	**VK/04266TR/B/3/W** ● **Black.** 3000K. 4W. 535lm. CRI>90.	**30pcs**
71164-053721	**VK/04266TR/B/3/C** ● **Black.** 4000K. 4W. 535lm. CRI>90.	**30pcs**
71164-058721	**VK/04266TR/W/6/W** ❍ **White**. 3000K. 10W. 1.148lm. CRI>90.	**12pcs**
71164-059721	**VK/04266TR/W/6/C** ❍ **White**. 4000K. 10W. 1.336lm. CRI>90.	**12pcs**
71164-056721	**VK/04266TR/B/6/W** ● **Black.** 3000K. 10W. 1.148lm. CRI>90.	**12pcs**
71164-057721	**VK/04266TR/B/6/C** ● **Black.** 4000K. 10W. 1.336lm. CRI>90.	**12pcs**

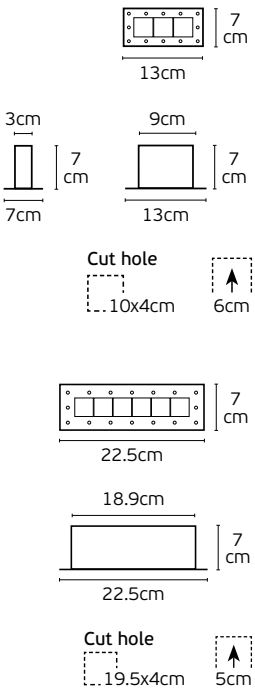

Details

AC Driver **220-240V**.
Beam Angle **8°**.
Type of Led .
Lifetime **50.000hrs**.
Clicks **20.000.**

Working temperature **< 45°C**.
Material **Aluminium**.
Magnet light.
Guarantee **3 years**.

IP20.




Kit




VK/04441/WB





VK/04442/WB

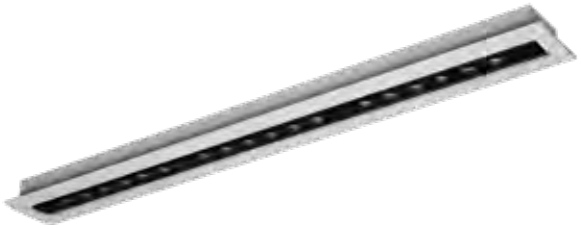



VK/04443/WB




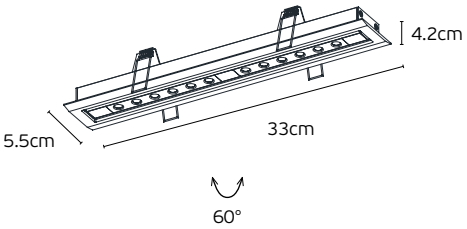

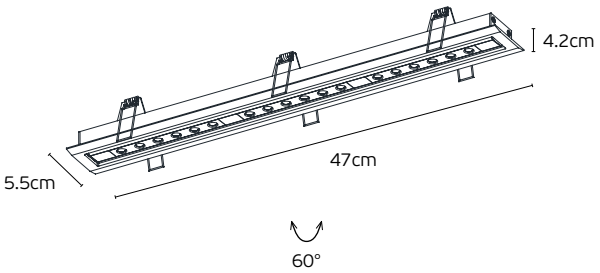








VK/04441, VK/04442, VK/04443

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-195721	**VK/04441/WB/WW**	○● White+Black sand	2700K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-196721	**VK/04441/WB/W**	○● White+Black sand	3000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-197721	**VK/04441/WB/C**	○● White+Black sand	4000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-198721	**VK/04441/B/WW**	● Black sand	2700K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-199721	**VK/04441/B/W**	● Black sand	3000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-200721	**VK/04441/B/C**	● Black sand	4000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-201721	**VK/04442/WB/WW**	○● White+Black sand	2700K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-202721	**VK/04442/WB/W**	○● White+Black sand	3000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-203721	**VK/04442/WB/C**	○● White+Black sand	4000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-204721	**VK/04442/B/WW**	● Black sand	2700K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-205721	**VK/04442/B/W**	● Black sand	3000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-206721	**VK/04442/B/C**	● Black sand	4000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs

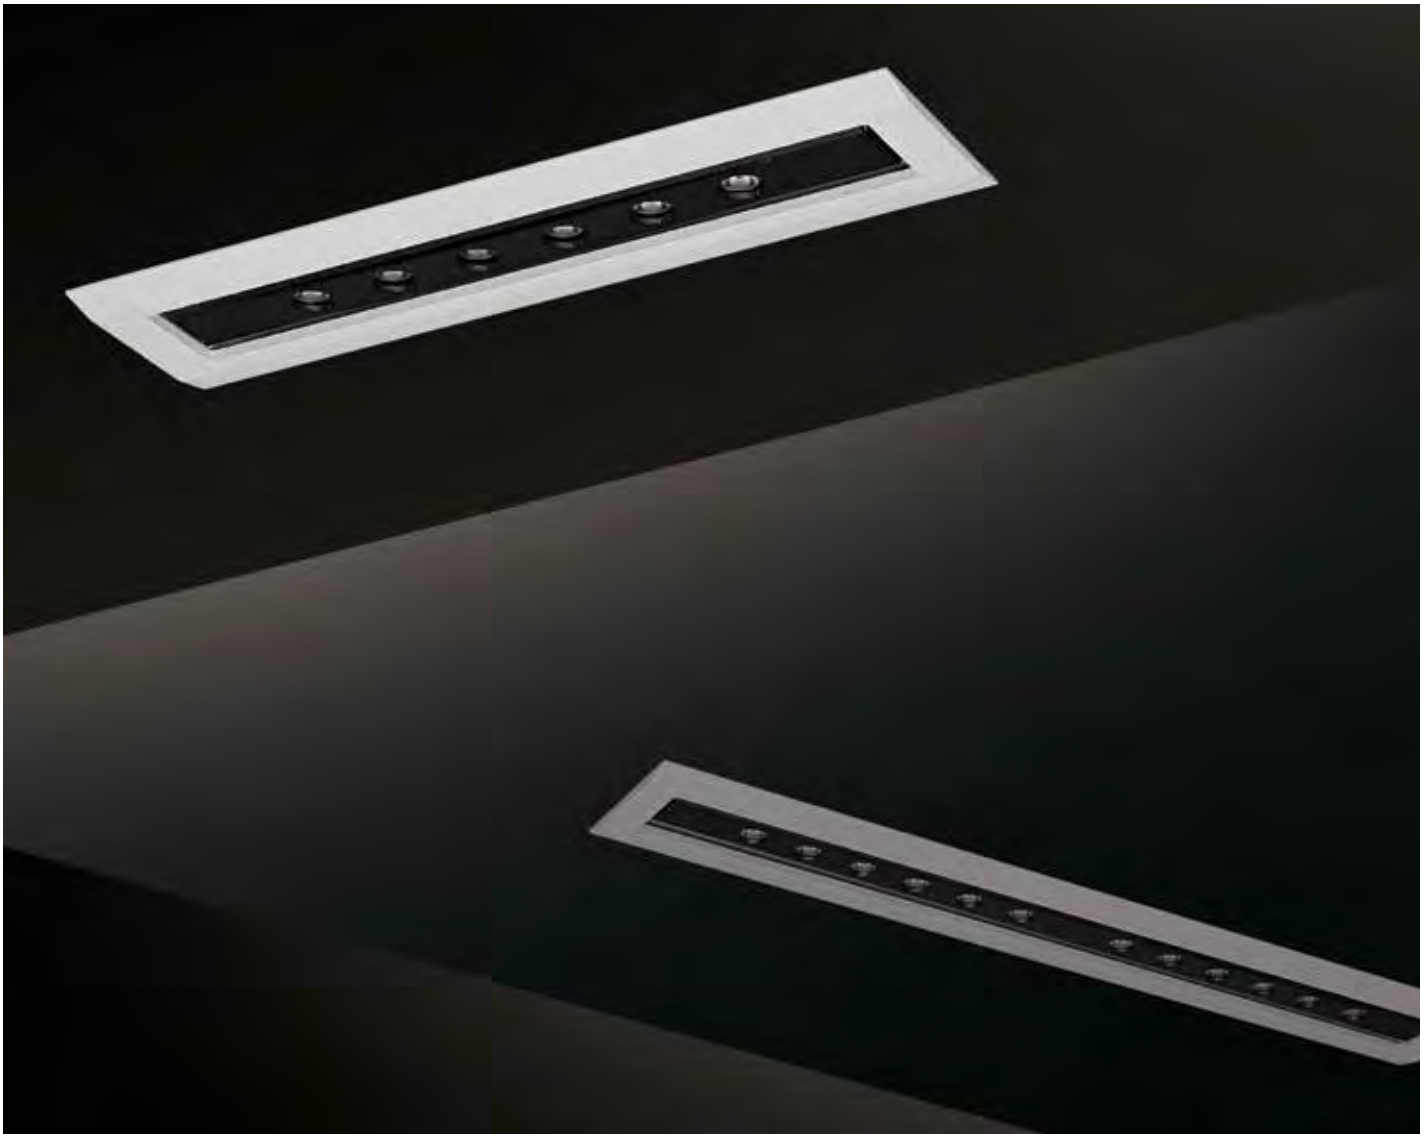

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-207721	**VK/04443/WB/WW**	○● White+Black sand	2700K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-208721	**VK/04443/WB/W**	○● White+Black sand	3000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-209721	**VK/04443/WB/C**	○● White+Black sand	4000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-210721	**VK/04443/B/WW**	● Black sand	2700K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-211721	**VK/04443/B/W**	● Black sand	3000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-212721	**VK/04443/B/C**	● Black sand	4000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs

Details

6x1W: Input current **350mA**, Input Voltage **DC 18V**. Driver: Input **AC220-240V 50/60Hz, Output DC 12-22V 350mA**.
12x1W: Input current **350mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz, Output DC 25-38V 350mA**.
18x1W: Input current **350mA/350mA**, Input Voltage **DC 18V/36V**. Driver: Input **AC220-240V 50/60Hz, Output DC 12-22V 350mA, DC 25-38V 350mA**.
Watt **6W, 12W, 18W**. CRI>**90,** CRI>**80 (5000K)**. Type of Led **SMD with driver**. Angle **24º**. Angle of inclination **60º**. **No Dimmable**. Lifetime **20.000 hrs**.
Working temperature **< 45ºC**. Material **Iron + aluminium.** Installation **Recessed. 3 years** guarantee.

Adjustable

IP20


Sero



VK/04618




VK/04618/2



Cut hole

3.7x3.7cm



Cut hole

6.8x3.7cm

VK/04618, VK/04618/2

Code	Model	Box
64174-033776	**VK/04618/B/W/15** ● **Black**. 3000K. **217lm. 2W. 15°** CRI>90	**1pc**
64174-034776	**VK/04618/B/W/30** ● **Black**. 3000K. **217lm. 2W. 30°** CRI>90	**1pc**
64174-035776	**VK/04618/2/B/W/15** ● **Black**. 3000K. **434lm. 2x2W. 15°** CRI>90	**1pc**
64174-036776	**VK/04618/2/B/W/30** ● **Black**. 3000K. **434lm. 2x2W. 30°** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium, PMMA lens**.
Beam Angle **15°, 30°**.
Type of Led **SMD 3535**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**. Flicker **free**.


5 years guarantee

IP20.

Sero




VK/04618/5






VK/04618/10

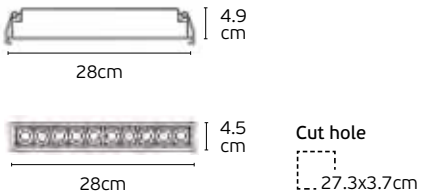



VK/04618/15

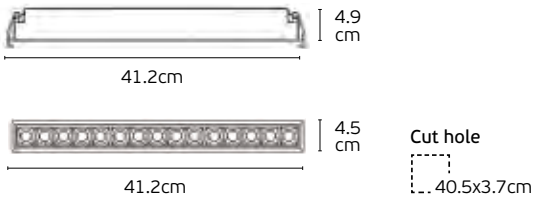

VK/04618/5, VK/04618/10, VK/04618/15

Code	Model	Box
64174-037776	**VK/04618/5/B/W/15** ● **Black**. 3000K. **1.085lm. 5x2W. 15°** CRI>90	**1pc**
64174-038776	**VK/04618/5/B/W/30** ● **Black**. 3000K. **1.085lm. 5x2W. 30°** CRI>90	**1pc**
64174-039776	**VK/04618/10/B/W/15** ● **Black**. 3000K. **2.170lm. 10x2W. 15°** CRI>90	**1pc**
64174-040776	**VK/04618/10/B/W/30** ● **Black**. 3000K. **2.170lm. 10x2W. 30°** CRI>90	**1pc**
64174-041776	**VK/04618/15/B/W/15** ● **Black**. 3000K. **3.255lm. 15x2W. 15°** CRI>90	**1pc**
64174-042776	**VK/04618/15/B/W/30** ● **Black**. 3000K. **3.255lm. 15x2W. 30°** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium, PMMA lens**.
Beam Angle **15°, 30°**.
Type of Led bridgelux **SMD 3535**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**. Flicker **free**.

5 years guarantee

IP20.





Recessed Led

Oro




VK/04127/B




VK/04126/B

VK/04127

Code	Model	Box
64174-011700	**VK/04127/W/W** ○ **White sanded**. 3000K. 122lm. 3W. CRI>80	**100pcs**
64174-012700	**VK/04127/W/C** ○ **White sanded**. 4000K. 122lm. 3W. CRI>80	**100pcs**
64174-013700	**VK/04127/B/W** ● **Black sanded**. 3000K. 122lm. 3W. CRI>80	**100pcs**
64174-014700	**VK/04127/B/C** ● **Black sanded**. 4000K. 122lm. 3W. CRI>80	**100pcs**





Details

AC **220-240V**
Driver **350mA (Included)**.
Beam Angle **20°.**
Type of Led **CREE**.
Lifetime **30.000hrs**.

Clicks **15.000.**
Working temperature **-25°C ~ 40°C**.
Material **Aluminium**.
Guarantee **2 years.**




IP20



VK/04126

Code	Model	Box
64174-007700	**VK/04126/W/W** ○ **White sanded**. 3000K. 150lm. 3W. 30°. CRI>80	**50pcs**
64174-008700	**VK/04126/W/C** ○ **White sanded**. 4000K. 150lm. 3W. 30°. CRI>80	**50pcs**
64174-009700	**VK/04126/B/W** ● **Black sanded**. 3000K. 150lm. 3W. 30°. CRI>80	**50pcs**
64174-010700	**VK/04126/B/C** ● **Black sanded**. 4000K. 150lm. 3W. 30°. CRI>80	**50pcs**





Details

AC **100-240V** Driver **(Included)**.
Type of Led **CREE**.
Lifetime **30.000hrs**.
Clicks **20.000.**
Working temperature **< 45°C**.

Material **Aluminium**.
Guarantee **2 years.**



IP20

Mino




VK/04128/B




VK/04097/W








VK/04128, VK/04097

Code	Model	Box
64174-015700	**VK/04128/W/W** ○ **White sanded**. 3000K. 97lm. 3W. **20°**. CRI>80	**100pcs**
64174-016700	**VK/04128/W/C** ○ **White sanded**. 4000K. 100lm. 3W. **20°**. CRI>80	**100pcs**
64174-017700	**VK/04128/B/W** ● **Black sanded**. 3000K. 97lm. 3W. **20°**. CRI>80	**100pcs**
64174-018700	**VK/04128/B/C** ● **Black sanded**. 4000K. 100lm. 3W. **20°**. CRI>80	**100pcs**
64171-043126	**VK/04097/W/W** ○ **White**. 3000K. 1W. 1**20°**. CRI>80	**1pc**
64171-044126	**VK/04097/W/C** ○ **White**. 4000K. 1W. 1**20°**. CRI>80	**1pc**
64171-074126	**VK/04097/MC/W** ● **Nickel mat**. 3000K. 1W. 1**20°**. CRI>80	**1pc**










Details

AC **220V** Driver **(Included)**.
Type of Led **CREE**.
Lifetime **30.000hrs./17.500hrs**.
Clicks **15.000.**

Working temperature **-25°C ~ 40°C**.
Material **Aluminium**.
Guarantee **2 years.**



IP20



Romo



VK/04124/W




VK/04125/W





VK/04108/W

VK/04124, VK/04125, VK/04108

Code	Model	Box
64174-003700	**VK/04124/W/W** ○ **White sanded**. 3000K. 710lm. 10W. 36º. CRI>80	**20pcs**
64174-004700	**VK/04124/W/C** ○ **White sanded**. 4000K. 730lm. 10W. 36º. CRI>80	**20pcs**
64174-005700	**VK/04125/W/W** ○ **White sanded**. 3000K. 710lm. 10W. 36º. CRI>80	**20pcs**
64174-006700	**VK/04125/W/C** ○ **White sanded**. 4000K. 730lm. 10W. 36º. CRI>80	**20pcs**
64174-876147	**VK/04108/W/W** ○ **White**. 3000K. 365lm. 5W. 38°. CRI>80	**50pcs**
64174-878147	**VK/04108/W/C** ○ **White**. 4000K. 365lm. 5W. 38°. CRI>80	**50pcs**
64174-877147	**VK/04108/B/W** ● **Black**. 3000K. 365lm. 5W. 38°. CRI>80	**50pcs**
64174-879147	**VK/04108/B/C** ● **Black**. 4000K. 365lm. 5W. 38°. CRI>80	**50pcs**







Details

AC **220-240V**
Driver **(Included)**.
Type of Led **COB / SMD 2835 (VK/04108)**.
Lifetime **30.000hrs**.

Clicks **15.000.**
Working temperature **< 45°C**.
Material **Aluminium**. **Plastic (VK/04108)**.
Guarantee **2 years.**



IP20


Veno



VK/04123/W

VK/04123


Code	Model	Box
64174-001700	**VK/04123/W/W** ○ **White sanded**. 3000K. 710lm. 10W. 36°. CRI>80	**20pcs**
64174-002700	**VK/04123/W/C** ○ **White sanded**. 4000K. 730lm. 10W. 36°. CRI>80	**20pcs**



Details

AC **220-240V** Driver **(Included)**.
Type of Led **COB**.
Lifetime **30.000hrs**.
Clicks **15.000.**

Working temperature **-25°C ~ 40°C**.
Material **Aluminium**.
Guarantee **2 years.**



IP20

Vera



VK/04290/W




VK/04291/W




VK/04292/W


VK/04290, VK/04291, VK/04292


Code	Model	Box
64174-951724	**VK/04290/W/W** ○ **White matte**. 3000K. 1.300lm. 13W. **36°**.	**48pcs**
64174-954724	**VK/04290/W/C** ○ **White matte**. 4000K. 1.300lm. 13W. **36°**.	**48pcs**
64174-952724	**VK/04291/W/W** ○ **White matte**. 3000K. 2.400lm. 24W. **40°**.	**24pcs**
64174-955724	**VK/04291/W/C** ○ **White matte**. 4000K. 2.400lm. 24W. **40°**.	**24pcs**
64174-953724	**VK/04292/W/D/W** ○ **White matte**. 3000K. 2.400lm. 24W. **40°**.	**24pcs**
64174-956724	**VK/04292/W/D/C** ○ **White matte**. 4000K. 2.400lm. 24W. **40°**.	**24pcs**







Cut hole










Cut hole








Cut hole



Details

AC Driver **100-265V (Included)**.
Type of Led **COB**.
Lifetime **50.000hrs**.
Clicks **50.000.**

Working temperature **-20°C ~ 45°C**.
Material **Aluminium**.
Guarantee **2 years**.



IP20

Pluno



VK/04083/W



VK/04084/W

VK/04083/W, VK/04084/W

Code	Model	Box
64174-226128	**VK/04083/W/W/24** ○ **White**. **3000K.** 1.800lm. 20W. **24°**. CRI>80	**1pc**
64174-227128	**VK/04083/W/C/24** ○ **White**. **4000K.** 1.800lm. 20W. **24°**. CRI>80	**1pc**
64174-228128	**VK/04084/W/W/24** ○ **White**. 3000K. 3.284lm. 30W. **24°**. CRI>80	**1pc**
64174-229128	**VK/04084/W/C/24** ○ **White**. 4000K. 3.284lm. 30W. **24°**. CRI>80	**1pc**


Details

AC Driver **200-240V (Included)**.
Type of Led **COB CITIZEN**.
Lifetime **50.000hrs**.
Clicks **25.000.**

Working temperature **-20°C ~ 45°C**.
Material **Aluminium**.
Guarantee **2 years.**

Adjustable

IP20

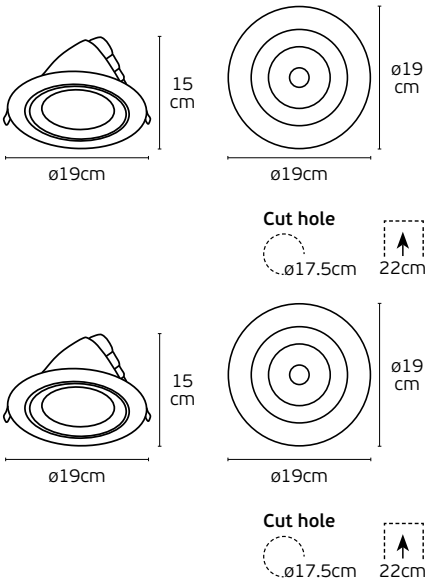


Arlo




VK/04145/W


VK/04145

Code	Model	Box
64174-008126	**VK/04145/W** ○ **White matte**. 3000K. 5.000lm. 50W. CRI>80	**1pc**
64174-009126	**VK/04145/C** ○ **White matte**. 4000K. 5.000lm. 50W. CRI>80	**1pc**
64174-010126	**VK/04145/D** ○ **White matte**. 5000K. 5.000lm. 50W. CRI>80	**1pc**





Cut hole



Details

AC Driver **200-240V (Included)**.
Beam Angle **45º.**
Type of Led **COB CREE**.
Lifetime **50.000hrs**.

Clicks **50.000.**
Working temperature **-40°C ~ 60°C**.
Material **Aluminium**.

5 years guarantee

IP20








Led Downlights waterproof

Celeno



VK/04613/B



Cut hole



VK/04613

Code	Model	Box
64174-021776	**VK/04613/W/W** ○ **White**. 3000K. **1.860lm. 15W.** CRI>90	**1pc**
64174-022776	**VK/04613/W/C** ○ **White**. 4000K. **2.080lm. 15W.** CRI>90	**1pc**
64174-023776	**VK/04613/B/W** ● **Black**. 3000K. **1.860lm. 15W.** CRI>90	**1pc**
64174-024776	**VK/04613/B/C** ● **Black**. 4000K. **2.080lm. 15W.** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium + PC lens**.
Beam Angle **36°**.
Type of Led bridgelux **V10-B**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**. Flicker **free**.

5 years guarantee

IP65.




Poc







VK/04435/38




Cut hole




VK/04435/68




Cut hole




VK/04435/83




Cut hole



VK/04435/98



Cut hole



VK/04435/...

Code	Model	Color	IP Rating	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
64174-235721	**VK/04435/W/W/38**	○ White sand	IP42	3000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-236721	**VK/04435/W/C/38**	○ White sand	IP42	4000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-237721	**VK/04435/B/W/38**	● Black sand	IP42	3000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-238721	**VK/04435/B/C/38**	● Black sand	IP42	4000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-161721	**VK/04435/W/W/68**	○ White sand	IP44	3000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-162721	**VK/04435/W/C/68**	○ White sand	IP44	4000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-163721	**VK/04435/B/W/68**	● Black sand	IP44	3000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-164721	**VK/04435/B/C/68**	● Black sand	IP44	4000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-165721	**VK/04435/W/W/83**	○ White sand	IP44	3000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-166721	**VK/04435/W/C/83**	○ White sand	IP44	4000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-167721	**VK/04435/B/W/83**	● Black sand	IP44	3000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-168721	**VK/04435/B/C/83**	● Black sand	IP44	4000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs







Code	Model	Color	IP Rating	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
64174-169721	**VK/04435/W/W/98**	○ White sand	IP44	3000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-170721	**VK/04435/W/C/98**	○ White sand	IP44	4000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-171721	**VK/04435/B/W/98**	● Black sand	IP44	3000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-172721	**VK/04435/B/C/98**	● Black sand	IP44	4000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs


Details
2W: Input current **700mA**, Input Voltage **DC 3V**. Driver: Input **AC100-240V 50/60Hz**, **Output DC 2-4V 700mA**. **IP42**
6W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, **Output DC 20-42V 150mA**. **IP44**
11W: Input current **300mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, **Output DC 25-42V 300mA**. **IP44**
17W: Input current **450mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, **Output DC 20-40V 450mA**. **IP44**
Watt **2W/6W/11W/17W**. Type of Led **COB with driver**. Angle **24º**, **20º**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **< 45ºC**.
Material **Aluminium**. Installation **Recessed**. **3 years** guarantee. **(The cut hole also fits the light driver).**

IP42. IP44.

Alo




VK/04614/W-CB





VK/04615/W-CB





VK/04614, VK/04615

Code	Model	Box
64174-025776	**VK/04614/W-CB/W** ○ **White+chrome+black**. 3000K. **2.918lm. 25W. 95°.** CRI>90	**1pc**
64174-026776	**VK/04614/W-CB/C** ○ **White+chrome+black**. 4000K. **3.597lm. 25W. 95°.** CRI>90	**1pc**
64174-027776	**VK/04615/W-CB/W** ○ **White+chrome+black**. 3000K. **5.318lm. 40W. 85°.** CRI>90	**1pc**
64174-028776	**VK/04615/W-CB/C** ○ **White+chrome+black**. 4000K. **5.777lm. 40W. 85°.** CRI>90	**1pc**

Details

Voltage **220-240V**.
Material **Aluminium**, **PC reflector**.
Color body **White frame + inner chrome, black reflector**.

Type of Led bridgeLux.
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Dimmable **No**. Flicker **free**.

5 years guarantee

IP54.



Uta




VK/04149/W




VK/04150/W

VK/04149, VK/04150

Code	Model	Box
64174-896703	**VK/04149/W/W/24** ○ **White**. 3000K. 1.350lm. **15W**. **24°**. CRI>90	**16pcs**
64174-897703	**VK/04149/W/W/36** ○ **White**. 3000K. 1.350lm. **15W**. **36°-40°**. CRI>90	**16pcs**
64174-900703	**VK/04149/W/C/36** ○ **White**. 4000K. 1.350lm. **15W**. **36°**. CRI>90	**16pcs**
64174-898703	**VK/04150/W/W/24** ○ **White**. 3000K. 2.700lm. **30W**. **24°**. CRI>90	**16pcs**
64174-899703	**VK/04150/W/W/36** ○ **White**. 3000K. 2.700lm. **30W**. **36°-40°**. CRI>90	**16pcs**
64174-901703	**VK/04150/W/C/36** ○ **White**. 4000K. 2.700lm. **30W**. **36°**. CRI>90	**16pcs**

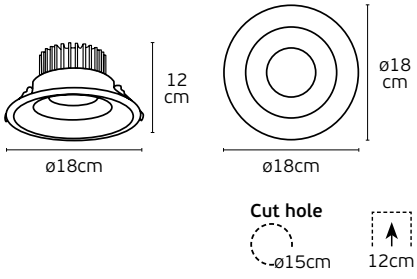


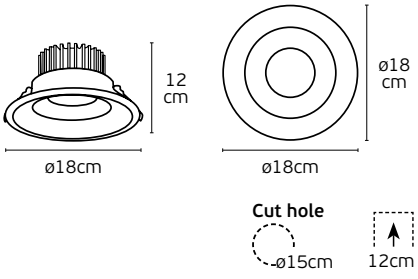

Details

AC Driver **85-256V (Included)**.
Type of Led **TOYONIA**.
Lifetime **50.000hrs**.
Clicks **20.000.**

Working temperature **-20°C ~ 45°C**.
Material **Aluminium**, **plastic**.
Guarantee **2 years.**



IP65







Recessed Spots for GU10/PAR16


Eve



VK/03009G

Code	Model	Box
64173-023121	**VK/03009G/W** ○ **White. GU10.** Max 12W (LED).	100pcs
64173-025121	**VK/03009G/C** ○ **Chrome. GU10.** Max 12W (LED).	100pcs
64173-024121	**VK/03009G/MC** ● **Brushed Chrome. GU10.** Max 12W (LED).	100pcs
64173-049121	**VK/03009G/B** ● **Black. GU10.** Max 12W (LED).	100pcs






VK/03010G

Code	Model	Box
64173-050121	**VK/03010G/W** ○ **White. GU10.** Max 12W (LED).	100pcs
64173-051121	**VK/03010G/MC** ● **Brushed Chrome. GU10.** Max 12W (LED).	100pcs
64173-052121	**VK/03010G/B** ● **Black. GU10.** Max 12W (LED).	100pcs





Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Die cast aluminium.**



VK/03008G

Code	Model	Box
64173-026121	**VK/03008G/W** ○ **White**. **GU10**. Max 12W (LED).	**100pcs**
64173-028121	**VK/03008G/C** ● **Chrome**. **GU10**. Max 12W (LED).	**100pcs**
64173-027121	**VK/03008G/MC** ● **Brushed Chrome**. **GU10**. Max 12W (LED).	**100pcs**
64173-047121	**VK/03008G/B** ● **Black**. **GU10**. Max 12W (LED).	**100pcs**







IP20.

VK/03011G

Code	Model	Box
64173-029121	**VK/03011G/W** ○ **White**. **GU10**. Max 12W (LED).	**100pcs**
64173-031121	**VK/03011G/C** ● **Chrome**. **GU10**. Max 12W (LED).	**100pcs**
64173-030121	**VK/03011G/MC** ● **Brushed Chrome**. **GU10.** Max 12W (LED).	**100pcs**
64173-048121	**VK/03011G/B** ● **Black**. **GU10.** Max 12W (LED).	**100pcs**







IP20.

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Die cast aluminium.**


Smoo



VK/03068

Code	Model	Box
64174-019700	**VK/03068/W** ○ **White sanded. GU10.** Max 12W (LED).	**50pcs**
64174-020700	**VK/03068/B** ● **Black sanded. GU10.** Max 12W (LED).	**50pcs**






IP20.

VK/03069

Code	Model	Box
64174-021700	**VK/03069/W** ○ **White sanded. GU10.** Max 12W (LED).	**50pcs**
64174-022700	**VK/03069/B** ● **Black sanded. GU10.** Max 12W (LED).	**50pcs**





IP20.

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.


Material **Aluminium.**



VK/03070

Code	Model	Box
64174-023700	**VK/03070/W** ○ **White sanded. GU10.** Max 12W (LED).	**50pcs**
64174-024700	**VK/03070/B** ● **Black sanded. GU10.** Max 12W (LED).	**50pcs**








IP20.

VK/03071

Code	Model	Box
64174-025700	**VK/03071/W** ○ **White sanded. GU10.** Max 12W (LED).	**50pcs**
64174-026700	**VK/03071/B** ● **Black sanded. GU10.** Max 12W (LED).	**50pcs**







IP20.

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Aluminium.**


Ikon



VK/03299G

Code	Model	Box
64173-121121	**VK/03299G/W** ○ **White**. GU10. Max. 12W. (LED)	**1pc**
64173-122121	**VK/03299G/B** ● **Black**. GU10. Max. 12W. (LED)	**1pc**
64173-123121	**VK/03299G/WB** ○● **White-Black**. GU10. Max. 12W. (LED)	**1pc**
64173-124121	**VK/03299G/BBS** ●● **Black-Bronze**. GU10. Max. 12W. (LED)	**1pc**
64173-125121	**VK/03299G/BGD** ●● **Black-Gold**. GU10. Max. 12W. (LED)	**1pc**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**



IP20




Ikon



VK/03306/BC

VK/03306

Code	Model	Box
64174-033108	**VK/03306/BG**	**50pcs**
	● ● **Sanded black body+gold reflector**. Max. 12W. (LED)	
64174-034108	**VK/03306/BC**	**50pcs**
	● ● **Sanded black body+copper reflector**. Max. 12W. (LED)	



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium+iron.**



IP20




Ikon



VK/03307/BG

VK/03307

Code	Model	Box
64174-035108	**VK/03307/BG**	**50pcs**
	● ● **Sanded black outside+gold inside**. Max. 12W. (LED)	
64174-036108	**VK/03307/WG**	**50pcs**
	○ ● **Sanded white outside+gold inside**. Max. 12W. (LED)	



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium+iron.**

IP20




Ikon



VK/03308/W

VK/03308

Code	Model	Box
64174-037108	**VK/03308/BG** ● ● **Sanded black outside+gold inside**. Max. 12W. (LED)	**50pcs**
64174-038108	**VK/03308/W** ○ **Sanded white**. Max. 12W. (LED)	**50pcs**
64174-039108	**VK/03308/B** ● **Sanded black**. Max. 12W. (LED)	**50pcs**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium+iron.**

IP20




Gree



VK/03015G

Code	Model	Box
64173-055121	**VK/03015G/W** ○ **White. GU10.** Max 12W (LED).	80pcs
64173-057121	**VK/03015G/AL** ● **Aluminium. GU10.** Max 12W (LED).	80pcs
64173-056121	**VK/03015G/B** ● **Black. GU10.** Max 12W (LED).	80pcs






VK/03014G

Code	Model	Box
64173-058121	**VK/03014G/W** ○ **White. GU10.** Max 12W (LED).	80pcs
64173-060121	**VK/03014G/AL** ● **Aluminium. GU10.** Max 12W (LED).	80pcs
64173-059121	**VK/03014G/B** ● **Black. GU10.** Max 12W (LED).	80pcs





Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**



IP20.

Gree




VK/03014G/3/W

VK/03014G/2/W

VK/03014G/2

Code	Model	Box
64173-061121	**VK/03014G/2/W** ○ **White. GU10x2.** Max 2x12W (LED).	**40pcs**
64173-063121	**VK/03014G/2/AL** ● **Aluminium. GU10x2.** Max 2x12W (LED).	**40pcs**
64173-062121	**VK/03014G/2/B** ● **Black. GU10x2.** Max 2x12W (LED).	**40pcs**






VK/03014G/3

Code	Model	Box
64173-064121	**VK/03014G/3/W** ○ **White. GU10x3**. Max 3x12W (LED).	**20pcs**
64173-066121	**VK/03014G/3/AL** ● **Aluminium. GU10x3**. Max 3x12W (LED).	**20pcs**
64173-065121	**VK/03014G/3/B** ● **Black. GU10x3**. Max 3x12W (LED).	**20pcs**



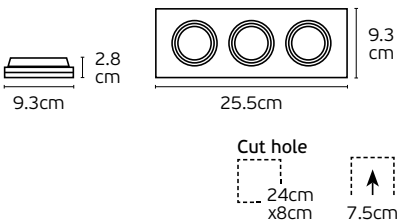

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**



IP20.


Koul



VK/03113G

Code	Model	Box	
64173-076121	**VK/03113G/W** ○ **White. GU10.** Max 12W (LED).	**80pcs**	
64173-077121	**VK/03113G/B** ● **Black. GU10.** Max 12W (LED).	**80pcs**	






VK/03114G

Code	Model	Box	
64173-078121	**VK/03114G/W** ○ **White. GU10.** Max 12W (LED).	**80pcs**	
64173-079121	**VK/03114G/B** ● **Black. GU10.** Max 12W (LED).	**80pcs**	





Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**




Ivy




VK/03065G

Code	Model	Box
64173-074121	**VK/03065G/W** ○ **White sanded**. **GU10**. Max 12W (LED).	**100pcs**
64173-075121	**VK/03065G/B** ● **Black sanded**. **GU10**. Max 12W (LED).	**100pcs**







Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Die casting aluminium.**


IP20.


Lot



VK/03012G

Code	Model	Box
64173-022121	**VK/03012G/W** ○ **White**. **GU10**. Max 12W (LED).	**100pcs**
64173-035121	**VK/03012G/B** ● **Black**. **GU10**. Max 12W (LED).	**100pcs**






VK/03013G

Code	Model	Box
64173-053121	**VK/03013G/W** ○ **White**. **GU10**. Max 12W (LED).	**100pcs**
64173-054121	**VK/03013G/B** ● **Black**. **GU10**. Max 12W (LED).	**100pcs**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**

IP20.

Loup





VK/03012G/HQ/W


clean base for lamp

VK/03012G/HQ

Code	Model	Box
64173-130121	**VK/03012G/HQ/W** ○ **White. GU10**. Max. 12W. (LED)	**1pc**
64173-131121	**VK/03012G/HQ/B** ● **Black. GU10**. Max. 12W. (LED)	**1pc**







Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**



IP20


Nana



VK/03192G

Code	Model	Box
64173-091121	**VK/03192G/W** ○ **White. GU10.** Max 12W (LED)	**100pcs**
64173-092121	**VK/03192G/B** ● **Black. GU10.** Max 12W (LED)	**100pcs**






VK/03191G

Code	Model	Box
64173-089121	**VK/03191G/W** ○ **White. GU10.** Max 12W (LED)	**100pcs**
64173-090121	**VK/03191G/B** ● **Black. GU10.** Max 12W (LED).	**100pcs**





Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Aluminium.**



IP20.




Loo



VK/03304G

Code	Model	Box
64173-126121	**VK/03304G/W** ○ **White**. GU10. Max. 12W. (LED)	**1pc**
64173-127121	**VK/03304G/B** ● **Black**. GU10. Max. 12W. (LED)	**1pc**





Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**


Adjustable

IP20

VK/03305G

Code	Model	Box
64173-128121	**VK/03305G/W** ○ **White**. GU10. Max. 12W. (LED)	**1pc**
64173-129121	**VK/03305G/B** ● **Black**. GU10. Max. 12W. (LED)	**1pc**



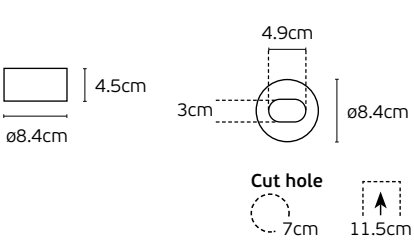

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Pure aluminium.**

Adjustable

IP20




Tene




VK/03193G

Code	Model	Box
64173-093121	**VK/03193G/W** ○ **White. GU10.** Max. 12W. (LED)	**50pcs**
64173-094121	**VK/03193G/B** ● **Black. GU10.** Max. 12W. (LED)	**50pcs**



Cut hole



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.


Material **Die cast aluminium.**




IP20.

VK/03194G

Code	Model	Box
64173-095121	**VK/03194G/W** ○ **White. GU10.** Max. 12W. (LED)	**50pcs**
64173-096121	**VK/03194G/B** ● **Black. GU10.** Max. 12W. (LED)	**50pcs**

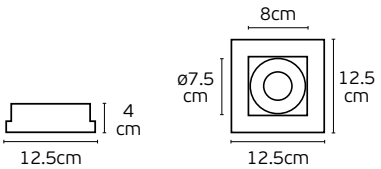

Cut hole



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16, Modules 50.

Material **Die cast aluminium.**



IP20.


Skin



VK/03292G/B

VK/03292G

Code	Model	Box
64173-115121	**VK/03292G/W** ○ **White. GU10**. Max. 6W. (LED)	**1pc**
64173-116121	**VK/03292G/B** ● **Black. GU10**. Max. 6W. (LED)	**1pc**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/35, MR11, Modules 35.

Material **Pure aluminium.**



VK/03292G/B



VK/03292G/W



IP20


Tik



VK/03291G

Code	Model	Box
64173-113121	**VK/03291G/W** ○ **White. GU10**. Max. 6W. (LED)	**1pc**
64173-114121	**VK/03291G/B** ● **Black. GU10**. Max. 6W. (LED)	**1pc**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/35, MR11, Modules 35.

Material **Pure aluminium.**
Location **Ceiling Recessed**



VK/05097G



VK/03293G

Code	Model	Box
64173-117121	**VK/03293G/W** ○ **White. GU10**. Max. 6W. (LED)	**1pc**
64173-118121	**VK/03293G/B** ● **Black. GU10**. Max. 6W. (LED)	**1pc**






VK/03294G

Code	Model	Box
64173-119121	**VK/03294G/W** ○ **White. GU10**. Max. 6W. (LED)	**1pc**
64173-120121	**VK/03294G/B** ● **Black. GU10**. Max. 6W. (LED)	**1pc**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/35, MR11, Modules 35.

Material **Pure aluminium.**
Location **Ceiling Recessed Adjustable**


VK/05097G




M.Ö. 600 (B.C.)
M.Ö. 546 (B.C.)
M.Ö. 334 (B.C.)
M.Ö. 480 (B.C.)
M.Ö. 333 (B.C.)
PERS DÖNEMİ / Persian Age
ARKAİK DÖNEM / Archaic Period
KLASİK DÖNEM / Classic Period
HELENİSTİK DÖNEM / Hellenistic Period

Filo




VK/03184/W

VK/03185/W

VK/03184

Code	Model	Box
64174-027700	**VK/03184/W** ○ **White. ES111/R111**. Max 20W (LED).	**1pc**
64174-028700	**VK/03184/B** ● **Black. ES111/R111**. Max 20W (LED).	**1pc**




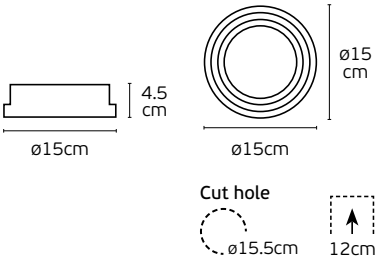

VK/03185

Code	Model	Box
64174-029700	**VK/03185/W** ○ **White. ES111/R111**. Max 20W (LED).	**1pc**
64174-030700	**VK/03185/B** ● **Black. ES111/R111**. Max 20W (LED).	**1pc**



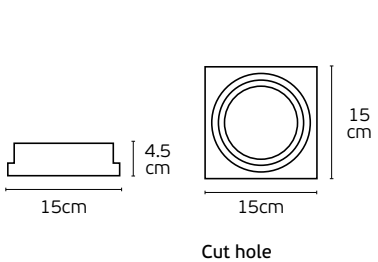

Details

Included lampholder **G53**.
Match also with lamps: GU10/ES111, R111, Modules 111.

Material **Aluminium.**



IP20.




Olo



VK/03115

Code	Model	Box
64173-080121	**VK/03115/W** ○ **White. ES111/R111**. Max 20W (LED).	**16pcs**
64173-081121	**VK/03115/B** ● **Black. ES111/R111**. Max 20W (LED).	**16pcs**






VK/03116

Code	Model	Box
64173-082121	**VK/03116/W** ○ **White. ES111/R111**. Max 20W (LED).	**16pcs**
64173-083121	**VK/03116/B** ● **Black. ES111/R111**. Max 20W (LED).	**16pcs**





Details

Included lampholder **G53**.
Match also with lamps: GU10/ES111, R111, Modules 111.

Material **Die cast aluminium.**



IP20.


Olo



VK/03116/2

Code	Model	Box
64173-084121	**VK/03116/2/W** ○ **White. 2xES111/R111**. Max 2x20W (LED).	**8pcs**
64173-085121	**VK/03116/2/B** ● **Black. 2xES111/R111**. Max 2x20W (LED).	**8pcs**




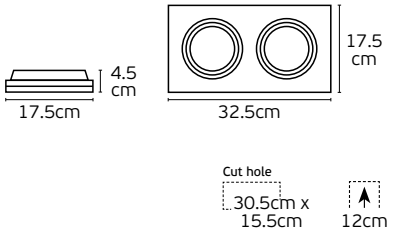

VK/03116/3

Code	Model	Box
64173-086121	**VK/03116/3/W** ○ **White. 3xES111/R111**. Max 3x20W (LED).	**5pcs**
64173-087121	**VK/03116/3/B** ● **Black. 3xES111/R111**. Max 3x20W (LED).	**5pcs**



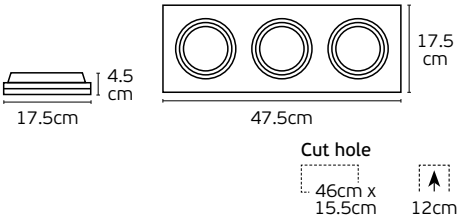

Details

Included lampholder **G53**.
Match also with lamps: GU10/ES111, R111, Modules 111.

Material **Aluminium.**

Adjustable

IP20.






Recessed Trimless Spots PAR16 IP65

Celeno



VK/03290


Code	Model	Box
64173-111121	VK/03290/W ○ **White. GU5.3**. Max. 12W. (LED)	1pc
64173-112121	VK/03290/B ● **Black. GU5.3**. Max. 12W. (LED)	1pc

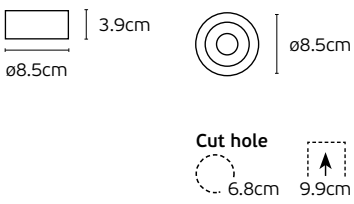

Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Die cast aluminium, clear glass**



Hudi





VK/03287/B

VK/03287/W

VK/03287

Code	Model	Box
64173-109121	**VK/03287/W** ○ **White. GU5.3**. Max. 12W. (LED)	**1pc**
64173-110121	**VK/03287/B** ● **Black. GU5.3**. Max. 12W. (LED)	**1pc**





Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Die cast aluminium, clear glass.**

IP65


Woof



VK/03195

Code	Model	Box
64173-097121	**VK/03195/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**100pcs**
64173-098121	**VK/03195/B** ● **Black**. **GU5.3.** Max. 12W. (LED)	**100pcs**





Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.


Material **Die cast aluminium.**

IP65.

VK/03058

Code	Model	Box
64173-032121	**VK/03058/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**100pcs**
64173-033121	**VK/03058/MC** ● **Brushed Chrome**. **GU5.3.** Max. 12W. (LED)	**100pcs**
64173-068121	**VK/03058/B** ● **Black**. **GU5.3.** Max. 12W. (LED)	**100pcs**






Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Pressing metal.**

IP65.


Primo

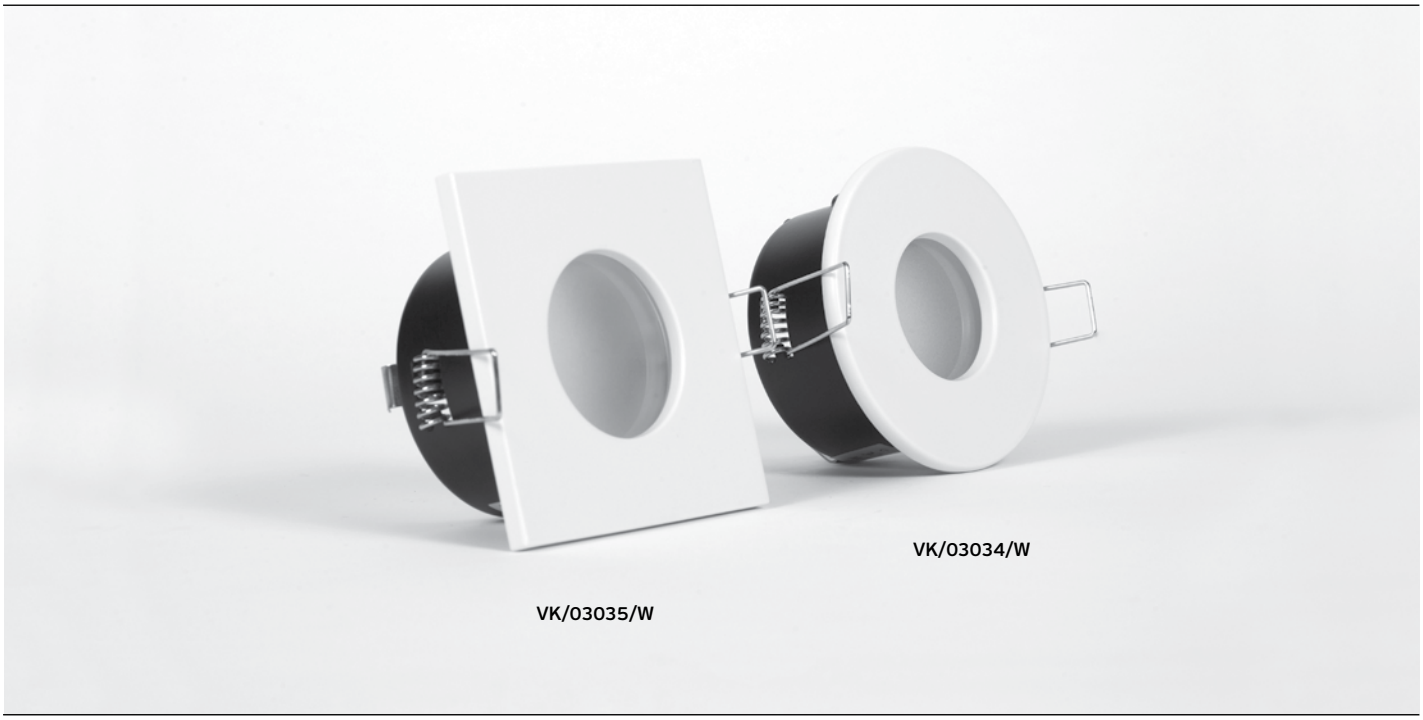


VK/03034

Code	Model	Box
64173-017121	**VK/03034/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**80pcs**
64173-018121	**VK/03034/MC** ● **Brushed Chrome**. **GU5.3**. Max. 12W. (LED)	**80pcs**
64173-067121	**VK/03034/B** ● **Black**. **GU5.3**. Max. 12W. (LED)	**80pcs**








Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Aluminium.**





IP65.

VK/03035

Code	Model	Box
64173-019121	**VK/03035/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**80pcs**
64173-020121	**VK/03035/MC** ● **Brushed Chrome**. **GU5.3**. Max. 12W. (LED)	**80pcs**







Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Die cast aluminium.**



IP65.


Irma



VK/03059

Code	Model	Box
64173-034121	**VK/03059/W** ○ **White. GU5.3**. Max. 12W (LED).	**80pcs**
64173-069121	**VK/03059/B** ● **Black. GU5.3.** Max. 12W (LED).	**80pcs**






VK/03208

Code	Model	Box
64173-104121	**VK/03208/W** ○ **White. GU5.3**. Max. 12W (LED).	**80pcs**
64173-102121	**VK/03208/B** ● **Black. GU5.3.** Max. 12W (LED).	**80pcs**






VK/03332

Code	Model	Box
64173-132121	**VK/03332/W** ○ **White. GU5.3/MR11**. Max. 6W (LED).	**80pcs**
64173-133121	**VK/03332/B** ● **Black. GU5.3/MR11.** Max. 6W (LED).	**80pcs**





Details

Included lampholder **GU5.3**.
VK/03059, VK/03208: Match also with lamps: PAR16, Modules 50.

VK/03332: Match also with lamps: MR11, Modules 35.
Material **Die cast aluminium.**

IP65.


Olpo



VK/03196

Code	Model	Box
64173-099121	**VK/03196/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**100pcs**
64173-100121	**VK/03196/B** ● **Black**. **GU5.3**. Max. 12W. (LED)	**100pcs**





Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.


Material **Die cast aluminium.**

IP65.

VK/03197

Code	Model	Box
64173-101121	**VK/03197/W** ○ **White**. **GU5.3**. Max. 12W. (LED)	**100pcs**
64173-103121	**VK/03197/B** ● **Black**. **GU5.3**. Max. 12W. (LED)	**100pcs**





Details

Included lampholder **GU5.3**.
Match also with lamps: Par16, Modules 50.

Material **Die cast aluminium.**

IP65.





Gypsum Spots

Recessed Gypsum Spots for GU10/PAR16



VK/09004

Code	Model	Box
64174-223131	**VK/09004** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**


Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20



Match also with lamps: GU10/50, Par16, Modules 50.







VK/09002


Code	Model	Box
64174-221131	**VK/09002** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





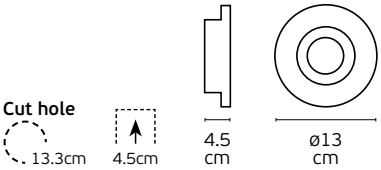




VK/09029


Code	Model	Box
64174-248131	**VK/09029** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





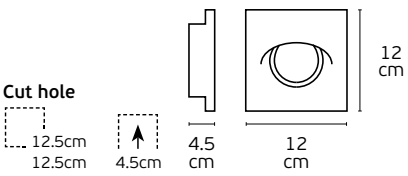




VK/09003


Code	Model	Box
64174-222131	**VK/09003** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





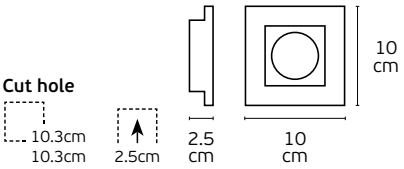


VK/09001


Code	Model	Box
64174-220131	**VK/09001** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





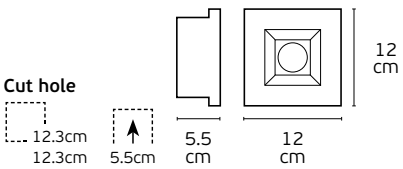


VK/09006

Code	Model	Box
64174-225131	**VK/09006** ○ **White. GU10x2.** Max. 2x12W. (LED).	**12pcs**


Details
Max watt **2x12W**. Included 2xGU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20







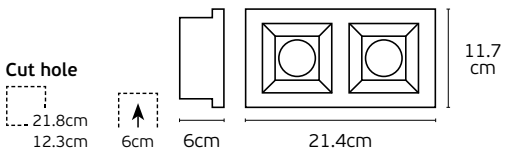

Recessed Gypsum Spots for GU10/PAR16



VK/09072

Code	Model	Box
64174-307131	**VK/09072** ○ **White. GU10.** Max. 12W. (LED).	**4pcs**


Details

Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





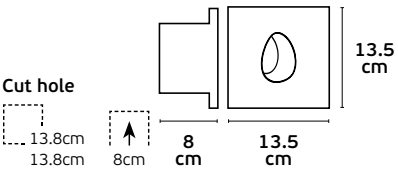





VK/09075

Code	Model	Box
64174-310131	**VK/09075** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**


Details


Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





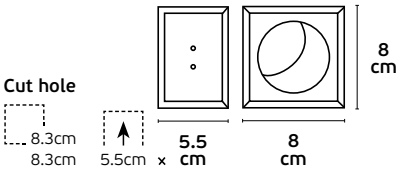

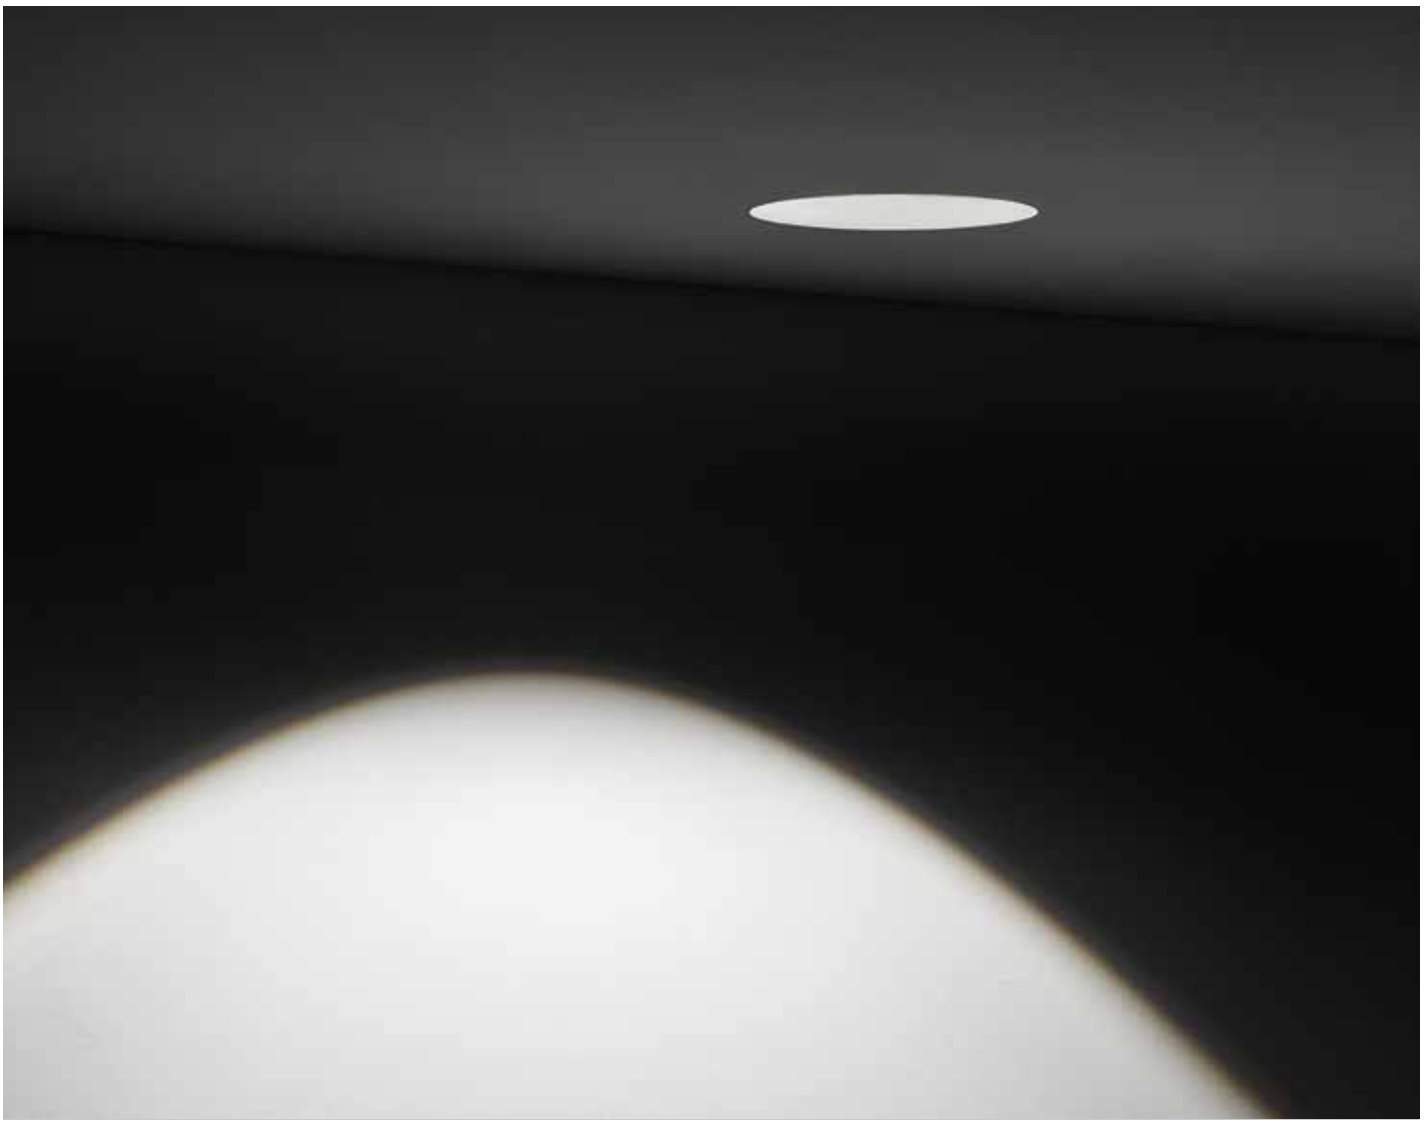

Recessed Gypsum Spots for GU10/PAR16




VK/09005


Code	Model	Box
64174-224131	**VK/09005** ○ **White. GU10.** Max. 12W. (LED).	**24pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20





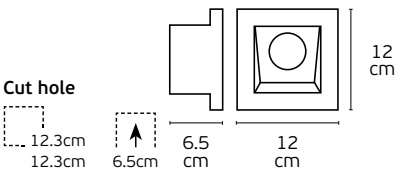



VK/09081

Code	Model	Box
75169-348131	**VK/09081** ○ **White. GU10**. Max. 12W. (LED).	**24pcs**

Details
Max watt **12W.** Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20



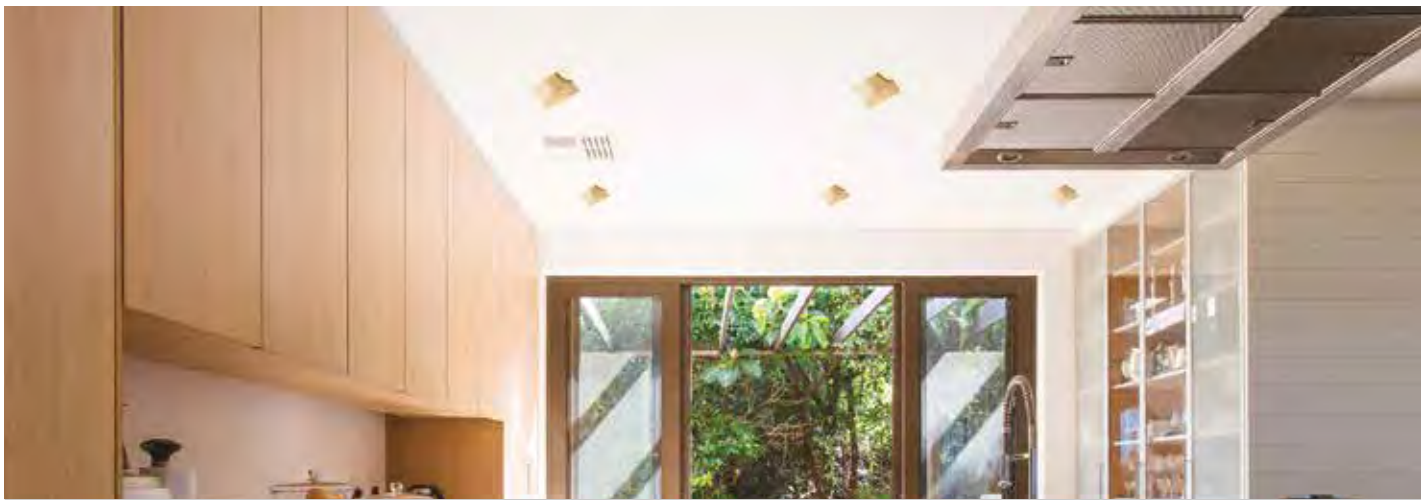



VK/09060


Code	Model	Box
64174-289131	**VK/09060** ○ **White. GU10.** Max. 12W. (LED).	**50pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Adjustable. Possibility to paint.**







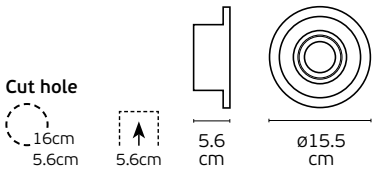



VK/09061


Code	Model	Box
64174-290131	**VK/09061** ○ **White. GU10.** Max. 12W. (LED).	**50pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Adjustable. Possibility to paint.**







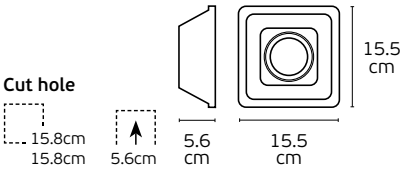




VK/09062


Code	Model	Box
64174-291131	**VK/09062** ○ **White. GU10.** Max. 12W. (LED).	**50pcs**

Details
Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Adjustable. Possibility to paint.**







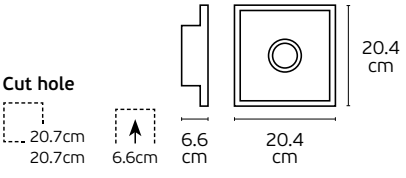

Recessed Gypsum Trimless Spots for ES111/R111



VK/09008

Code	Model	Box
64174-227131	**VK/09008** ○ **White. ES111/R111.** Max 20W (LED).	**6pcs**


Details

Max watt **20W**. Included lampholder **G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Possibility to paint.**

IP20





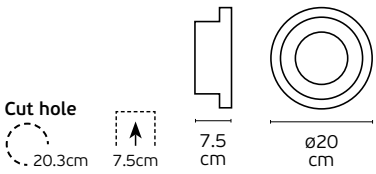



VK/09007

Code	Model	Box
64174-226131	**VK/09007** ○ White. **ES111/R111.** Max 20W (LED).	**6pcs**


Details

Max watt **20W**. Included lampholder **G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Possibility to paint.**

IP20





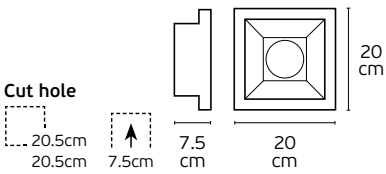



VK/09078

Code	Model	Box
64174-317131	**VK/09078** ○ White. **ES111/R111.** Max 20W (LED).	**8pcs**


Details

Max watt **20W**. Included lampholder **G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Possibility to paint.**

IP20





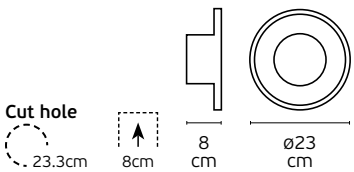



VK/09030

Code	Model	Box
64174-249131	**VK/09030** ○ White. **ES111/R111.** Max 20W (LED).	**4pcs**


Details

Max watt **20W**. Included lampholder **G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Adjustable. Possibility to paint.**



IP20



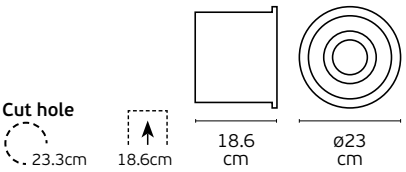



VK/09009

Code	Model	Box
64174-228131	**VK/09009** ○ **White. ES111/R111.** Max 2x20W (LED).	**4pcs**


Details

Max watt **2x20W**. Included lampholder 2x**G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Adjustable. Possibility to paint.**



IP20








VK/09080


Code	Model	Box
64174-353131	**VK/09080** ○ **White. ES111/R111**. Max 20W (LED).	**8pcs**

Details

Max watt **20W.** Included lampholder **G53**. Match also with lamps GU10/**ES111, R111, Modules 111**. Material **Gypsum. Adjustable. Possibility to paint.**



IP20

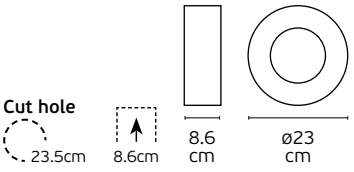

Recessed Gypsum Spots for GU10/PAR16




VK/09077

Code	Model	Box
64174-315131	**VK/09077** ○ **White. GU10.** Max 12W (LED). **L10.5cm.**	**4pcs**
64174-318131	**VK/09077/12** ○ **White. GU10.** Max 12W (LED). **L12cm.**	**4pcs**
64174-319131	**VK/09077/16** ○ **White. GU10.** Max 12W (LED). **L16cm.**	**4pcs**

Details

Max watt **12W**. Included GU10/50. **Match also with lamps: GU10/50, Par16, Modules 50.**
Material **Gypsum. Possibility to paint.**

IP20







VK/09031


Code	Model	Box
64174-250131	**VK/09031** ○ **White. 3000K. 23W. 1935lm. CRI>80**	**4pcs**

Details

AC Driver **220-240V (Included)**. Watt **23W**. Beam Angle **Diffuser light.** Type of Led **SMD 2835**. **No Dimmable**. Lifetime **30.000 hrs**. Working temperature **< 45°C**. Material **Gypsum**. **Possibility to paint. 2 years** guarantee.

IP20



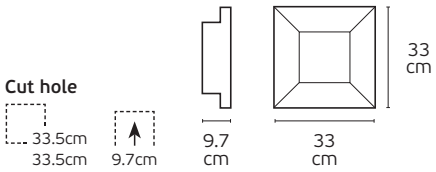



VK/09032


Code	Model	Box
64174-251131	**VK/09032** ○ **White. 3000K. 9W. CRI>80**	**16pcs**

Details

AC Driver **220-240V (Included)**. Watt **9W**. Beam Angle **Diffuser light.** Type of Led **SMD 2835**. **No Dimmable**. Lifetime **30.000 hrs.** Working temperature **< 45°C**. Material **Gypsum**. **Possibility to paint. 2 years** guarantee.

IP20



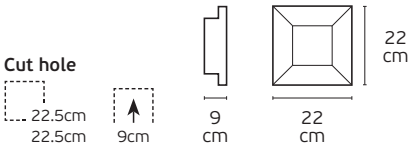



VK/09033


Code	Model	Box
64174-252131	**VK/09033** ○ **White. 3000K. 20W. 1691lm. CRI>80**	**4pcs**


Details


AC Driver **220-240V (Included)**. Watt **20W**. Beam Angle **Diffuser light.** Type of Led **SMD 2835**. W**No Dimmable**. **Lifetime 30.000 hrs**. Working temperature **< 45°C**. Material **Gypsum**. **Possibility to paint. 2 years** guarantee.

IP20



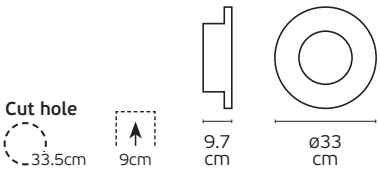

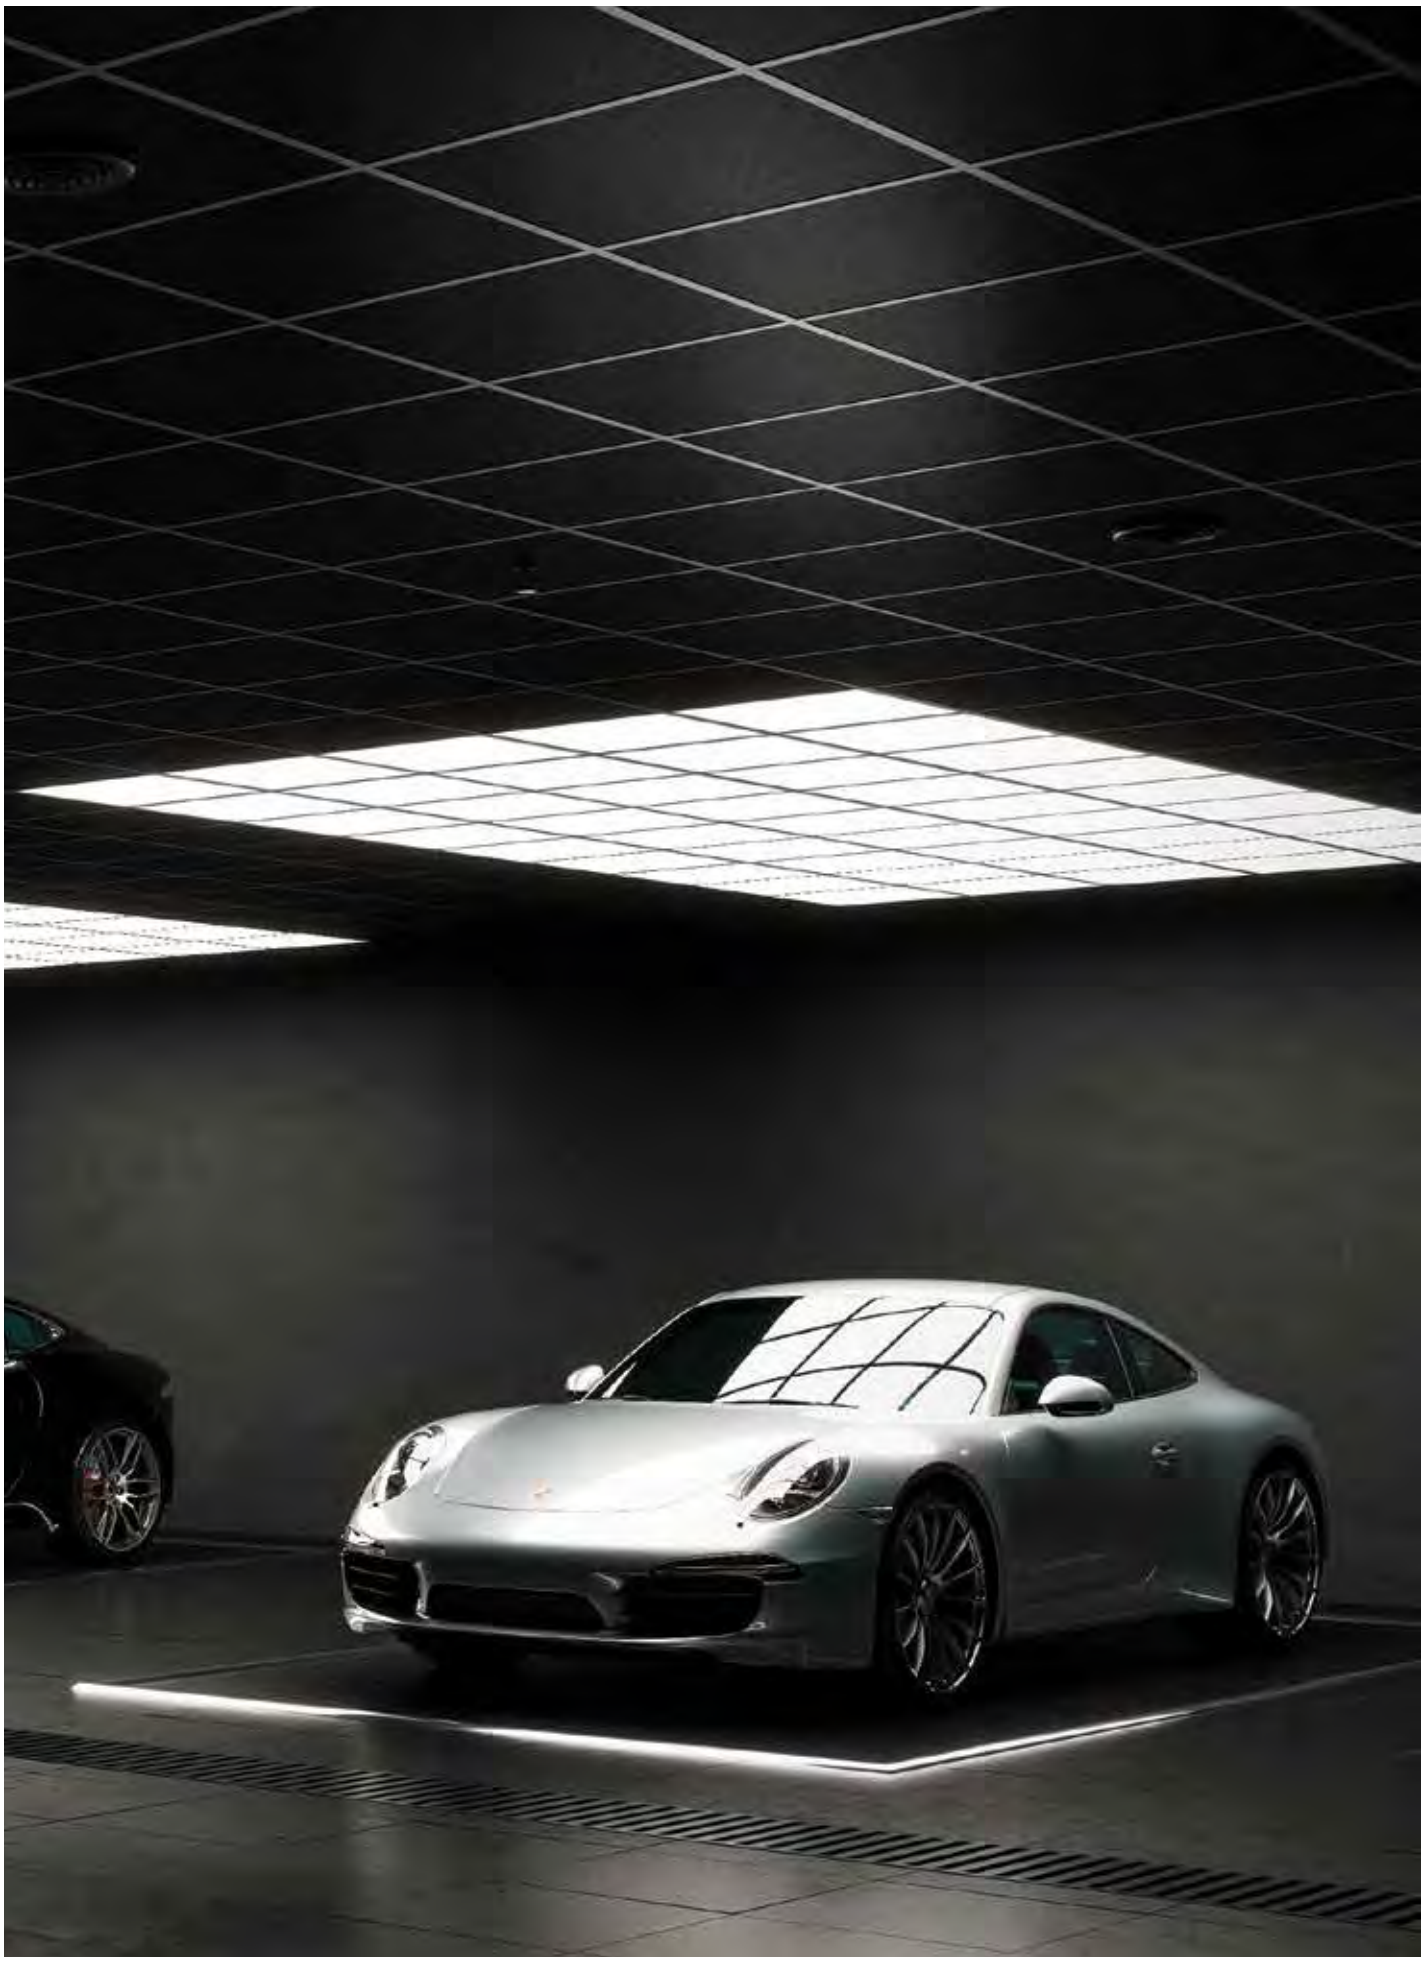

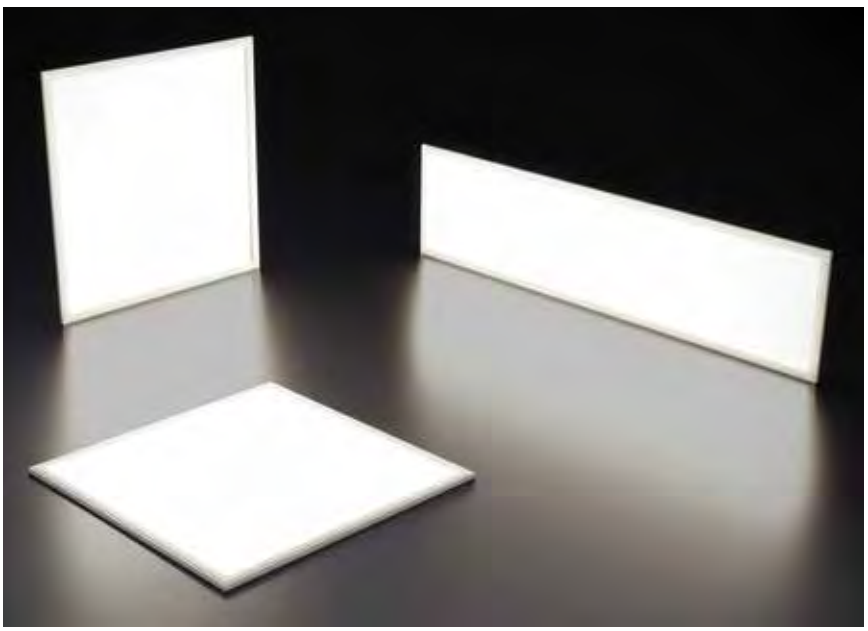

Led panels

Slim Led Panel 60x60

VK/04019/W


VK/04019/W with PHILIPS driver

Code	Model						Box
63158-212123	VK/04019/W/W	○ White	3000K	4.000lm	40W	UGR>22	1pc
63158-213123	VK/04019/W/C	○ White	4000K	4.000lm	40W	UGR>22	1pc
63158-214123	VK/04019/W/D	○ White	6000K	4.000lm	40W	UGR>22	1pc
63158-219123	VK/04019/W/RGB/D	○ White	6000K+RGB	3.200lm+N/A	40W	UGR>22	1pc


Details

AC Driver **220-240V** PHILIPS **(Included)**.
LED **SMD 4014**.
LED **SMD 2835+5050**. (RGB)
Lifetime **50.000hrs**.
Clicks **50.000.**


Working temperature **< 45°C**.
Material **Aluminium, Plastic PMMA.**
Beam angle **115°.**
CRI>80
Guarantee **2 years**.



IP40

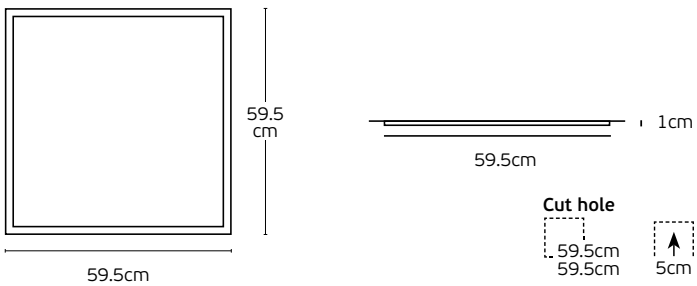

Slim Led Panel 60x60

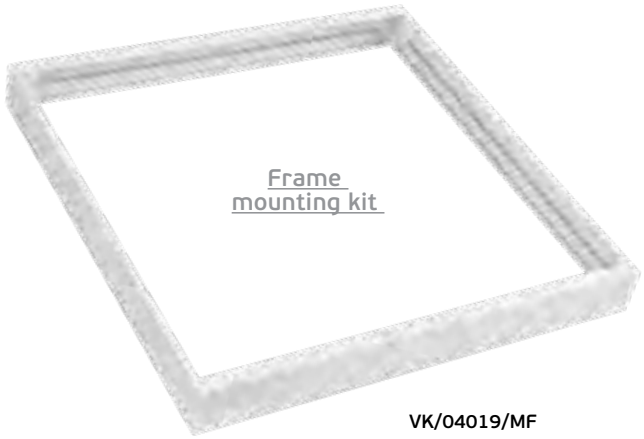

VK/04019/MF






VK/04019/RF



VK/04019/MF
VK/04019/RF

Code	Model	Box
63158-223123	**VK/04019/MF** ○ **White**. 59.5x59.5cm	**1pc**
77161-133164	**VK/04019/RF** ○ **White**. 59.5x59.5cm	**1pc**

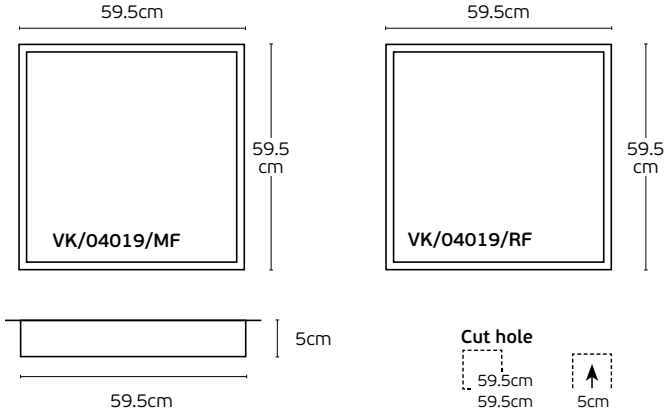

Details

VK/04019/MF: Frame mounting kit for LED panel **VK/04019**.

VK/04019/RF: Frame recessed kit for LED panel **VK/04019 with metal clip set**.

Panel LED Slim

Slim Led Panel 120x30 & 60x30

VK/04041/W

VK/04051/W

VK/04041/W with driver
VK/04051/W with driver


Code	Model						Box
63158-215123	VK/04041/W/W	○ White	3000K	4.000lm	40W	UGR>22	1pc
63158-216123	VK/04041/W/C	○ White	4000K	4.000lm	40W	UGR>22	1pc
63158-217123	VK/04041/W/D	○ White	6000K	4.000lm	40W	UGR>22	1pc
63158-224123	VK/04051/W/W	○ White	3000K	3.600lm	36W	UGR>22	1pc
63158-225123	VK/04051/W/C	○ White	4000K	3.600lm	36W	UGR>22	1pc
63158-226123	VK/04051/W/D	○ White	6000K	3.600lm	36W	UGR>22	1pc

Details


AC Driver **85-265V (Included)**.
LED **SMD 4014**
Lifetime **50.000hrs**. Clicks **50.000.**
Working temperature **< 45°C**.

Material **Aluminium, Plastic PMMA.**
Beam angle **115°.**
CRI>80
Guarantee **2 years**.

VK/04041/W

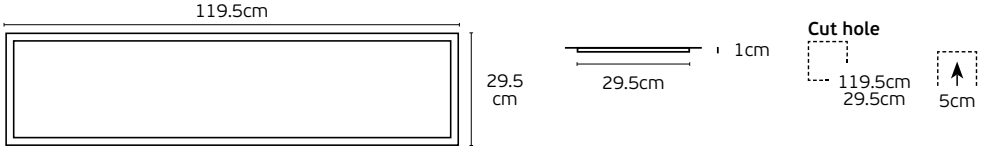


VK/04051/W

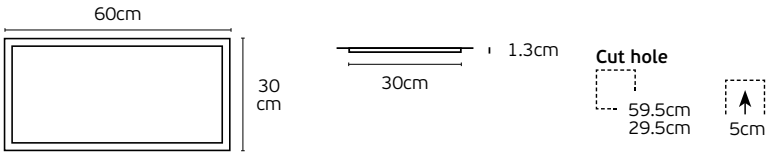


IP40

Slim Led Panel 120x30 & 60x30

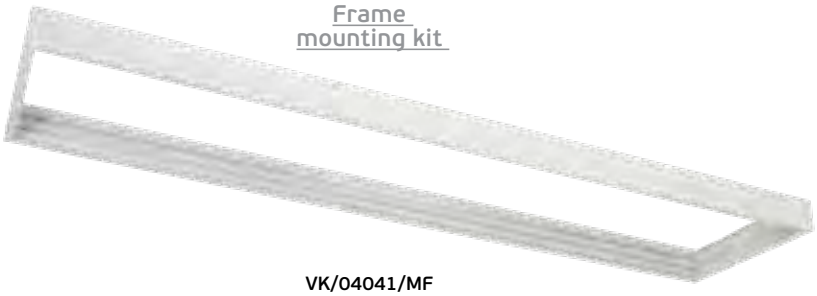

VK/04041/MF



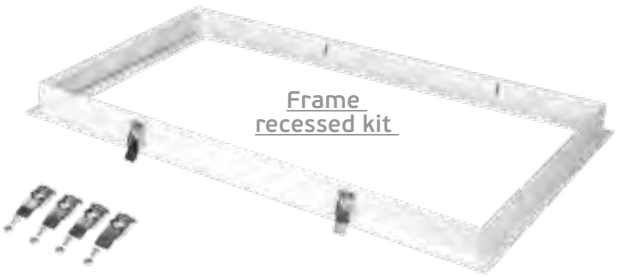

VK/04051/RF



VK/04051/MF, VK/04041/MF
VK/04051/RF, VK/04041/RF

Code	Model	Box
77161-135164	**VK/04051/MF** ○ **White**. 60x30cm	**1pc**
77161-131164	**VK/04041/MF** ○ **White**. 120x30cm	**1pc**
77161-147164	**VK/04051/RF** ○ **White**. 60x30cm	**1pc**
77161-128164	**VK/04041/RF** ○ **White**. 120x30cm	**1pc**


Details


VK/04051/MF: Frame mounting kit for LED panel **VK/04051**.


VK/04041/MF: Frame mounting kit for LED panel **VK/04041**.


VK/04051/RF: Frame recessed kit for LED panel **VK/04051 with metal clip set**.

VK/04041/RF: Frame recessed kit for LED panel **VK/04041 with metal clip set**.

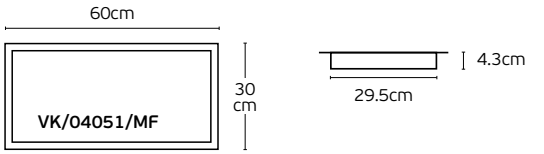

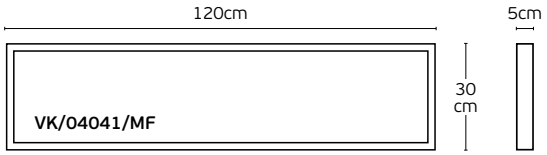

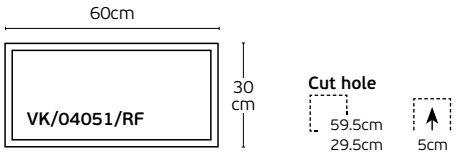

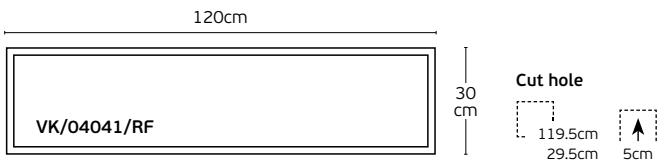

Office Eco Light Management via bluetooth

VK/04019/W/C/54/45

VK/04041/W/C/54/45

VK/04019/W/C/54/45 without driver
VK/04041/W/C/54/45 without driver


Code	Model								Box
63158-296123	VK/04019/W/C/54/45	○ White	4000K	5.400lm	45W	115°	UGR>22	IP54	1pc
63158-297123	VK/04041/W/C/54/45	○ White	4000K	7.350lm	49W	120°	UGR>22	IP54	1pc

Details


Driver **Xitanium (Required)**.
See next page.
Sensor **EASYAIR (Required)**.
See next page.
Lifetime **50.000hrs**.
Clicks **50.000.**

Working temperature **< 45°C**.
Material **Aluminium, Plastic PMMA.**
Dimmable **Yes.**
CRI>80
Guarantee **2 years**.


VK/04041/W

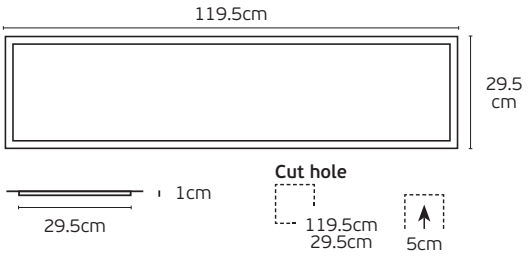

VK/04019/W

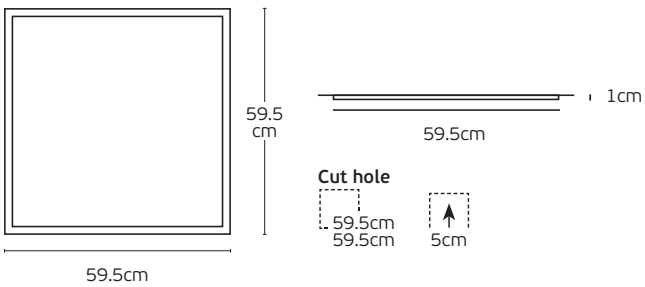

IP54

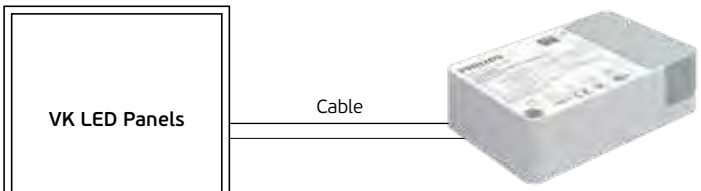

1-16 pcs

XITANIUM 45W 0.3-1.2A 48V MC FLEX TUNE LED DRIVER
1-16 pcs

need only 1 sensor **EASYAIR OCCU DL ZGP SENSOR MC**
1 pc

Product Features

Occupancy Detection
- Passive Infrared (PIR) technology to detect occupancy accurately.
- Adjustable sensitivity. Minimum false trigger.
- 40 sqm Field-of-View at typical mounting height.

Daylight Sensing
- High accuracy of ambient light measurement from 1-2000 LUX
- Closed loop daylight regulation
- Daylight fast report for calibration

Installation
- Battery-powered, no mains wire required.
- Quick and easy mounting with tapes or screws.
- Walk test mode available for optimal detection.
- Indoor use only.

Environment
- No Mercury.
- Low Carbon Footprint.

Connectivity
- 2.4GHz mesh networking technology.
- Reliable and secure wireless communication, nominal range 15m.
- Easy commissioning.

Control Functionality
- Automatic light control based on occupancy detection and daylight sensing.
- Adjustable sensor parameters for personalized lighting behaviors.

Reliability
- Reliable operation between -5°C and +45°C ambient temperature.
- Battery lifetime above 8 years. Minimum maintenance. [1]
- IP42 (IEC standard 60529)

[1]: As calculated in typical conference room application.




XITANIUM 45W 0.3-1.2A 48V MC FLEX TUNE LED DRIVER



EASYAIR OCCU DL ZGP SENSOR MC

XITANIUM 45W 0.3-1.2A 48V MC FLEX TUNE LED DRIVER
EASYAIR OCCU DL ZGP SENSOR MC

Code	Model	Box
78000-798112	**XITANIUM 45W 0.3-1.2A 48V MC FLEX TUNE LED DRIVER**	**1pc**
78000-797112	**EASYAIR OCCU DL ZGP SENSOR MC**	**1pc**



Details

Voltage **220-240V.**

Material **Plastic housing.**

IP20

Backlit Led Panel 60x60



VK/04424/W


VK/04424 Backlit with PHILIPS driver


Code	Model						Box
63158-260727	VK/04424/W/W	○ White	3000K	4.000lm	40W	UGR>22	10pcs
63158-261727	VK/04424/W/C	○ White	4000K	4.400lm	40W	UGR>22	10pcs
63158-263727	VK/04424/W/W/19	○ White	3000K	3.240lm	36W	UGR<19	10pcs
63158-262727	VK/04424/W/C/19	○ White	4000K	3.600lm	36W	UGR<19	10pcs


Details

Led Panel Light **220-240V**.
LED **OSRAM SMD 2835**
with PHILIPS flicker free driver
PF>0.95. (included).
Lifetime **50.000hrs**.
Clicks 50.000.

Working temperature **-20°C → 45°C**.
Material **Aluminium, Plastic PMMA**.
Beam angle **115°**
Backlit










LED SMD 2835 OSRAM

5 years guarantee

IP40


Backlit Led Panel 60x60

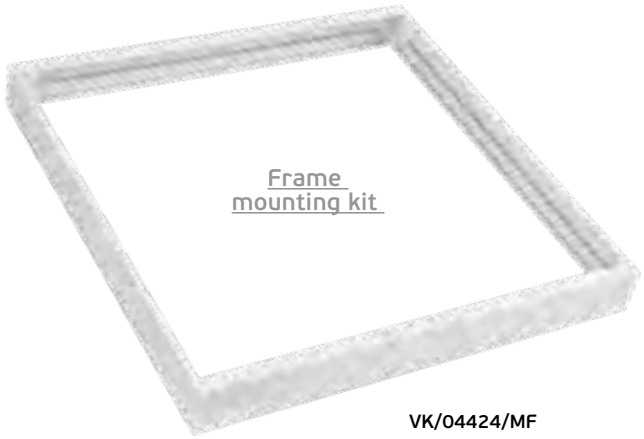

VK/04424/MF



Backlit

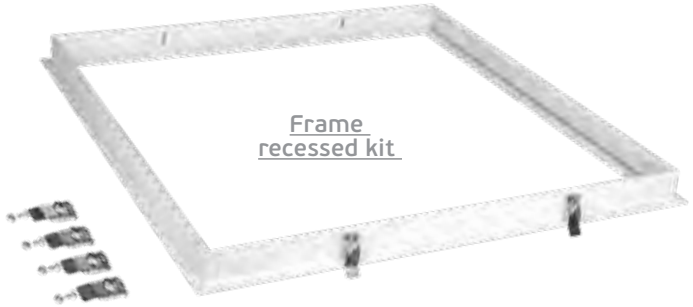

VK/04019/RF



Backlit


VK/04424/MF
VK/04019/RF

Code	Model	Box
63158-301123	**VK/04424/MF** ○ **White**. 60x60cm	**1pc**
77161-133164	**VK/04019/RF** ○ **White**. 59.5x59.5cm	**1pc**

Details

VK/04424/MF: Frame mounting kit for Backlit LED panel

VK/04019/RF: Frame recessed kit for LED panel **VK/04019 with metal clip set**.

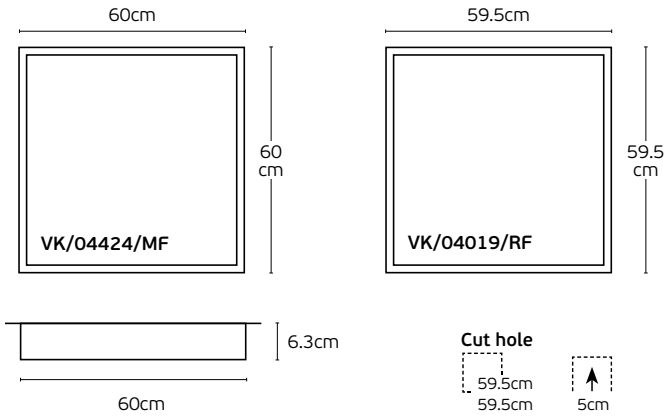

Backlit Led Panel 120x30

VK/04426/W

VK/04426 Backlit with driver

Code	Model						Box
63158-298123	**VK/04426/W/W**	○ **White**	**3000K**	**4.000lm**	**40W**	**UGR>22**	**4pcs**
63158-299123	**VK/04426/W/C**	○ **White**	**4000K**	**4.000lm**	**40W**	**UGR>22**	**4pcs**
63158-292123	**VK/04426/W/W/19**	○ **White**	**3000K**	**4.000lm**	**40W**	**UGR<19**	**4pcs**
63158-291123	**VK/04426/W/C/19**	○ **White**	**4000K**	**4.000lm**	**40W**	**UGR<19**	**4pcs**


Details


Led Panel Light **220-240V**.
LED **SMD 4014 with PHILIPS flicker free driver PF>0.95. (included).**
Lifetime **50.000hrs**.
Clicks **50.000**.

Working temperature **-20°C → 45°C**.
Material **Aluminium, Plastic PMMA.**
Beam angle **90°**.
CRI>80.
Backlit.



LED SMD 2835 OSRAM

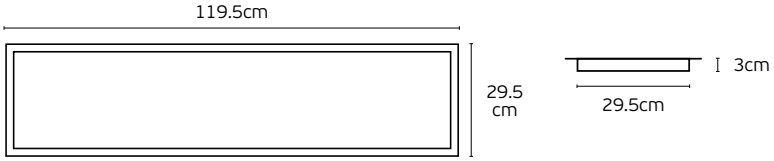



5 years guarantee


IP40

Backlit Led Panel 120x30



VK/04426/MF



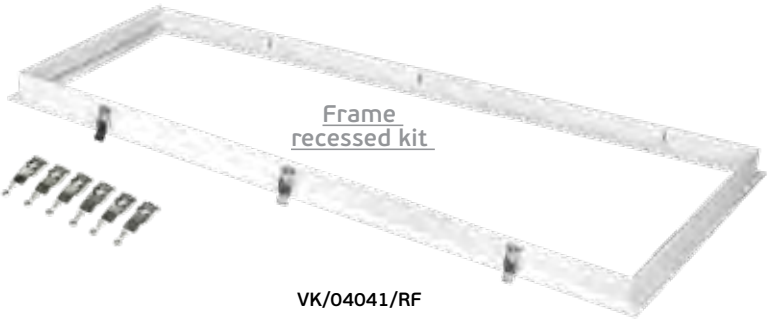



VK/04041/RF



VK/04426/MF
VK/04041/RF

Code	Model	Box
63158-300123	**VK/04426/MF** ○ **White**. 120x30cm	**1pc**
77161-128164	**VK/04041/RF** ○ **White**. 120x30cm	**1pc**

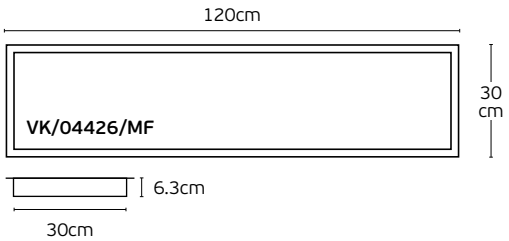

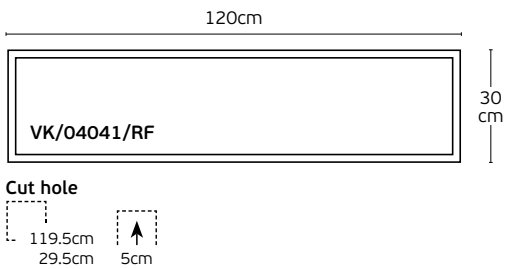

Details

VK/04426/MF: Frame mounting kit for Backlit LED panel

VK/04041/RF: Frame recessed kit for LED panel **VK/04041 with metal clip set**.

Cut hole

Panel accessories LED



VK/04019/W/RC



VK/LVD/PANEL




OTi DALI 35/220-240/1A0 LT2




VK/LV40W/PANEL/DALI

VK/04019/W/RC Controller for RGB panels
VK/LVD/PANEL Driver dimmable for LED panels 40W
OTi DALI 35/220-240/1A0 LT2 Controller for panels
VK/LV40W/PANEL/DALI

Code	Model	Box
63158-220123	**VK/04019/W/RGB/RC** **12-24V**.	**1pc**
63158-218123	**VK/LVD/PANEL** **220-240V**. TRIAC DIM	**1pc**
78000-424019	**OTi DALI 35/220-240/1A0 LT2** **220-240V**. 10.3x6.7x2.95cm **3 years** guarantee.	**1pc**
63158-293123	**VK/LV40W/PANEL/DALI** **220-240V**. **550-1050mA**. **40W**. **42V**. DALI/PUSH. Dimmable LED Driver DALI/Push **5 years** guarantee.	**100pcs** *DALI/PUSH*






Details

Material **Plastic housing.**

Working temperature **-20°C → 45°C**.

IP20

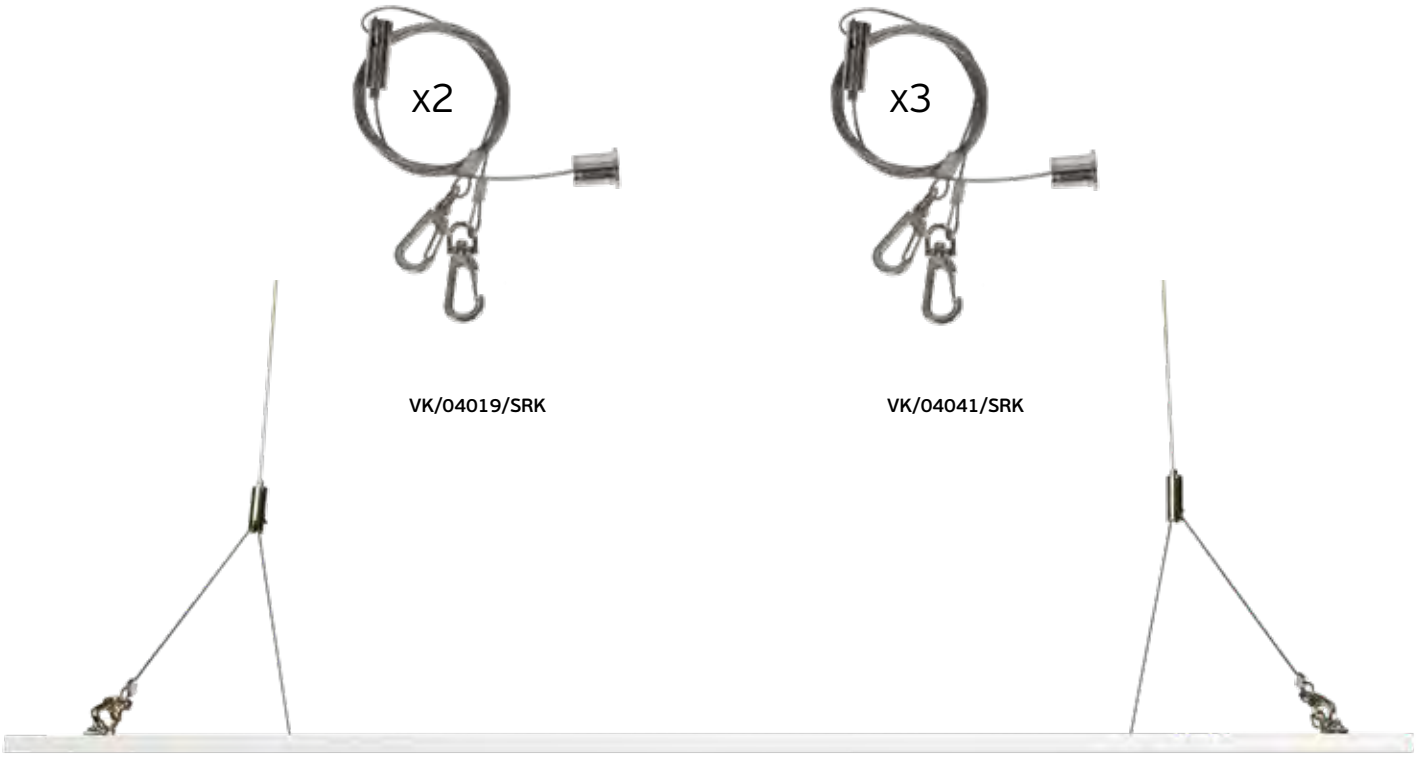



VK/04019/SRK

VK/04041/SRK

VK/04019/SRK Set of 2 ropes
VK/04041/SRK Set of 3 ropes

Code	Model	Box
63158-221123	VK/04019/SRK Set of 2 ropes for LED panel VK/04019.	1pc
63158-222123	VK/04041/SRK Set of 3 ropes for LED panel VK/04041.	1pc





Details

Set of 2 ropes for LED panel VK/04019. Material **Steel, Aluminium**.

Set of 3 ropes for LED panel VK/04041. Material **Steel, Aluminium**.

IP20

Slim Panel LED

VK/04072-VK/04074, VK/04048-VK/04050, VK/04017

Code	Model							Box
64173-055123	VK/04072/W/W	○ White	3000K	180lm	3W	115°	CRI>80	10pcs
64173-056123	VK/04072/W/C	○ White	4000K	180lm	3W	115°	CRI>80	10pcs
64173-057123	VK/04073/W/W	○ White	3000K	360lm	6W	115°	CRI>80	10pcs
64173-058123	VK/04073/W/C	○ White	4000K	360lm	6W	115°	CRI>80	10pcs
64173-049123	VK/04048/W/W	○ White	3000K	540lm	9W	115°	CRI>80	10pcs
64173-050123	VK/04048/W/C	○ White	4000K	540lm	9W	115°	CRI>80	10pcs
64173-059123	VK/04074/W/W	○ White	3000K	840lm	12W	115°	CRI>80	10pcs
64173-060123	VK/04074/W/C	○ White	4000K	840lm	12W	115°	CRI>80	10pcs
64173-086123	VK/04074/W/D	○ White	6000K	840lm	12W	115°	CRI>80	10pcs
64173-054123	VK/04049/W/W	○ White	3000K	1.050lm	15W	115°	CRI>80	10pcs
64173-051123	VK/04049/W/C	○ White	4000K	1.050lm	15W	115°	CRI>80	10pcs
64173-087123	VK/04049/W/D	○ White	6000K	1.050lm	15W	115°	CRI>80	10pcs
64173-052123	VK/04050/W/W	○ White	3000K	1.440lm	18W	115°	CRI>80	10pcs
64173-053123	VK/04050/W/C	○ White	4000K	1.440lm	18W	115°	CRI>80	10pcs
64173-085123	VK/04050/W/D	○ White	6000K	1.440lm	18W	115°	CRI>80	10pcs
64173-061123	VK/04050/G/W	● Grey	3000K	1.440lm	18W	115°	CRI>80	10pcs
64173-062123	VK/04050/G/C	● Grey	4000K	1.440lm	18W	115°	CRI>80	10pcs
64173-043115	VK/04017/W/W	○ White	3000K	1.920lm	24W	115°	CRI>80	10pcs
64173-044115	VK/04017/W/C	○ White	4000K	1.920lm	24W	115°	CRI>80	10pcs
64173-045115	VK/04017/W/D	○ White	6000K	1.920lm	24W	115°	CRI>80	10pcs
64173-037115	VK/04017/G/W	● Grey	3000K	1.920lm	24W	115°	CRI>80	10pcs
64173-038115	VK/04017/G/C	● Grey	4000K	1.920lm	24W	115°	CRI>80	10pcs
64173-039115	VK/04017/G/D	● Grey	6000K	1.920lm	24W	115°	CRI>80	10pcs


Details

AC Driver **100-240V (Included)**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000.**

Working temperature **< 45°C**.
Material **Aluminium, plastic**.
Guarantee **2 years**.



IP20

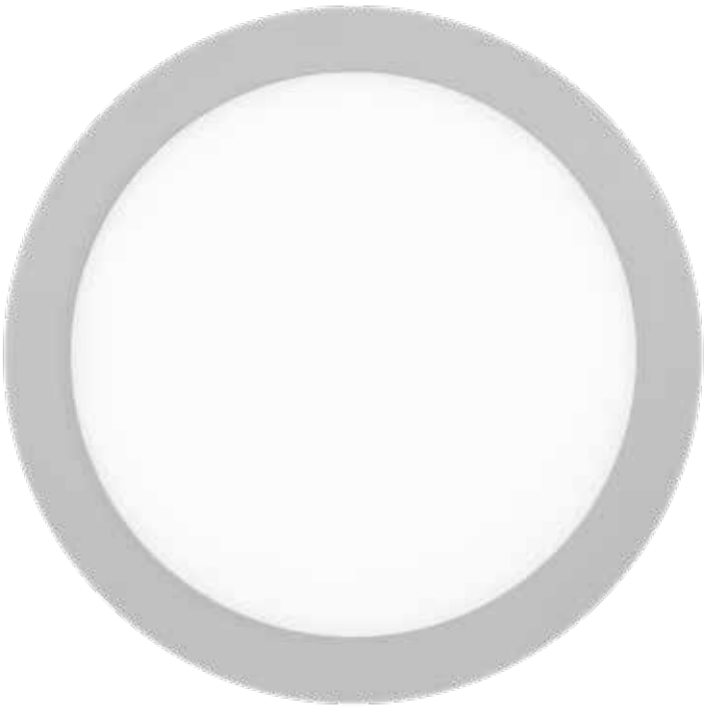






ø9cm

1.5 cm

Cut hole







ø12cm

1.5 cm

Cut hole







ø15cm

1.5 cm

Cut hole







ø17cm

1.5 cm

Cut hole







ø20cm

1.5 cm

Cut hole







ø22.5cm

1.5 cm

Cut hole






ø24cm

1.5 cm

Cut hole



Slim Panel LED


VK/04075-VK/04080, VK/04018

Code	Model							Box
64173-063123	VK/04075/W/W	○ White	3000K	180lm	3W	115°	CRI>80	10pcs
64173-064123	VK/04075/W/C	○ White	4000K	180lm	3W	115°	CRI>80	10pcs
64173-065123	VK/04076/W/W	○ White	3000K	360lm	6W	115°	CRI>80	10pcs
64173-066123	VK/04076/W/C	○ White	4000K	360lm	6W	115°	CRI>80	10pcs
64173-067123	VK/04077/W/W	○ White	3000K	540lm	9W	115°	CRI>80	10pcs
64173-068123	VK/04077/W/C	○ White	4000K	540lm	9W	115°	CRI>80	10pcs
64173-069123	VK/04078/W/W	○ White	3000K	840lm	12W	115°	CRI>80	10pcs
64173-070123	VK/04078/W/C	○ White	4000K	840lm	12W	115°	CRI>80	10pcs
64173-071123	VK/04079/W/W	○ White	3000K	1.050lm	15W	115°	CRI>80	10pcs
64173-072123	VK/04079/W/C	○ White	4000K	1.050lm	15W	115°	CRI>80	10pcs
64173-073123	VK/04080/W/W	○ White	3000K	1.440lm	18W	115°	CRI>80	10pcs
64173-074123	VK/04080/W/C	○ White	4000K	1.440lm	18W	115°	CRI>80	10pcs
64173-075123	VK/04080/G/W	● Grey	3000K	1.440lm	18W	115°	CRI>80	10pcs
64173-076123	VK/04080/G/C	● Grey	4000K	1.440lm	18W	115°	CRI>80	10pcs
64173-046115	VK/04018/W/W	○ White	3000K	1.920lm	24W	115°	CRI>80	10pcs
64173-047115	VK/04018/W/C	○ White	4000K	1.920lm	24W	115°	CRI>80	10pcs
64173-048115	VK/04018/W/D	○ White	6000K	1.920lm	24W	115°	CRI>80	10pcs
64173-040115	VK/04018/G/W	● Grey	3000K	1.920lm	24W	115°	CRI>80	10pcs
64173-041115	VK/04018/G/C	● Grey	4000K	1.920lm	24W	115°	CRI>80	10pcs
64173-042115	VK/04018/G/D	● Grey	6000K	1.920lm	24W	115°	CRI>80	10pcs

Details


AC Driver **100-240V (Included)**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000.**


Working temperature **< 45°C**.
Material **Aluminium, plastic**.
Guarantee **2 years**.





IP20

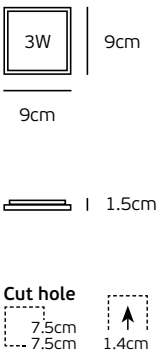




3W
9cm
9cm
1.5cm
Cut hole
7.5cm
7.5cm
1.4cm

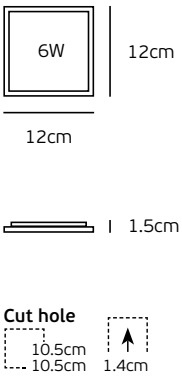

6W
12cm
12cm
1.5cm
Cut hole
10.5cm
10.5cm
1.4cm

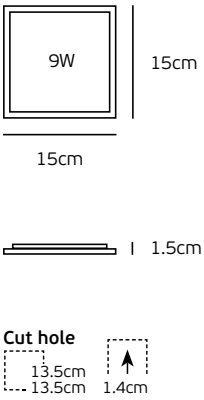
9W
15cm
15cm
1.5cm
Cut hole
13.5cm
13.5cm
1.4cm

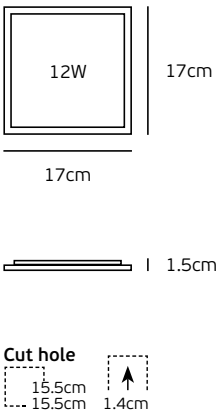
12W
17cm
17cm
1.5cm
Cut hole
15.5cm
15.5cm
1.4cm

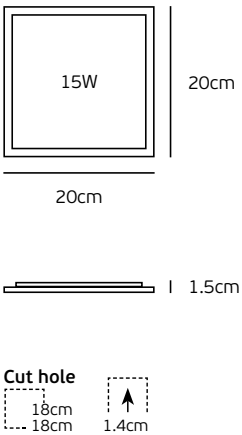
15W
20cm
20cm
1.5cm
Cut hole
18cm
18cm
1.4cm

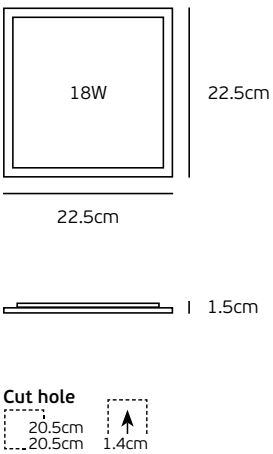
18W
22.5cm
22.5cm
1.5cm
Cut hole
20.5cm
20.5cm
1.4cm

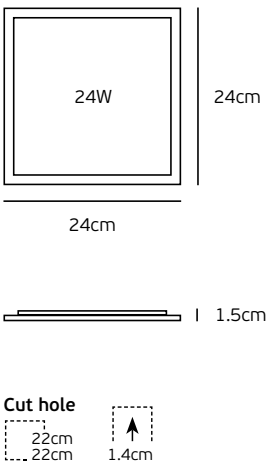

24W
24cm
24cm
1.5cm
Cut hole
22cm
22cm
1.4cm

Panel LED - Surface



VK/04015, VK/04014

Code	Model	Box
71164-003122	**VK/04015/W/W** ○ **White**. 3000K. 1.780lm. 18W. 120°. CRI>75	**20pcs**
71164-004122	**VK/04015/W/C** ○ **White**. 4000K. 1.440lm. 18W. 120°. CRI>75	**20pcs**
71164-006122	**VK/04015/W/D** ○ **White**. 6000K. 1.780lm. 18W. 120°. CRI>75	**20pcs**
71164-001122	**VK/04014/W/W** ○ **White**. 3000K. 1.440lm. 18W. 120°. CRI>80	**20pcs**
71164-002122	**VK/04014/W/C** ○ **White**. 4000K. 1.440lm. 18W. 120°. CRI>80	**20pcs**
71164-005122	**VK/04014/W/D** ○ **White**. 6000K. 1.440lm. 18W. 120°. CRI>80	**20pcs**

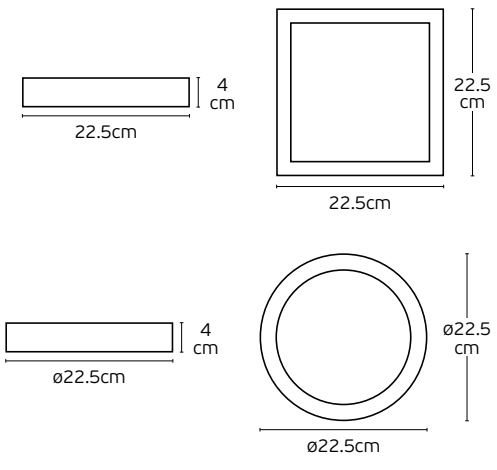

Details

AC Driver **90-265V (Included) 220-240V (Included).**
Type of Led **SMD 2835 / 2016.**
Lifetime **30.000hrs.**

Clicks **20.000.**
Working temperature **-20°C ~ 45°C.**
Material **Aluminium, plastic.**
Guarantee **2 years.**

IP20




Panel LED



VK/04287

VK/04287

Code	Model	Box
63158-293164	**VK/04287/700/3/W/W 3 double parabolic** ○ **White & silver**. 36W. 3000K. **700mA**. 3.500lm (origin 5.250lm.)	**1pc**
63158-294164	**VK/04287/700/3/W/C 3 double parabolic** ○ **White & silver**. 36W. 4000K. **700mA**. 3.500lm (origin 5.400lm.)	**1pc**
63158-299164	**VK/04287/700/5/W/W 5 double parabolic** ○ **White & silver**. 38W. 3000K. **700mA**. 3.100lm (origin 5.250lm.)	**1pc**
63158-300164	**VK/04287/700/5/W/C 5 double parabolic** ○ **White & silver**. 38W. 4000K. **700mA**. 3.100lm (origin 5.400lm.)	**1pc**

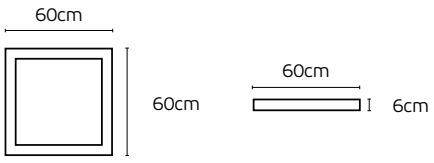

Details

700mA. Supply Voltage **230V AC.**
Driver OSRAM **or** PHILIPS **(included).**
UGR<19.
Special Led board **1.4cm** customized by VK Leading Light **2835 Edison**.
Working Temperature **-25ºC → 45ºC**.
CRI>**80**.
Material **Metal body, electrostatically painted in white color, 99.85% clear mirror**. **PMMA** Diffuser**.**
Transmission **92%**.
Beam angle **130º**.
Lifetime **100.000hrs**.
Clicks **100.000.**

5 years guarantee


IP20









Parabolic detail




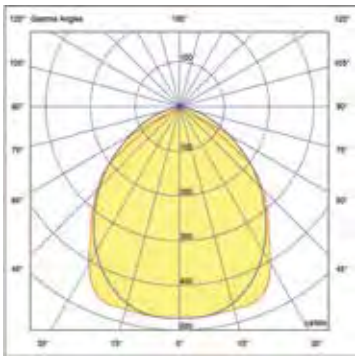


VK/04287/700/3/W/C



3 double parabolic

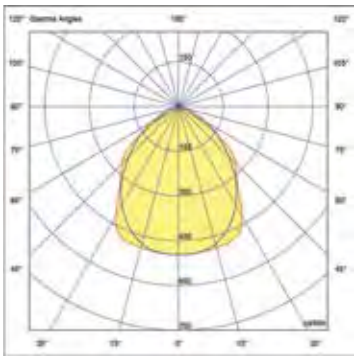

VK/04287/700/5/W/W



5 double parabolic


Panel LED



VK/04286

VK/04286

Code	Model	Box
63158-291164	**VK/04286/900/3/W/W 3 double parabolic** ○ **White & silver**. 44W. 3000K. **900mA**. 4.000lm (origin 6.750lm.)	**1pc**
63158-292164	**VK/04286/900/3/W/C 3 double parabolic** ○ **White & silver**. 44W. 4000K. **900mA**. 4.000lm (origin 6.900lm.)	**1pc**
63158-301164	**VK/04286/900/5/W/W 5 double parabolic** ○ **White & silver**. 46W. 3000K. **900mA**. 3.700lm (origin 6.750lm.)	**1pc**
63158-302164	**VK/04286/900/5/W/C 5 double parabolic** ○ **White & silver**. 46W. 4000K. **900mA**. 3.700lm (origin 6.900lm.)	**1pc**

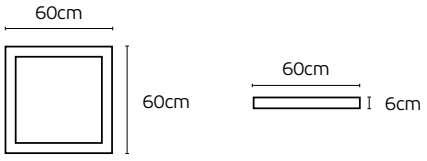

Details

900mA. Supply Voltage **230V AC.**
Driver OSRAM **or** PHILIPS **(included).**
UGR<19.
Special Led board **1.4cm**
customized by VK Leading Light
2835 Edison.
Working Temperature **-25ºC → 45ºC**.
CRI>**80**.

Material **Metal body, electrostatically painted in white color,**
99.85% clear mirror.
PMMA Diffuser**.**
Transmission **92%**.
Beam angle **130º**.
Lifetime **100.000hrs**.
Clicks **100.000.**

5 years guarantee

IP20










PHILIPS DRIVER

Parabolic detail




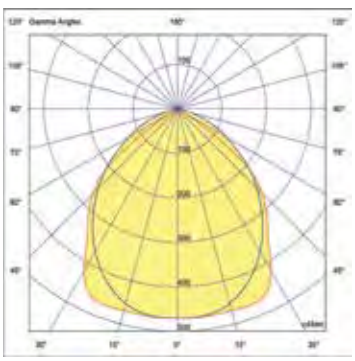


VK/04286/900/3/W/C



3 double parabolic

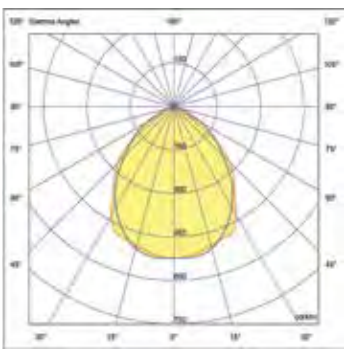


VK/04286/900/5/W/C



5 double parabolic


Panel LED

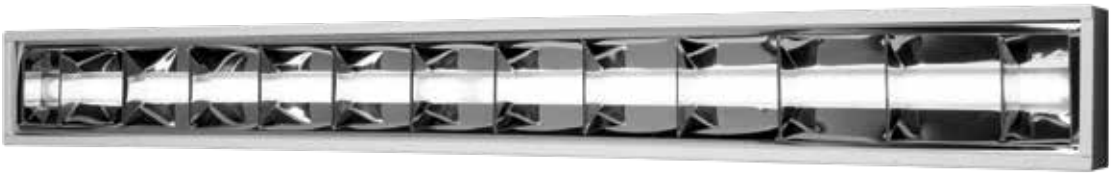

VK/04289

VK/04289, VK/04288

Code	Model	Box
63158-297164	**VK/04289/700/W/W double parabolic** ○ **White & silver**. 19W. 3000K. **700mA**. 1.400lm. (origin 2.850lm.)	**1pc**
63158-298164	**VK/04289/700/W/C double parabolic** ○ **White & silver**. 19W. 4000K. **700mA**. 1.400lm. (origin 2.950lm.)	**1pc**
63158-295164	**VK/04288/900/W/W double parabolic** ○ **White & silver**. 25W. 3000K. **900mA**. 1.700lm. (origin 3.700lm.)	**1pc**
63158-296164	**VK/04288/900/W/C double parabolic** ○ **White & silver**. 25W. 4000K. **900mA**. 1.700lm. (origin 3.850lm.)	**1pc**



Details

700mA. 900mA.
Supply Voltage **230V AC.**
Driver **OSRAM or PHILIPS (included)**.
UGR<19.
Special Led board **1.4cm**
customized by VK Leading Light
2835 Edison.
Working Temperature **-25ºC → 45ºC**.

CRI>80.
Material **Metal body, electrostatically painted in white color, 99.85% clear mirror**.
PMMA Diffuser**.**
Transmission **92%**.
Beam angle **130º**.
Lifetime **100.000hrs**.
Clicks **100.000.**

5 years guarantee


IP20






Parabolic detail



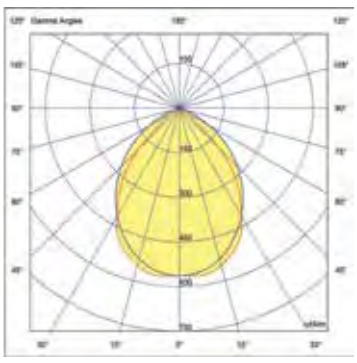


VK/04289/W/W

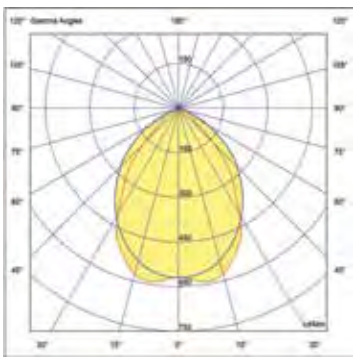

VK/04288/W/W


Panel LED

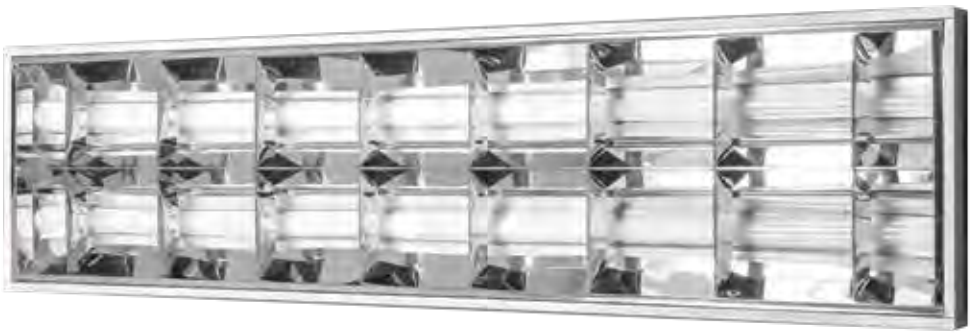

VK/04289/2

VK/04289/2, VK/04288/2

Code	Model	Box
63158-303164	**VK/04289/700/2/W/W double parabolic** ○ **White & silver**. 36W. 3000K. 3.500lm. (origin 5.250lm.) **700mA**.	**1pc**
63158-304164	**VK/04289/700/2/W/C double parabolic** ○ **White & silver**. 36W. 4000K. 3.500lm. (origin 5.400lm.) **700mA**.	**1pc**
63158-305164	**VK/04288/900/2/W/W double parabolic** ○ **White & silver**. 44W. 3000K. 4.000lm. (origin 6.750lm.) **900mA**.	**1pc**
63158-306164	**VK/04288/900/2/W/C double parabolic** ○ **White & silver**. 44W. 4000K. 4.000lm. (origin 6.750lm.) **900mA**.	**1pc**




Details

700mA, 900mA. Supply Voltage **230V AC.**
Driver **OSRAM or PHILIPS (included).**
UGR<19.
Special Led board **1.4cm** customized by VK Leading Light **2835 Edison**.
Working Temperature **-25ºC → 45ºC**.
CRI**>80**.

Material **Metal body. electrostatically painted in white color, 99.85% clear mirror**.
PMMA Diffuser**.**
Transmission **92%**.
Beam angle **130º**.
Lifetime **100.000hrs**.
Clicks **100.000.**


5 years guarantee


IP20

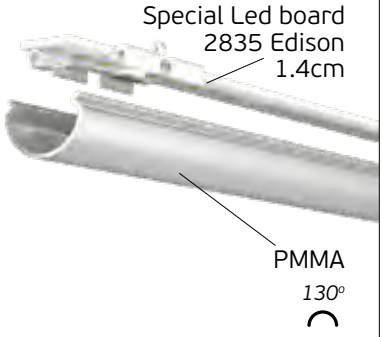




Parabolic detail




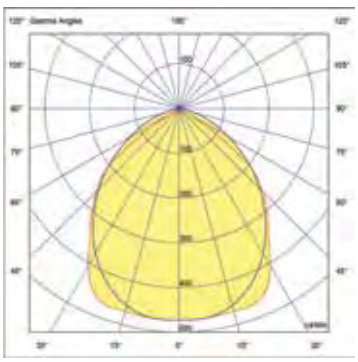


VK/04289/700/2/W/C



double parabolic

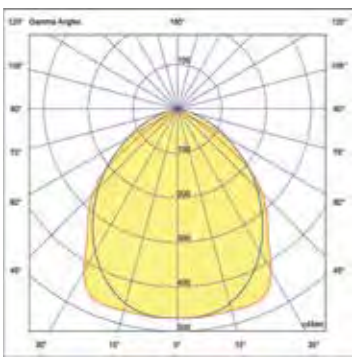

VK/04288/900/2/W/C



double parabolic

Wabi




VK/04556/W

Superslim 2.5cm

VK/04556, VK/04557, VK/04558, VK/04559, VK/04560

Code	Model	Box
64175-510727	**VK/04556/W/CCT** ○ **White. 3000K, 4000K or 6000K.** 18W. 1800lm. CRI>80. **ø23cm**	**20pcs**
64175-511727	**VK/04556/B/CCT** ● **Black. 3000K, 4000K or 6000K.** 18W. 1800lm. CRI>80. **ø23cm**	**20pcs**
64175-512727	**VK/04557/W/CCT** ○ **White. 3000K, 4000K or 6000K.** 24W. 2400lm. CRI>80. **ø30cm**	**10pcs**
64175-513727	**VK/04557/B/CCT** ● **Black. 3000K, 4000K or 6000K.** 24W. 2400lm. CRI>80. **ø30cm**	**10pcs**
64175-514727	**VK/04558/W/CCT** ○ **White. 3000K, 4000K or 6000K.** 30W. 3000lm. CRI>80. **ø40cm**	**10pcs**
64175-515727	**VK/04558/B/CCT** ● **Black. 3000K, 4000K or 6000K.** 30W. 3000lm. CRI>80. **ø40cm**	**10pcs**
64175-516727	**VK/04559/W/CCT** ○ **White. 3000K, 4000K or 6000K.** 36W. 3600lm. CRI>80. **ø50cm**	**5pcs**
64175-517727	**VK/04559/B/CCT** ● **Black. 3000K, 4000K or 6000K.** 36W. 3600lm. CRI>80. **ø50cm**	**5pcs**
64175-518727	**VK/04560/W/CCT** ○ **White. 3000K, 4000K or 6000K.** 42W. 4200lm. CRI>80. **ø60cm**	**5pcs**
64175-519727	**VK/04560/B/CCT** ● **Black. 3000K, 4000K or 6000K.** 42W. 4200lm. CRI>80. **ø60cm**	**5pcs**

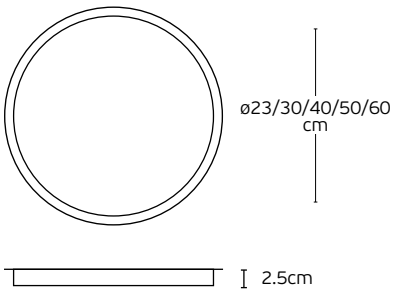

3000K **4000K** **6000K**



Details

Material **ABS+PS**
Type of Led **SMD 2835**
Voltage **AC220-240V**
Location **Ceiling**
Color led **choice 3000K, 4000K, 6000K (CCT)**

Flicker free
Beam angle **120°**
Working temperature **-25°C - 45°C**
Lifetime **30.000hrs**
Dimmable **No**
Guarantee **3 years**

IP40




Malo



VK/04347/CE/W/W/45

VK/04347/CE/.../45-95

Code	Model	Box
71164-069721	**VK/04347/CE/W/W/45** ○ **White**. 3000K. 4.936lm. 33W. CRI>90. **ø45cm**	**1pc**
71164-070721	**VK/04347/CE/W/C/45** ○ **White**. 4000K. 5.364lm. 33W. CRI>90. **ø45cm**	**1pc**
71164-071721	**VK/04347/CE/W/W/65** ○ **White**. 3000K. 8.042lm. 52W. CRI>90. **ø65cm**	**1pc**
71164-072721	**VK/04347/CE/W/C/65** ○ **White**. 4000K. 7.882lm. 51W. CRI>90. **ø65cm**	**1pc**
71164-073721	**VK/04347/CE/W/W/95** ○ **White**. 3000K. 15.772lm. 105W. CRI>90. **ø95cm**	**1pc**
71164-074721	**VK/04347/CE/W/C/95** ○ **White**. 4000K. 16.529lm. 106W. CRI>90. **ø95cm**	**1pc**



Details

AC Driver **220-240V (included)**.
Beam Angle **120º.**
Type of Led **2835 with driver**.
Dimmable **No.**

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium.**
Guarantee **3 years**.

IP20




Dream



VK/04347

VK/04347/.../33-43-53

Code	Model	Box
64174-137721	**VK/04347/W/W/33** ○ **White**. 3000K. 2.200lm. 17W. CRI>90. **ø25.9cm**.	**12pcs**
64174-138721	**VK/04347/W/C/33** ○ **White**. 4000K. 2.638lm. 17W. CRI>90. **ø25.9cm**	**12pcs**
64174-139721	**VK/04347/W/W/43** ○ **White**. 3000K. 4.936lm. 33W. CRI>90. **ø35.9cm**	**6pcs**
64174-140721	**VK/04347/W/C/43** ○ **White**. 4000K. 5.364lm. 33W. CRI>90. **ø35.9cm**	**6pcs**
64174-141721	**VK/04347/W/W/53** ○ **White**. 3000K. 4.936lm. 33W. CRI>90. **ø45.9cm.**	**1pc**
64174-142721	**VK/04347/W/C/53** ○ **White**. 4000K. 5.364lm. 33W. CRI>90. **ø45.9cm.**	**1pc**

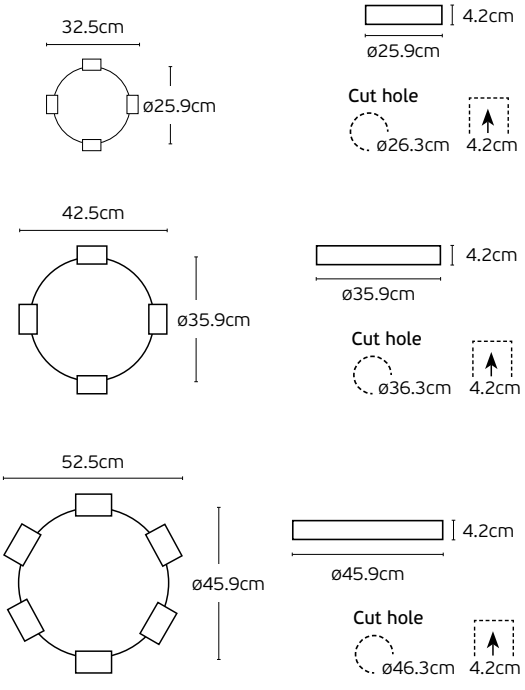

Details

AC **220-240V** Driver **(included)**.
Type of Led **2835 with driver**.
Dimmable **No**.
Beam angle **110°**.
Working temperature **< 45°C**.


Lifetime **50.000 hrs**.
Material **Aluminium**.
Recessed **Trimless ceiling**.
Guarantee **3 years**.

IP20



VK/04347/.../73-103


Code	Model	Box
64174-143721	**VK/04347/W/W/73** ○ **White**. 3000K. 8.042lm. 52W. CRI>90**. ø65.9cm.**	**1pc**
64174-144721	**VK/04347/W/C/73** ○ **White**. 4000K. 7.882lm. 51W. CRI>90. **ø65.9cm.**	**1pc**
64174-145721	**VK/04347/W/W/103** ○ **White**. 3000K. 15.772lm. 105W. CRI>90. **ø95.9cm.**	**1pc**
64174-146721	**VK/04347/W/C/103** ○ **White**. 4000K. 16.529lm. 106W. CRI>90. **ø95.9cm.**	**1pc**

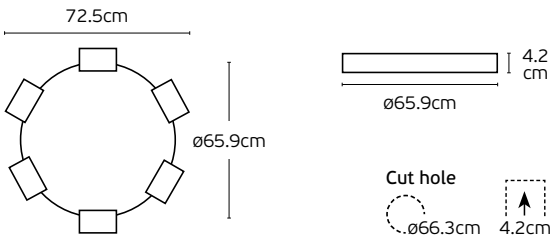


Details

AC **220-240V** Driver **(included)**.
Type of Led **2835 with driver**.
Dimmable **No**.
Beam angle **110°**.
Working temperature **< 45°C**.

Lifetime **50.000 hrs**.
Material **Aluminium**.
Recessed **Trimless ceiling**.
Guarantee **3 years**.



IP20

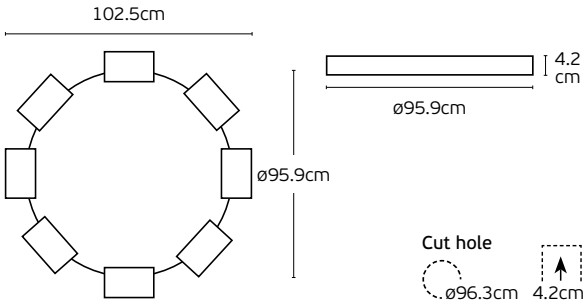

Dream



VK/04348/35-55

VK/04348/.../35-55

Code	Model	Box
64174-147721	**VK/04348/W/W/35** ○ **White.** 3000K. 2.202lm. 17W. CRI>90. **ø25cm.**	**4pcs**
64174-148721	**VK/04348/W/C/35** ○ **White.** 4000K. 2.638lm. 17W. CRI>90. **ø25cm.**	**4pcs**
64174-149721	**VK/04348/B/W/35** ● **Black.** 3000K. 2.202lm. 17W. CRI>90. **ø25cm.**	**4pcs**
64174-150721	**VK/04348/B/C/35** ● **Black.** 4000K. 2.638lm. 17W. CRI>90. **ø25cm.**	**4pcs**
64174-151721	**VK/04348/W/W/45** ○ **White.** 3000K. 3.589lm. 24W. CRI>90. **ø35cm.**	**1pc**
64174-152721	**VK/04348/W/C/45** ○ **White.** 4000K. 4.030lm. 23W. CRI>90. **ø35cm.**	**1pc**
64174-153721	**VK/04348/B/W/45** ● **Black.** 3000K. 3.589lm. 24W. CRI>90. **ø35cm.**	**1pc**
64174-154721	**VK/04348/B/C/45** ● **Black.** 4000K. 4.030lm. 23W. CRI>90. **ø35cm.**	**1pc**
64174-155721	**VK/04348/W/W/55** ○ **White.** 3000K. 4.936lm. 33W. CRI>90. **ø45cm.**	**1pc**
64174-156721	**VK/04348/W/C/55** ○ **White.** 4000K. 5.364lm. 33W. CRI>90. **ø45cm.**	**1pc**
64174-157721	**VK/04348/B/W/55** ● **Black.** 3000K. 4.936lm. 33W. CRI>90. **ø45cm.**	**1pc**
64174-158721	**VK/04348/B/C/55** ● **Black.** 4000K. 5.364lm. 33W. CRI>90. **ø45cm.**	**1pc**

Details


AC Driver **220-240V** Driver **(included)**.
Type of Led **2835 with driver**.
Rotation **20º & 350º**.
Dimmable **No.**
Beam angle **110°.**


Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium.**
Recessed Trimless adjustable ceiling.
Guarantee **3 years.**






IP20.






ø28.6cm
ø25cm
35.2cm



ø38.6cm
ø35cm
45.2cm



ø48.6cm
ø45cm
55.2cm



350º
ø28.6cm
8.8 cm
5.5cm
20º
ø25cm


350º
ø38.6cm
8.8 cm
5.5 cm
20º
ø35cm


350º
ø48.6cm
8.8 cm
5.5 cm
20º
ø45cm


Cut hole
ø30cm
8.8cm


Cut hole
ø40cm
8.8cm


Cut hole
ø50cm
8.8cm





3 Phase Track Lights

Surface



VK/19B/B




VK/19B/W



VK/19B/S

VK/19B

Code	Model	Box
71164-003111	**VK/19B/B** ● **Black.** Track line. Available 1, 2, 3 meters.	**10pcs**
71164-002111	**VK/19B/W** ○ **White.** Track line. Available 1, 2, 3 meters.	**10pcs**
71164-001111	**VK/19B/S** ● **Silver.** Track line. Available 1, 2, 3 meters.	**10pcs**




Details

3-phase track line. Material **Aluminium**.



Left

VK/32B/S/L1



VK/32B/L1

Code	Model	Box
71164-052111	**VK/32B/S/L1** ● **Silver.** Left “T” connector.	**25pcs**
71164-053111	**VK/32B/W/L1** ○ **White.** Left “T” connector.	**25pcs**
71164-054111	**VK/32B/B/L1** ● **Black.** Left “T” connector.	**25pcs**


Details

Left “T” connector to three tracks. Material **Aluminium, plastic**.



Right

VK/32B/S/R1



VK/32B/R1

Code	Model	Box
71164-019111	**VK/32B/S/R1** ● **Silver.** Right “T” connector.	**25pcs**
71164-020111	**VK/32B/W/R1** ○ **White.** Right “T” connector.	**25pcs**
71164-021111	**VK/32B/B/R1** ● **Black.** Right “T” connector.	**25pcs**


Details


Right “T” connector to three tracks. Material **Aluminium, plastic**.



Left

VK/28B/S/L





VK/28B/L

Code	Model	Box
71164-022111	**VK/28B/S/L** ● **Silver.** Left L-shape.	**25pcs**
71164-023111	**VK/28B/W/L** ○ **White.** Left L-shape.	**25pcs**
71164-024111	**VK/28B/B/L** ● **Black.** Left L-shape.	**25pcs**


Details


Left L-shape connector to connect two track sections at a 90º angle. Material **Aluminium, plastic**.



Right

VK/28B/S/R





VK/28B/R

Code	Model	Box
71164-049111	**VK/28B/S/R** ● **Silver.** Right L-shape.	**25pcs**
71164-050111	**VK/28B/W/R** ○ **White.** Right L-shape.	**25pcs**
71164-051111	**VK/28B/B/R** ● **Black.** Right L-shape.	**25pcs**


Details

Right L-shape connector to connect two track sections at a 90º angle. Material **Aluminium, plastic**.



Left

VK/24B/S/L



VK/24B/L

Code	Model	Box
71164-010111	**VK/24B/S/L** ● **Silver.** Left connector.	**50pcs**
71164-011111	**VK/24B/W/L** ○ **White.** Left connector.	**50pcs**
71164-012111	**VK/24B/B/L** ● **Black.** Left connector.	**50pcs**


Details

Left power connector to start track. Material **Aluminium, plastic**.



Right

VK/24B/S/R




VK/24B/R

Code	Model	Box
71164-046111	**VK/24B/S/R** ● **Silver.** Right connector.	**50pcs**
71164-047111	**VK/24B/W/R** ○ **White.** Right connector.	**50pcs**
71164-048111	**VK/24B/B/R** ● **Black.** Right connector.	**50pcs**

Details


Right power connector to start track. Material **Aluminium, plastic**.

Surface





VK/30B/S



VK/30B

Code	Model	Box
71164-028111	**VK/30B/S** ● **Silver.** Flexible connector.	**25pcs**
71164-029111	**VK/30B/W** ○ **White.** Flexible connector.	**25pcs**
71164-030111	**VK/30B/B** ● **Black.** Flexible connector.	**25pcs**

Details


Flexible connector to connect two track sections at any angle up to 180º.

Material **Aluminium, plastic.**





VK/25B/S



VK/25B

Code	Model	Box
71164-025111	**VK/25B/S** ● **Silver.** L-shape connector.	**25pcs**
71164-026111	**VK/25B/W** ○ **White.** L-shape connector.	**25pcs**
71164-027111	**VK/25B/B** ● **Black.** L-shape connector.	**25pcs**


Details

Adjustable L-shape connector to connect two track sections end-to-end.

Material **Aluminium, plastic.**



VK/26B/S



VK/26B

Code	Model	Box
71164-013111	**VK/26B/S** ● **Silver.** I-shape connector.	**50pcs**
71164-014111	**VK/26B/W** ○ **White.** I-shape connector.	**50pcs**
71164-015111	**VK/26B/B** ● **Black.** I-shape connector.	**50pcs**


Details

Straight I-shape connector.

Material **Aluminium, plastic.**



VK/34B/S



VK/34B

Code	Model	Box
71164-004111	**VK/34B/S** ● **Silver.** Straight interior connector.	**100pcs**
71164-005111	**VK/34B/W** ○ **White.** Straight interior connector.	**100pcs**
71164-006111	**VK/34B/B** ● **Black.** Straight interior connector.	**100pcs**


Details

Straight interior connector.

Material **Aluminium, plastic.**



VK/85/W



VK/85

Code	Model	Box
71164-045111	**VK/85/S** ● **Silver.** Pendant adaptor.	**100pcs**
71164-043111	**VK/85/W** ○ **White.** Pendant adaptor.	**100pcs**
71164-044111	**VK/85/B** ● **Black.** Pendant adaptor.	**100pcs**

Details


Pendant adaptor for connection to candelier or pendant fixture.

Material **Aluminium**.





VK/38B/S



VK/38B

Code	Model	Box
71164-031111	**VK/38B/S** ● **Silver.** Suspension clamp.	**100pcs**
71164-032111	**VK/38B/W** ○ **White.** Suspension clamp.	**100pcs**
71164-033111	**VK/38B/B** ● **Black.** Suspension clamp.	**100pcs**


Details

Suspension clamp for track connection.

Material **Aluminium**.



VK/37D



VK/37D

Code	Model	Box
71164-055111	**VK/37D** ● **Silver.** Suspension kit.	**10pcs**






Details

Suspension kit with 2m wire.

Material **Aluminium**.



VK/35B/S



VK/35B

Code	Model	Box
71164-007111	**VK/35B/S** ● **Silver.** End plug.	**200pcs**
71164-008111	**VK/35B/W** ○ **White.** End plug.	**200pcs**
71164-009111	**VK/35B/B** ● **Black. End plug.**	**200pcs**

Details


End plug connects to the track end.

Material **Aluminium, plastic**.

Surface



VK/29B/S



VK/29B

Code	Model	Box
71164-016111	**VK/29B/S** ● **Silver.** "+" connector.	**20pcs**
71164-017111	**VK/29B/W** ○ **White.** "+" connector.	**20pcs**
71164-018111	**VK/29B/B** ● **Black.** "+" connector.	**20pcs**


Details

"+" connector to connect four track sections into a cross configuration.

Material **Aluminium, plastic.**



VK/87/S



VK/87

Code	Model	Box
71164-042111	**VK/87/S** ● **Silver.** Base for track light VK/04109.	**40pcs**
71164-041111	**VK/87/W** ○ **White.** Base for track light VK/04109.	**40pcs**
71164-040111	**VK/87/B** ● **Black.** Base for track light VK/04109.	**40pcs**


Details

Base for all track lights.

Material **Plastic.**



VK/FLAPS/D90/B



VK/FLAPS

Code	Model	Box
64174-273128	**VK/FLAPS/D90/W** ○ **White.** Flaps.	**50pcs**
64174-274128	**VK/FLAPS/D90/B** ● **Black.** Flaps.	**50pcs**


Details

Flaps.

Material **Aluminium.**

Recessed





VK/19R/B

VK/19R


Code	Model	Box
71164-002126	**VK/19R/W** ○ **White.** Reccessed Track line.	**8pcs**
71164-003126	**VK/19R/B** ● **Black.** Reccessed Track line.	**8pcs**

Details

3-phase track line reccessed. Available in 1 meter, 2m, 3m.

Material **Aluminium**.





VK/24R/B

VK/24R


Code	Model	Box
71164-011126	**VK/24R/W** ○ **White.** Power connector.	**100pcs**
71164-012126	**VK/24R/B** ● **Black.** Power connector.	**100pcs**

Details

Power connector to start track.

Material **Aluminium, plastic**.





VK/25R/B

VK/25R


Code	Model	Box
71164-026126	**VK/25R/W** ○ **White.** Adjustable L-shape.	**50pcs**
71164-027126	**VK/25R/B** ● **Black.** Adjustable L-shape.	**50pcs**

Details

Adjustable L-shape connector to connect two track sections end-to-end.

Material **Aluminium, plastic**.





VK/28R/B

VK/28R

Code	Model	Box
71164-023126	**VK/28R/W** ○ **White.** L-shape connector.	**50pcs**
71164-024126	**VK/28R/B** ● **Black.** L-shape connector.	**50pcs**

Details


L-shape connector to connect two track sections at a 90º angle.

Material **Aluminium, plastic**.

Recessed



VK/29R/B



VK/29R

Code	Model	Box
71164-017126	**VK/29R/W** ○ **White.** "+" connector.	**40pcs**
71164-018126	**VK/29R/B** ● **Black.** "+" connector.	**40pcs**


Details

"+" connector to connect four track sections into a cross configuration.

Material **Aluminium, plastic.**



VK/30R/B



VK/30R

Code	Model	Box
71164-029126	**VK/30R/W** ○ **White.** Flexible connector.	**50pcs**
71164-030126	**VK/30R/B** ● **Black.** Flexible connector.	**50pcs**


Details

Flexible connector to connect two track sections at any angle up to 180º.

Material **Aluminium, plastic.**



VK/32R/B



VK/32R

Code	Model	Box
71164-020126	**VK/32R/W** ○ **White.** "T" connector.	**50pcs**
71164-021126	**VK/32R/B** ● **Black.** "T" connector.	**50pcs**


Details

"T" connector to three track sections.

Material **Aluminium, plastic.**



VK/35R/B



VK/35R

Code	Model	Box
71164-008126	**VK/35R/W** ○ **White.** End plug.	**500pcs**
71164-009126	**VK/35R/B** ● **Black.** End plug.	**500pcs**

Details

End plug connects to the track end.

Material **Aluminium, plastic.**



Surface



VK/19DA


Code	Model	Box
71164-001804	**VK/19DA/B**	**6pcs**
	● **Black RAL 9011.** Track line. Available 1, 2, 3 meters.	
71164-002804	**VK/19DA/W**	**6pcs**
	○ **White RAL 9010.** Track line. Available 1, 2, 3 meters.	
71164-003804	**VK/19DA/S**	**6pcs**
	● **Silver RAL 7040.** Track line. Available 1, 2, 3 meters.	

Details

6 wires 3 circuits Dali track line.
Material
Copper+aluminium.

VK/24DA/.../L






Code	Model	Box
71164-016804	**VK/24DA/B/L**	● Black. Live-end connector "**Left**".**120pcs**
71164-017804	**VK/24DA/W/L**	○ White. Live-end connector "**Left**".**120pcs**
71164-018804	**VK/24DA/S/L**	● Silver. Live-end connector "**Left**".**120pcs**

Material **Copper+aluminium+stainless steel**.

VK/24DA/.../R






Code	Model	Box
71164-019804	**VK/24DA/B/R**	● Black. Live-end connector "**Right**". **120pcs**
71164-020804	**VK/24DA/W/R**	○ White. Live-end connector "**Right**".**120pcs**
71164-021804	**VK/24DA/S/R**	● Silver. Live-end connector "**Right**".**120pcs**

Material **Copper+aluminium+stainless steel**.

VK/28DA/.../L






Code	Model	Box
71164-010804	**VK/28DA/B/L**	● Black. "L" connector "**Left**". **112pcs**
71164-011804	**VK/28DA/W/L**	○ White. "L" connector "**Left**". **112pcs**
71164-012804	**VK/28DA/S/L**	● Silver. "L" connector "**Left**". **112pcs**

Material **Copper+aluminium+stainless steel**.

VK/28DA/.../R






Code	Model	Box
71164-013804	**VK/28DA/B/R**	● Black. "L" connector "**Right**". **112pcs**
71164-014804	**VK/28DA/W/R**	○ White. "L" connector "**Right**". **112pcs**
71164-015804	**VK/28DA/S/R**	● Silver. "L" connector "**Right**". **112pcs**

Material **Copper+aluminium+stainless steel**.

VK/32DA/.../L






Code	Model	Box
71164-004804	**VK/32DA/B/L**	● Black. "T" connector "**Left 1**". **63pcs**
71164-005804	**VK/32DA/W/L**	○ White. "T" connector "**Left 1**". **63pcs**
71164-006804	**VK/32DA/S/L**	● Silver. "T" connector "**Left 1**". **63pcs**

Material **Copper+aluminium+stainless steel**.

VK/32DA/.../R





Code	Model	Box
71164-007804	**VK/32DA/B/R**	● Black. "T" connector "**Right 1**".**63pcs**
71164-008804	**VK/32DA/W/R**	○ White. "T" connector "**Right 1**".**63pcs**
71164-009804	**VK/32DA/S/R**	● Silver. "T" connector "**Right 1**".**63pcs**


Material **Copper+aluminium+stainless steel**.

DALI

● **Black RAL 9011**
○ **White RAL 9010**
● **Silver RAL 7040**

VK/26DA






Code	Model		Box
71164-028804	**VK/26DA/B**	● Black. Straight connector.	**140pcs**
71164-029804	**VK/26DA/W**	○ White. Straight connector.	**140pcs**
71164-030804	**VK/26DA/S**	● Silver. Straight connector.	**140pcs**

Material **Copper+aluminium+stainless steel**.

VK/34DA






Code	Model		Box
71164-034804	**VK/34DA/B**	● Black. Mini joiner.	**300pcs**
71164-035804	**VK/34DA/W**	○ White. Mini joiner.	**300pcs**
71164-036804	**VK/34DA/S**	● Silver. Mini joiner.	**300pcs**

Material **Copper+aluminium+stainless steel**.

VK/30DA






Code	Model		Box
71164-022804	**VK/30DA/B**	● Black. Flexible connector.	**98pcs**
71164-023804	**VK/30DA/W**	○ White. Flexible connector.	**98pcs**
71164-024804	**VK/30DA/S**	● Silver. Flexible connector.	**98pcs**

Material **Copper+aluminium+stainless steel**.

VK/29DA






Code	Model		Box
71164-025804	**VK/29DA/B**	● Black. "X" connector.	**56pcs**
71164-026804	**VK/29DA/W**	○ White. "X" connector.	**56pcs**
71164-027804	**VK/29DA/S**	● Silver. "X" connector.	**56pcs**

Material **Copper+aluminium+stainless steel**.

VK/25DA






Code	Model		Box
71164-031804	**VK/25DA/B**	● Black. Adjustable "L" connector.	**112pcs**
71164-032804	**VK/25DA/W**	○ White. Adjustable "L" connector.	**112pcs**
71164-033804	**VK/25DA/S**	● Silver. Adjustable "L" connector.	**112pcs**

Material **Copper+aluminium+stainless steel**.

VK/85DA






Code	Model		Box
71164-037804	**VK/85DA/B**	● Black. DALI adaptor.	**150pcs**
71164-038804	**VK/85DA/W**	○ White. DALI adaptor.	**150pcs**
71164-039804	**VK/85DA/S**	● Silver. DALI adaptor.	**150pcs**

Material **Copper+aluminium+stainless steel**.

VK/35DA






Code	Model		Box
71164-040804	**VK/35DA/B**	● Black. Cup.	**500pcs**
71164-041804	**VK/35DA/W**	○ White. Cup.	**500pcs**
71164-042804	**VK/35DA/S**	● Silver. Cup.	**500pcs**

Material **PC+stainless steel**.

VK/19DA/COV





Code	Model		Box
71164-043804	**VK/19DA/COV/B**	● Black. Cover.	**1pc**
71164-044804	**VK/19DA/COV/W**	○ White. Cover.	**1pc**
71164-045804	**VK/19DA/COV/S**	● Silver. Cover.	**1pc**

Material **PVC+ABS**. Available on 2 meters.

Edo


CRI>90 / 5 Years Guarantee



VK/04572/TR/D/B/CCT




VK/04572/TR/D/W/CCT

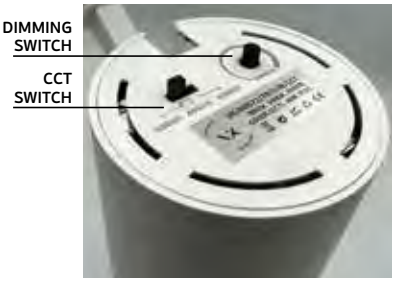

40W

VK/04572/TR

Code	Model	Box
64174-935739	VK/04572/TR/D/B/CCT ● **Black sand.** 40W. 3671lm. CRI>90	1pc
64174-934739	VK/04572/TR/D/W/CCT ○ **White sand.** 40W. 3671lm. CRI>90	1pc



Details

Material **Aluminium**
Location **Ceiling**
Color led **choice 3000K 4000K, 6000K (CCT)**
Type of LED **CCT COB**

Beam angle **38°**
Lifetime **50.000hrs**
Working temperature **< 40°C**
Dimmable **Yes**

5 years guarantee

Adjustable

IP20


dwaj z teksasu
CIMARRON

Pali



VK/04428/TR/W



VK/04428/TR/B

VK/04428/TR 36° ø10cm


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-957128	VK/04428/TR/W/36/830	○ White	3000K	12.6→42W	1.547→4.619lm	36°	CRI>80	KGP	2pcs
64174-958128	VK/04428/TR/W/36/840	○ White	4000K	12.6→42W	1.547→4.619lm	36°	CRI>80	KGP	2pcs
64174-959128	VK/04428/TR/B/36/830	● Black	3000K	12.6→42W	1.547→4.619lm	36°	CRI>80	KGP	2pcs
64174-960128	VK/04428/TR/B/36/840	● Black	4000K	12.6→42W	1.547→4.619lm	36°	CRI>80	KGP	2pcs

Details
Voltage **220-240V**. LED source **COB**. Working temperature **-20ºC→ 45ºC**. Inclination **90°.** Rotation **350°.** Lifetime **50.000hrs**. Clicks **25.000.** Material **Die-casting aluminium.** 4-wires adapter driver.

5 years guarantee

Adjustable

IP20




VK/04428/REF



Code	Model	Box
64174-961128	**VK/04428/REF/15** ● Silver. **Metal. Reflector 15°.**	**1pc**
64174-962128	**VK/04428/REF/24** ● Silver. **Metal. Reflector 24°.**	**1pc**

Details
Can be used to **VK/04428/TR**. Material **Metal.**



12.6W~42W



Multi watt

5 years guarantee

Pout	Lumen	Iout	1	2	3	4
12.6W	1547	300mA	-	-	-	-
14.7W	1760	350mA	-	-	-	ON
16.8W	2026	400mA	-	-	ON	-
18.9W	2231	450mA	-	-	ON	ON
21W	2478	500mA	-	ON	-	-
23.1W	2672	550mA	-	ON	-	ON
25.2W	2915	600mA	-	ON	ON	-
27.3W	3117	650mA	-	ON	ON	ON
29.4W	3314	700mA	ON	-	-	-
31.5W	3493	750mA	ON	-	-	ON
33.6W	3742	800mA	ON	-	ON	-
34W	3907	850mA	ON	-	ON	ON
36W	4102	900mA	ON	ON	-	-
38W	4275	950mA	ON	ON	-	ON
40W	4460	1000mA	ON	ON	ON	-
42W	4619	1050mA	ON	ON	ON	ON


Olpo



VK/04119/W 12°



VK/04119/B 24°




10W


VK/04119 12°
VK/04119 24°

Code	Model	Box
64174-244128	**VK/04119/W/W/12** ○ **White.** 3000K. 934lm. 10W. 12°. CRI>80	**24pcs**
64174-245128	**VK/04119/W/C/12** ○ **White.** 4000K. 800lm. 10W. 12°. CRI>80	**24pcs**
64174-246128	**VK/04119/B/W/12** ● **Black.** 3000K. 800lm. 10W. 12°. CRI>80	**24pcs**
64174-247128	**VK/04119/B/C/12** ● **Black.** 4000K. 800lm. 10W. 12°. CRI>80	**24pcs**
64174-248128	**VK/04119/W/W/24** ○ **White.** 3000K. 814lm. 10W. 24°. CRI>80	**24pcs**
64174-249128	**VK/04119/W/C/24** ○ **White.** 4000K. 800lm. 10W. 24°. CRI>80	**24pcs**
64174-250128	**VK/04119/B/W/24** ● **Black.** 3000K. 814lm. 10W. 24°. CRI>80	**24pcs**
64174-251128	**VK/04119/B/C/24** ● **Black.** 4000K. 776lm. 10W. 24°. CRI>80	**24pcs**


VK/04119/WW/12




VK/04119/C/12



VK/04119/WW/24



VK/04119/C/24



Details

Voltage **220-240V**.
Type of LED **COB Citizen**.
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **50.000hrs**. 3-phase adapter.
Material **Aluminium.**

5 years guarantee







IP20


Olpo



VK/04120/B 12°



VK/04120/W 24°




20W


VK/04120 12°
VK/04120 24°

Code	Model	Box
64174-252128	**VK/04120/W/W/12** ○ **White.** 3000K. 2.101lm. 20W. 12°. CRI>80	**24pcs**
64174-253128	**VK/04120/W/C/12** ○ **White.** 4000K. 1.695lm. 20W. 12°. CRI>80	**24pcs**
64174-254128	**VK/04120/B/W/12** ● **Black.** 3000K. 2.013lm. 20W. 12°. CRI>80	**24pcs**
64174-255128	**VK/04120/B/C/12** ● **Black.** 4000K. 1.695lm. 20W. 12°. CRI>80	**24pcs**
64174-256128	**VK/04120/W/W/24** ○ **White.** 3000K. 1.695lm. 20W. 24°. CRI>80	**24pcs**
64174-257128	**VK/04120/W/C/24** ○ **White.** 4000K. 2.203lm. 20W. 24°. CRI>80	**24pcs**
64174-258128	**VK/04120/B/W/24** ● **Black.** 3000K. 1.695lm. 20W. 24°. CRI>80	**24pcs**
64174-259128	**VK/04120/B/C/24** ● **Black.** 4000K. 2.058lm. 20W. 24°. CRI>80	**24pcs**


VK/04120/W/12




VK/04120/C/12



VK/04120/W/24



VK/04120/C/24



Details

Voltage **220-240V**.
Type of LED **COB Bridgelux**.
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **35.000hrs**. 3-phase adapter.
Material **Aluminium.**

5 years guarantee

Adjustable

IP20


Pera



VK/04121/B 12°



VK/04121/W 24°




30W


VK/04121 12°
VK/04121 24°

Code	Model	Box
64174-260128	**VK/04121/W/W/12** ○ **White.** 3000K. 3.012lm. 30W. 12º. CRI>80	**15pcs**
64174-261128	**VK/04121/W/C/12** ○ **White.** 4000K. 3.333lm. 30W. 12º. CRI>80	**15pcs**
64174-262128	**VK/04121/B/W/12** ● **Black.** 3000K. 3.012lm. 30W. 12º. CRI>80	**15pcs**
64174-263128	**VK/04121/B/C/12** ● **Black.** 4000K. 3.333lm. 30W. 12º. CRI>80	**15pcs**
64174-264128	**VK/04121/W/W/24** ○ **White.** 3000K. 3.328lm. 30W. 24º. CRI>80	**15pcs**
64174-265128	**VK/04121/W/C/24** ○ **White.** 4000K. 3.350lm. 30W. 24º. CRI>80	**15pcs**
64174-266128	**VK/04121/B/W/24** ● **Black.** 3000K. 2.971lm. 30W. 24º. CRI>80	**15pcs**
64174-267128	**VK/04121/B/C/24** ● **Black.** 4000K. 3.049lm. 30W. 24º. CRI>80	**15pcs**


VK/04121/W/12




VK/04121/C/12



VK/04121/W/24



VK/04121/C/24



Details

Voltage **220-240V**.
Type of LED **COB Bridgelux**.
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **35.000hrs**. 3-phase adapter.
Material **Aluminium.**

5 years guarantee







IP20


Pera




40W


VK/04228/W

VK/04228/C



VK/04228/W





VK/04228

Code	Model	Box
64174-281128	**VK/04228/W/W/36** ○ **White.** 3000K. 3.816lm. 40W. 36º. CRI>80	**24pcs**
64174-282128	**VK/04228/W/C/36** ○ **White.** 4000K. 4.422lm. 40W. 36º. CRI>80	**24pcs**
64174-283128	**VK/04228/B/W/36** ● **Black.** 3000K. 3.816lm. 40W. 36º. CRI>80	**24pcs**
64174-284128	**VK/04228/B/C/36** ● **Black.** 4000K. 4.081lm. 40W. 36º. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of LED **COB Bridgelux**.
Clicks **25.000.**
Lifetime **35.000hrs**.

Working temperature
-25ºC→ 45ºC.
3-phase adapter.
Material **Aluminium.**

5 years guarantee

Adjustable

IP20



VK/LENSE





VK/ANTIGLARE-NET



VK/LENSE
VK/ANTIGLARE-NET

Code	Model	Box
64174-268128	**VK/LENSE/12** **Clear.** Glass. 12º.	**100pcs**
64174-269128	**VK/LENSE/24** **Clear.** Glass. 24º.	**100pcs**
64174-272128	**VK/ANTIGLARE-NET** **Black.** Metal. Filter.	**1pc**

Details

VK/LENSE: Can be used to **VK/04121**. Material **Glass.**

VK/ANTIGLARE-NET: Can be used to **VK/04117**. Material **Metal.**

Pette




VK/04020/W


15W

VK/04020


Code	Model	Box
64174-199128	**VK/04020/W/W/24** ○ **White.** 3000K. 1.447lm. 15W. CRI>80	**1pc**
64174-200128	**VK/04020/W/C/24** ○ **White.** 4000K. 1.350lm. 15W. CRI>80	**1pc**
64174-201128	**VK/04020/B/W/24** ● **Black.** 3000K. 1.447lm. 15W. CRI>80	**1pc**
64174-202128	**VK/04020/B/C/24** ● **Black.** 4000K. 1.350lm. 15W. CRI>80	**1pc**
64174-203128	**VK/04020/G/W/24** ● **Grey.** 3000K. 1.200lm. 15W. CRI>80	**1pc**
64174-204128	**VK/04020/G/C/24** ● **Grey.** 4000K. 1.350lm. 15W. CRI>80	**1pc**



VK/04020/W/24



VK/04020/C/24



Details

Voltage **220-240V**.
Type of LED **COB Citizen**.
Beam angle **24º.**
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **50.000hrs**.
3-phase adapter.
Material **Aluminium.**

5 years guarantee



IP20

Pette




VK/04021/B


30W

VK/04021


Code	Model	Box
64174-205128	**VK/04021/W/W/36** ○ **White.** 3000K. 3.388lm. 30W. CRI>80	**1pc**
64174-206128	**VK/04021/W/C/36** ○ **White.** 4000K. 3.519lm. 30W. CRI>80	**1pc**
64174-207128	**VK/04021/B/W/36** ● **Black.** 3000K. 3.363lm. 30W. CRI>80	**1pc**
64174-208128	**VK/04021/B/C/36** ● **Black.** 4000K. 2.700lm. 30W. CRI>80	**1pc**
64174-209128	**VK/04021/G/W/36** ● **Grey.** 3000K. 2.400lm. 30W. CRI>80	**1pc**
64174-210128	**VK/04021/G/C/36** ● **Grey.** 4000K. 2.700lm. 30W. CRI>80	**1pc**



VK/04021/W/36



VK/04021/C/36



Details

Voltage **220-240V**.
Type of LED **COB Bridgelux**.
Beam angle **36º.**
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **50.000hrs**.
3-phase adapter.
Material **Aluminium.**

5 years guarantee



IP20

Spaa




VK/04022/B


45W

VK/04022


Code	Model	Box
64174-211128	**VK/04022/W/W/36** ○ **White.** 3000K. 3.600lm. 45W. CRI>80	**1pc**
64174-212128	**VK/04022/W/C/36** ○ **White.** 4000K. 4.470lm. 40W. CRI>80	**1pc**
64174-213128	**VK/04022/B/W/36** ● **Black.** 3000K. 3.600lm. 45W. CRI>80	**1pc**
64174-214128	**VK/04022/B/C/36** ● **Black.** 4000K. 4.546lm. 40W. CRI>80	**1pc**
64174-215128	**VK/04022/G/W/36** ● **Grey.** 3000K. 3.600lm. 45W. CRI>80	**1pc**
64174-216128	**VK/04022/G/C/36** ● **Grey.** 4000K. 4.050lm. 45W. CRI>80	**1pc**



VK/04022/W/36



VK/04022/C/36



Details

Voltage **220-240V**.
Type of LED **COB Citizen**.
Beam angle **36º.**
Clicks **25.000.**

Working temperature **-25ºC→ 45ºC**.
Lifetime **50.000hrs**. 3-phase adapter.
Material **Aluminium.**

5 years guarantee







IP20

Spaa




VK/04117/W/W/36


30W



VK/04118/W/W/36

50W







VK/04117
VK/04118

Code	Model	Box
64174-236128	**VK/04117/W/W/36** ○ **White.** 3000K. 3.067lm. 30W. 36º. CRI>80	**10pcs**
64174-237128	**VK/04117/W/C/36** ○ **White.** 4000K. 2.400lm. 30W. 36º. CRI>80	**10pcs**
64174-238128	**VK/04117/B/W/36** ● **Black.** 3000K. 2.786lm. 30W. 36º. CRI>80	**10pcs**
64174-239128	**VK/04117/B/C/36** ● **Black.** 4000K. 2.802lm. 30W. 36º. CRI>80	**10pcs**
64174-240128	**VK/04118/W/W/36** ○ **White.** 3000K. 4.000lm. 50W. 36º. CRI>80	**10pcs**
64174-241128	**VK/04118/W/C/36** ○ **White.** 4000K. 4.000lm. 50W. 36º. CRI>80	**10pcs**
64174-242128	**VK/04118/B/W/36** ● **Black.** 3000K. 4.000lm. 50W. 36º. CRI>80	**10pcs**
64174-243128	**VK/04118/B/C/36** ● **Black.** 4000K. 4.362lm. 50W. 36º. CRI>80	**10pcs**


VK/04117/W/36




VK/04117/C/36



VK/04118/W/36



VK/04118/C/36



Details

Voltage **220-240V**.
Type of LED **COB Epistar**.
Working temperature **-25ºC→ 45ºC**.

Lifetime **35.000hrs**. 3-phase adapter.
Material **Aluminium.**
Guarantee **3 years**.



IP20


Homa




VK/04116/W/W/24



VK/04122/W/W/24






15W **20W**

VK/04116
VK/04122


Code	Model	Box
64174-232128	**VK/04116/W/W/24** ○ **White.** 3000K. 1.200lm. 15W. 24º. CRI>80	**20pcs**
64174-233128	**VK/04116/W/C/24** ○ **White.** 4000K. 1.200lm. 15W. 24º. CRI>80	**20pcs**
64174-234128	**VK/04116/B/W/24** ● **Black.** 3000K. 1.543lm. 15W. 24º. CRI>80	**20pcs**
64174-235128	**VK/04116/B/C/24** ● **Black.** 4000K. 1.200lm. 15W. 24º. CRI>80	**20pcs**
64174-270128	**VK/04122/W/W/24** ○ **White.** 3000K. 1.800lm. 20W. 24º. CRI>80	**10pcs**
64174-271128	**VK/04122/W/C/24** ○ **White.** 4000K. 1.800lm. 20W. 24º. CRI>80	**10pcs**



VK/04116/W/24




VK/04116/C/24






VK/04122/W/24



VK/04122/C/24



Details

Voltage **220-240V**.
Type of LED **COB Epistar**.
Working temperature **-25ºC→ 45ºC**.

Lifetime **35.000hrs**. 3-phase adapter.
Material **Aluminium.**
Guarantee **2 years**.





IP20

Homa




VK/04107/W/W


45W



VK/04081/W/W/24

30W






VK/04107
VK/04081


Code	Model	Box
64174-285128	**VK/04107/W/W** ○ **White.** 3000K. 3.775lm. 45W. 90°. SMD2835. CRI>80	**1pc**
64174-231128	**VK/04107/W/C** ○ **White.** 4000K. 3.775lm. 45W. 90°. SMD2835. CRI>80	**1pc**
64174-286128	**VK/04107/B/W** ● **Black.** 3000K. 3.775lm. 45W. 90°. SMD2835. CRI>80	**1pc**
64174-276128	**VK/04107/B/C** ● **Black.** 4000K. 3.775lm. 45W. 90°. SMD2835. CRI>80	**1pc**
64174-220128	**VK/04081/W/W/24** ○ **White.** 3000K. 2.100lm. 30W. 24°. COB Epistar. CRI>80	**1pc**
64174-221128	**VK/04081/W/C/24** ○ **White.** 4000K. 2.100lm. 30W. 24°. COB Epistar. CRI>80	**1pc**
64174-222128	**VK/04081/B/W/24** ● **Black.** 3000K. 2.100lm. 30W. 24°. COB Epistar. CRI>80	**1pc**
64174-223128	**VK/04081/B/C/24** ● **Black.** 4000K. 2.100lm. 30W. 24°. COB Epistar. CRI>80	**1pc**



VK/04107/W




VK/04107/C






VK/04081/W



VK/04081/C



Details

Voltage **220-240V**.
Clicks **25.000.**
Working temperature **-25ºC→ 45ºC**.
Lifetime **50.000hrs / 25.000hrs**.

3-phase adapter.
Material **Aluminium.**
Guarantee **2 years (VK/04107).**
3 years (VK/04081).






IP20

Zoum



VK/04453/TR/B

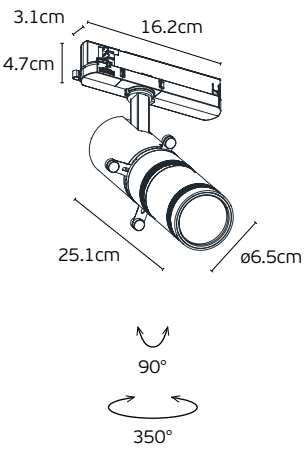



VK/04453/TR

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-132721	VK/04453/TR/B/W	● Black sand	3000K	25W	15°-1180lm / 21°-1600lm	15°-21°	CRI>90	8pcs
71164-133721	VK/04453/TR/B/C	● Black sand	4000K	25W	15°-1180lm / 21°-1600lm	15°-21°	CRI>90	8pcs

Details

Input current **700mA**. Input Voltage **DC36V**. Watt **25W**. CRI>**90**. Type of Led **COB with driver**. Zoomlight **Yes.** Driver: input AC 220-240V 50/60Hz Output **DC30-40V 700mA**. Angle **15-21°**. Angle of inclination **90°**. Rotation Angle **350°**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **< 45°C**.
Material **Aluminium**. Installation **Track**. **3 years** guarantee.


Adjustable

IP20

Zoum




VK/04082/B




VK/04082

Code	Model	Box
64174-224128	**VK/04082/B/W** ● **Black.** 2700K. 2.100lm. 30W. 15°-65°. CRI>80	**1pc**
64174-225128	**VK/04082/B/C** ● **Black.** 4000K. 2.100lm. 30W. 15°-65°. CRI>80	**1pc**

VK/04082/W



VK/04082/C



Details

Voltage **220-240V**.
Type of LED **COB Telescopic Sharp**.
Clicks **25.000.**
Working temperature **-25°C→ 45°C**.

Lifetime **25.000hrs**.
3-phase adapter.
Material **Plastic.**
Guarantee **3 years**.




IP20

Kafe



VK/04452/TR/W





VK/04452/TR

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
71164-128721	**VK/04452/TR/W/W**	○ White sand	**3000K**	**9W**	580lm	110°	**CRI>90**	**ø15cm**	**20pcs**
71164-129721	**VK/04452/TR/W/C**	○ White sand	**4000K**	**9W**	580lm	110°	**CRI>90**	**ø15cm**	**20pcs**
71164-130721	**VK/04452/TR/B/W**	● Black sand	**3000K**	**9W**	580lm	110°	**CRI>90**	**ø15cm**	**20pcs**
71164-131721	**VK/04452/TR/B/C**	● Black sand	**4000K**	**9W**	580lm	110°	**CRI>90**	**ø15cm**	**20pcs**

Details
9W: Input current **300mA**, Input Voltage **DC 30V**. Driver: Input **AC220-240V 50/60Hz, Output DC 26-40V 300mA**.
Watt **9W**. CRI>**90**. Type of Led **SMD with driver**. Angle **110º**. Angle of inclination **45°**. Rotation Angle **350°. No Dimmable** Lifetime **20.000 hrs**.
Working temperature **< 45ºC**. Material **Aluminium.** Installation **Surface-mounted spot track light. 3 years** guarantee.




IP20


Kafe



VK/04431/B, VK/04432/B



VK/04431

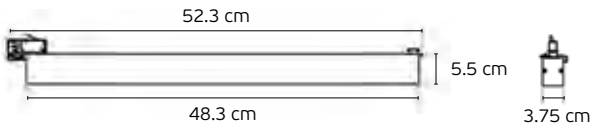

VK/04432

VK/04431, VK/04432

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
64174-890111	**VK/04431/W/W**	○ **White**	**3000K**	**23W**	**1.600lm**	**120°**	**CRI>80**	**15pcs**
64174-891111	**VK/04431/W/C**	○ **White**	**4000K**	**23W**	**1.650lm**	**120°**	**CRI>80**	**15pcs**
64174-886111	**VK/04431/B/W**	● **Black**	**3000K**	**23W**	**1.600lm**	**120°**	**CRI>80**	**15pcs**
64174-887111	**VK/04431/B/C**	● **Black**	**4000K**	**23W**	**1.650lm**	**120°**	**CRI>80**	**15pcs**
64174-892111	**VK/04432/W/W**	○ **White**	**3000K**	**35W**	**2.500lm**	**120°**	**CRI>80**	**15pcs**
64174-893111	**VK/04432/W/C**	○ **White**	**4000K**	**35W**	**2.800lm**	**120°**	**CRI>80**	**15pcs**
64174-888111	**VK/04432/B/W**	● **Black**	**3000K**	**35W**	**2.500lm**	**120°**	**CRI>80**	**15pcs**
64174-889111	**VK/04432/B/C**	● **Black**	**4000K**	**35W**	**2.800lm**	**120°**	**CRI>80**	**15pcs**

Details

Led Linear Track Light. Material **Plastic**. Voltage **230V**. Beam Angle **120°**. Lighting source **SMD2835**. Power **23W. 35W**. Hours **50.000**. CRI **Ra>80**. Clicks **15.000**. Working temperature **-20°C → 60°C**. IP Rating **IP20**. **2 years** guarantee.

IP20

Emi



VK/03303/TR/W


VK/03303/TR


Code	Model	Box
64174-972121	VK/03303/TR/W ○ **White.** GU10. Max. 12W (LED).	1pc
64174-973121	VK/03303/TR/B ● **Black.** GU10. Max. 12W (LED).	1pc

Details

Material **Pure aluminium**
Location **3 phase Track**
Included lampholder **GU10**.

Match also with lamps: GU10/50, Par16.
3 phase adapter







IP20

Masko



VK/03190TR/B

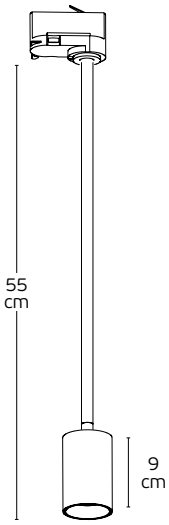

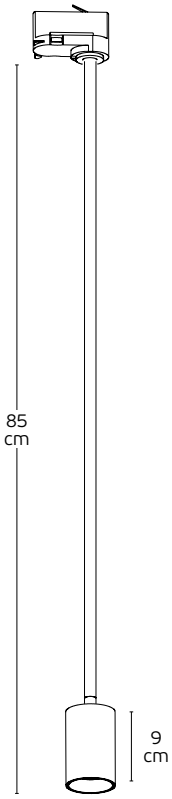

VK/03190TR

Code	Model	Box
64174-327131	**VK/03190TR/W/40** ○ **White.** GU10. Max 12W (LED). **L55cm.**	**30pcs**
64174-326131	**VK/03190TR/B/40** ● **Black.** GU10. Max 12W (LED). **L55cm.**	**30pcs**
64174-325131	**VK/03190TR/W/70** ○ **White.** GU10. Max 12W (LED). **L85cm.**	**30pcs**
64174-324131	**VK/03190TR/B/70** ● **Black.** GU10. Max 12W (LED). **L85cm.**	**30pcs**

Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16**
3 phase adapter

Adjustable

IP20

Monas




VK/04197TR/W




VK/03093TR/B

VK/04197TR/S
VK/03093TR

Code	Model	Box
64174-945128	**VK/04197TR/W/S** ○ **White.** GU10. Max. 12W (LED).	**60pcs**
64174-946128	**VK/04197TR/B/S** ● **Black.** GU10. Max. 12W (LED).	**60pcs**
64174-947128	**VK/04197TR/G/S** ● **Grey.** GU10. Max. 12W (LED).	**60pcs**
64174-009108	**VK/03093TR/W** ○ **White.** GU10. Max. 12W (LED).	**40pcs**
64174-010108	**VK/03093TR/B** ● **Black.** GU10. Max. 12W (LED).	**40pcs**





Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16**
3 phase adapter



IP20

Monas




VK/03198TR/B




VK/04196TR/W

VK/03198TR
VK/04196TR

Code	Model	Box
64174-946121	**VK/03198TR/W** ○ **White.** GU10. Max. 12W (LED).	**30pcs**
64174-947121	**VK/03198TR/B** ● **Black.** GU10. Max. 12W (LED).	**30pcs**
64174-950121	**VK/03198TR/CH-GD** ● **Champaign Gold.** GU10. Max. 12W (LED).	**30pcs**
64174-969121	**VK/03198TR/BGD** ● ● **Black Gold.** GU10. Max. 12W (LED).	**30pcs**
64174-942121	**VK/04196TR/W** ○ **White.** GU10. Max. 12W (LED).	**30pcs**
64174-943121	**VK/04196TR/B** ● **Black.** GU10. Max. 12W (LED).	**30pcs**





Details

Material **Pure aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16**
3 phase adapter



IP20

Moop




VK/04350G/TR/W




VK/04043TR/B

VK/04350G/TR
VK/04043TR

Code	Model	Box
64174-699269	**VK/04350G/TR/W** ○ **White.** GU10. Max. 12W (LED).	**1pc**
64174-700269	**VK/04350G/TR/B** ● **Black.** GU10. Max. 12W (LED).	**1pc**
64174-701269	**VK/04350G/TR/G** ● **Grey.** GU10. Max. 12W (LED).	**1pc**
64174-300269	**VK/04043TR/W** ○ **White.** GU10. Max. 12W (LED).	**1pc**
64174-298269	**VK/04043TR/B** ● **Black.** GU10. Max. 12W (LED).	**1pc**
64174-299269	**VK/04043TR/MC** ● **Brushed Chrome.** GU10. Max. 12W (LED).	**1pc**





Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16. Matses also with module OSRAM. 3 phase adapter**



IP20

Moop




VK/03094TR/BGD




VK/04197TR/W/L

VK/03094TR
VK/04197TR/L

Code	Model	Box
64174-012108	**VK/03094TR/BGD** ● **Black+Gold.** GU10. Max. 12W (LED).	**20pcs**
64174-948128	**VK/04197TR/W/L** ○ **White.** GU10. Max. 12W (LED).	**30pcs**
64174-949128	**VK/04197TR/B/L** ● **Black.** GU10. Max. 12W (LED).	**30pcs**
64174-950128	**VK/04197TR/G/L** ● **Grey.** GU10. Max. 12W (LED).	**30pcs**





Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16.**
3 phase adapter

Adjustable

IP20

Lape




VK/04052TR/2/B/S




VK/04071G/PAR16/W

VK/04052TR/2/S
VK/04071G

Code	Model	Box
64174-328269	**VK/04052TR/2/W/S** ○ **White.** GU10x2. Max 2x12W (LED).	**1pc**
64174-327269	**VK/04052TR/2/B/S** ● **Black.** GU10x2. Max 2x12W (LED).	**1pc**
64174-330269	**VK/04052TR/2/AN/S** ● **Anthracite.** GU10x2. Max 2x12W (LED).	**1pc**
64174-331269	**VK/04052TR/2/MC/S** ● **Brushed Chrome.** GU10x2. Max 2x12W (LED).	**1pc**
64174-394269	**VK/04071G/PAR16/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-386269	**VK/04071G/PAR16/B** ● **Black.** GU10. Max 12W (LED).	**1pc**





Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16.**
3 phase adapter



IP20

Lape




VK/04052TR/W/S




VK/04052TR/MC/L

VK/04052TR/S
VK/04052TR/L

Code	Model	Box
64174-323269	**VK/04052TR/W/S** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-322269	**VK/04052TR/B/S** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-324269	**VK/04052TR/G/S** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-325269	**VK/04052TR/AN/S** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
64174-326269	**VK/04052TR/MC/S** ● **Brushed Chrome.** GU10. Max 12W (LED).	**1pc**
64174-318269	**VK/04052TR/W/L** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-316269	**VK/04052TR/B/L** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-319269	**VK/04052TR/G/L** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-320269	**VK/04052TR/AN/L** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
64174-321269	**VK/04052TR/MC/L** ● **Brushed Chrome.** GU10. Max 12W (LED).	**1pc**





Details

Material **Aluminium**
Location **3 phase Track**

Lampholder **GU10-Par16.**
3 phase adapter



IP20

Alf




VK/03109TR/W




VK/03045/B

VK/03109TR
VK/03045

Code	Model	Box
64174-026108	**VK/03109TR/W** ❍ **White sanded.** GU10. Max 20W (LED).	**10pcs**
64174-027108	**VK/03109TR/B** ● **Black sanded.** GU10. Max 20W (LED).	**10pcs**
64174-382269	**VK/03045/W** ❍ **White.** GU10. Max 20W (LED).	**1pc**
64174-383269	**VK/03045/B** ● **Black.** GU10. Max 20W (LED).	**1pc**





Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/ES111, R111.

Material **Aluminium.**
3 phase adapter



IP20

Alf



VK/03025/W



VK/03183TR/W


VK/03025
VK/03183TR


Code	Model	Box
64174-217128	**VK/03025/W** ○ **White.** G53/ES111. Max 20W (LED).	**1pc**
64174-218128	**VK/03025/B** ● **Black.** G53/ES111. Max 20W (LED).	**1pc**
64174-219128	**VK/03025/G** ● **Grey.** G53/ES111. Max 20W (LED).	**1pc**
64174-944121	**VK/03183TR/W** ○ **White.** E27/Par30. Max 20W (LED).	**30pcs**
64174-945121	**VK/03183TR/B** ● **Black.** E27/Par30. Max 20W (LED).	**30pcs**

Details

VK/03025: Included lampholder **G53/ES111.**
Match also with lamps: **GU10/ES111, R111, Modules 111.**
Material **Aluminium.**
3 phase adapter

VK/03183TR: Included lampholder **E27/Par30.**
Material **Aluminium.**
3 phase adapter

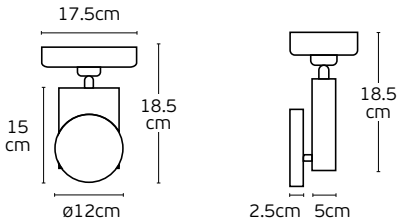





IP20

Bada




VK/04198TR/W




VK/04199TR/W

VK/04198TR
VK/04199TR

Code	Model	Box
64174-951128	**VK/04198TR/W** ○ **White.** GU10. Max 20W (LED).	**8pcs**
64174-952128	**VK/04198TR/B** ● **Black.** GU10. Max 20W (LED).	**8pcs**
64174-953128	**VK/04198TR/G** ● **Grey.** GU10. Max 20W (LED).	**8pcs**
64174-954128	**VK/04199TR/W** ○ **White**. GU10. Max 20W (LED).	**8pcs**
64174-955128	**VK/04199TR/B** ● **Black.** GU10. Max 20W (LED).	**8pcs**





Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/ES111, R111.

Material **Aluminium.**
3 phase adapter



IP20

Bada




VK/04053TR/MC/L




VK/04053TR/2/W/S

VK/04053TR/L
VK/04053TR/2/S

Code	Model	Box
64174-353269	**VK/04053TR/W/L** ○ **White.** GU10. Max 20W (LED).	**1pc**
64174-352269	**VK/04053TR/B/L** ● **Black.** GU10. Max 20W (LED).	**1pc**
64174-354269	**VK/04053TR/G/L** ● **Grey.** GU10. Max 20W (LED).	**1pc**
64174-355269	**VK/04053TR/AN/L** ● **Anthracite.** GU10. Max 20W (LED).	**1pc**
64174-356269	**VK/04053TR/MC/L** ● **Brushed Chrome.** GU10. Max 20W (LED).	**1pc**
64174-374269	**VK/04053TR/2/W/S** ○ **White.** 2xGU10. Max 2x20W (LED).	**1pc**
64174-373269	**VK/04053TR/2/B/S** ● **Black.** 2xGU10. Max 2x20W (LED).	**1pc**
64174-375269	**VK/04053TR/2/G/S** ● **Grey.** 2xGU10. Max 2x20W (LED).	**1pc**
64174-376269	**VK/04053TR/2/AN/S** ● **Anthracite.** 2xGU10. Max 2x20W (LED).	**1pc**
64174-377269	**VK/04053TR/2/MC/S** ● **Brushed Chrome.** 2xGU10. Max 2x20W (LED).	**1pc**





Details

Included lampholder **2xGU10/ES111.**
Match also with lamps: GU10/ES111, R111.

Material **Aluminium. 3 phase adapter**

Adjustable

IP20

Bem




VK/04071G/R111/B



VK/04071E/PAR30/B

VK/04071G/R111
VK/04071E/PAR30

Code	Model	Box
64174-393269	**VK/04071G/R111/W** ○ **White.** GU10. Max 20W (LED).	**1pc**
64174-385269	**VK/04071G/R111/B** ● **Black.** GU10. Max 20W (LED).	**1pc**
64174-392269	**VK/04071E/PAR30/W** ○ **White.** E27. Max 20W (LED).	**1pc**
64174-384269	**VK/04071E/PAR30/B** ● **Black.** E27. Max 20W (LED).	**1pc**



Details

Included lampholder **VK/04071G:** GU10/ES111.
Match also with lamps: R111.

VK/04071E: E27/PAR30.
Material **Aluminium. 3 phase adapter**



IP20

Bem




VK/03045/S




VK/04053TR/S

VK/03045/S
VK/04053TR/S

Code	Model	Box
64174-390269	**VK/03045/S/W** ○ **White.** GU10. Max 20W (LED).	**1pc**
64174-391269	**VK/03045/S/B** ● **Black.** GU10. Max 20W (LED).	**1pc**
64174-348269	**VK/04053TR/W/S** ○ **White.** GU10. Max 20W (LED).	**1pc**
64174-317269	**VK/04053TR/B/S** ● **Black.** GU10. Max 20W (LED).	**1pc**
64174-349269	**VK/04053TR/G/S** ● **Grey.** GU10. Max 20W (LED).	**1pc**
64174-350269	**VK/04053TR/AN/S** ● **Anthracite.** GU10. Max 20W (LED).	**1pc**
64174-351269	**VK/04053TR/MC/S** ● **Brushed Chrome.** GU10. Max 20W (LED).	**1pc**





Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/ES111, R111.

Material **Aluminium.**
3 phase adapter



IP20

Coop



VK/04477/TR/W




VK/04477/TR/B

VK/04477/TR ø4cm

Code	Model	Color	Lampholder	Box
64174-954121	**VK/04477/TR/W**	○ White	**GU10 (MR11)**	30pcs
64174-955121	**VK/04477/TR/B**	● Black	**GU10 (MR11)**	30pcs

Details

Max watt **6W**. Included lampholder **GU10 (MR11)**. Match also with lamps: **MR11, modules 35**. Inclination **90°.** Rotation **350°.**
Working temperature **-20ºC→ 45ºC**. Material **Pure aluminium.** 4-wires adapter driver.





MR11



OSRAM
MODULE 35







IP20.



Η VK Leading Light επίσης σας δίνει την δυνατότητα κατασκευής όλων των φωτιστικών της σειράς VK/04350, VK/04352 και VK/04354 και σε μέτρηση **CRI>80**, στην κλίμακα 0 έως 100, ώστε να υπάρχει μεγαλύτερη ποικιλία σε Watt και lumen.

VK Leading Light also gives you the possibility to manufacture all the lights of the VK/04350, VK/04352 and VK/04354 series in a **CRI>80** measurement, on the scale of 0 to 100, so that there is more variety in Watt and lumen.

3 phase Track Light Led







VK/04350/TR

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-542269	VK/04350/TR/W/18/927	○ White	2700K	18.5W	1.958lm	18°	CRI>90	OSRAM 500mA	6pcs
64174-543269	VK/04350/TR/W/18/930	○ White	3000K	17.1W	2.052lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-733269	VK/04350/TR/W/18/935	○ White	3500K	16.4W	2.124lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-544269	VK/04350/TR/W/18/940	○ White	4000K	16.0W	2.167lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-545269	VK/04350/TR/B/18/927	● Black	2700K	18.5W	1.958lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-499269	VK/04350/TR/B/18/930	● Black	3000K	17.1W	2.052lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-734269	VK/04350/TR/B/18/935	● Black	3500K	16.4W	2.124lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-546269	VK/04350/TR/B/18/940	● Black	4000K	16.0W	2.167lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-547269	VK/04350/TR/G/18/927	● Grey	2700K	18.5W	1.958lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-548269	VK/04350/TR/G/18/930	● Grey	3000K	17.1W	2.052lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-735269	VK/04350/TR/G/18/935	● Grey	3500K	16.4W	2.124lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-549269	VK/04350/TR/G/18/940	● Grey	4000K	16.0W	2.167lm	18º	CRI>90	OSRAM 500mA	6pcs
64174-550269	VK/04350/TR/W/24/927	○ White	2700K	18.5W	1.958lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-500269	VK/04350/TR/W/24/930	○ White	3000K	17.1W	2.052lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-736269	VK/04350/TR/W/24/935	○ White	3500K	16.4W	2.124lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-551269	VK/04350/TR/W/24/940	○ White	4000K	16.0W	2.167lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-552269	VK/04350/TR/B/24/927	● Black	2700K	18.5W	1.958lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-553269	VK/04350/TR/B/24/930	● Black	3000K	17.1W	2.052lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-737269	VK/04350/TR/B/24/935	● Black	3500K	16.4W	2.124lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-554269	VK/04350/TR/B/24/940	● Black	4000K	16.0W	2.164lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-555269	VK/04350/TR/G/24/927	● Grey	2700K	18.5W	1.958lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-556269	VK/04350/TR/G/24/930	● Grey	3000K	17.1W	2.052lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-738269	VK/04350/TR/G/24/935	● Grey	3500K	16.4W	2.124lm	24º	CRI>90	OSRAM 500mA	6pcs
64174-557269	VK/04350/TR/G/24/940	● Grey	4000K	16.0W	2.164lm	24º	CRI>90	OSRAM 500mA	6pcs


3 phase Track Light Led

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-558269	**VK/04350/TR/W/40/927**	○ White	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-559269	**VK/04350/TR/W/40/930**	○ White	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-739269	**VK/04350/TR/W/40/935**	○ White	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-561269	**VK/04350/TR/W/40/940**	○ White	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-562269	**VK/04350/TR/B/40/927**	● Black	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-563269	**VK/04350/TR/B/40/930**	● Black	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-740269	**VK/04350/TR/B/40/935**	● Black	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-564269	**VK/04350/TR/B/40/940**	● Black	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-565269	**VK/04350/TR/G/40/927**	● Grey	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-501269	**VK/04350/TR/G/40/930**	● Grey	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-741269	**VK/04350/TR/G/40/935**	● Grey	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	OSRAM 500mA	6pcs
64174-566269	**VK/04350/TR/G/40/940**	● Grey	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	OSRAM 500mA	6pcs


Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.

5 years guarantee   


IP20.

VK/04350/18


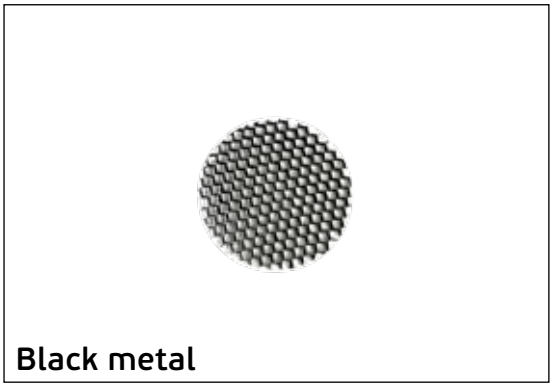
VK/04350/24


VK/04350/40


ø6cm
18° 24° 40°
Flicker free




VK/04350/HONEYCOMB



Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter.**	**1p**

Details
Can be used to **VK/04350**. Material **Metal.**



3 phase Track Light Led Dimmable







VK/04350/TR/D

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-567269	VK/04350/TR/D/W/18/927	○ White	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64174-568269	VK/04350/TR/D/W/18/930	○ White	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64174-743269	VK/04350/TR/D/W/18/935	○ White	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64174-569269	VK/04350/TR/D/W/18/940	○ White	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64174-570269	VK/04350/TR/D/B/18/927	● Black	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64174-496269	VK/04350/TR/D/B/18/930	● Black	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64174-744269	VK/04350/TR/D/B/18/935	● Black	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64174-571269	VK/04350/TR/D/B/18/940	● Black	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64174-572269	VK/04350/TR/D/G/18/927	● Grey	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64174-573269	VK/04350/TR/D/G/18/930	● Grey	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64174-745269	VK/04350/TR/D/G/18/935	● Grey	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64174-574269	VK/04350/TR/D/G/18/940	● Grey	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64174-575269	VK/04350/TR/D/W/24/927	○ White	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64174-497269	VK/04350/TR/D/W/24/930	○ White	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64174-746269	VK/04350/TR/D/W/24/935	○ White	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64174-576269	VK/04350/TR/D/W/24/940	○ White	4000K	16.0W	2.167lm	24º	CRI>90	HEP 500mA	6pcs
64174-577269	VK/04350/TR/D/B/24/927	● Black	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64174-578269	VK/04350/TR/D/B/24/930	● Black	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64174-747269	VK/04350/TR/D/B/24/935	● Black	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64174-579269	VK/04350/TR/D/B/24/940	● Black	4000K	16.0W	2.164lm	24º	CRI>90	HEP 500mA	6pcs
64174-580269	VK/04350/TR/D/G/24/927	● Grey	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64174-581269	VK/04350/TR/D/G/24/930	● Grey	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64174-748269	VK/04350/TR/D/G/24/935	● Grey	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64174-582269	VK/04350/TR/D/G/24/940	● Grey	4000K	16.0W	2.164lm	24º	CRI>90	HEP 500mA	6pcs


3 phase Track Light Led Dimmable

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-583269	**VK/04350/TR/D/W/40/927**	○ White	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-584269	**VK/04350/TR/D/W/40/930**	○ White	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-749269	**VK/04350/TR/D/W/40/935**	○ White	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-585269	**VK/04350/TR/D/W/40/940**	○ White	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-586269	**VK/04350/TR/D/B/40/927**	● Black	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-587269	**VK/04350/TR/D/B/40/930**	● Black	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-750269	**VK/04350/TR/D/B/40/935**	● Black	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-588269	**VK/04350/TR/D/B/40/940**	● Black	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-589269	**VK/04350/TR/D/G/40/927**	● Grey	**2700K**	**18.5W**	**1.958lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-498269	**VK/04350/TR/D/G/40/930**	● Grey	**3000K**	**17.1W**	**2.052lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-751269	**VK/04350/TR/D/G/40/935**	● Grey	**3500K**	**16.4W**	**2.124lm**	**40º**	CRI>90	HEP 500mA	6pcs
64174-590269	**VK/04350/TR/D/G/40/940**	● Grey	**4000K**	**16.0W**	**2.167lm**	**40º**	CRI>90	HEP 500mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.

5 years guarantee **IP20.**


VK/04350/18




VK/04350/24



VK/04350/40



ø6cm
18° 24° 40°
Flicker free

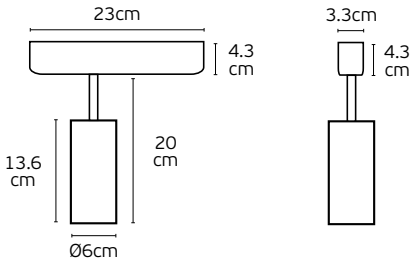


VK/04350/HONEYCOMB



Black metal

Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter**.	**1p**

Details
Can be used to **VK/04350**. Material **Metal.**



3 phase Track Light Led







VK/04352/TR

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-591269	**VK/04352/TR/W/18/927**	○ White	**2700K**	**27.0W**	**2.828lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-592269	**VK/04352/TR/W/18/930**	○ White	**3000K**	**25.5W**	**2.959lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-752269	**VK/04352/TR/W/18/935**	○ White	**3500K**	**24.3W**	**3.071lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-593269	**VK/04352/TR/W/18/940**	○ White	**4000K**	**23.7W**	**3.137lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-753269	**VK/04352/TR/W/18/865**	○ White	**6500K**	**18.7W**	**2.935lm**	**18º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-594269	**VK/04352/TR/B/18/927**	● Black	**2700K**	**27.0W**	**2.828lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-514269	**VK/04352/TR/B/18/930**	● Black	**3000K**	**25.5W**	**2.959lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-754269	**VK/04352/TR/B/18/935**	● Black	**3500K**	**24.3W**	**3.071lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-595269	**VK/04352/TR/B/18/940**	● Black	**4000K**	**23.7W**	**3.137lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-755269	**VK/04352/TR/B/18/865**	● Black	**6500K**	**18.7W**	**2.935lm**	**18º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-596269	**VK/04352/TR/G/18/927**	● Grey	**2700K**	**27.0W**	**2.828lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-597269	**VK/04352/TR/G/18/930**	● Grey	**3000K**	**25.5W**	**2.959lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-756269	**VK/04352/TR/G/18/935**	● Grey	**3500K**	**24.3W**	**3.071lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-598269	**VK/04352/TR/G/18/940**	● Grey	**4000K**	**23.7W**	**3.137lm**	**18º**	CRI>90	OSRAM 700mA	6pcs
64174-757269	**VK/04352/TR/G/18/865**	● Grey	**6500K**	**18.7W**	**2.935lm**	**18º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-599269	**VK/04352/TR/W/24/927**	○ White	**2700K**	**27.0W**	**2.828lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-515269	**VK/04352/TR/W/24/930**	○ White	**3000K**	**25.5W**	**2.959lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-758269	**VK/04352/TR/W/24/935**	○ White	**3500K**	**24.3W**	**3.071lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-600269	**VK/04352/TR/W/24/940**	○ White	**4000K**	**23.7W**	**3.137lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-759269	**VK/04352/TR/W/24/865**	○ White	**6500K**	**18.7W**	**2.935lm**	**24º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-601269	**VK/04352/TR/B/24/927**	● Black	**2700K**	**27.0W**	**2.828lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-602269	**VK/04352/TR/B/24/930**	● Black	**3000K**	**25.5W**	**2.959lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-760269	**VK/04352/TR/B/24/935**	● Black	**3500K**	**24.3W**	**3.071lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-603269	**VK/04352/TR/B/24/940**	● Black	**4000K**	**23.7W**	**3.137lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-761269	**VK/04352/TR/B/24/865**	● Black	**6500K**	**18.7W**	**2.935lm**	**24º**	**CRI>80**	**OSRAM 550mA**	6pcs

3 phase Track Light Led

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-604269	**VK/04352/TR/G/24/927**	● Grey	**2700K**	**27.0W**	**2.828lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-605269	**VK/04352/TR/G/24/930**	● Grey	**3000K**	**25.5W**	**2.959lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-762269	**VK/04352/TR/G/24/935**	● Grey	**3500K**	**24.3W**	**3.071lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-606269	**VK/04352/TR/G/24/940**	● Grey	**4000K**	**23.7W**	**3.137lm**	**24º**	CRI>90	OSRAM 700mA	6pcs
64174-763269	**VK/04352/TR/G/24/865**	● Grey	**6500K**	**18.7W**	**2.935lm**	**24º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-607269	**VK/04352/TR/W/40/927**	○ White	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-608269	**VK/04352/TR/W/40/930**	○ White	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-764269	**VK/04352/TR/W/40/935**	○ White	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-609269	**VK/04352/TR/W/40/940**	○ White	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-765269	**VK/04352/TR/W/40/865**	○ White	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-610269	**VK/04352/TR/B/40/927**	● Black	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-611269	**VK/04352/TR/B/40/930**	● Black	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-766269	**VK/04352/TR/B/40/935**	● Black	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-612269	**VK/04352/TR/B/40/940**	● Black	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-767269	**VK/04352/TR/B/40/865**	● Black	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**OSRAM 550mA**	6pcs
64174-613269	**VK/04352/TR/G/40/927**	● Grey	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-516269	**VK/04352/TR/G/40/930**	● Grey	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-768269	**VK/04352/TR/G/40/935**	● Grey	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-614269	**VK/04352/TR/G/40/940**	● Grey	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	OSRAM 700mA	6pcs
64174-769269	**VK/04352/TR/G/40/865**	● Grey	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**OSRAM 550mA**	6pcs


Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.

5 years guarantee

Adjustable

IP20.


VK/04352/18




VK/04352/24




VK/04352/40



ø8cm
18° 24° 40°
Flicker free

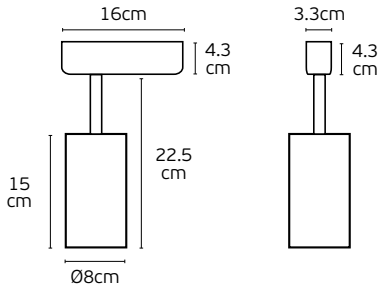


VK/04352/HONEYCOMB

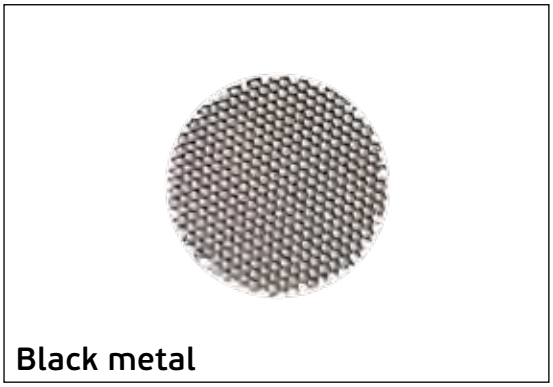

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter**.	**1p**

Details
Can be used to **VK/04352**. Material **Metal.**



3 phase Track Light Led Dimmable







VK/04352/TR/D

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-615269	VK/04352/TR/D/W/18/927	○ White	2700K	27.0W	2.828lm	18º	CRI>90	HEP 700mA	6pcs
64174-616269	VK/04352/TR/D/W/18/930	○ White	3000K	25.5W	2.959lm	18º	CRI>90	HEP 700mA	6pcs
64174-771269	VK/04352/TR/D/W/18/935	○ White	3500K	24.3W	3.071lm	18º	CRI>90	HEP 700mA	6pcs
64174-617269	VK/04352/TR/D/W/18/940	○ White	4000K	23.7W	3.137lm	18º	CRI>90	HEP 700mA	6pcs
64174-772269	VK/04352/TR/D/W/18/865	○ White	6500K	18.7W	2.935lm	18º	CRI>80	HEP 550mA	6pcs
64174-618269	VK/04352/TR/D/B/18/927	● Black	2700K	27.0W	2.828lm	18º	CRI>90	HEP 700mA	6pcs
64174-517269	VK/04352/TR/D/B/18/930	● Black	3000K	25.5W	2.959lm	18º	CRI>90	HEP 700mA	6pcs
64174-773269	VK/04352/TR/D/B/18/935	● Black	3500K	24.3W	3.071lm	18º	CRI>90	HEP 700mA	6pcs
64174-619269	VK/04352/TR/D/B/18/940	● Black	4000K	23.7W	3.137lm	18º	CRI>90	HEP 700mA	6pcs
64174-774269	VK/04352/TR/D/B/18/865	● Black	6500K	18.7W	2.935lm	18º	CRI>80	HEP 550mA	6pcs
64174-620269	VK/04352/TR/D/G/18/927	● Grey	2700K	27.0W	2.828lm	18º	CRI>90	HEP 700mA	6pcs
64174-621269	VK/04352/TR/D/G/18/930	● Grey	3000K	25.5W	2.959lm	18º	CRI>90	HEP 700mA	6pcs
64174-775269	VK/04352/TR/D/G/18/935	● Grey	3500K	24.3W	3.071lm	18º	CRI>90	HEP 700mA	6pcs
64174-622269	VK/04352/TR/D/G/18/940	● Grey	4000K	23.7W	3.137lm	18º	CRI>90	HEP 700mA	6pcs
64174-776269	VK/04352/TR/D/G/18/865	● Grey	6500K	18.7W	2.935lm	18º	CRI>80	HEP 550mA	6pcs
64174-623269	VK/04352/TR/D/W/24/927	○ White	2700K	27.0W	2.828lm	24º	CRI>90	HEP 700mA	6pcs
64174-518269	VK/04352/TR/D/W/24/930	○ White	3000K	25.5W	2.959lm	24º	CRI>90	HEP 700mA	6pcs
64174-777269	VK/04352/TR/D/W/24/935	○ White	3500K	24.3W	3.071lm	24º	CRI>90	HEP 700mA	6pcs
64174-624269	VK/04352/TR/D/W/24/940	○ White	4000K	23.7W	3.137lm	24º	CRI>90	HEP 700mA	6pcs
64174-778269	VK/04352/TR/D/W/24/865	○ White	6500K	18.7W	2.935lm	24º	CRI>80	HEP 550mA	6pcs
64174-625269	VK/04352/TR/D/B/24/927	● Black	2700K	27.0W	2.828lm	24º	CRI>90	HEP 700mA	6pcs
64174-626269	VK/04352/TR/D/B/24/930	● Black	3000K	25.5W	2.959lm	24º	CRI>90	HEP 700mA	6pcs
64174-779269	VK/04352/TR/D/B/24/935	● Black	3500K	24.3W	3.071lm	24º	CRI>90	HEP 700mA	6pcs
64174-627269	VK/04352/TR/D/B/24/940	● Black	4000K	23.7W	3.137lm	24º	CRI>90	HEP 700mA	6pcs
64174-780269	VK/04352/TR/D/B/24/865	● Black	6500K	18.7W	2.935lm	24º	CRI>80	HEP 550mA	6pcs

3 phase Track Light Led Dimmable

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-628269	**VK/04352/TR/D/G/24/927**	● Grey	**2700K**	**27.0W**	**2.828lm**	**24º**	CRI>90	HEP 700mA	6pcs
64174-629269	**VK/04352/TR/D/G/24/930**	● Grey	**3000K**	**25.5W**	**2.959lm**	**24º**	CRI>90	HEP 700mA	6pcs
64174-781269	**VK/04352/TR/D/G/24/935**	● Grey	**3500K**	**24.3W**	**3.071lm**	**24º**	CRI>90	HEP 700mA	6pcs
64174-630269	**VK/04352/TR/D/G/24/940**	● Grey	**4000K**	**23.7W**	**3.137lm**	**24º**	CRI>90	HEP 700mA	6pcs
64174-782269	**VK/04352/TR/D/G/24/865**	● Grey	**6500K**	**18.7W**	**2.935lm**	**24º**	**CRI>80**	**HEP 550mA**	6pcs
64174-631269	**VK/04352/TR/D/W/40/927**	○ White	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-632269	**VK/04352/TR/D/W/40/930**	○ White	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-783269	**VK/04352/TR/D/W/40/935**	○ White	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-633269	**VK/04352/TR/D/W/40/940**	○ White	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-784269	**VK/04352/TR/D/W/40/865**	○ White	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**HEP 550mA**	6pcs
64174-634269	**VK/04352/TR/D/B/40/927**	● Black	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-635269	**VK/04352/TR/D/B/40/930**	● Black	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-785269	**VK/04352/TR/D/B/40/935**	● Black	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-636269	**VK/04352/TR/D/B/40/940**	● Black	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-786269	**VK/04352/TR/D/B/40/865**	● Black	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**HEP 550mA**	6pcs
64174-637269	**VK/04352/TR/D/G/40/927**	● Grey	**2700K**	**27.0W**	**2.828lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-519269	**VK/04352/TR/D/G/40/930**	● Grey	**3000K**	**25.5W**	**2.959lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-787269	**VK/04352/TR/D/G/40/935**	● Grey	**3500K**	**24.3W**	**3.071lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-638269	**VK/04352/TR/D/G/40/940**	● Grey	**4000K**	**23.7W**	**3.137lm**	**40º**	CRI>90	HEP 700mA	6pcs
64174-788269	**VK/04352/TR/D/G/40/865**	● Grey	**6500K**	**18.7W**	**2.935lm**	**40º**	**CRI>80**	**HEP 550mA**	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.

5 years guarantee








IP20.


VK/04352/18




VK/04352/24



VK/04352/40



ø8cm
18° 24° 40°
Flicker free

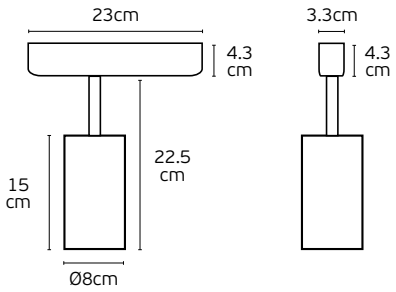


VK/04352/HONEYCOMB



Black metal

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter**.	**1p**

Details
Can be used to **VK/04352**. Material **Metal.**



3 phase Track Light Led







VK/04354/TR

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-639269	VK/04354/TR/W/18/927	○ White	2700K	39.20W	4.257lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-640269	VK/04354/TR/W/18/930	○ White	3000K	39.10W	4.295lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-789269	VK/04354/TR/W/18/935	○ White	3500K	39.00W	4.377lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-641269	VK/04354/TR/W/18/940	○ White	4000K	38.80W	4.467lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-642269	VK/04354/TR/B/18/927	● Black	2700K	39.20W	4.257lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-643269	VK/04354/TR/B/18/930	● Black	3000K	39.10W	4.295lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-790269	VK/04354/TR/B/18/935	● Black	3500K	39.00W	4.377lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-644269	VK/04354/TR/B/18/940	● Black	4000K	38.80W	4.467lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-645269	VK/04354/TR/G/18/927	● Grey	2700K	39.20W	4.257lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-646269	VK/04354/TR/G/18/930	● Grey	3000K	39.10W	4.295lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-791269	VK/04354/TR/G/18/935	● Grey	3500K	39.00W	4.377lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-647269	VK/04354/TR/G/18/940	● Grey	4000K	38.80W	4.467lm	18º	CRI>90	OSRAM 1050mA	6pcs
64174-648269	VK/04354/TR/W/24/927	○ White	2700K	39.20W	4.257lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-649269	VK/04354/TR/W/24/930	○ White	3000K	39.10W	4.295lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-792269	VK/04354/TR/W/24/935	○ White	3500K	39.00W	4.377lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-650269	VK/04354/TR/W/24/940	○ White	4000K	38.80W	4.467lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-651269	VK/04354/TR/B/24/927	● Black	2700K	39.20W	4.257lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-652269	VK/04354/TR/B/24/930	● Black	3000K	39.10W	4.295lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-793269	VK/04354/TR/B/24/935	● Black	3500K	39.00W	4.377lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-653269	VK/04354/TR/B/24/940	● Black	4000K	38.80W	4.467lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-654269	VK/04354/TR/G/24/927	● Grey	2700K	39.20W	4.257lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-655269	VK/04354/TR/G/24/930	● Grey	3000K	39.10W	4.295lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-794269	VK/04354/TR/G/24/935	● Grey	3500K	39.00W	4.377lm	24º	CRI>90	OSRAM 1050mA	6pcs
64174-656269	VK/04354/TR/G/24/940	● Grey	4000K	38.80W	4.467lm	24º	CRI>90	OSRAM 1050mA	6pcs

3 phase Track Light Led


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-657269	**VK/04354/TR/W/40/927**	○ White	**2700K**	**39.20W**	**4.257lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-658269	**VK/04354/TR/W/40/930**	○ White	**3000K**	**39.10W**	**4.295lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-795269	**VK/04354/TR/W/40/935**	○ White	**3500K**	**39.00W**	**4.377lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-659269	**VK/04354/TR/W/40/940**	○ White	**4000K**	**38.80W**	**4.467lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-661269	**VK/04354/TR/B/40/927**	● Black	**2700K**	**39.20W**	**4.257lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-662269	**VK/04354/TR/B/40/930**	● Black	**3000K**	**39.10W**	**4.295lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-796269	**VK/04354/TR/B/40/935**	● Black	**3500K**	**39.00W**	**4.377lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-663269	**VK/04354/TR/B/40/940**	● Black	**4000K**	**38.80W**	**4.467lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-665269	**VK/04354/TR/G/40/927**	● Grey	**2700K**	**39.20W**	**4.257lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-666269	**VK/04354/TR/G/40/930**	● Grey	**3000K**	**39.10W**	**4.295lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-797269	**VK/04354/TR/G/40/935**	● Grey	**3500K**	**39.00W**	**4.377lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs
64174-667269	**VK/04354/TR/G/40/940**	● Grey	**4000K**	**38.80W**	**4.467lm**	**40º**	CRI>90	OSRAM 1050mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.

5 years guarantee   


IP20.

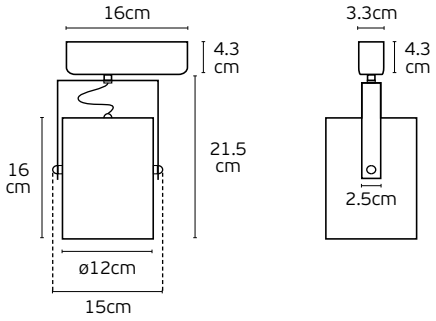


VK/04354/18




VK/04354/24




VK/04354/40



ø12cm
18° 24° 40°
Flicker free

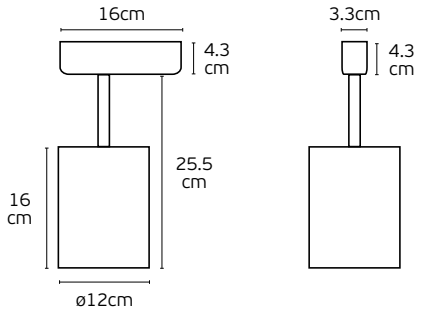


VK/04354/HONEYCOMB

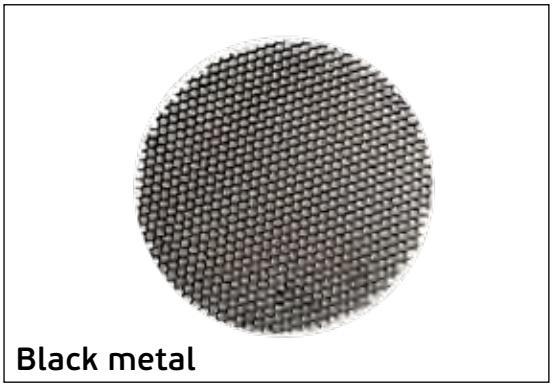

Code	Model	Box
64174-798269	**VK/04354/HONEYCOMB** ● Black. **Metal. Filter**.	**1p**

Details

Can be used to **VK/04354**. Material **Metal.**



3 phase Track Light Led Dimmable







VK/04354/TR/D

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-669269	VK/04354/TR/D/W/18/927	○ White	2700K	29.80W	3.163lm	18º	CRI>90	HEP 800mA	6pcs
64174-670269	VK/04354/TR/D/W/18/930	○ White	3000K	29.70W	3.512lm	18º	CRI>90	HEP 800mA	6pcs
64175-425269	VK/04354/TR/D/W/18/935	○ White	3500K	29.70W	3.265lm	18º	CRI>90	HEP 800mA	6pcs
64174-671269	VK/04354/TR/D/W/18/940	○ White	4000K	29.60W	3.344lm	18º	CRI>90	HEP 800mA	6pcs
64174-672269	VK/04354/TR/D/B/18/927	● Black	2700K	29.80W	3.163lm	18º	CRI>90	HEP 800mA	6pcs
64174-673269	VK/04354/TR/D/B/18/930	● Black	3000K	29.70W	3.512lm	18º	CRI>90	HEP 800mA	6pcs
64174-800269	VK/04354/TR/D/B/18/935	● Black	3500K	29.70W	3.265lm	18º	CRI>90	HEP 800mA	6pcs
64174-674269	VK/04354/TR/D/B/18/940	● Black	4000K	29.60W	3.344lm	18º	CRI>90	HEP 800mA	6pcs
64174-675269	VK/04354/TR/D/G/18/927	● Grey	2700K	29.80W	3.163lm	18º	CRI>90	HEP 800mA	6pcs
64174-676269	VK/04354/TR/D/G/18/930	● Grey	3000K	29.70W	3.512lm	18º	CRI>90	HEP 800mA	6pcs
64174-801269	VK/04354/TR/D/G/18/935	● Grey	3500K	29.70W	3.265lm	18º	CRI>90	HEP 800mA	6pcs
64174-677269	VK/04354/TR/D/G/18/940	● Grey	4000K	29.60W	3.344lm	18º	CRI>90	HEP 800mA	6pcs
64174-678269	VK/04354/TR/D/W/24/927	○ White	2700K	29.80W	3.163lm	24º	CRI>90	HEP 800mA	6pcs
64174-679269	VK/04354/TR/D/W/24/930	○ White	3000K	29.70W	3.512lm	24º	CRI>90	HEP 800mA	6pcs
64174-802269	VK/04354/TR/D/W/24/935	○ White	3500K	29.70W	3.265lm	24º	CRI>90	HEP 800mA	6pcs
64174-680269	VK/04354/TR/D/W/24/940	○ White	4000K	29.60W	3.344lm	24º	CRI>90	HEP 800mA	6pcs
64174-681269	VK/04354/TR/D/B/24/927	● Black	2700K	29.80W	3.163lm	24º	CRI>90	HEP 800mA	6pcs
64174-682269	VK/04354/TR/D/B/24/930	● Black	3000K	29.70W	3.512lm	24º	CRI>90	HEP 800mA	6pcs
64174-803269	VK/04354/TR/D/B/24/935	● Black	3500K	29.70W	3.265lm	24º	CRI>90	HEP 800mA	6pcs
64174-683269	VK/04354/TR/D/B/24/940	● Black	4000K	29.60W	3.344lm	24º	CRI>90	HEP 800mA	6pcs
64174-684269	VK/04354/TR/D/G/24/927	● Grey	2700K	29.80W	3.163lm	24º	CRI>90	HEP 800mA	6pcs
64174-685269	VK/04354/TR/D/G/24/930	● Grey	3000K	29.70W	3.512lm	24º	CRI>90	HEP 800mA	6pcs
64174-804269	VK/04354/TR/D/G/24/935	● Grey	3500K	29.70W	3.265lm	24º	CRI>90	HEP 800mA	6pcs
64174-686269	VK/04354/TR/D/G/24/940	● Grey	4000K	29.60W	3.344lm	24º	CRI>90	HEP 800mA	6pcs

3 phase Track Light Led Dimmable


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64174-687269	VK/04354/TR/D/W/40/927	○ White	2700K	29.80W	3.163lm	40º	CRI>90	HEP 800mA	6pcs
64174-688269	VK/04354/TR/D/W/40/930	○ White	3000K	29.70W	3.512lm	40º	CRI>90	HEP 800mA	6pcs
64174-805269	VK/04354/TR/D/W/40/935	○ White	3500K	29.70W	3.265lm	40º	CRI>90	HEP 800mA	6pcs
64174-689269	VK/04354/TR/D/W/40/940	○ White	4000K	29.60W	3.344lm	40º	CRI>90	HEP 800mA	6pcs
64174-691269	VK/04354/TR/D/B/40/927	● Black	2700K	29.80W	3.163lm	40º	CRI>90	HEP 800mA	6pcs
64174-692269	VK/04354/TR/D/B/40/930	● Black	3000K	29.70W	3.512lm	40º	CRI>90	HEP 800mA	6pcs
64175-426269	VK/04354/TR/D/B/40/935	● Black	3500K	29.70W	3.265lm	40º	CRI>90	HEP 800mA	6pcs
64174-693269	VK/04354/TR/D/B/40/940	● Black	4000K	29.60W	3.344lm	40º	CRI>90	HEP 800mA	6pcs
64174-695269	VK/04354/TR/D/G/40/927	● Grey	2700K	29.80W	3.163lm	40º	CRI>90	HEP 800mA	6pcs
64174-696269	VK/04354/TR/D/G/40/930	● Grey	3000K	29.70W	3.512lm	40º	CRI>90	HEP 800mA	6pcs
64174-806269	VK/04354/TR/D/G/40/935	● Grey	3500K	29.70W	3.265lm	40º	CRI>90	HEP 800mA	6pcs
64174-697269	VK/04354/TR/D/G/40/940	● Grey	4000K	29.60W	3.344lm	40º	CRI>90	HEP 800mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Inclination **90°.** Rotation **350°.**
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.** 3-phase adapter.


5 years guarantee

Adjustable


IP20.

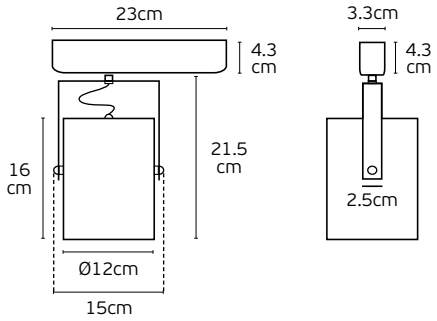


VK/04354/18




VK/04354/24




VK/04354/40



ø12cm
18° 24° 40°
Flicker free

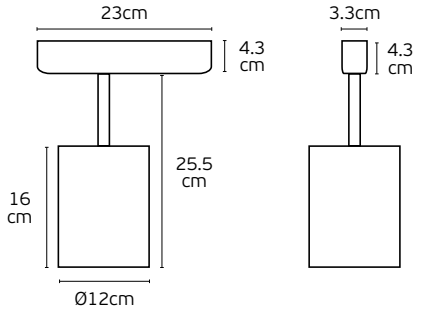


VK/04354/HONEYCOMB

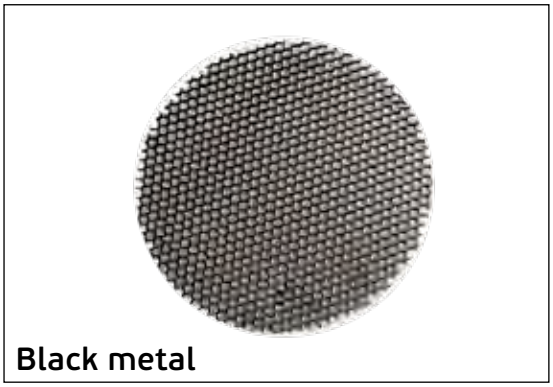

Code	Model	Box
64174-798269	**VK/04354/HONEYCOMB** ● Black. **Metal. Filter**.	**1p**

Details
Can be used to **VK/04354**. Material **Metal.**







Ento

Led Round Magnetic Track 48V Dali

Ento



VK/04623/TR/R/-/B



VK/04623/TR/R/-/W

Recessed Trimless

VK/04623/TR/R/1

Code	Model	Box
71165-001777	**VK/04623/TR/R/1/W** ○ **White.** Recessed. **ø101.8cm**	**1pc**
71165-004777	**VK/04623/TR/R/1/B** ● **Black.** Recessed. **ø101.8cm**	**1pc**

VK/04623/TR/R/2

Code	Model	Box
71165-002777	**VK/04623/TR/R/2/W** ○ **White.** Recessed. **ø201.8cm**	**1pc**
71165-005777	**VK/04623/TR/R/2/B** ● **Black.** Recessed. **ø201.8cm**	**1pc**

VK/04623/TR/R/3


Code	Model	Box
71165-003777	**VK/04623/TR/R/3/W** ○ **White.** Recessed. **ø300cm**	**1pc**
71165-006777	**VK/04623/TR/R/3/B** ● **Black.** Recessed. **ø300cm**	**1pc**

Details


Material **Aluminium**


Location **Ceiling**


5 years guarantee

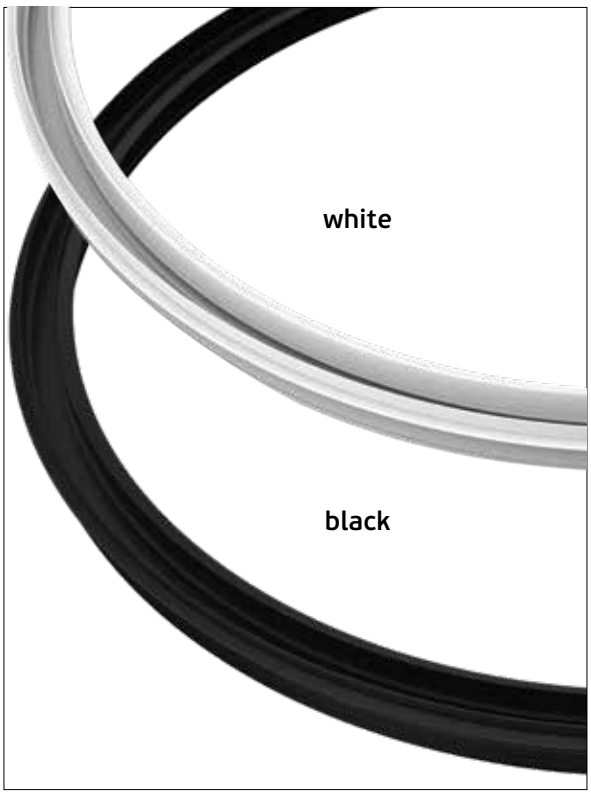







2.76cm
5.13 cm
ø101.8cm
4.86cm


2.76cm
5.13 cm
ø201.8cm
4.86cm



2.76cm
5.13 cm
ø300cm
4.86cm

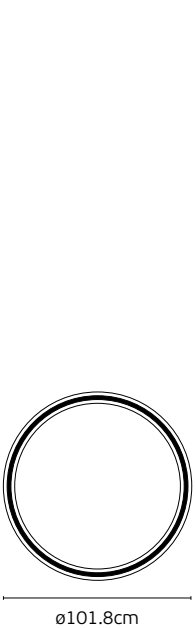
ø101.8cm

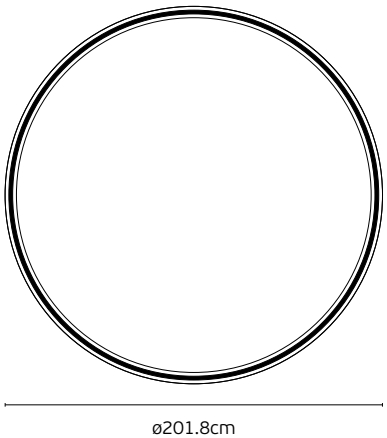
ø201.8cm

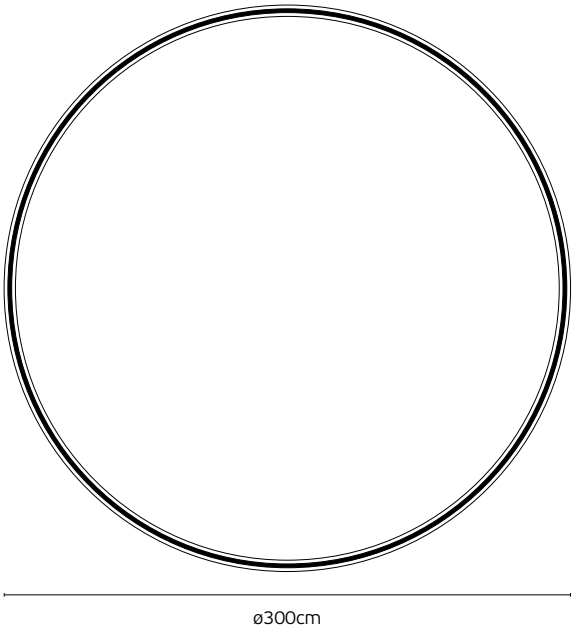
ø300cm

Ento

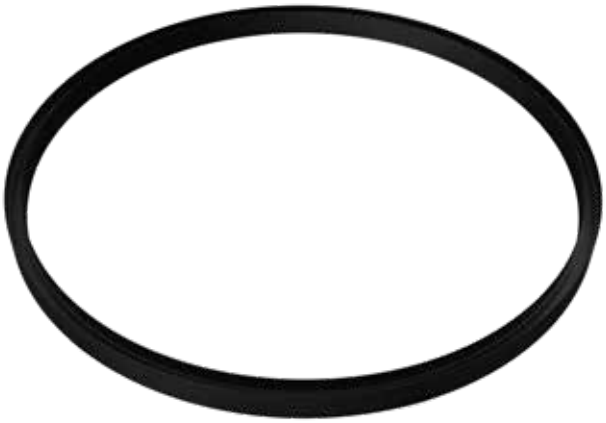

VK/04623/TR/S/-/B



VK/04623/TR/S/-/W

Surface

VK/04623/TR/S/1

Code	Model	Box
71165-007777	**VK/04623/TR/S/1/W** ○ **White.** Surface. **ø100cm**	**1pc**
71165-010777	**VK/04623/TR/S/1/B** ● **Black.** Surface. **ø100cm**	**1pc**

VK/04623/TR/S/2

Code	Model	Box
71165-008777	**VK/04623/TR/S/2/W** ○ **White.** Surface. **ø200cm**	**1pc**
71165-011777	**VK/04623/TR/S/2/B** ● **Black.** Surface. **ø200cm**	**1pc**

VK/04623/TR/S/3


Code	Model	Box
71165-009777	**VK/04623/TR/S/3/W** ○ **White.** Surface. **ø300cm**	**1pc**
71165-012777	**VK/04623/TR/S/3/B** ● **Black.** Surface. **ø300cm**	**1pc**

Details


Material **Aluminium**


Location **Ceiling**

5 years guarantee

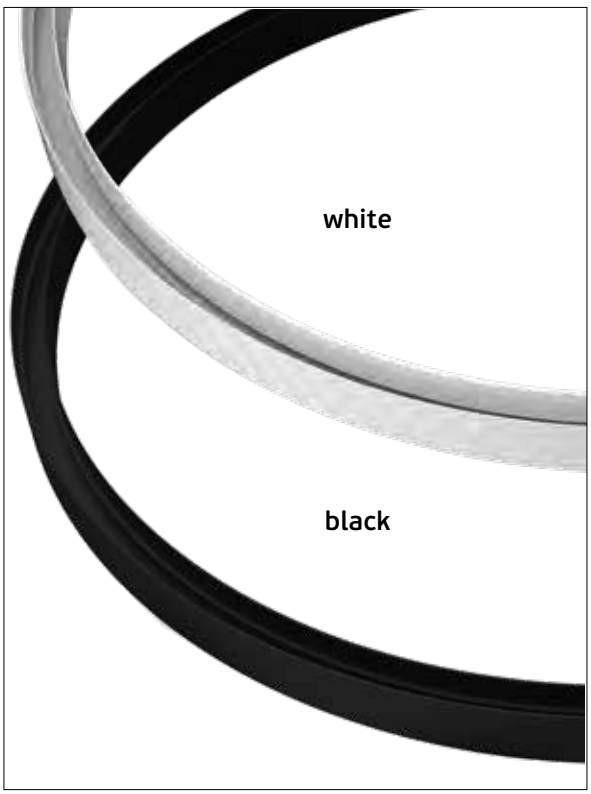




2.72cm
5.13 cm
ø100cm
2.72cm
5.13 cm
ø200cm
2.72cm
5.13 cm
ø300cm

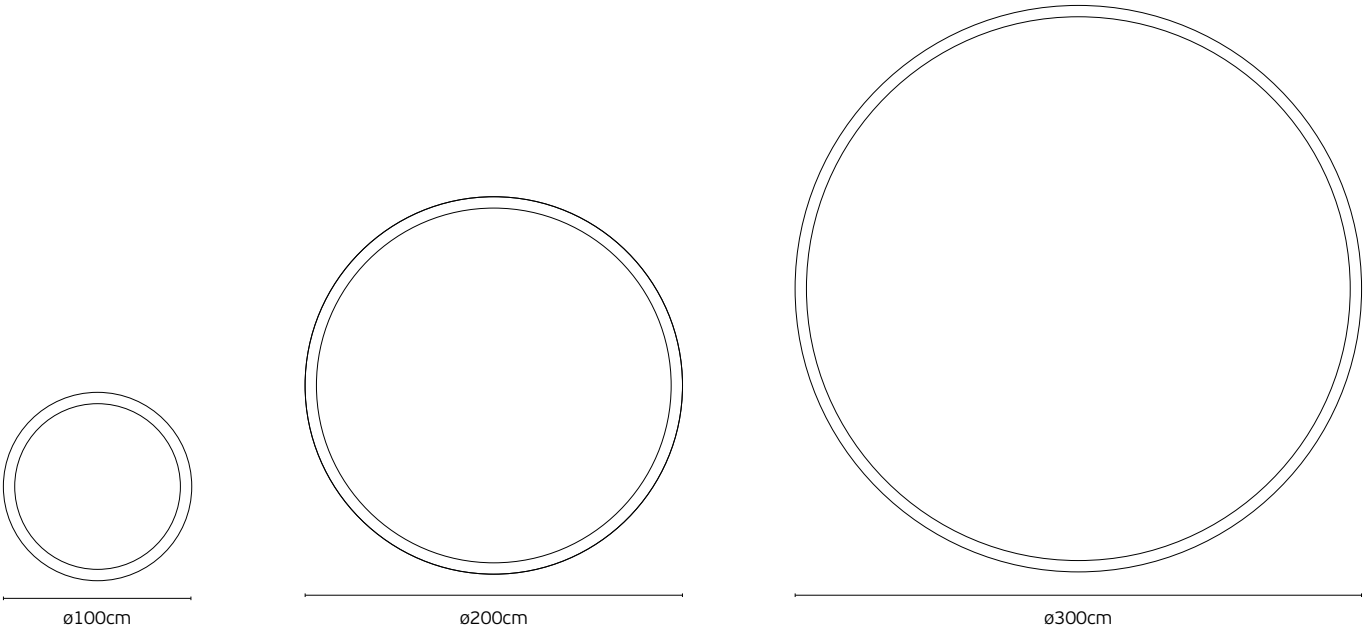
ø100cm
ø200cm
ø300cm

Ento



VK/04623/TR/PC/B



VK/04623/TR/PC/W

VK/04623/TR/PC

Code	Model	Box	
71165-067777	**VK/04623/TR/PC/1/W** ○ **White.** 100W	**20pcs**	**for 1 meter diameter**
71165-070777	**VK/04623/TR/PC/1/B** ● **Black.** 100W	**20pcs**	2.5 cm, 27.5cm; 2.22 cm, 27.5cm
71165-068777	**VK/04623/TR/PC/2/W** ○ **White.** 150W	**20pcs**	**for 2 meters diameter**
71165-071777	**VK/04623/TR/PC/2/B** ● **Black.** 150W	**20pcs**	2.5 cm, 35cm; 2.22 cm, 35cm
71165-069777	**VK/04623/TR/PC/3/W** ○ **White.** 200W	**20pcs**	**for 3 meters diameter**
71165-072777	**VK/04623/TR/PC/3/B** ● **Black.** 200W	**20pcs**	2.5 cm, 35cm; 2.22 cm, 35cm

Details

Material Aluminium+Plastic
Lifetime **30.000hrs**
Input 220-240V

Output 48V
Working temperature -20°C → 40°C

5 years guarantee


IP20

Note




VK/DALI/PCU/TW

Control unit for push-button use for DALI magnetic lights.

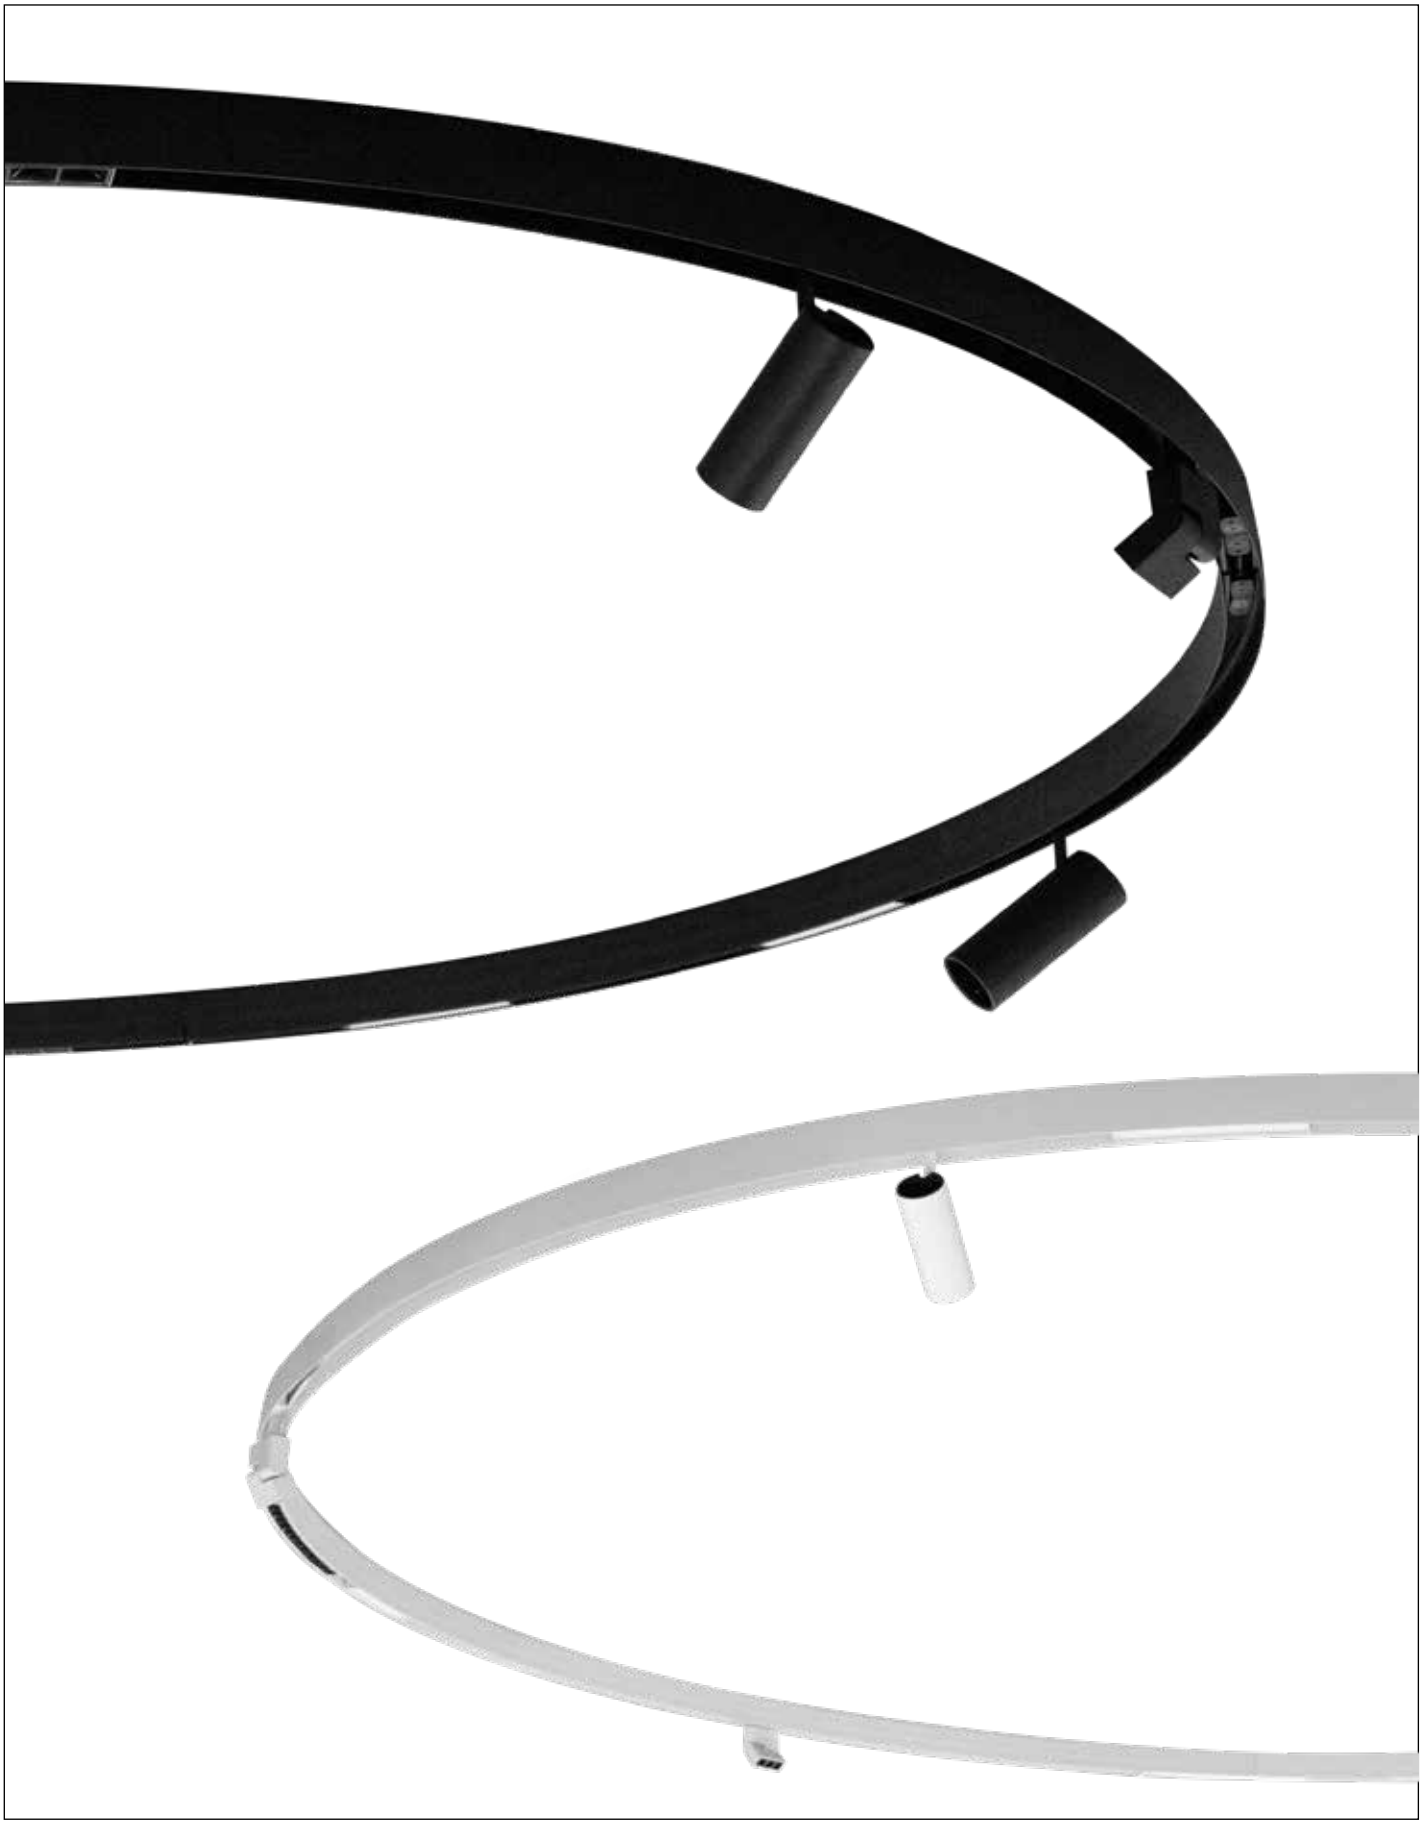

Ento

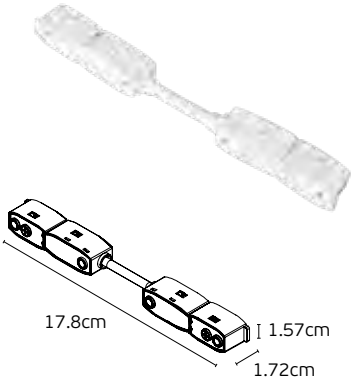


VK/04623/TR/ICON

Code	Model	Box
71165-013777	**VK/04623/TR/ICON/W** ○ **White.** Power Connector for Led Magnetic Track	**100pcs**
71165-014777	**VK/04623/TR/ICON/B** ● **Black.** Power Connector for Led Magnetic Track	**100pcs**

Details

Material **Plastic+Iron**
4 Cables
Location **Track**

5 years guarantee

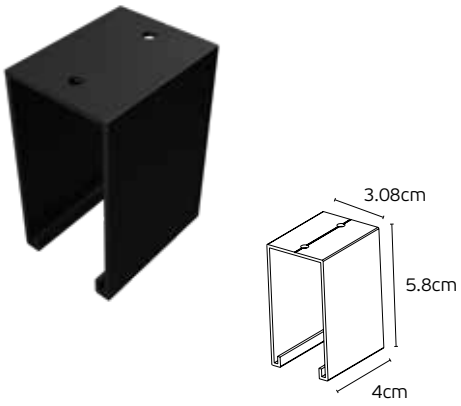

VK/04623/TR/S/CON

Code	Model	Box
71165-017777	**VK/04623/TR/S/CON/W** ○ **White.** Surface Connector	**100pcs**
71165-018777	**VK/04623/TR/S/CON/B** ● **Black.** Surface Connector	**100pcs**

Details

Material **Aluminum**
Location **Track**

5 years guarantee



VK/04623/TR/SRK/S

Code	Model	Box
71165-015777	**VK/04623/TR/SRK/S** ● **Silver.** Track hanging accessories	**1set**

Details

Material **Iron**
Location **Track**

5 years guarantee


14
17777 • 00

Ento






VK/04624/TR/DA/W



VK/04624/TR/DA/B

VK/04624/TR/DA

Code	Model	Box	
71165-019777	**VK/04624/TR/DA/1/W/W** ○ **White.** 3000K. 8W. 380lm. CRI>90	**50pcs**	**(for 1 meter diameter)**
71165-022777	**VK/04624/TR/DA/1/B/W** ● **Black.** 3000K. 8W. 250lm. CRI>90	**50pcs**	
71165-020777	**VK/04624/TR/DA/2/W/W** ○ **White.** 3000K. 8W. 380lm. CRI>90	**50pcs**	**(for 2 meters diameter)**
71165-023777	**VK/04624/TR/DA/2/B/W** ● **Black.** 3000K. 8W. 250lm. CRI>90	**50pcs**	
71165-021777	**VK/04624/TR/DA/3/W/W** ○ **White.** 3000K. 8W. 380lm. CRI>90	**50pcs**	**(for 3 meters diameter)**
71165-024777	**VK/04624/TR/DA/3/B/W** ● **Black.** 3000K. 8W. 250lm. CRI>90	**50pcs**	

Details

Material **Aluminium+PC**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **110°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

IP20



Ento






VK/04625/TR/DA/W



VK/04625/TR/DA/B

VK/04625/TR/DA

Code	Model	Box	
71165-025777	**VK/04625/TR/DA/1/W/W** ○ **White.** 3000K. 15W. 710lm. CRI>90	**20pcs**	**(for 1 meter diameter)**
71165-028777	**VK/04625/TR/DA/1/B/W** ● **Black.** 3000K. 15W. 470lm. CRI>90	**20pcs**	
71165-026777	**VK/04625/TR/DA/2/W/W** ○ **White.** 3000K. 15W. 710lm. CRI>90	**20pcs**	**(for 2 meters diameter)**
71165-029777	**VK/04625/TR/DA/2/B/W** ● **Black.** 3000K. 15W. 470lm. CRI>90	**20pcs**	
71165-027777	**VK/04625/TR/DA/3/W/W** ○ **White.** 3000K. 15W. 710lm. CRI>90	**20pcs**	**(for 3 meters diameter)**
71165-030777	**VK/04625/TR/DA/3/B/W** ● **Black.** 3000K. 15W. 470lm. CRI>90	**20pcs**	

Details

Material **Aluminium+PC**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **110°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

IP20



Ento



VK/04626/TR/DA/W




VK/04626/TR/DA/B


VK/04626/TR/DA

Code	Model	Box
71165-031777	**VK/04626/TR/DA/1/W/W** ○ **White.** 3000K. 6W. 500lm. CRI>90	**50pcs**
71165-034777	**VK/04626/TR/DA/1/B/W** ● **Black.** 3000K. 6W. 490lm. CRI>90	**50pcs**
71165-032777	**VK/04626/TR/DA/2/W/W** ○ **White.** 3000K. 6W. 500lm. CRI>90	**50pcs**
71165-035777	**VK/04626/TR/DA/2/B/W** ● **Black.** 3000K. 6W. 490lm. CRI>90	**50pcs**
71165-033777	**VK/04626/TR/DA/3/W/W** ○ **White.** 3000K. 6W. 500lm. CRI>90	**50pcs**
71165-036777	**VK/04626/TR/DA/3/B/W** ● **Black.** 3000K. 6W. 490lm. CRI>90	**50pcs**

(for 1 meter diameter)



(for 2 meters diameter)



(for 3 meters diameter)



Details

Material **Aluminium+PC**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **24°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

IP20



Ento



VK/04627/TR/DA/W



VK/04627/TR/DA/B

VK/04627/TR/DA

Code	Model	Box	
71165-037777	**VK/04627/TR/DA/1/W/W** ○ **White.** 3000K. 12W. 990lm. CRI>90	**20pcs**	**(for 1 meter diameter)**
71165-040777	**VK/04627/TR/DA/1/B/W** ● **Black.** 3000K. 12W. 1010lm. CRI>90	**20pcs**	2.55 cm, 34.3cm; 2.22 cm, 32.8cm
71165-038777	**VK/04627/TR/DA/2/W/W** ○ **White.** 3000K. 12W. 990lm. CRI>90	**20pcs**	**(for 2 meters diameter)**
71165-041777	**VK/04627/TR/DA/2/B/W** ● **Black.** 3000K. 12W. 1010lm. CRI>90	**20pcs**	2.55 cm, 34.9cm; 2.22 cm, 34.1cm
71165-039777	**VK/04627/TR/DA/3/W/W** ○ **White.** 3000K. 12W. 990lm. CRI>90	**20pcs**	**(for 3 meters diameter)**
71165-042777	**VK/04627/TR/DA/3/B/W** ● **Black.** 3000K. 12W. 1010lm. CRI>90	**20pcs**	2.55 cm, 36.3cm; 2.22 cm, 35.8cm

Details

Material **Aluminium+PC**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **24°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

IP20



Ento






VK/04628/TR/DA/W



VK/04628/TR/DA/B

VK/04628/TR/DA

Code	Model	Box		
71165-043777	**VK/04628/TR/DA/1/W/W** ○ **White.** 3000K. 10W. 670lm. CRI>90	**20pcs**	**(for 1 meter diameter)**	
71165-046777	**VK/04628/TR/DA/1/B/W** ● **Black.** 3000K. 10W. 640lm. CRI>90	**20pcs**		
71165-044777	**VK/04628/TR/DA/2/W/W** ○ **White.** 3000K. 10W. 670lm. CRI>90	**20pcs**	**(for 2 meters diameter)**	
71165-047777	**VK/04628/TR/DA/2/B/W** ● **Black.** 3000K. 10W. 640lm. CRI>90	**20pcs**		
71165-045777	**VK/04628/TR/DA/3/W/W** ○ **White.** 3000K. 10W. 670lm. CRI>90	**20pcs**	**(for 3 meters diameter)**	
71165-048777	**VK/04628/TR/DA/3/B/W** ● **Black.** 3000K. 10W. 640lm. CRI>90	**20pcs**		

Details

Material **Aluminium+Plastic**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **24°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee







IP20



Ento






VK/04629/TR/DA/W



VK/04629/TR/DA/B

VK/04629/TR/DA

Code	Model	Box		
71165-049777	**VK/04629/TR/DA/1/W/W** ○ **White.** 3000K. 18W. 1330lm. CRI>90	**20pcs**	**(for 1 meter diameter)**	
71165-052777	**VK/04629/TR/DA/1/B/W** ● **Black.** 3000K. 18W. 1300lm. CRI>90	**20pcs**		
71165-050777	**VK/04629/TR/DA/2/W/W** ○ **White.** 3000K. 18W. 1330lm. CRI>90	**20pcs**	**(for 2 meters diameter)**	
71165-053777	**VK/04629/TR/DA/2/B/W** ● **Black.** 3000K. 18W. 1300lm. CRI>90	**20pcs**		
71165-051777	**VK/04629/TR/DA/3/W/W** ○ **White.** 3000K. 18W. 1330lm. CRI>90	**20pcs**	**(for 3 meters diameter)**	
71165-054777	**VK/04629/TR/DA/3/B/W** ● **Black.** 3000K. 18W. 1300lm. CRI>90	**20pcs**		

Details

Material **Aluminium+Plastic**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **24°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

DALI · Dim DALI · Adjustable · IP20



Ento






VK/04630/TR/DA/W



VK/04630/TR/DA/B

VK/04630/TR/DA

Code	Model	Box		
71165-055777	**VK/04630/TR/DA/1/W/W** ○ **White.** 3000K. 6W. 460lm. CRI>90	**60pcs**	**(for 1 meter diameter)**	
71165-058777	**VK/04630/TR/DA/1/B/W** ● **Black.** 3000K. 6W. 430lm. CRI>90	**60pcs**		
71165-056777	**VK/04630/TR/DA/2/W/W** ○ **White.** 3000K. 6W. 460lm. CRI>90	**60pcs**	**(for 2 meters diameter)**	
71165-059777	**VK/04630/TR/DA/2/B/W** ● **Black.** 3000K. 6W. 430lm. CRI>90	**60pcs**		
71165-057777	**VK/04630/TR/DA/3/W/W** ○ **White.** 3000K. 6W. 460lm. CRI>90	**60pcs**	**(for 3 meters diameter)**	
71165-060777	**VK/04630/TR/DA/3/B/W** ● **Black.** 3000K. 6W. 430lm. CRI>90	**60pcs**		

Details

Material **Aluminium+Plastic**
Type of Led **Sanan**
Voltage **48V**
Location **Track**


Beam angle **24°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

DALI · Dim DALI · Adjustable · IP20



Ento

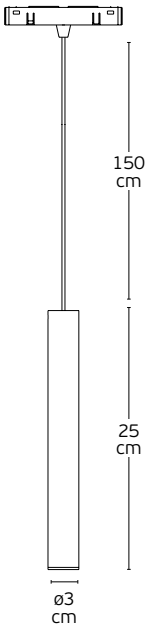

VK/04631/TR/PE/DA

Code	Model	Box	
71165-061777	**VK/04631/TR/PE/DA/1/W/W** ○ **White.** 3000K. 6W. 560lm. CRI>90	**20pcs**	
71165-064777	**VK/04631/TR/PE/DA/1/B/W** ● **Black.** 3000K. 6W. 520lm. CRI>90	**20pcs**	**(for 1 meter diameter)**
71165-062777	**VK/04631/TR/PE/DA/2/W/W** ○ **White.** 3000K. 6W. 560lm. CRI>90	**20pcs**	
71165-065777	**VK/04631/TR/PE/DA/2/B/W** ● **Black.** 3000K. 6W. 520lm. CRI>90	**20pcs**	**(for 2 meters diameter)**
71165-063777	**VK/04631/TR/PE/DA/3/W/W** ○ **White.** 3000K. 6W. 560lm. CRI>90	**20pcs**	
71165-066777	**VK/04631/TR/PE/DA/3/B/W** ● **Black.** 3000K. 6W. 520lm. CRI>90	**20pcs**	**(for 3 meters diameter)**

Details

Material **Aluminium+Plastic**
Type of Led **Sanan**
Voltage **48V**
Location **Track**

Beam angle **50°**
Working temperature **-20°C - 40°C**
Lifetime **30.000hrs**
Dimmable **DALI**

5 years guarantee

IP20



VK/04631/TR/PE/DA/W



VK/04631/TR/PE/DA/B





Eiva

LED Magnetic Track Lights 48V. Slim. Dali.

Eiva

VK/04583/TR/S

Code	Model	Box
71164-007776	**VK/04583/TR/S/1/W** ○ **White**. 48V. **1m**.	**10pcs**
71164-008776	**VK/04583/TR/S/1/B** ● **Black**. 48V. **1m**.	**10pcs**
71164-009776	**VK/04583/TR/S/1.5/W** ○ **White**. 48V. **1.5m**.	**6pcs**
71164-010776	**VK/04583/TR/S/1.5/B** ● **Black**. 48V. **1.5m**.	**6pcs**
71164-011776	**VK/04583/TR/S/2/W** ○ **White**. 48V. **2m**.	**6pcs**
71164-012776	**VK/04583/TR/S/2/B** ● **Black**. 48V. **2m**.	**6pcs**

Details

Magnetic **surface/Suspended** track profile **48V**.
Length **1-2m**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Material **Aluminium**.

5 years guarantee

VK/04586/TR/S

Code	Model	Box
71164-017776	**VK/04586/TR/S/1/W** ○ **White**. 48V. **1m**.	**10pcs**
71164-018776	**VK/04586/TR/S/1/B** ● **Black**. 48V. **1m**.	**10pcs**
71164-019776	**VK/04586/TR/S/1.5/W** ○ **White**. 48V. **1.5m**.	**6pcs**
71164-020776	**VK/04586/TR/S/1.5/B** ● **Black**. 48V. **1.5m**.	**6pcs**
71164-021776	**VK/04586/TR/S/2/W** ○ **White**. 48V. **2m**.	**6pcs**
71164-022776	**VK/04586/TR/S/2/B** ● **Black**. 48V. **2m**.	**6pcs**

Details

Magnetic **surface/Suspended hight track** profile **48V**.
Length **1-2m**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Material **Aluminium**.

5 years guarantee

VK/04588/TR/TL

Code	Model	Box
71164-028776	**VK/04588/TR/TL/1/W** ○ **White**. 48V. **1m**.	**10pcs**
71164-029776	**VK/04588/TR/TL/1/B** ● **Black**. 48V. **1m**.	**10pcs**
71164-030776	**VK/04588/TR/TL/1.5/W** ○ **White**. 48V. **1.5m**.	**6pcs**
71164-031776	**VK/04588/TR/TL/1.5/B** ● **Black**. 48V. **1.5m**.	**6pcs**
71164-032776	**VK/04588/TR/TL/2/W** ○ **White**. 48V. **2m**.	**6pcs**
71164-033776	**VK/04588/TR/TL/2/B** ● **Black**. 48V. **2m**.	**6pcs**


Details


Magnetic **Recessed Trimless** track profile **48V**.
Length **1-2m**.


IP Rating **IP20**.
Working temperature **< 45°C**.
Material **Aluminium**.


5 years guarantee






2.7cm
2.3cm



2.7cm
1m
1.5m
2m
2.3
cm

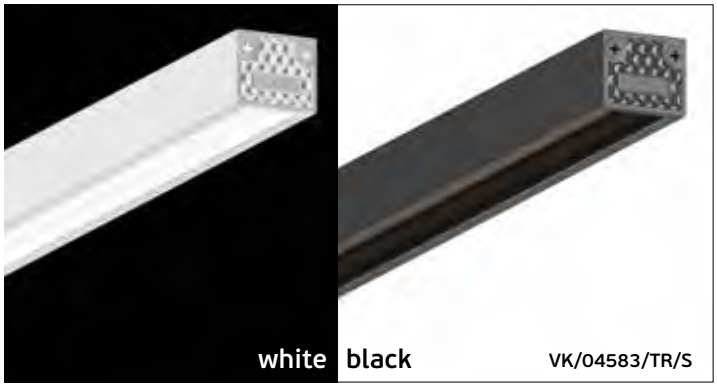

white
black
VK/04583/TR/S



2.7cm
5.6cm

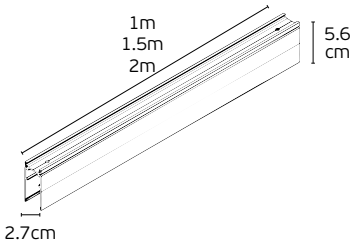
1m
1.5m
2m
5.6
cm
2.7cm

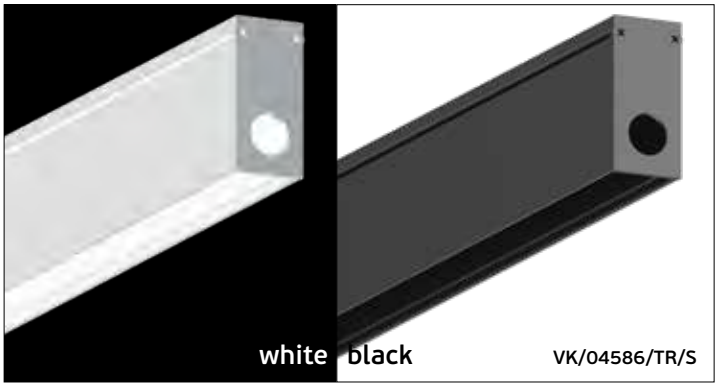
white
black
VK/04586/TR/S

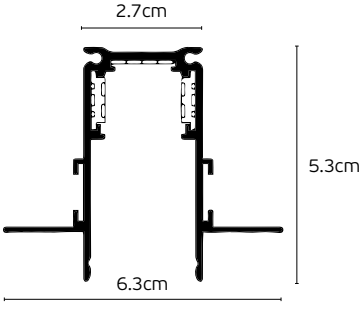
2.7cm
5.3cm
6.3cm

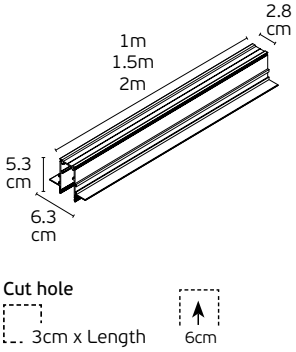

2.8
cm
1m
1.5m
2m
5.3
cm
6.3
cm
Cut hole
3cm x Length
6cm

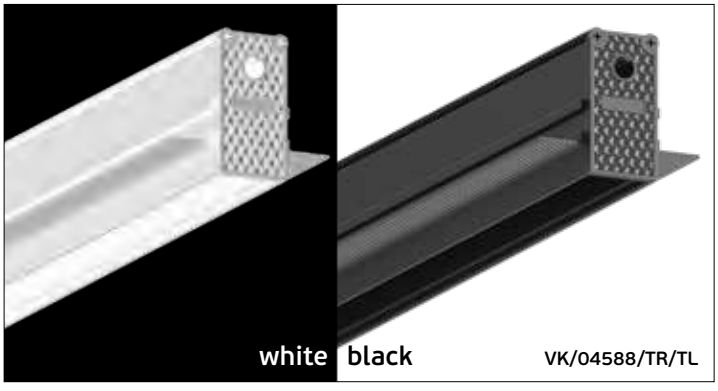

white
black
VK/04588/TR/TL

Eiva











VK/04598/TR/R

Code	Model	Box
71164-051776	**VK/04598/TR/R/40/W** ○ **White**. 48V. **Curved Recessed Trimless R40cm**.	**5pcs**
71164-052776	**VK/04598/TR/R/40/B** ● **Black**. 48V. **Curved Recessed Trimless R40cm.**	**5pcs**
71164-053776	**VK/04598/TR/R/50/W** ○ **White**. 48V. **Curved Recessed Trimless R50cm**.	**5pcs**
71164-054776	**VK/04598/TR/R/50/B** ● **Black**. 48V. **Curved Recessed Trimless R50cm**.	**5pcs**

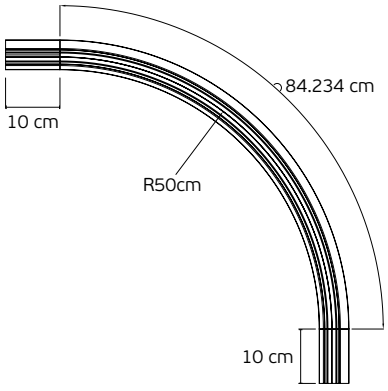



Details

Magnetic **Curved Recessed Trimless** track profile **48V**.
Size R60cm, 1/4 circle.

IP Rating **IP20**.
Working temperature **< 45°C**.


5 years guarantee



Eiva



VK/04584/TR/CON/LH/B



VK/04584/TR/CON/LH

Code	Model	Box
71164-013776	**VK/04584/TR/CON/LH/W** ○ **White**. 48V. L type horizontal for surface track	**1pc**
71164-014776	**VK/04584/TR/CON/LH/B** ● **Black**. 48V. L type horizontal for surface track	**1pc**


Details

L type horizontal connector for Track profile, 4 wire Surface mount type.
Material **Aluminium**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.



VK/04585/TR/CON/LV/B



VK/04585/TR/CON/LV

Code	Model	Box
71164-015776	**VK/04585/TR/CON/LV/W** ○ **White**. 48V. L type vertical for surface track	**1pc**
71164-016776	**VK/04585/TR/CON/LV/B** ● **Black**. 48V. L type vertical for surface track	**1pc**


Details

L type vertical connector for Track profile, 4 wire Surface mount type.
Material **Aluminium**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.



VK/04587/TR/CON/LH/B



VK/04587/TR/CON/LH

Code	Model	Box
71164-023776	**VK/04587/TR/CON/LH/W** ○ **White**. 48V. L type horizontal for surface High	**1pc**
71164-025776	**VK/04587/TR/CON/LH/B** ● **Black**. 48V. L type horizontal for surface High	**1pc**


Details

L type horizontal connector for High Track profile, 4 wire Surface mount type.
Material **Aluminium**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.



VK/04599/TR/CON/LV/B



VK/04599/TR/CON/LV

Code	Model	Box
71164-026776	**VK/04599/TR/CON/LV/W** ○ **White**. 48V. L type vertical for surface High	**1pc**
71164-027776	**VK/04599/TR/CON/LV/B** ● **Black**. 48V. L type vertical for surface High	**1pc**

Details

L type vertical connector for High Track profile, 4 wire Surface mount type.
Material **Aluminium**.


IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.

5 years guarantee

Accessories Recessed for Led Magnetic Track Lights 48V. Slim. DALI.



VK/04589/TR/CON/LH/B



VK/04589/TR/CON/LH

Code	Model	Box
71164-034776	**VK/04589/TR/CON/LH/W** ○ **White**. 48V. L type horizontal for recessed track	**1pc**
71164-035776	**VK/04589/TR/CON/LH/B** ● **Black**. 48V. L type horizontal for recessed track	**1pc**


Details

L type horizontal connector for Track profile, 4 wire Recessed trimless type.
Material **Aluminium**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.



VK/04590/TR/CON/LV/B



VK/04590/TR/CON/LV

Code	Model	Box
71164-036776	**VK/04590/TR/CON/LV/W** ○ **White**. 48V. L type vertical for recessed track	**1pc**
71164-037776	**VK/04590/TR/CON/LV/B** ● **Black**. 48V. L type vertical for recessed track	**1pc**


Details

L type vertical connector for Track profile, 4 wire Recessed trimless type.
Material **Aluminium**.

IP Rating **IP20**.
Working temperature **< 45°C**.
Voltage **48V**.



VK/04591/TR/PC/R/B



VK/04591/TR/PC/R

Code	Model	Box
71164-038776	**VK/04591/TR/PC/R/W** ○ **White**. 48V. Power connector for recessed track	**1pc**
71164-039776	**VK/04591/TR/PC/R/B** ● **Black**. 48V. Power connector for recessed track	**1pc**


Details

In track Power connector for recessed track profile, 4 wire Recessed track profile mount type.

Material **Aluminium**.
Working temperature **< 45°C**.
Voltage **48V**. IP Rating **IP20**.



VK/04592/TR/PC/S/B



VK/04592/TR/PC/S

Code	Model	Box
71164-040776	**VK/04592/TR/PC/S/W** ○ **White**. 48V. Power connector for surface track	**1pc**
71164-041776	**VK/04592/TR/PC/S/B** ● **Black**. 48V. Power connector for surface track	**1pc**

Details

In track Power connector for surface track profile, 4 wire surface & pendant track profile mount type.


Material **Aluminium**.
Working temperature **< 45°C**.
Voltage **48V**. IP Rating **IP20**.

5 years guarantee

Eiva



VK/04593/TR/CC/B



VK/04593/TR/CC

Code	Model	Box
71164-042776	**VK/04593/TR/CC/W** ○ **White**. 48V. Power connector for corner connection	**1pc**
71164-043776	**VK/04593/TR/CC/B** ● **Black**. 48V. Power connector for corner connection	**1pc**


Details

In track Power connector for corner connection, 4 wire.
Material **Aluminium**.

Working temperature **< 45°C**.
Voltage **48V**.
IP Rating **IP20**.



VK/04595/TR/PP/B



VK/04595/TR/PP

Code	Model	Box
71164-045776	**VK/04595/TR/PP/W** ○ **White**. 48V. Power plug for transformer use	**1pc**
71164-046776	**VK/04595/TR/PP/B** ● **Black**. 48V. Power plug for transformer use	**1pc**


Details

In track signal/Power plug for transformer use, 4 wire.
Material **Aluminium**.

Working temperature **< 45°C**.
Voltage **48V**.
IP Rating **IP20**.




VK/04596/TR/PP/100/B





VK/04597/TR/PP/200/B



VK/04596/TR/PP/100, VK/04597/TR/PP/200

Code	Model	Box
71164-047776	**VK/04596/TR/PP/100/W** ○ **White**. 48V. 100W in-track Power plug. 3x0.75mm²	**1pc**
71164-048776	**VK/04596/TR/PP/100/B** ● **Black**. 48V. 100W in-track Power plug. 3x0.75mm²	**1pc**
71164-049776	**VK/04597/TR/PP/200/W** ○ **White**. 48V. 200W in-track Power plug. 3x0.75mm²	**1pc**
71164-050776	**VK/04597/TR/PP/200/B** ● **Black**. 48V. 200W in-track Power plug. 3x0.75mm²	**1pc**

Note



VK/DALI/PCU/TW

Control unit for push-button use for DALI magnetic lights.

Details

100W In track Power plug, 4 wire.
Input **220-240V.** Output **DC48V**.
with **2m cable.**

Material **Aluminium**.
Working temperature **< 45°C**.
IP Rating **IP20**.

5 years guarantee

Eiva



VK/04594/TR/SRK/1.5


VK/04594/TR/SRK/1.5

Code	Model	Box
71164-044776	**VK/04594/TR/SRK/1.5** ● **Silver**. Suspension kit	**1pc**

Details

Suspension kit 1.5m.
Material **Aluminium**.
Working temperature **< 45°C**.

Voltage **48V**.
IP Rating **IP20**.

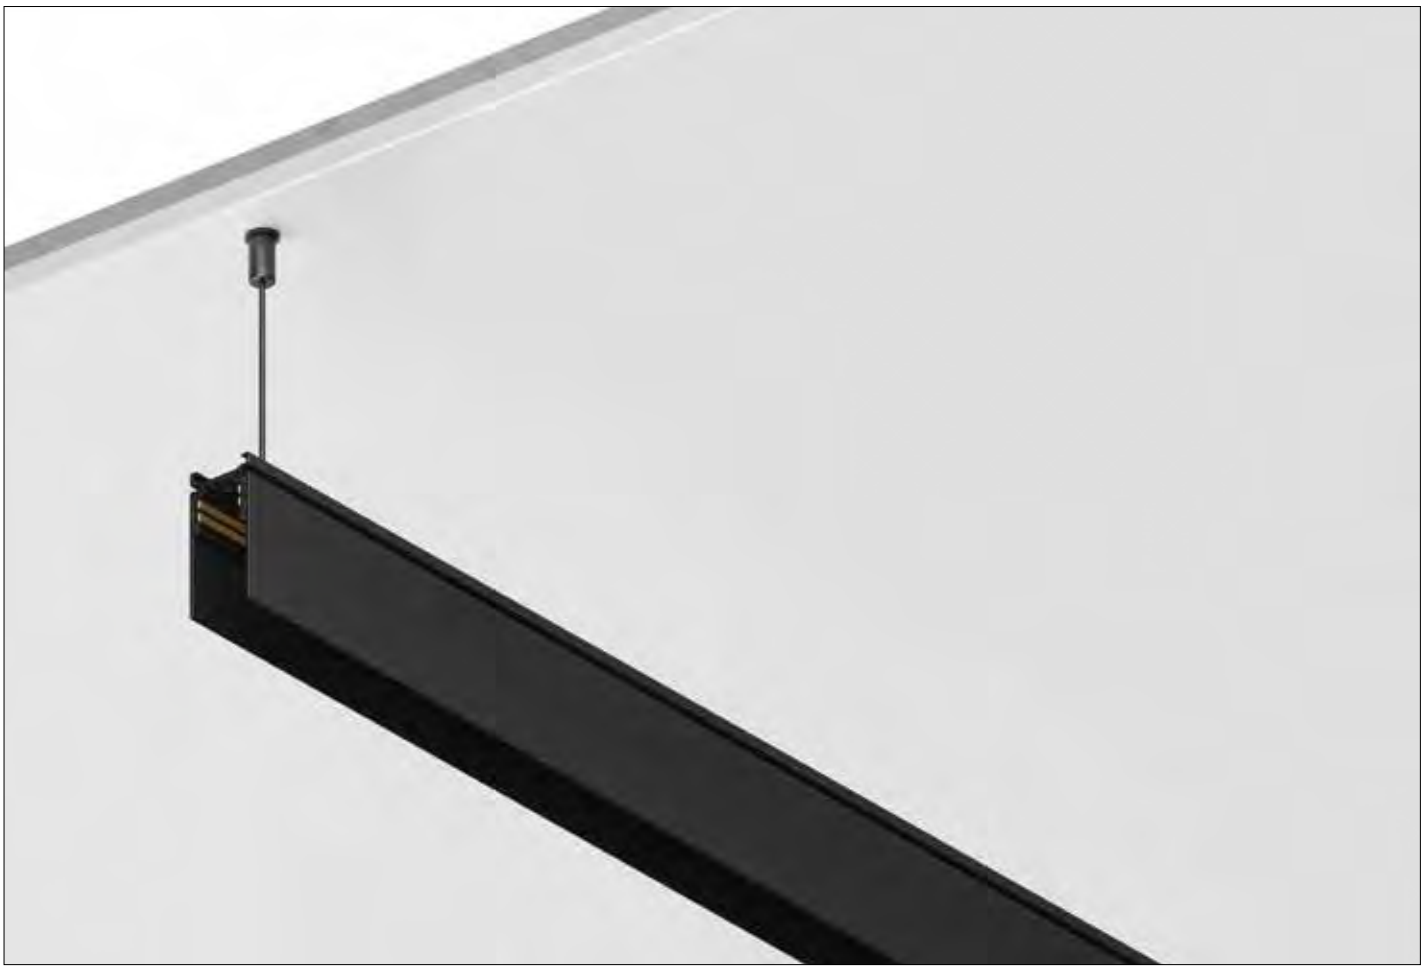


Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.

Eiva




VK/04600/TR/DA/30/B






VK/04600/TR/DA/45/B





VK/04600/TR/DA/60/B



VK/04600/TR/DA

Code	Model	Box
71164-055776	**VK/04600/TR/DA/30/W/W** ○ **White**. 3000K. **1.141lm. 9W.** DALI CRI>90. **30cm**.	**1pc**
71164-056776	**VK/04600/TR/DA/30/B/W** ● **Black**. 3000K. **1.141lm. 9W.** DALI CRI>90. **30cm**.	**1pc**
71164-057776	**VK/04600/TR/DA/45/W/W** ○ **White**. 3000K. **1.521lm. 12W.** DALI CRI>90. **45cm**.	**1pc**
71164-058776	**VK/04600/TR/DA/45/B/W** ● **Black**. 3000K. **1.521lm. 12W.** DALI CRI>90. **45cm**.	**1pc**
71164-059776	**VK/04600/TR/DA/60/W/W** ○ **White**. 3000K. **2.282lm. 18W.** DALI CRI>90. **60cm**.	**1pc**
71164-060776	**VK/04600/TR/DA/60/B/W** ● **Black**. 3000K. **2.282lm. 18W.** DALI CRI>90. **60cm**.	**1pc**

5 years guarantee DALI **IP20.**

Details

Led magnetic track light **DC driver 48V** (included).
Type of Led bridgelux **2835.**
Material **Aluminium**, **PC diffuser**.

Beam Angle **110°.**
Dimmable **DALI Driver DT6.**
Lifetime **50.000 hrs.**
Working temperature **< 45°C**.

Eiva




Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.

Eiva




VK/04601/TR/DA/13/B





VK/04601/TR/DA/22/B



VK/04601/TR/DA

Code	Model	Box
71164-061776	**VK/04601/TR/DA/13/W/W** ○ **White**. 3000K. **750lm. 6W.** DALI CRI>90	**1pc**
71164-062776	**VK/04601/TR/DA/13/B/W** ● **Black**. 3000K. **750lm. 6W.** DALI CRI>90	**1pc**
71164-063776	**VK/04601/TR/DA/22/W/W** ○ **White**. 3000K. **1.499lm. 12W.** DALI CRI>90	**1pc**
71164-064776	**VK/04601/TR/DA/22/B/W** ● **Black**. 3000K. **1.499lm. 12W.** DALI CRI>90	**1pc**

5 years guarantee DALI **IP20.**

Details

Led magnetic track light **DC driver 48V** (included).
Type of Led **3030**.
Material **Aluminium**, **PMMA lens**.

Beam Angle **30º**.
Dimmable **Dali Driver DT6**.
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.



Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04602/TR/DA/13/B



VK/04602/TR/DA/22/B





VK/04602/TR/DA

Code	Model	Box
71164-065776	**VK/04602/TR/DA/13/W/W** ○ **White**. 3000K. **750lm. 6W.** DALI CRI>90	**1pc**
71164-066776	**VK/04602/TR/DA/13/B/W** ● **Black**. 3000K. **750lm. 6W.** DALI CRI>90	**1pc**
71164-067776	**VK/04602/TR/DA/22/W/W** ○ **White**. 3000K. **1.499lm. 12W.** DALI CRI>90	**1pc**
71164-068776	**VK/04602/TR/DA/22/B/W** ● **Black**. 3000K. **1.499lm. 12W.** DALI CRI>90	**1pc**

5 years guarantee DALI Adjustable **IP20.**

Details

Led magnetic track light **DC driver 48V** (included).
Type of Led bridgelux **3030**.
Material **Aluminium**, **PMMA lens**.

Beam Angle **30º**.
Dimmable **Dali Driver DT6**.
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.






Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.

Eiva



VK/04603/TR/DA/PE/B

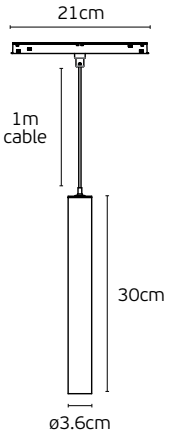

VK/04603/TR/DA


Code	Model	Box
71164-069776	**VK/04603/TR/DA/PE/W/W** ❍ **White**. 3000K. **711lm. 7W.** DALI CRI>90	**1pc**
71164-070776	**VK/04603/TR/DA/PE/B/W** ● **Black**. 3000K. **711lm. 7W.** DALI CRI>90	**1pc**

Details

Led magnetic track Pendant Light **with DC driver 48V** (included).
Type of Led bridgelux **V6-HD**
Dimmable **Dali Driver DT6**

Beam Angle **24°**.
Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium**, **PC lens**.

5 years guarantee DALI **IP20.**

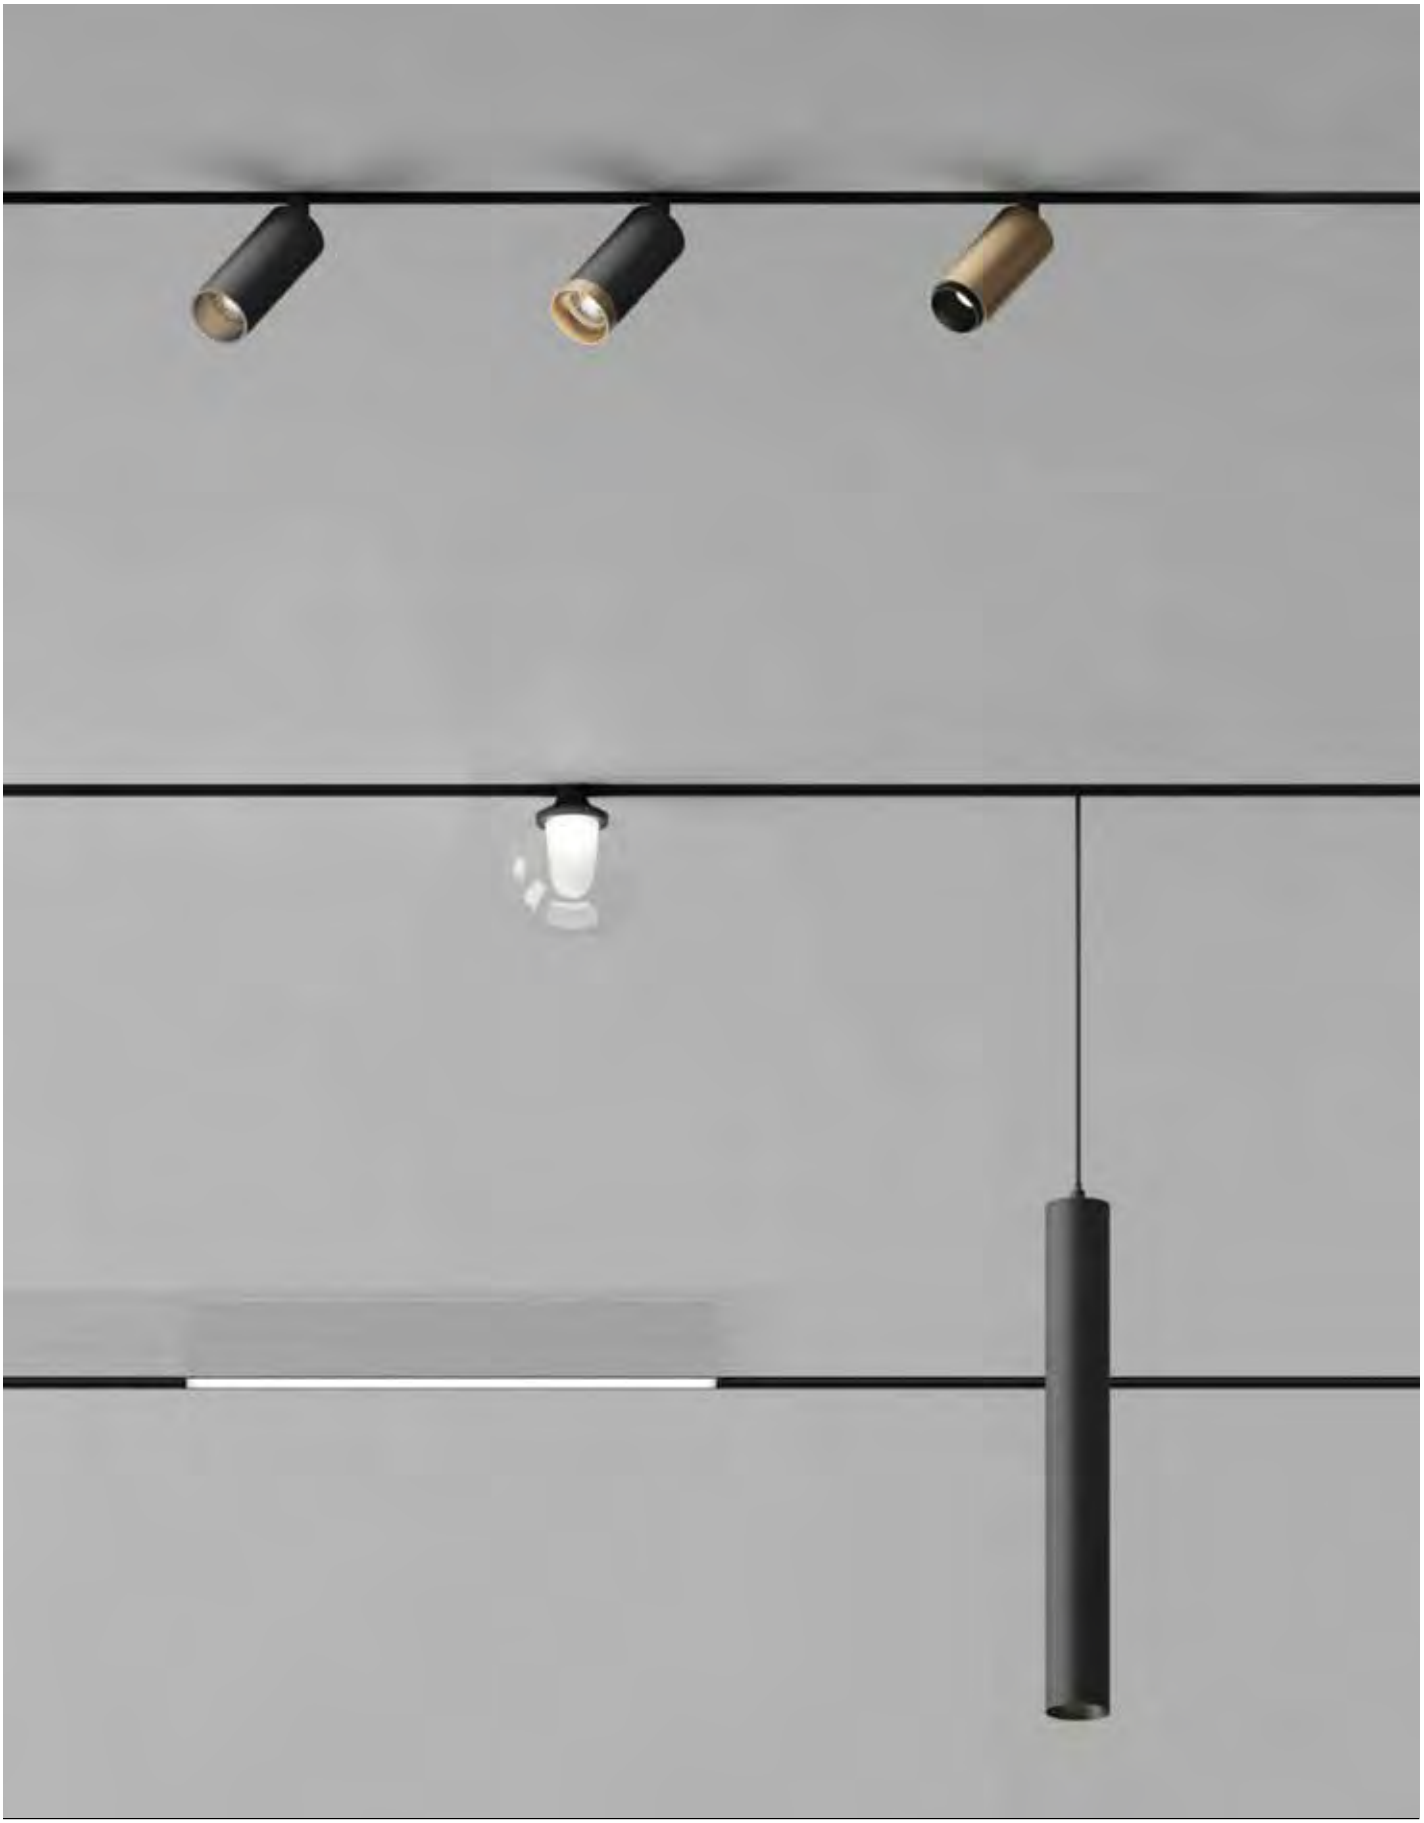

Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04604/TR/DA/TB-B



VK/04605/TR/DA/W-B





VK/04604/TR/DA, VK/04605/TR/DA

Code	Model	Box
71164-071776	**VK/04604/TR/DA/TB-B/W** ● **Titanium bronze+black**. 3000K. **711lm. 7W.** DALI CRI>90	**1pc**
71164-072776	**VK/04604/TR/DA/W-B/W** ○ **White+black**. 3000K. **711lm. 7W.** DALI CRI>90	**1pc**
71164-073776	**VK/04605/TR/DA/TB-B/W** ● **Titanium bronze+black**. 3000K. **1.524lm. 15W.** DALI CRI>90	**1pc**
71164-074776	**VK/04605/TR/DA/W-B/W** ○ **White+black**. 3000K. **1.524lm. 15W.** DALI CRI>90	**1pc**

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**
Beam Angle **24°**

Type of Led bridgelux **COB V6HD**
Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium, PC lens**

5 years guarantee DALI Adjustable **IP20.**



Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04604/TR/DA/B



VK/04605/TR/DA/B





VK/04604/TR/DA, VK/04605/TR/DA

Code	Model	Box
71164-075776	**VK/04604/TR/DA/B/W** ● **Black (without retainer ring)**. 3000K. **711lm. 7W.** DALI CRI>90	**1pc**
71164-080776	**VK/04605/TR/DA/B/W** ● **Black (without retainer ring)**. 3000K. **1.524lm. 15W.** DALI CRI>90	**1pc**

This track spot accepts replacement retaining ring available in the following colors: gold, bronze, silver, black. Included honey comb.

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**
Beam Angle **24°**

Type of Led bridgelux **COB V6HD**
Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium, PC lens**

5 years guarantee DALI Adjustable **IP20.**

Accessories for Led Magnetic Track Lights 48V Slim. DALI.



VK/04604/TR/RING

Code	Model	Box
71164-076776	**VK/04604/TR/RING/GD** ● **Gold**. Retainer ring **for VK/04604/TR/DA/B**	**1pc**
71164-077776	**VK/04604/TR/RING/TB** ● **Titanium bronze**. Retainer ring **for VK/04604/TR/DA/B**	**1pc**
71164-078776	**VK/04604/TR/RING/MC** ● **Nickel chrome**. Retainer ring **for VK/04604/TR/DA/B**	**1pc**
71164-079776	**VK/04604/TR/RING/B** ● **Black**. Retainer ring **for VK/04604/TR/DA/B**	**1pc**

VK/04605/TR/RING

Code	Model	Box
71164-081776	**VK/04605/TR/RING/GD** ● **Gold**. Retainer ring **for VK/04605/TR/DA/B**	**1pc**
71164-082776	**VK/04605/TR/RING/TB** ● **Titanium bronze**. Retainer ring **for VK/04605/TR/DA/B**	**1pc**
71164-083776	**VK/04605/TR/RING/MC** ● **Nickel chrome**. Retainer ring **for VK/04605/TR/DA/B**	**1pc**
71164-084776	**VK/04605/TR/RING/B** ● **Black**. Retainer ring **for VK/04605/TR/DA/B**	**1pc**

Details

Retainers rings for **VK/04604/TR/DA/B & VK/04605/TR/DA/B. Included honey comb**

Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04604/TR/DA/ZM/B



VK/04605/TR/DA/ZM/W-B





VK/04604/TR/DA/ZM, VK/04605/TR/DA/ZM

Code	Model	Box
71164-085776	**VK/04604/TR/DA/ZM/W-B/W** ○ **White+black**. 3000K. **711lm. 7W.** DALI Zoomable **19°-42°** CRI>90	**1pc**
71164-086776	**VK/04604/TR/DA/ZM/B/W** ● **Black**. 3000K. **711lm. 7W.** DALI Zoomable **19°-42°** CRI>90	**1pc**
71164-087776	**VK/04605/TR/DA/ZM/W-B/W** ○ **White+black**. 3000K. **1.524lm. 15W.** DALI Zoomable **15°-45°** CRI>90	**1pc**
71164-088776	**VK/04605/TR/DA/ZM/B/W** ● **Black**. 3000K. **1.524lm. 15W.** DALI Zoomable **15°-45°** CRI>90	**1pc**

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**
Type of Led bridgelux **COB V6HD**

Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium, PC lens**

5 years guarantee DALI Adjustable **IP20.**

Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.




Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva



VK/04606/TR/DA/B-TB

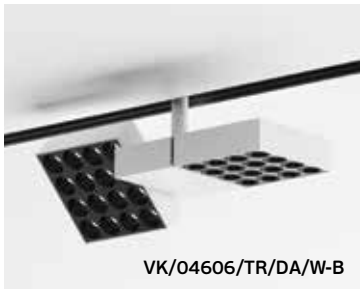

VK/04606/TR/DA/W-B



VK/04606/TR/DA

Code	Model	Box
71164-089776	**VK/04606/TR/DA/W-B/W** ○ **White+black**. 3000K. **2.087lm. 20W.** DALI **45°** CRI>90	**1pc**
71164-090776	**VK/04606/TR/DA/B-TB/W** ● **Black+titanium bronze**. 3000K. **2.087lm. 20W.** DALI **45°** CRI>90	**1pc**

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**
Type of Led bridgelux **SMD**

Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium, PMMA lens**
Beam Angle **45°**

5 years guarantee DALI Adjustable **IP20.**



Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04607/TR/DA/100/W-TB



VK/04607/TR/DA/120/B-TB





VK/04607/TR/DA/100, VK/04607/TR/DA/120

Code	Model	Box
71164-091776	**VK/04607/TR/DA/100/W-TB/W** ○ **White+titanium bronze**. 3000K. **796lm. 6W.** DALI CRI>90	**1pc**
71164-092776	**VK/04607/TR/DA/100/B-TB/W** ● **Black+titanium bronze**. 3000K. **796lm. 6W.** DALI CRI>90	**1pc**
71164-093776	**VK/04607/TR/DA/120/W-TB/W** ○ **White+titanium bronze**. 3000K. **1.194lm. 9W.** DALI CRI>90	**1pc**
71164-094776	**VK/04607/TR/DA/120/B-TB/W** ● **Black+titanium bronze**. 3000K. **1.194lm. 9W.** DALI CRI>90	**1pc**

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**.
Type of Led bridgelux **SMD**.

Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Material **Aluminium, PS diffuser**.
Beam Angle **90°**.

5 years guarantee DALI Adjustable **IP20.**



Led Magnetic Track Lights 48V **CRI>90**. Slim. DALI.


Eiva




VK/04608/TR/DA/75/B-TB



VK/04609/TR/DA/B





VK/04608/TR/DA/75, VK/04609/TR/DA


Code	Model	Box
71164-095776	**VK/04608/TR/DA/75/W-TB/W** ○ **White+titanium bronze ring**. 3000K. **1.220lm. 12W.** DALI **24°.** CRI>90	**1pc**
71164-096776	**VK/04608/TR/DA/75/B-TB/W** ● **Black+titanium bronze ring**. 3000K. **1.220lm. 12W.** DALI **24°.** CRI>90	**1pc**
71164-097776	**VK/04609/TR/DA/W/W** ○ **White**. 3000K. **375lm. 3W.** DALI **360°.** CRI>90	**1pc**
71164-098776	**VK/04609/TR/DA/B/W** ● **Black**. 3000K. **375lm. 3W.** DALI **360°.** CRI>90	**1pc**

Details

Led magnetic track light **DC driver 48V** (included).
Dimmable **Dali Driver DT6**
Type of Led bridgelux.

Lifetime **50.000 hrs**
Working temperature **< 45°C**
Material **Aluminium, PC lens (VK/04608)**
Aluminium, Acrylic lens (VK/04609)

5 years guarantee DALI **IP20.**

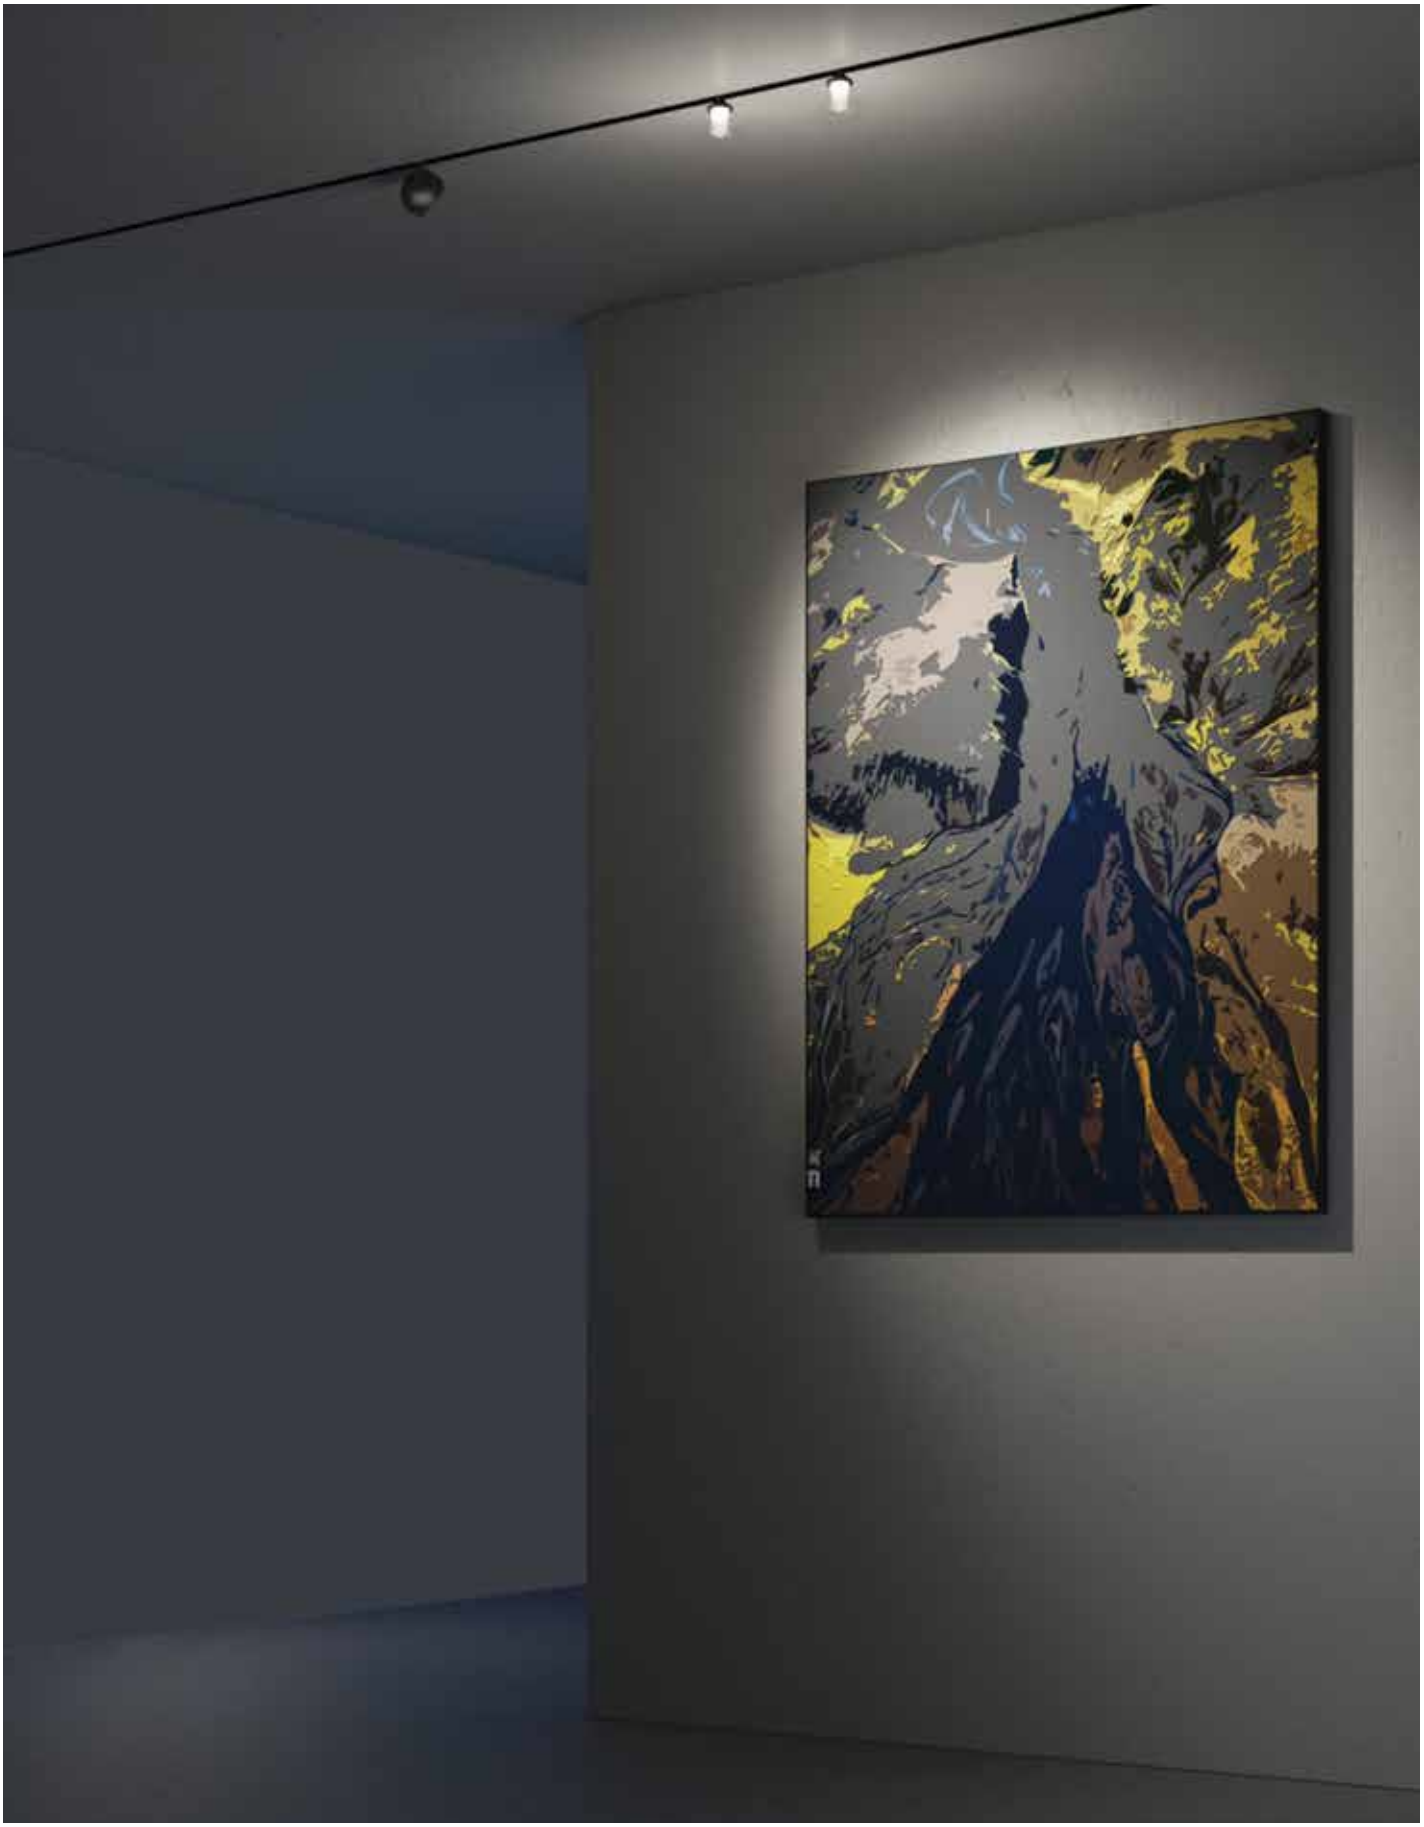

This product must be installed by a qualified electrician. Please read this manual before installation, please keep it for reference.

48V Track system Installation Manual

Precautions


1. Do not install or use the luminaires until you have read and fully understood the luminaire installation instructions and the markinh on the luminaires.
2. Power supply must be cut off when installing or replacing the lamps. Operating in strict accordance with the installation instructions and keep away from flammable objects.
3. Too high or too low voltage will affect the lifespan of the lamp.
4. It is forbidden to put conductive objects inside the lamp to avoid short circuit.
5. Please install it securely and ensure that the total weight of the lamps is within the bearing range of the guide rail.
6. Do not disassemble, wash or modify the luminairies.
7. Do not bump or drop the luminaries.
8. The use of this light must not violate any fire regulations.
9. Do not look directly at the light source when it turn on, in order not harmful to theyes; Do not touch the lamp when it is hot.
10. The life time of the lamp is calculated under the condition of “shut down for 1 hour of every 23 hours operation”.
11. The total lengthof the track connection cannot exceed 6 meters, and the total power of the entire track system cannot exceed 200W.
12. Not suitable for electronic induction switches controlled by semiconductor devices such as thyristors, not suitable for dimmers, not suitable for humid places. It workable for the inductive switch for relay on-off control.
13. In the process of installation and use, if you find any abnormal situation, please contact the seller or local distributor.

The light source should be replaced by the manufacturer or local distributor or a qualified person. Do not disassemble or modify the LED lamps or unscrew the LED light source without authorization. Otherwise it will affect the heat dissipation performance and shorten the lifespan of the LED, or even burn out the light source and causing potential safety hazards.

Installation Instruction


1. Press and hold the buttons on both sides of the luminaires adaptor, and install the luminairies directly into the appropriate position of the track rail.
2. Adjust the lamp head to the appropriate illumination angle.
3. Turn on the power supply.

Recessed Track Luminaires Installation

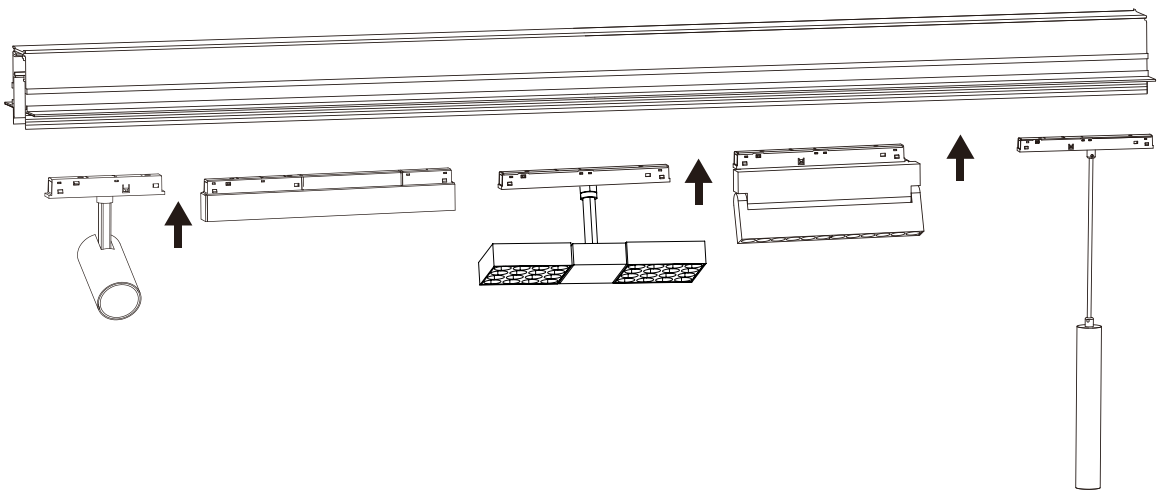

Installation


The conductive plate of the track rail provides 48V low-voltage DC power. The lamp has a built-in power supply. The copper sheet on luminaries adaptor takes electricity regardless of positive and negative poles. Press the buttons on tboth sides of the adaptor to install the lamp on the guide rail to complete the installation.

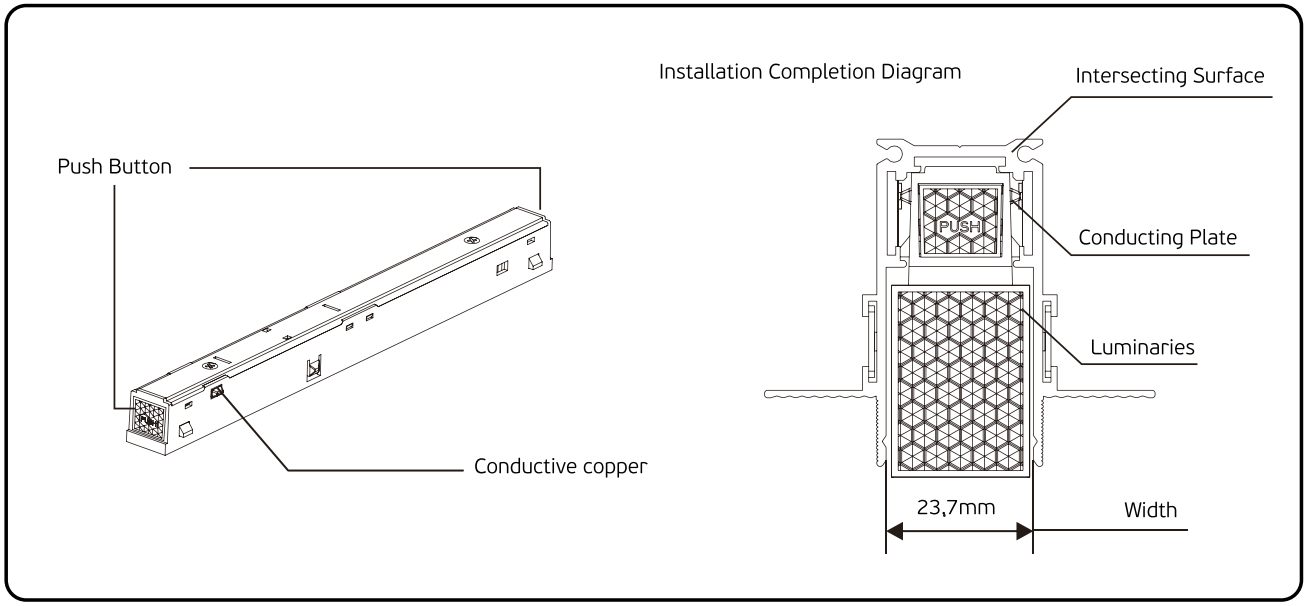



Warning


If the position of the lamp need to be changed, please remove the lamp first, and find a suitable position to install the lamp again into the track. Do not move the lamp directly in the track to change the position, in order to avoid fire during the movement process! The total load of one circuit should not excess the power of the constant voltage power supply.


1. Surface Mount Track Rail + 48V luminaires

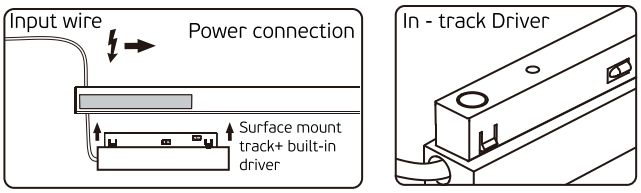



























Kona

LED Magnetic Track Lights 48V. Dali. On-off. 0-10

Kona





VK/04360TR/S



VK/04360TR/R


Cut hole





VK/04360TR/TL

Cut hole



VK/04360TR/S/.../B

Code	Model	Box
71164-078721	**VK/04360TR/S/1/B** ● **Black**. 48V. **1m**. (L100.4cm)	**9pcs**
71164-079721	**VK/04360TR/S/1.5/B** ● **Black**. 48V. **1.5m**. (L150.4cm)	**6pcs**
71164-080721	**VK/04360TR/S/2/B** ● **Black**. 48V. **2m**. (L200.4cm)	**6pcs**

Details

Magnetic **surface** mounted track line **48V**.
Length **1-2m**.
IP Rating **IP20**.

Working temperature **< 45°C**.
Material **Aluminium**.
Must be install **VK/04361 to work**.

VK/04360TR/R/.../B

Code	Model	Box
71164-075721	**VK/04360TR/R/1/B** ● **Black**. 48V. **1m**. (L100.4cm)	**9pcs**
71164-076721	**VK/04360TR/R/1.5/B** ● **Black**. 48V. **1.5m**. (L150.4cm)	**6pcs**
71164-077721	**VK/04360TR/R/2/B** ● **Black**. 48V. **2m**. (L200.4cm)	**6pcs**

Details

Magnetic **recessed** track line **48V**.
Length **1-2m**.
IP Rating **IP20**.

Working temperature **< 45°C**.
Material **Aluminium**.
Must be install **VK/04361 to work**.


VK/04360TR/TL/.../B

Code	Model	Box
71164-187721	**VK/04360TR/TL/1/B** ● **Black**. 48V. **1m**. (L100.5xW3cm)	**9pcs**
71164-188721	**VK/04360TR/TL/1.5/B** ● **Black**. 48V. **1.5m**. (L150.5xW3cm)	**6pcs**
71164-189721	**VK/04360TR/TL/2/B** ● **Black**. 48V. **2m**. (L200.5xW3cm)	**6pcs**


Details

Magnetic **trimless** track line 48V.
Length **1-2m**.
IP Rating **IP20**.

Working temperature **< 45°C**.
Material **Aluminium**.
Must be install **VK/04361 to work**.

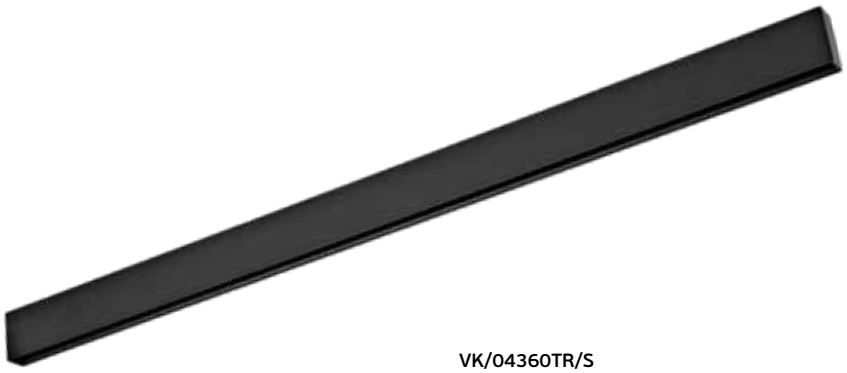


VK/04360TR/S

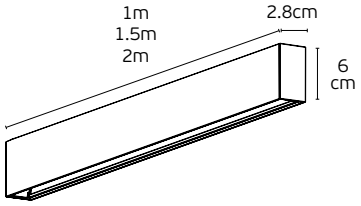




VK/04360TR/R

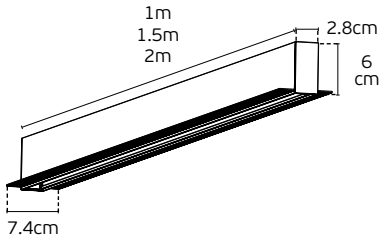




VK/04360TR/TL

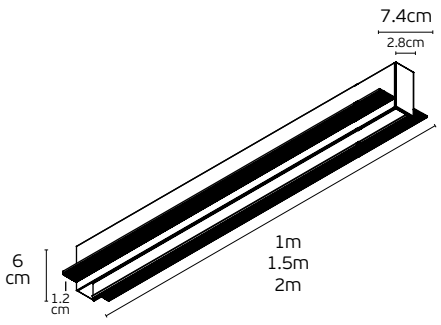

Kona



VK/04363/S/B/LR



VK/04363/S/B/LR

Code	Model	Box
71164-089721	**VK/04363/S/B/LR**	**20pcs**

● **Black**. 48V. Left & Right corner for surface track


Details

Left/Right corner for surface.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.



VK/04363/S/B/IC



VK/04363/S/B/IC

Code	Model	Box
71164-090721	**VK/04363/S/B/IC**	**20pcs**

● **Black**. 48V. Inner corner for surface magnetic


Details

Inner corner for surface.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.



VK/04363/S/B/OC



VK/04363/S/B/OC

Code	Model	Box
71164-091721	**VK/04363/S/B/OC**	**20pcs**

● **Black**. 48V. Outer corner for surface magnetic


Details

Outer corner for surface.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.



VK/04363/RC/B/LR



VK/04363/RC/B/LR

Code	Model	Box
71164-086721	**VK/04363/RC/B/LR**	**20pcs**
	● **Black**. 48V. Left & Right recessed corner	


Details

Left/Right corner recessed.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.



VK/04363/RC/B/IC



VK/04363/RC/B/IC

Code	Model	Box
71164-087721	**VK/04363/RC/B/IC**	**20pcs**
	● **Black**. 48V. Inner corner for recessed track	


Details

Inner corner for recessed.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.



VK/04363/RC/B/OC



VK/04363/RC/B/OC

Code	Model	Box
71164-088721	**VK/04363/RC/B/OC**	**20pcs**
	● **Black**. 48V. Outer corner for recessed track	

Details


Outer corner for recessed.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364/PC to work** (connector for corners).
Guarantee **3 years**.

Kona



VK/04363/TL/B/LR



VK/04363/TL/B/LR

Code	Model	Box
71164-217721	**VK/04363/TL/B/LR**	**20pcs**

● **Black**. 48V. Left & Right corner for trimless track


Details

Left/Right corner for trimless.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364 to work** (connector for corners).
Guarantee **3 years**.



VK/04363/TL/B/IC/LR



VK/04363/TL/B/IC/LR

Code	Model	Box
71164-218721	**VK/04363/S/B/IC**	**20pcs**

● **Black**. 48V. Inner corner for trimless magnetic


Details

Left/Right Inner corner for trimless.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364 to work** (connector for corners).
Guarantee **3 years**.



VK/04363/TL/B/OC/LR

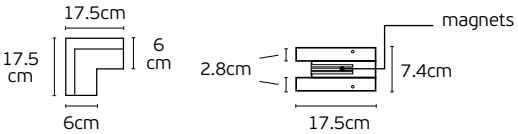

VK/04363/TL/B/OC/LR

Code	Model	Box
71164-219721	**VK/04363/TL/B/OC/LR**	**20pcs**

● **Black**. 48V. Outer corner for surface magnetic


Details

Left/Right Outer Corner for trimless.
Track lines **48V**.
2 rails link at an angle of **90°**.
Material **Aluminium**.

Must be install **VK/04364 to work** (connector for corners).
Guarantee **3 years**.



VK/04361/B



VK/04361/B

Code	Model	Box
71164-082721	**VK/04361/B** ● **Black**. 48V.	**30pcs**


Details

Power connector for recessed & surface magnetic track lines (VK/04360TR/R/... & VK/04360TR/S/...) **with cable**.

Working temperature **< 45°C**.
Material **Plastic.**
Guarantee **3 years**.



VK/04364/B/PC/2



VK/04364/B/PC/2

Code	Model	Box
71164-093721	**VK/04364/B/PC/2** ● **Black**. **48V.**	**30pcs**


Details

Power connector for 2 recessed or 2 surface magnetic track 48V (VK/04360TR/R/... & VK/04360TR/S/...)

with cable.
Working temperature **< 45°C**.
Material **Plastic**.
Guarantee **3 years**.



VK/04364/B/PC



VK/04364/B/PC

Code	Model	Box
71164-092721	**VK/04364/B/PC** ● **Black**. 48V.	**30pcs**

Details

Corner Power connector for recessed & surface magnetic track 48V (VK/04360TR/R/... & VK/04360TR/S/...)

with cable.
Working temperature **< 45°C**.
Material **Plastic**.
Guarantee **3 years**.

Kona



VK/04365/B


VK/04365/B

Code	Model	Box
71164-094721	**VK/04365/B** ● **Black. 48V. 2m.**	**1pc**

Details

Cover for magnetic track lights 48V, decoration bar for **recessed or surface** tracks.

Working temperature **< 45°C**.
Material **PC**.





VK/04360/SRK


VK/04360/SRK

Code	Model	Box
71164-081721	**VK/04360/SRK** ● **Black**. 48V.	**20pcs**

Details


Hanging kit for magnetic surface track lines (VK/04360TR/S/...) 48V to become **hanging track**.

Material **Aluminium**.
Guarantee **3 years**.





VK/LV100W48CG



VK/LV100W48CG

Code
71164-083721

Model
VK/LV100W48CG
0-2100mA. 100W.

Box
1pc

Details


Voltage **220-240V**.
Iin≤0.6A.
Urated=48V.
Irange=0-2100mA.

Prange=0-100W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.
Guarantee **3 years**.

IP20.



VK/LV150W48CG



VK/LV150W48CG

Code
71164-084721

Model
VK/LV150W48CG
0-3125mA. **150W**.

Box
1pc

Details


Voltage **220-240V**.
Iin≤0.9A.
Urated=48V.
Irange=0-3125mA.

Prange=0-150W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.
Guarantee **3 years**.

IP20.



VK/LV250W48CG



VK/LV250W48CG

Code
71164-085721

Model
VK/LV250W48CG
0-5210mA. **250W**

Box
1pc

Details

Voltage **220-240V**.
Iin≤1.5A.
Urated=48V.
Irange=0-5210mA.

Prange=0-250W.
Working temperature **-25°C → 45°C**.
Material **Plastic housing**.
Guarantee **3 years**.

IP20.

Note



VK/DALI/PCU/TW

Control unit for push-button use for DALI magnetic lights.

Kona




VK/04366/B/6/DALI - VK/04366/B/6






VK/04366/B/12/DALI - VK/04366/B/12





VK/04366/B/18/DALI - VK/04366/B/18




VK/04366


Code	Model	Box
71164-190721	**VK/04366/B/6/DALI** ● **Black sand**. 3000K. **859lm. 9W**. DALI	**50pcs**
71164-191721	**VK/04366/B/12/DALI** ● **Black sand**. 3000K. **1.798lm. 17W**. DALI	**30pcs**
71164-192721	**VK/04366/B/18/DALI** ● **Black sand**. 3000K. **2.692lm. 27W**. DALI	**20pcs**
71164-095721	**VK/04366/B/6** ● **Black sand**. 3000K. **859lm. 9W**. (Dim. 0-10V).	**50pcs**
71164-096721	**VK/04366/B/12** ● **Black sand**. 3000K. **1.798lm. 17W**. (Dim. 0-10V).	**30pcs**
71164-097721	**VK/04366/B/18** ● **Black sand**. 3000K. **2.692lm. 27W**. (Dim. 0-10V).	**20pcs**

DALI Dim 0-10V **IP20.**


VK/04366/B/6/DALI




VK/04366/B/12/DALI




VK/04366/B/18/DALI




VK/04366/B/6



VK/04366/B/12



VK/04366/B/18



Details

Led magnetic track light
DC driver 48V (included).
Type of Led **OSRAM with driver**.
Dimmable **DALI, 0-10V**.
Beam Angle **24°**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.
CRI**>90**



Kona




VK/04367/B/6/DALI - VK/04367/B/6





VK/04367/B/12/DALI - VK/04367/B/12



VK/04372/B/DALI - VK/04372/B








VK/04367, VK/04372

Code	Model	Box
71164-193721	**VK/04367/B/6/DALI** ● **Sand Black**. 3000K. **859lm. 9W.** OSRAM. **24°.** DALI	**30pcs**
71164-194721	**VK/04367/B/12/DALI** ● **Sand Black**. 3000K. **1.798lm. 17W.** OSRAM. **24°.** DALI	**20pcs**
71164-195721	**VK/04372/B/DALI** ● **Sand Black**. 3000K. **2.562lm. 18W.** bridgeLux. **50° + <60°.** DALI	**30pcs**
71164-098721	**VK/04367/B/6** ● **Black sand**. 3000K. **859lm. 9W.** OSRAM. **24°.** (Dim. 0-10V).	**30pcs**
71164-099721	**VK/04367/B/12** ● **Black sand**. 3000K. **1.798lm. 17W.** OSRAM. **24°.** (Dim. 0-10V).	**20pcs**
71164-108721	**VK/04372/B** ● **Black sand**. 3000K. **2.562lm. 18W.** bridgeLux. **50° + <60°.** (Dim. 0-10V).	**30pcs**

DALI · Dim 0-10V · **IP20.**


VK/04367/B/6/DALI




VK/04367/B/12/DALI




VK/04372/B/DALI




VK/04367/B/6



VK/04367/B/12



VK/04372/B



Details

Led magnetic track light
DC driver 48V (included).
Type of Led OSRAM **with driver,**
bridgeLux **5050 with driver.**
Dimmable **DALI, 0-10V 0-10V.**


Lifetime **50.000 hrs.**
Working temperature **< 45ºC.**
Material **Aluminium.**
Guarantee **3 years.**
CRI**>90**



Kona




VK/04368/B/9/DALI - VK/04368/B/9






VK/04368/B/15/DALI - VK/04368/B/15





VK/04368/B/25/DALI - VK/04368/B/25




VK/04368


Code	Model	Box
71164-196721	**VK/04368/B/9/DALI** ● **Black sand**. 3000K. **1.343lm. 9W.** DALI CRI>90	**20pcs**
71164-197721	**VK/04368/B/15/DALI** ● **Black sand**. 3000K. **2.162lm. 13W.** DALI CRI>90	**12pcs**
71164-198721	**VK/04368/B/25/DALI** ● **Black sand**. 3000K. **3.496lm. 25W.** DALI CRI>90	**9pcs**
71164-100721	**VK/04368/B/9** ● **Black sand**. 3000K. **1.343lm. 9W**. (Dim. 0-10V). CRI>90	**20pcs**
71164-101721	**VK/04368/B/15** ● **Black sand**. 3000K. **2.162lm. 13W**. (Dim. 0-10V). CRI>90	**12pcs**
71164-102721	**VK/04368/B/25** ● **Black sand**. 3000K. **3.496lm. 25W**. (Dim. 0-10V). CRI>90	**9pcs**

DALI Dim 0-10V **IP20.**


VK/04368/B/9/DALI




VK/04368/B/15/DALI




VK/04368/B/25/DALI




VK/04368/B/9



VK/04368/B/15



VK/04368/B/25



Details

Led magnetic track light
DC driver 48V (included).
Type of Led bridgelux **2835 with driver**.
Beam Angle **110°**.

Dimmable **DALI, 0-10V**.
Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.





VK/04369/B/DALI - VK/04369/B



VK/04369


Code	Model	Box
71164-199721	**VK/04369/B/DALI** ● **Black sand**. 3000K. **1.343lm. 9W.** DALI CRI>90	**10pcs**
71164-103721	**VK/04369/B** ● **Black sand**. 3000K. **1.343lm. 9W**. (Dim. 0-10V). CRI>90	**10pcs**

Details


Led magnetic track light
DC driver 48V (included).
Type of Led bridgelux **2835 with driver**.
Dimmable **DALI, 0-10V**.
Beam Angle **110°**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

VK/04369/B/DALI



VK/04369/B




DALI Dim 0-10V Adjustable **IP20.**

Kona




VK/04370/B/13/DALI - VK/04370/B/13






VK/04370/B/20/DALI - VK/04370/B/20

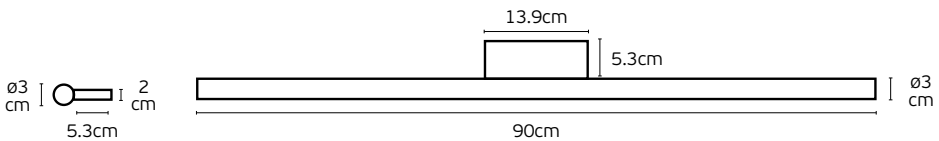


VK/04370

Code	Model	Box
71164-200721	**VK/04370/B/13/DALI** ● **Black sand**. 3000K. **2.202lm. 13W.** DALI CRI>90	**20pcs**
71164-201721	**VK/04370/B/20/DALI** ● **Black sand**. 3000K. **2.677lm. 19W.** DALI CRI>90	**12pcs**
71164-104721	**VK/04370/B/13** ● **Black sand**. 3000K. **2.202lm. 13W**. (Dim. 0-10V). CRI>90	**20pcs**
71164-105721	**VK/04370/B/20** ● **Black sand**. 3000K. **2.677lm. 19W**. (Dim. 0-10V). CRI>90	**12pcs**


VK/04370/B/13/DALI




VK/04370/B/20/DALI



VK/04370/B/13



VK/04370/B/20



Details

Led magnetic track light
DC driver 48V (included).
Type of Led **2835 with driver**.
Dimmable **DALI**, **0-10V**.
Beam Angle **110°**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.


DALI Dim 0-10V **IP20.**



Kona




VK/04371/B/20/DALI - VK/04371/B/20






VK/04371/B/28/DALI - VK/04371/B/28




VK/04371

Code	Model	Box
71164-202721	**VK/04371/B/20/DALI** ● **Black sand**. 3000K. **2.677lm. 19W.** DALI CRI>90	**12pcs**
71164-203721	**VK/04371/B/28/DALI** ● **Black sand**. 3000K. **3.484lm 27W.** DALI CRI>90	**12pcs**
71164-106721	**VK/04371/B/20** ● **Black sand**. 3000K. **2.677lm. 19W**. (Dim. 0-10V). CRI>90	**12pcs**
71164-107721	**VK/04371/B/28** ● **Black sand**. 3000K. **3.484lm. 27W.** (Dim. 0-10V). CRI>90	**12pcs**


VK/04371/B/20/DALI




VK/04371/B/28/DALI



VK/04371/B/20



VK/04371/B/28




Details

Led magnetic track light
DC driver 48V (included).
Type of Led **2835 with driver**.
Dimmable **DALI**, **0-10V**.
Beam Angle **110°**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

DALI Dim 0-10V **IP20.**

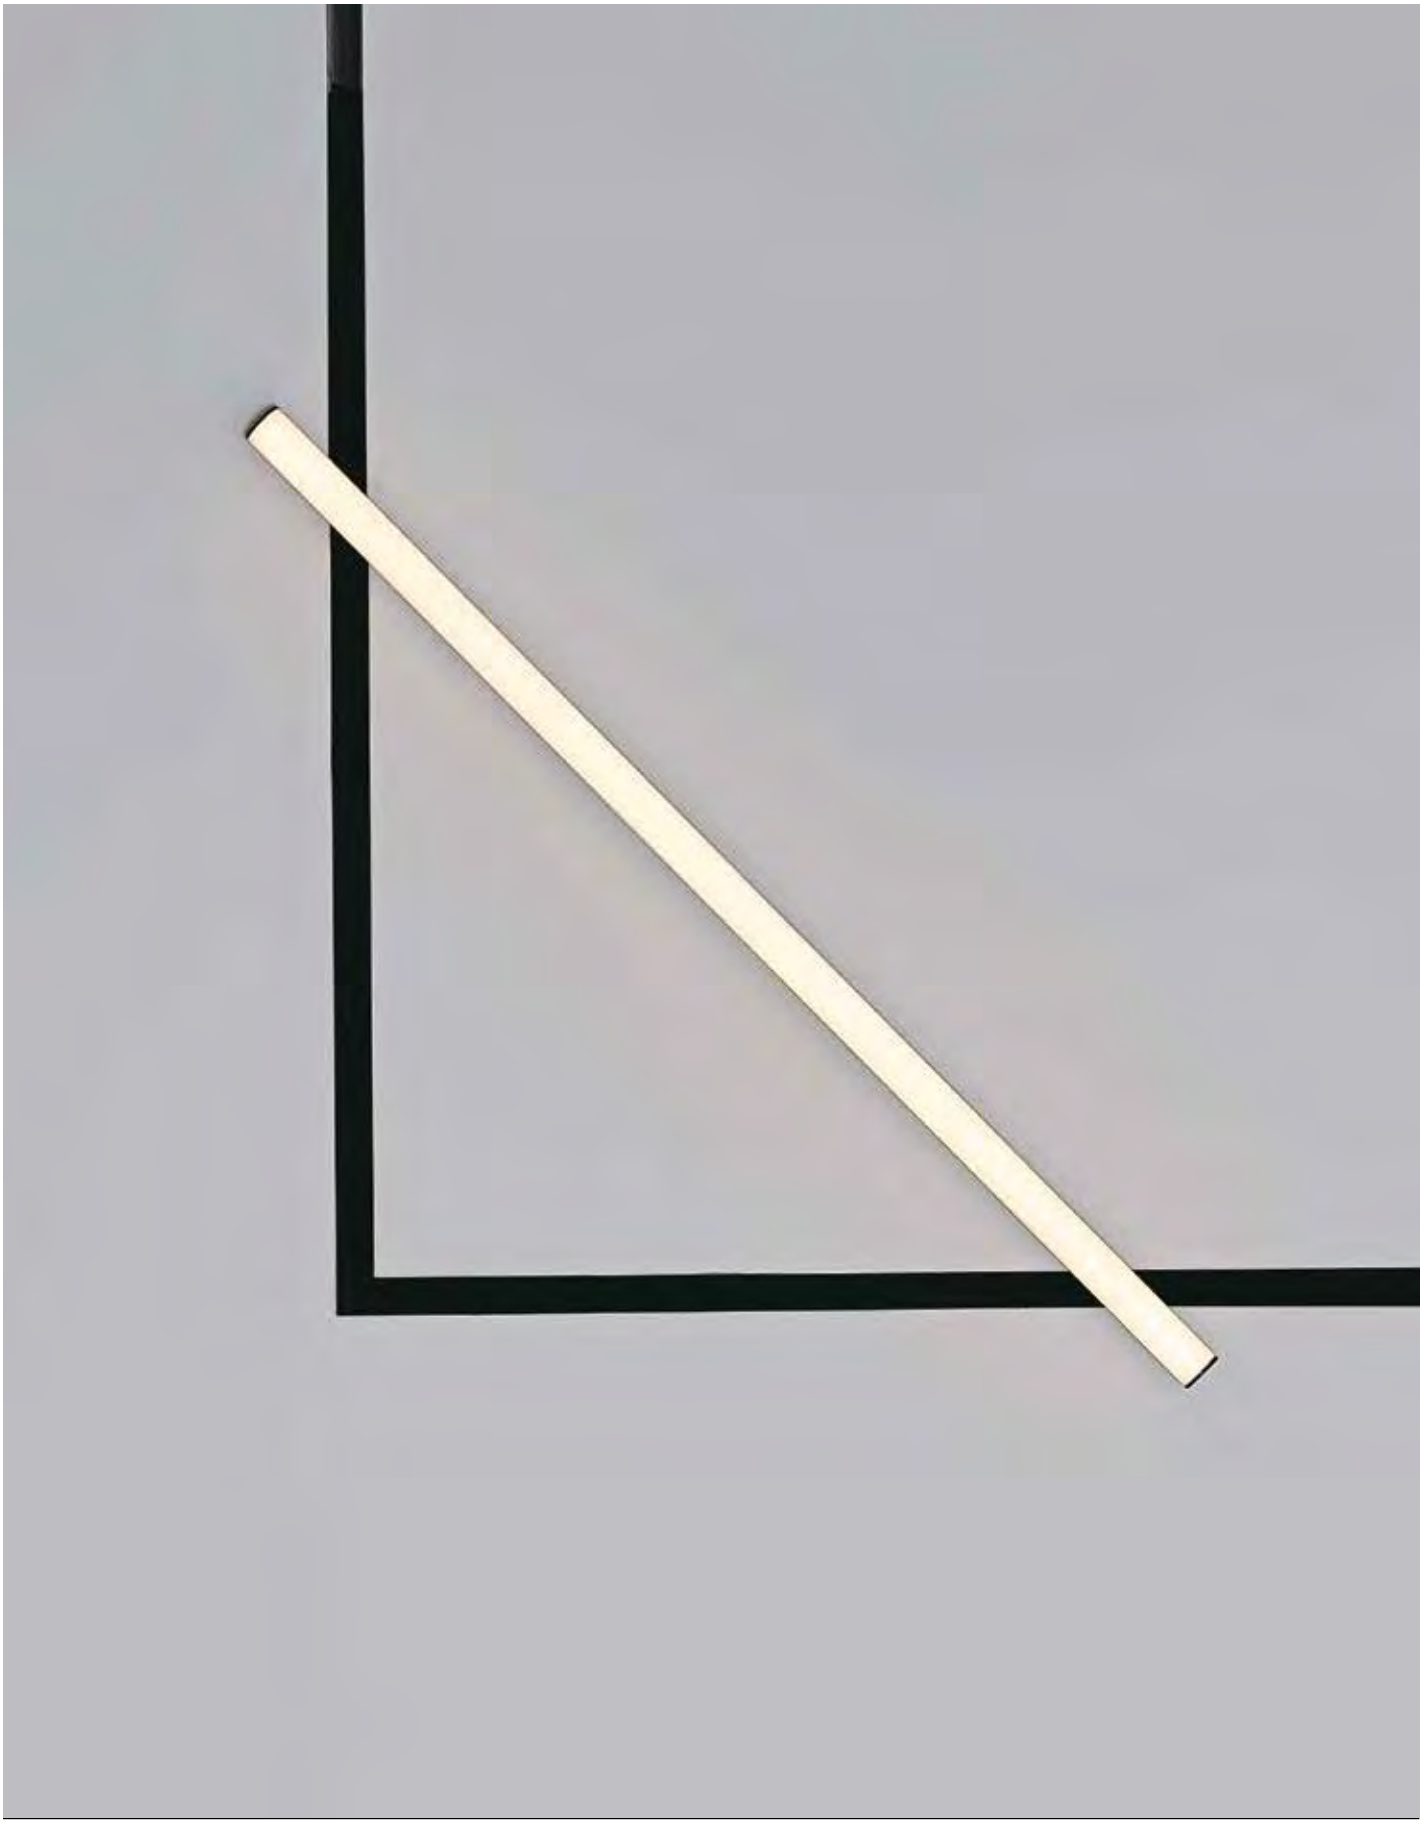


LED Magnetic Track Lights 48V **CRI>90**

Kona




VK/04373/B/DALI - VK/04373/B

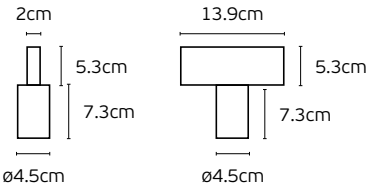




VK/04374/B/DALI - VK/04374/B

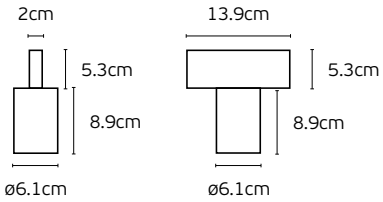



VK/04375/B/DALI - VK/04375/B

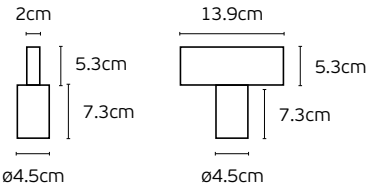


VK/04373, VK/04374, VK/04375

Code	Model	Box
71164-204721	**VK/04373/B/DALI** ● **Black sand**. 3000K. **180lm. 2W.** **OSRAM** led. **8°**. DALI CRI>90	**30pcs**
71164-205721	**VK/04374/B/DALI** ● **Black sand**. 3000K. **688lm. 9W.** **OSRAM** led. **8°**. DALI CRI>90	**30pcs**
71164-206721	**VK/04375/B/DALI** ● **Black sand**. 3000K. **702lm. 7W.** **OSRAM** led. **24°**. DALI CRI>90	**30pcs**
71164-109721	**VK/04373/B** ● **Black sand**. 3000K. **180lm. 2W.** **OSRAM** led. **8°**. (Dim. 0-10V). CRI>90	**30pcs**
71164-110721	**VK/04374/B** ● **Black sand**. 3000K. **688lm. 9W**. CREE XHP-35 led. **8°**. (Dim. 0-10V). CRI>90	**30pcs**
71164-111721	**VK/04375/B** ● **Black sand**. 3000K. **702lm. 7W.** bridgelux led. **24°**. (Dim. 0-10V). CRI>90	**30pcs**

Details

Led magnetic track light
DC driver 48V (included).
Dimmable **DALI**, **0-10V**.
Inclination **90°**
Rotation **350°**


Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

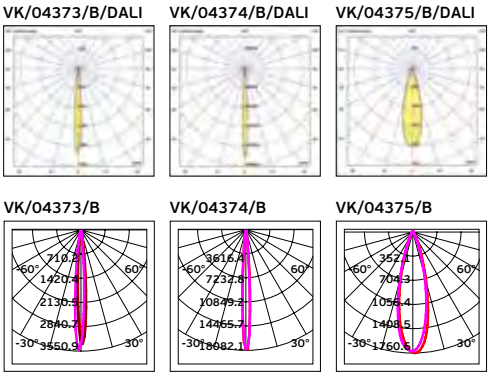

DALI Dim 0-10V Adjustable **IP20.**





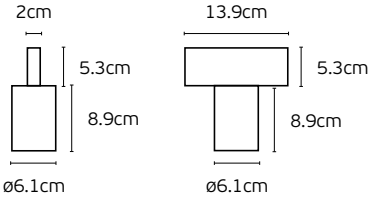

VK/04376/B/12/DALI - VK/04376/B/12

VK/04376


Code	Model	Box
71164-207721	**VK/04376/B/12/DALI** ● **Black sand**. 3000K. **1.156lm. 11W. 24°**. DALI CRI>90	**30pcs**
71164-112721	**VK/04376/B/12** ● **Black sand**. 3000K. **1.156lm. 11W. 24°**. (Dim. 0-10V). CRI>90	**30pcs**

Details


Led magnetic track light
DC driver 48V (included).
Type of led **E8 with driver**
Dimmable **DALI**, **0-10V**.
Inclination **90°**

Rotation **350°**
Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

VK/04376/B/12/DALI



VK/04376/B/12



DALI · Dim 0-10V · Adjustable · **IP20.**


Kona









VK/04376/B/HC/15/DALI
VK/04376/B/HC/15

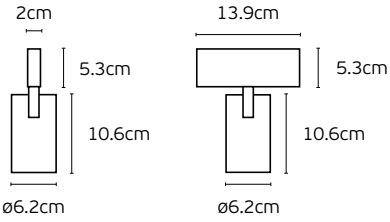

VK/04377/B/HC/18/DALI
VK/04377/B/HC/18

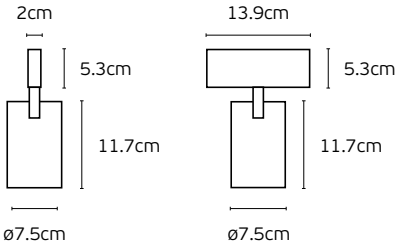

VK/04377/B/HC/25/DALI
VK/04377/B/HC/25

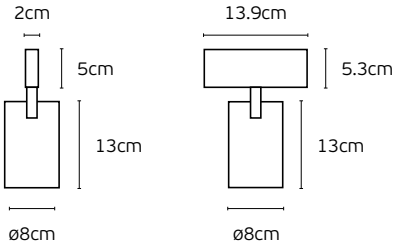

VK/04376, VK/04377


Code	Model	Box
71164-208721	**VK/04376/B/HC/15/DALI** ● **Black sand**. 3000K. **1.304lm. 13W**. DALI CRI>90	**20pcs**
71164-209721	**VK/04377/B/HC/18/DALI** ● **Black sand**. 3000K. **1.870lm. 17W**. DALI CRI>90	**12pcs**
71164-210721	**VK/04377/B/HC/25/DALI** ● **Black sand**. 3000K. **2.459lm. 25W**. DALI CRI>90	**12pcs**
71164-113721	**VK/04376/B/HC/15** ● **Black sand**. 3000K. **1.304lm. 13W**. (Dim. 0-10V). CRI>90	**20pcs**
71164-114721	**VK/04377/B/HC/18** ● **Black sand**. 3000K. **1.870lm. 17W**. (Dim. 0-10V). CRI>90	**12pcs**
71164-115721	**VK/04377/B/HC/25** ● **Black sand**. 3000K. **2.459lm. 25W**. (Dim. 0-10V). CRI>90	**12pcs**

Details


Led magnetic track light **with honeycomb cover DC driver 48V** (included).
Type of Led bridgelux with driver.
Dimmable **DALI, 0-10V**.
Inclination **90°**
Rotation **350°**

Beam angle 24°
Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.


VK/04376/B/HC/15/DALI | VK/04377/B/HC/18/DALI | VK/04377/B/HC/25/DALI

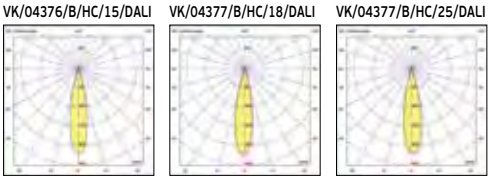

VK/04376/B/HC/15 | VK/04377/B/HC/18 | VK/04377/B/HC/25

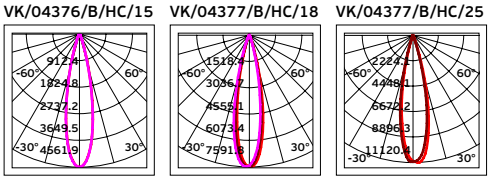

DALI | Dim 0-10V | Adjustable | **IP20.**

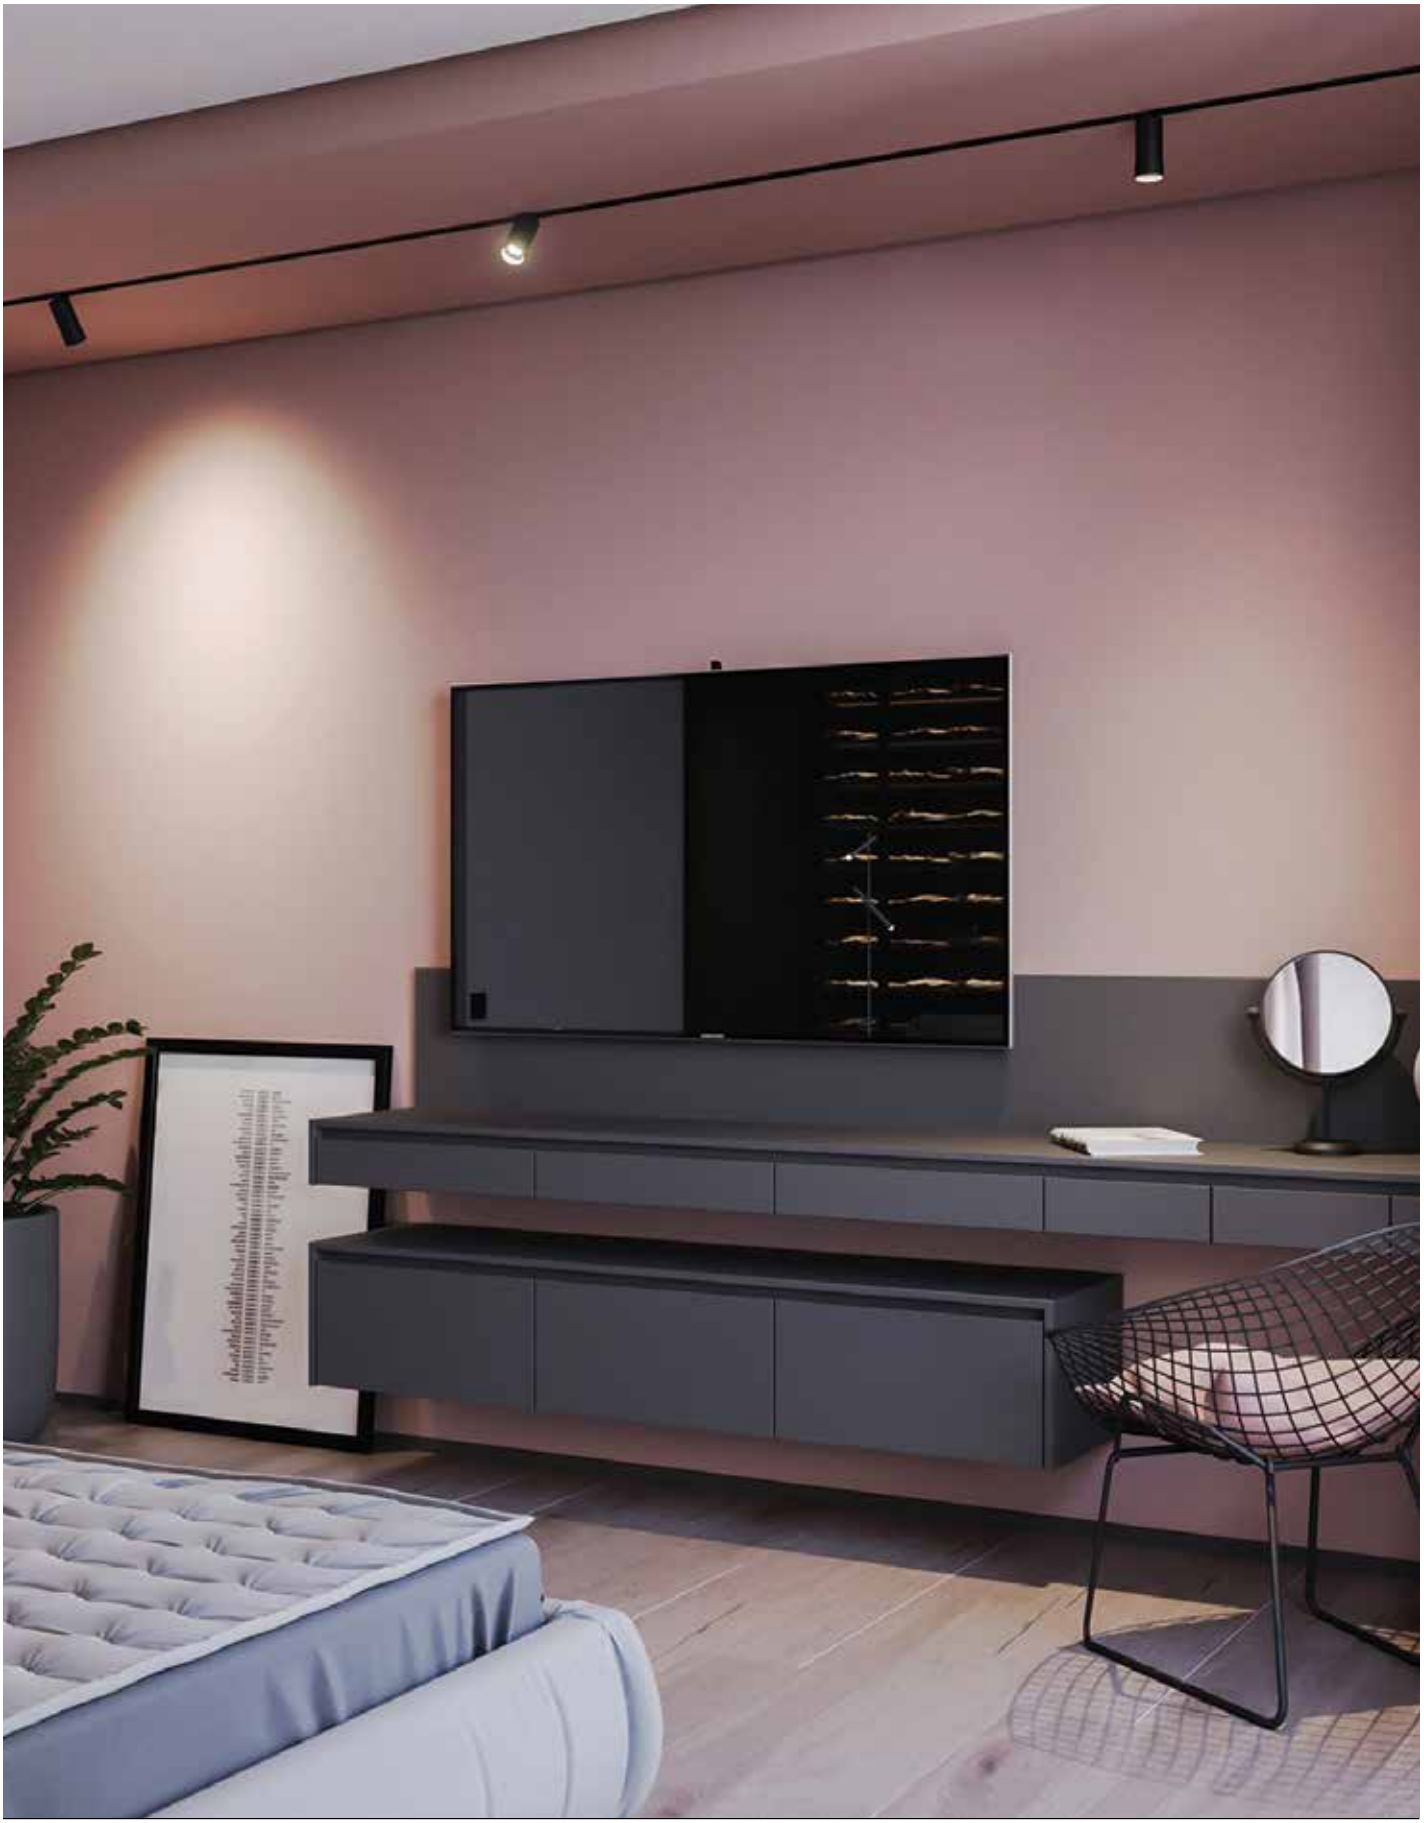


Kona









VK/04378/B/ZM/DALI - VK/04378/B/ZM

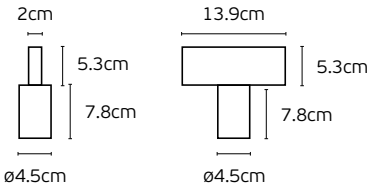

VK/04379/B/ZM/DALI - VK/04379/B/ZM

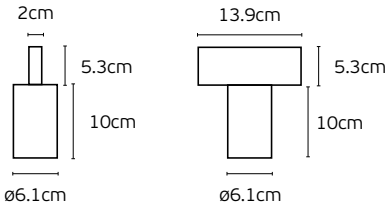

VK/04380/B/ZM/DALI - VK/04380/B/ZM

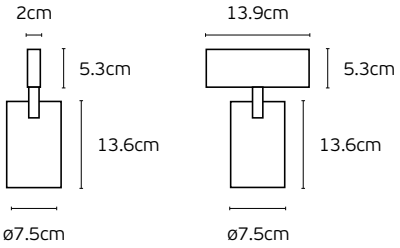

VK/04378/B/ZM, VK/04379/B/ZM, VK/04380/B/ZM

Code	Model	Box
71164-211721	**VK/04378/B/ZM/DALI** ● **Black sand**. 3000K. **399lm. 5W. Zoom 15°-45°**. DALI CRI>90	**30pcs**
71164-212721	**VK/04379/B/ZM/DALI** ● **Black sand**. 3000K. **1.265lm. 10W. Zoom 15°-60°**. DALI CRI>90	**30pcs**
71164-213721	**VK/04380/B/ZM/DALI** ● **Black sand**. 3000K. **2.034lm. 17W. Zoom 15°-60°**. DALI CRI>90	**12pcs**
71164-116721	**VK/04378/B/ZM** ● **Black sand**. 3000K. **399lm. 5W. Zoom 15°-45°**. (Dim. 0-10V) CRI>90	**30pcs**
71164-117721	**VK/04379/B/ZM** ● **Black sand**. 3000K. **1.265lm. 10W. Zoom 15°-60°**. (Dim. 0-10V) CRI>90	**30pcs**
71164-118721	**VK/04380/B/ZM** ● **Black sand**. 3000K. **2.034lm. 17W. Zoom 15°-60°**. (Dim. 0-10V) CRI>90	**12pcs**


Details

Led magnetic track Zoom Light **with DC driver 48V** (included).
Type of Led . with driver.
Dimmable **DALI**, **0-10V**.
Inclination **90°**

Rotation **350°**
Lifetime **50.000 hrs**.
Working temperature **< 45°C**.
Material **Aluminium**.
Guarantee **3 years**.


DALI · Dim 0-10V · Adjustable · **IP20.**

VK/04378/B/ZM/DALI




15° 45°

VK/04379/B/ZM/DALI




15° 60°

VK/04380/B/ZM/DALI




15° 60°


VK/04378/B/ZM




VK/04379/B/ZM



VK/04380/B/ZM






15° 60°





VK/04381/B/ZM/DALI - VK/04381/B/ZM

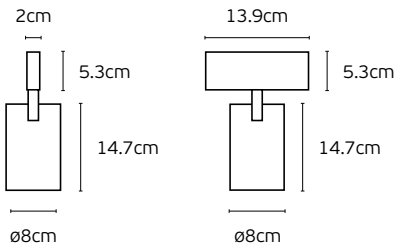

VK/04381/B/ZM


Code	Model	Box
71164-214721	**VK/04381/B/ZM/DALI**	**12pcs**
	● **Black sand**. 3000K. **2.639lm. 25W. Zoom 15°-60°.** DALI CRI>90	
71164-119721	**VK/04381/B/ZM**	**12pcs**
	● **Black sand**. 3000K. **2.639lm. 25W. Zoom 15°-60°.** (Dim. 0-10V) CRI>90	

Details

Led magnetic track Zoom Light **with DC driver 48V** (included).
Type of Led bridgelux with driver.
Dimmable **DALI**, **0-10V**.
Inclination **90°**


Rotation **350°**
Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

VK/04381/B/ZM/DALI



15° 60°

VK/04381/B/ZM




15° 60°

DALI Dim 0-10V Adjustable **IP20.**

Kona



VK/04433/TR

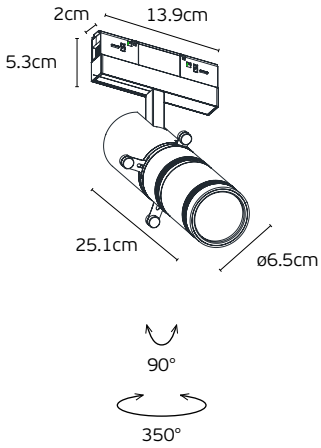

VK/04433/TR

Code	Model	Box
71164-127721	**VK/04433/TR/B/W** ● **Black sand.** 3000K. **15°-1180lm / 21°-1600lm. 25W**. (Dim. 0-10V)	**8pcs**

Details

Led magnetic track Zoom Light
with DC driver 48V (included).
Input current **700mA**.
Input Voltage **DC36V**.
Type of Led bridgelux. **COB with driver**.
Driver input **DC48V**,
Output **DC 3-40V 700mA**.
Beam angle **15°-21°**.

Angle of inclination **90°**.
Rotation Angle **350°**.
Dimmable **0-10V**.
Lifetime **20.000 hrs**.
Working temperature **< 45°C**.
Material **Aluminium+PC**.
Guarantee **3 years**.
CRI**>90**

Dim 0-10 V · Adjustable · **IP20.**



15°

<<<

>>>

21°

Kona



VK/04382/CE/B/DALI - VK/04382/CE/B


VK/04382/CE/B


Code	Model	Box
71164-215721	**VK/04382/CE/B/DALI** ● **Black sand**. 3000K. **587lm. 6W**. DALI	**20pcs**
71164-120721	**VK/04382/CE/B** ● **Black sand**. 3000K. **587lm. 6W**. (Dim. 0-10V)	**20pcs**

Details

Led magnetic track Pendant Light
with DC driver 48V (included).
Type of Led bridgelux with driver.
Dimmable **DALI**, **0-10V**.
Beam angle **24°**

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.
CRI**>90**



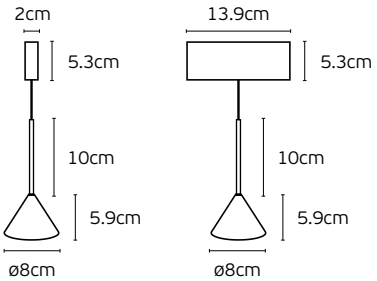


DALI Dim 0-10V **IP20.**



LED Magnetic Track Lights 48V Instruction


Συνδεσμολογία Μαγνητικής Ράγας 48V
1. Magnet Track System Electrical Diagram 48V

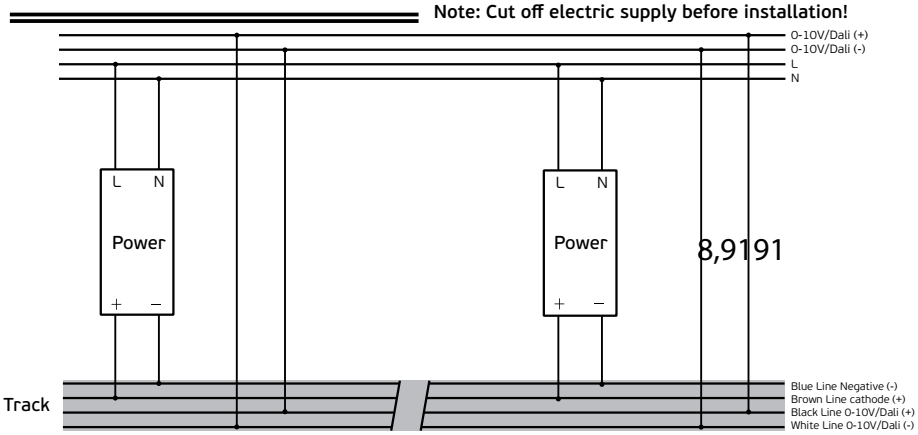

Note: When all lights power is bigger than load power, need to add one new driver into track.

Διάγραμμα κοπής για το τροφοδοτικό
2. The cut out diagram of the driver

Put the driver into ceiling before installation.
Calculate the power of lamp, it must less than load power of driver. If the lamp wattage exceed load power of driver. Need to add one more driver.
Note: New added driver need to cut out ø10mm for wires.

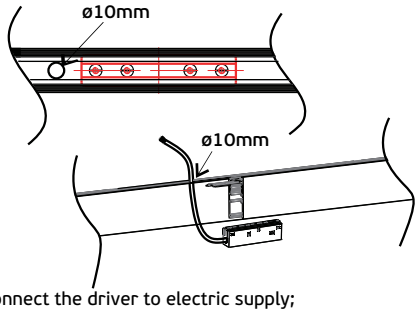


Connect the driver to electric supply;
(The driver needs to close to the installation position for the easy installation).


Cut off electric supply before installation!

Διάγραμμα σύνδεσης track φωτιστικών 48V 3. Track connection diagram 48V


3a. Power head connection diagram/Διάγραμμα σύνδεσης παροχής ενέργειας




Loose the screw, pull out the side cover.



Put GD-connection Part into the correct position




Put the side cover, tightening the screw.




Pay attention to the correct connection position when the installation.


3b. The corner connection diagram/Διάγραμμα γωνιακής σύνδεσης




Put connection part into the correct position.



Use connection part to connect the track.




Tightening the screw after the installation.




Put connection part into the correct position.


3c. Track connection diagram/Διάγραμμα σύνδεσης σε σειρά




Put connection part into the correct position.



Use connection part to connect the track.




Tightening the screw after the installation.

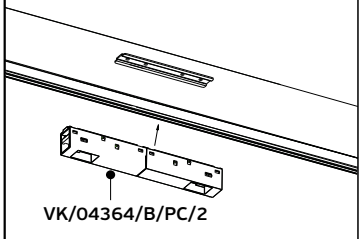






Put connection part into the correct position.

Οδηγίες εγκατάστασης χωνευτής μαγνητικής ράγας 48V


4. Recessed magnetic track installation diagram 48V

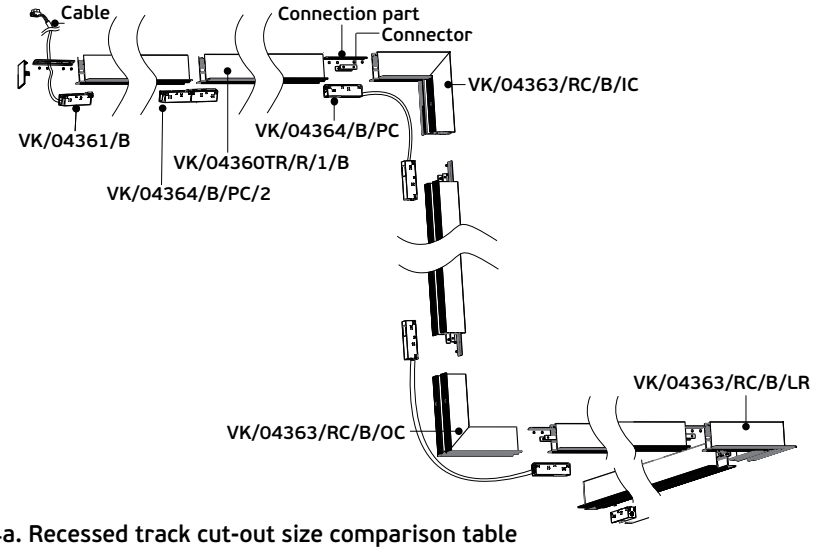


4a. Recessed track cut-out size comparison table
Συγκριτικός Πίνακας διαστάσεων κοπής

Product drawing	Models	Cut-out	Cut-out size
	VK/04360TR/R/1/B VK/04360TR/R/1.5/B VK/04360TR/R/2/B	L1005xW30mm L1505xW30mm L2005xW30mm	
	VK/04363/RC/B/IC	L120xW30mm	
	VK/04363/RC/B/OC	L170xW30mm	
	VK/04363/RC/B/LR	L180xW30mm	


4b. Measure the size of cut-out, drill the hole in the installation position




4c. Connect input end of power supply to the cable of magnetic track

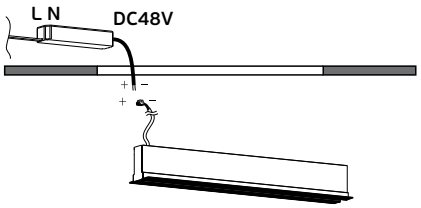

4d. Put the magnetic track into the installation hole, then fix the magnetic track by screws, and put decoration cover into the magnetic track to avoid touch dust

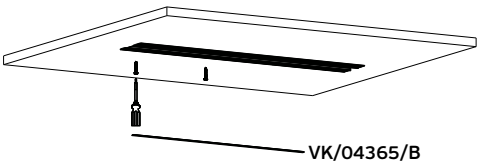


4e. After the installation of magnetic track, clean the surface




Οδηγίες εγκατάστασης επιτοίχιας μαγνητικής ράγας 48V

5. Surface-mounted magnetic track installation diagram 48V

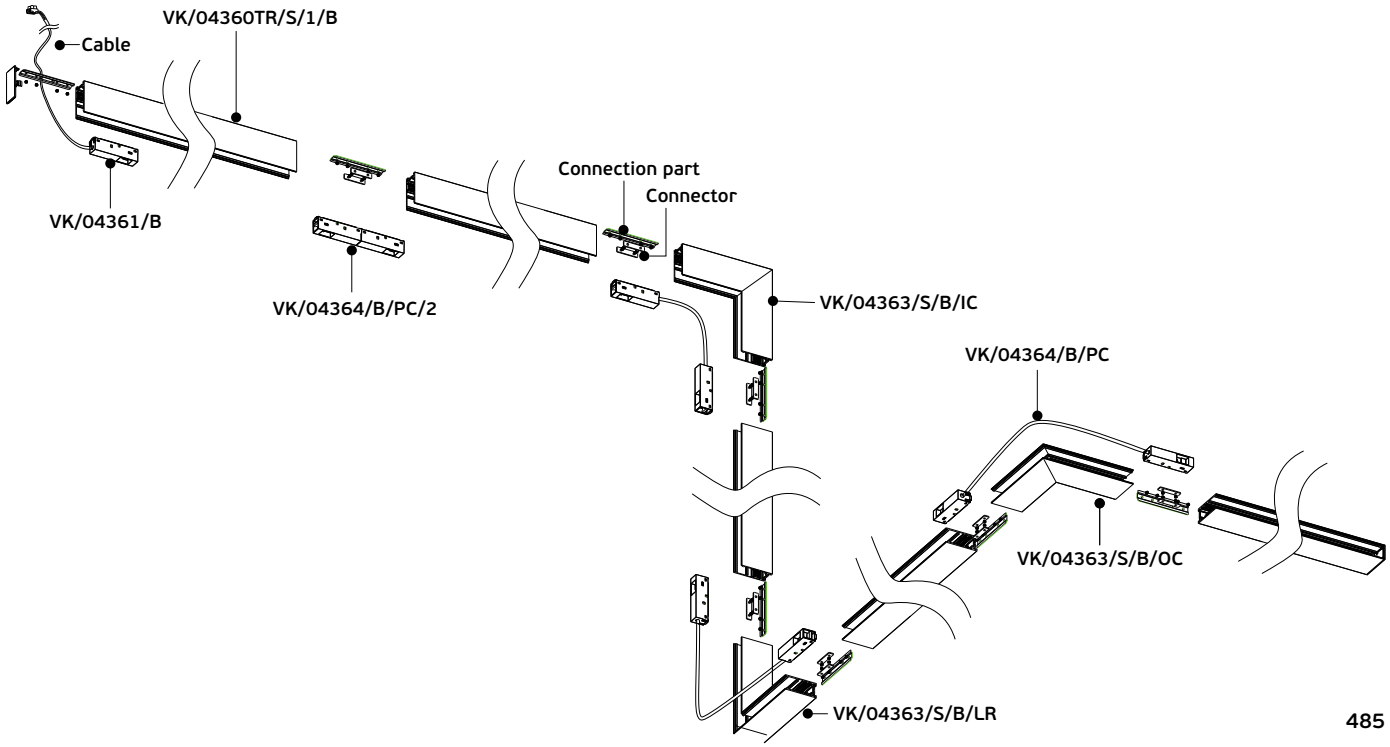

LED Magnetic Track Lights 48V Instruction


5a. Connect input end of power supply to the cable of magnetic track, then fix surface-mounted magnetic track by screws

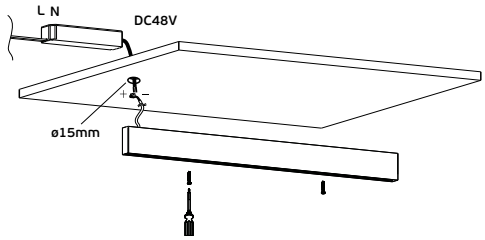




Οδηγίες εγκατάστασης κρεμαστής μαγνητικής ράγας 48V

6. Hanging magnetic track installation diagram 48V

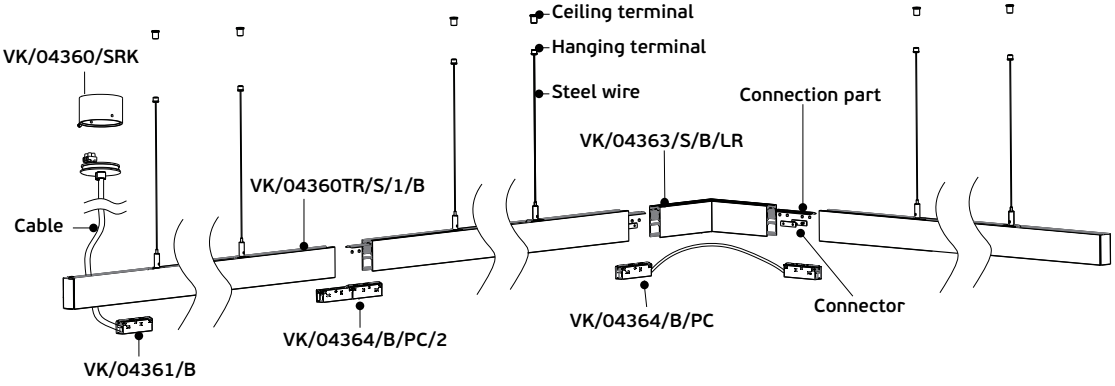


6a. Fix the ceiling box and ceiling terminal by screws first

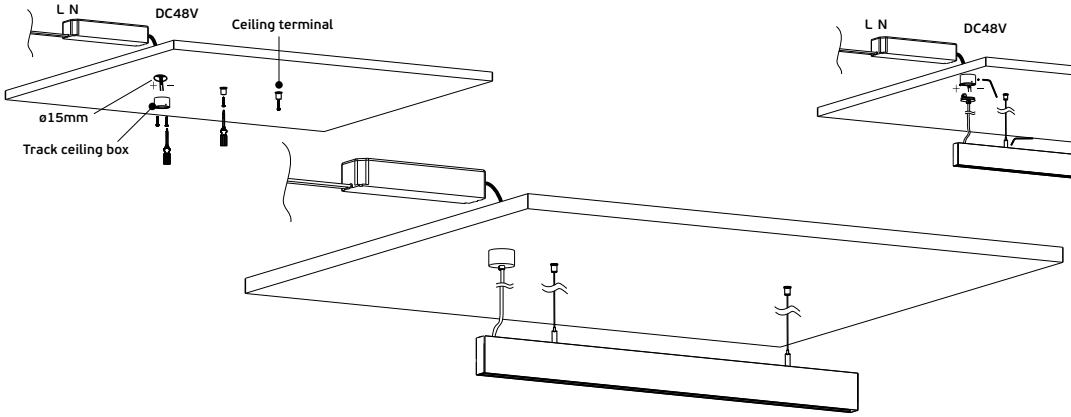

6b. Connect output and of power supply to the cable of magnetic track
(Install hanging fixture first, then tightening the screws)

Σύνδεση 0-10V Dim Dali μαγνητικής ράγας 48V


7. 0-10V Dimming/Dali Dimming connection diagram 48V

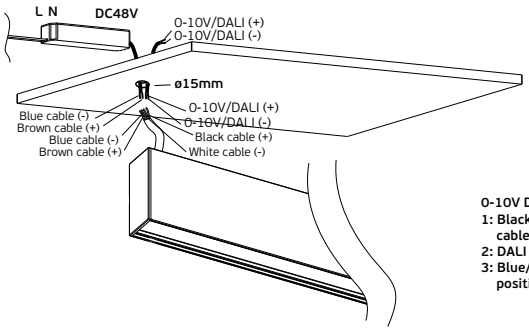

0-10V Dimming/DALI Dimming:
1: Black cable connect dimming positive pole/white cable connect dimming negative pole.
2: DALI module connect black cable.
3: Blue/Brown cable connect power supply, output positive pole and negative.

Εγκατάσταση φωτιστικών στη μαγνητική ράγα 48V

8. Magnet track system-lights installation 48V

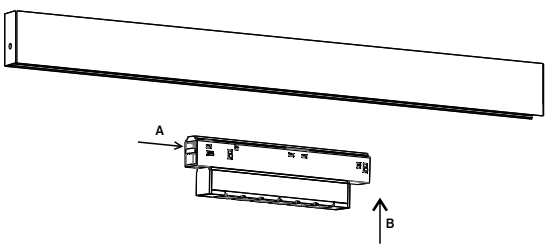










Bisqit

LED Magnetic Track Lights 48V.
Ultra Slim (Zigbee)



Bisqit

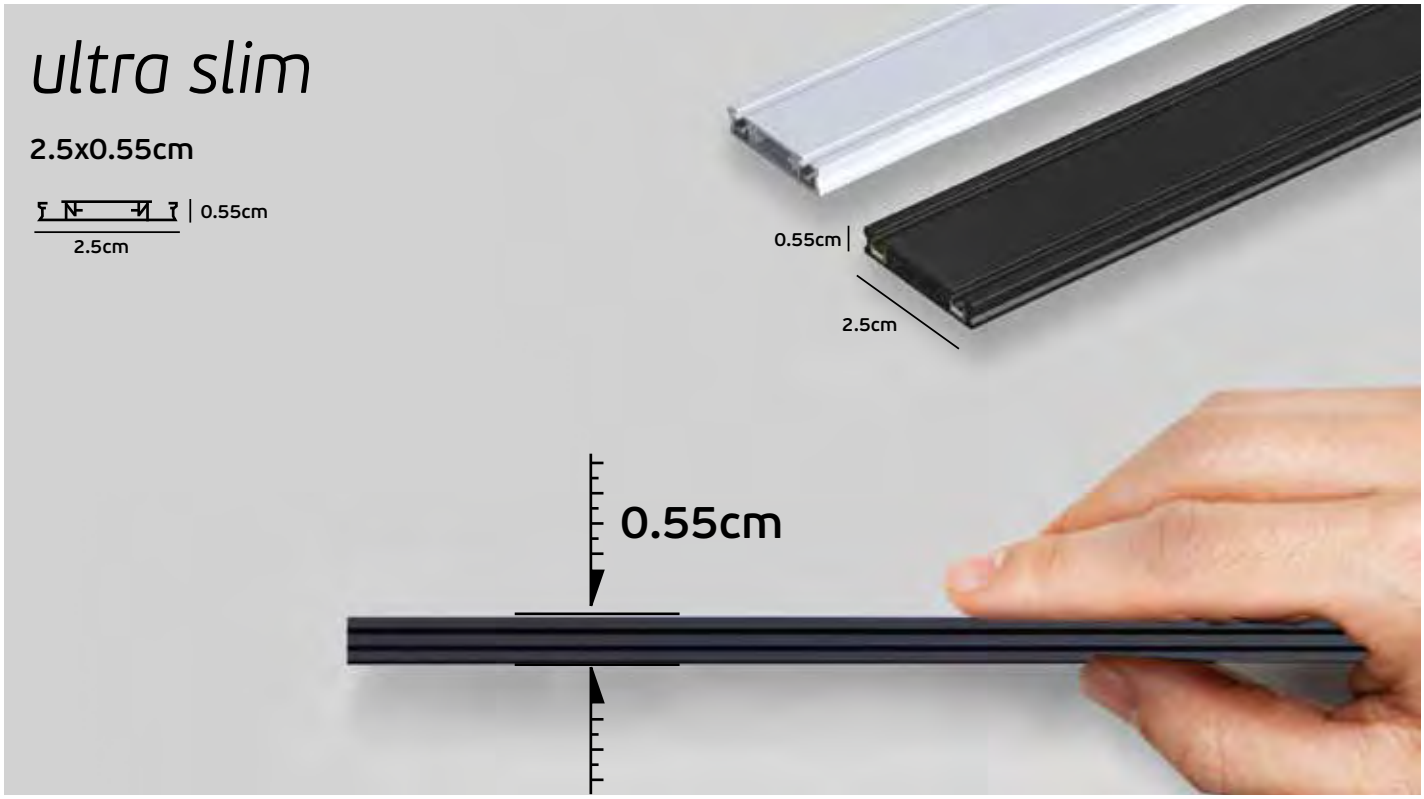

VK/04478

Code	Model	Box
71164-031115	**VK/04478/1/B** ● **Black**. 40V. **1mx0.55cmx2.5cm**	**40pcs**
71164-032115	**VK/04478/1/W** ○ **White**. 40V. **1mx0.55cmx2.5cm**	**40pcs**
71164-033115	**VK/04478/1.5/B** ● **Black**. 40V. **1.5mx0.55cmx2.5cm**	**40pcs**
71164-034115	**VK/04478/1.5/W** ○ **White**. 40V. **1.5mx0.55cmx2.5cm**	**40pcs**
71164-009115	**VK/04478/2/B** ● **Black**. 40V. **2mx0.55cmx2.5cm**	**40pcs**
71164-010115	**VK/04478/2/W** ○ **White**. 40V. **2mx0.55cmx2.5cm**	**40pcs**



100cm, 150cm, 200cm


0.55cm
2.5cm

Details

Magnetic surface mounted track line **40V**.
Length **1m**, **1.5m**, **2m**
Thickness **0.55cm**.

IP Rating **IP20**.
Working temperature **<45°C**.
Material **Aluminium**.

operation only with WiFi android iOS zigbee



VK/04479/B/CON


VK/04479

Code	Model	Box
71164-011115	**VK/04479/B/CON** ● **Black**. 40V. **3x2.5x0.55cm**	**50pcs**
71164-012115	**VK/04479/W/CON** ○ **White**. 40V. **3x2.5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.



VK/04480/B/CON


VK/04480

Code	Model	Box
71164-013115	**VK/04480/B/CON** ● **Black**. 40V. **5.5x5.5x0.55cm**	**50pcs**
71164-014115	**VK/04480/W/CON** ○ **White**. 40V. **5.5x5.5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.



VK/04481/B/CON

VK/04481


Code	Model	Box
71164-015115	**VK/04481/B/CON** ● **Black**. 40V. **5x5x0.55cm**	**50pcs**
71164-016115	**VK/04481/W/CON** ○ **White**. 40V. **5x5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.

Bisqit



VK/04482/B/CON


VK/04482

Code	Model	Box
71164-017115	**VK/04482/B/CON** ● **Black**. 40V. **8.5x2.5x0.55cm**	**50pcs**
71164-018115	**VK/04482/W/CON** ○ **White**. 40V. **8.5x2.5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.



VK/04483/B/CON


VK/04483

Code	Model	Box
71164-019115	**VK/04483/B/CON** ● **Black**. 40V. **11x2.5x0.55cm**	**50pcs**
71164-020115	**VK/04483/W/CON** ○ **White**. 40V. **11x2.5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.



VK/04484/B/CON

VK/04484

Code	Model	Box
71164-021115	**VK/04484/B/CON** ● **Black**. 40V. **5.5x5.5x0.55cm**	**50pcs**
71164-022115	**VK/04484/W/CON** ○ **White**. 40V. **5.5x5.5x0.55cm**	**50pcs**

Details

Connectors for Magnetic surface mounted track line **40V**.

IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.



VK/04490/B/ZB


VK/04490

Code	Model	Box
71164-176721	**VK/04490/B/ZB** ● **Black.**	**10pcs**
71164-177721	**VK/04490/W/ZB** ○ **White.**	**10pcs**

Details


Connection method **Zigbee wireless gateway.**
Power input **DC 5V 1A.**
Operating temperature **-20°C~45°C.**

Working humidity **10%-90%RH (No condensation).**
Application **"Tuya Smart".**



operation only with WiFi android iOS zigbee

Product description

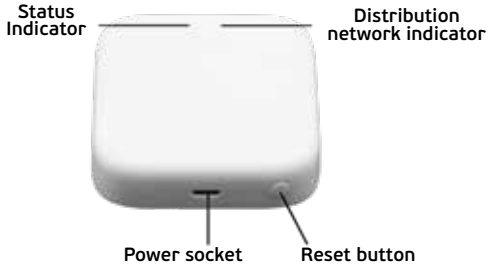

Preparation for use

1. Connect your phone to Wi-fi.



Ensure that the product is within the effective coverage of the Wifi network to ensure an effective connection between the product and the smart host (gateway) Zigbee network.

* **The gateway is in the network distribution mode (the indicator lights are on at the same time).**

2. Download and open the App. Search for "Tuya Smart" in the application store or scan the QR code on the outer packaging /instructions to download and install the App.

Bisqit



VK/04488/B/MOD

VK/04488/100/.../MOD



VK/04488/200/.../MOD



VK/04488

Code	Model	Box
71164-029115	**VK/04488/100/B/MOD** ● **Black**. **100W**. 40V. 29x2.5x2.76cm	**30pcs**
71164-030115	**VK/04488/100/W/MOD** ○ **White**. **100W**. 40V. 29x2.5x2.76cm	**30pcs**
71164-035115	**VK/04488/200/B/MOD** ● **Black**. **200W**. 40V. 34.5x2.5x2.76cm	**30pcs**
71164-036115	**VK/04488/200/W/MOD** ○ **White**. **200W**. 40V. 34.5x2.5x2.76cm	**30pcs**



Details

Drivers for Magnetic surface mounted track line **40V**.
IP Rating **IP20**.

Working temperature **<45°C**.
Material **Aluminium**.
Guarantee **3 years**.

operation only with WiFi android iOS zigbee

Bisqit




Bisqit



VK/04460/B/DW/6



VK/04460/W/DW/6



VK/04460/.../6

Code	Model	Box
71164-134721	**VK/04460/B/DW/6** ● **Black**. 2700K-6000K. **5W. 208lm**. CRI>90	**50pcs**
71164-135721	**VK/04460/W/DW/6** ○ **White**. 2700K-6000K. **5W. 208lm**. CRI>90	**50pcs**

Details

Input Voltage **40V**.
Input current **0.133A**.
Output Voltage **18.8V**.
Output current **300mA**.
Type of Led **San'an**. Numbers of Led **12.**
Beam angle **120°**.
Dimmable **yes**.


Lifetime 8000 hrs.
Clicks 30.000 clicks.
Working temperature < 70°C.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

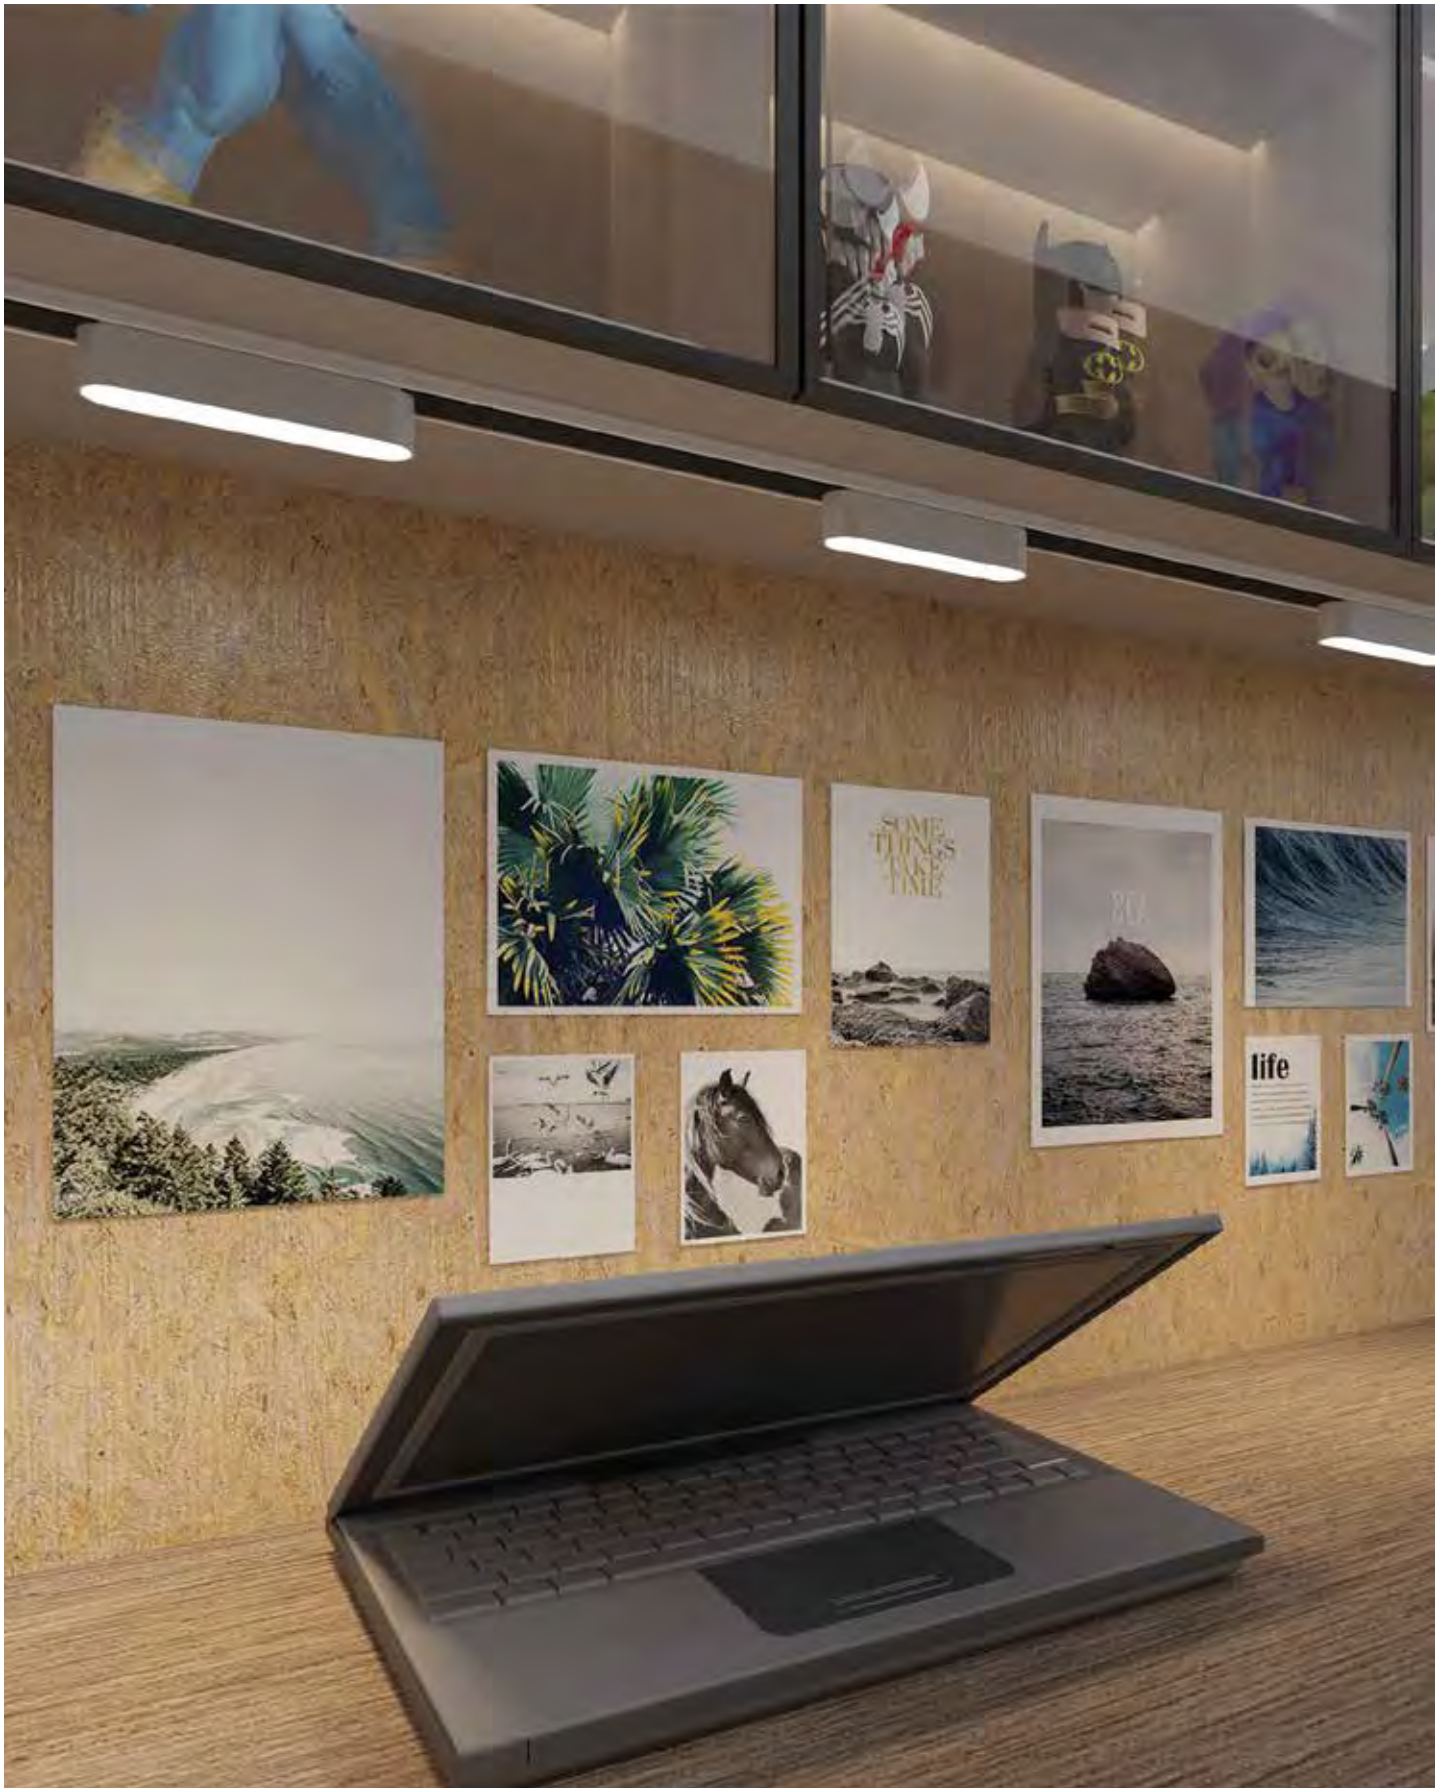
SOME THINGS TAKE TIME
life


Bisqit



VK/04467/B/DW/6



VK/04467/W/DW/6



VK/04467/.../6

Code	Model	Box
71164-136721	**VK/04467/B/DW/6** ● **Black. 2700K-6000K. 5W. 376lm.** CRI>90	**50pcs**
71164-137721	**VK/04467/W/DW/6** ○ **White. 2700K-6000K. 5W. 376lm.** CRI>90	**50pcs**

Details

Input Voltage **40V.**
Input current **0.128A.**
Output Voltage **18.8V.**
Output current **300mA.**
Type of Led **San'an.** Numbers of Led **6.**
Beam angle **36º.**
Dimmable **yes.**

Lifetime **8000 hrs.**
Clicks **30.000 clicks.**
Working temperature **< 70°C.**
Material **Aluminium.**
Installation **Track.**
Guarantee **3 years.**
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee




Bisqit



VK/04468/B/DW/6



VK/04468/W/DW/6



VK/04468/.../6

Code	Model	Box
71164-138721	**VK/04468/B/DW/6** ● **Black. 2700K-6000K. 5W. 143lm.** CRI>90	**50pcs**
71164-139721	**VK/04468/W/DW/6** ○ **White. 2700K-6000K. 5W. 143lm.** CRI>90	**50pcs**

Details

Input Voltage **40V**.
Input current **0.133A**.
Output Voltage **189V**.
Output current **300mA**.
Type of Led **San'an**. Numbers of Led **12.**
Beam angle **60º**.
Dimmable **yes**.

Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee


01


Bisqit



VK/04460/B/DW/12



VK/04460/W/DW/12



VK/04460/.../12

Code	Model	Box
71164-140721	**VK/04460/B/DW/12** ● **Black. 2700K-6000K. 8W. 614lm.** CRI>90	**50pcs**
71164-141721	**VK/04460/W/DW/12** ○ **White. 2700K-6000K. 8W. 614lm.** CRI>90	**50pcs**

Details

Input Voltage **40V**.
Input current **0.26A**.
Output Voltage **37.8V**.
Output current **300mA**.
Type of Led **San'an**. Numbers of Led **24**.
Beam angle **120°**.
Dimmable **yes**.


Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

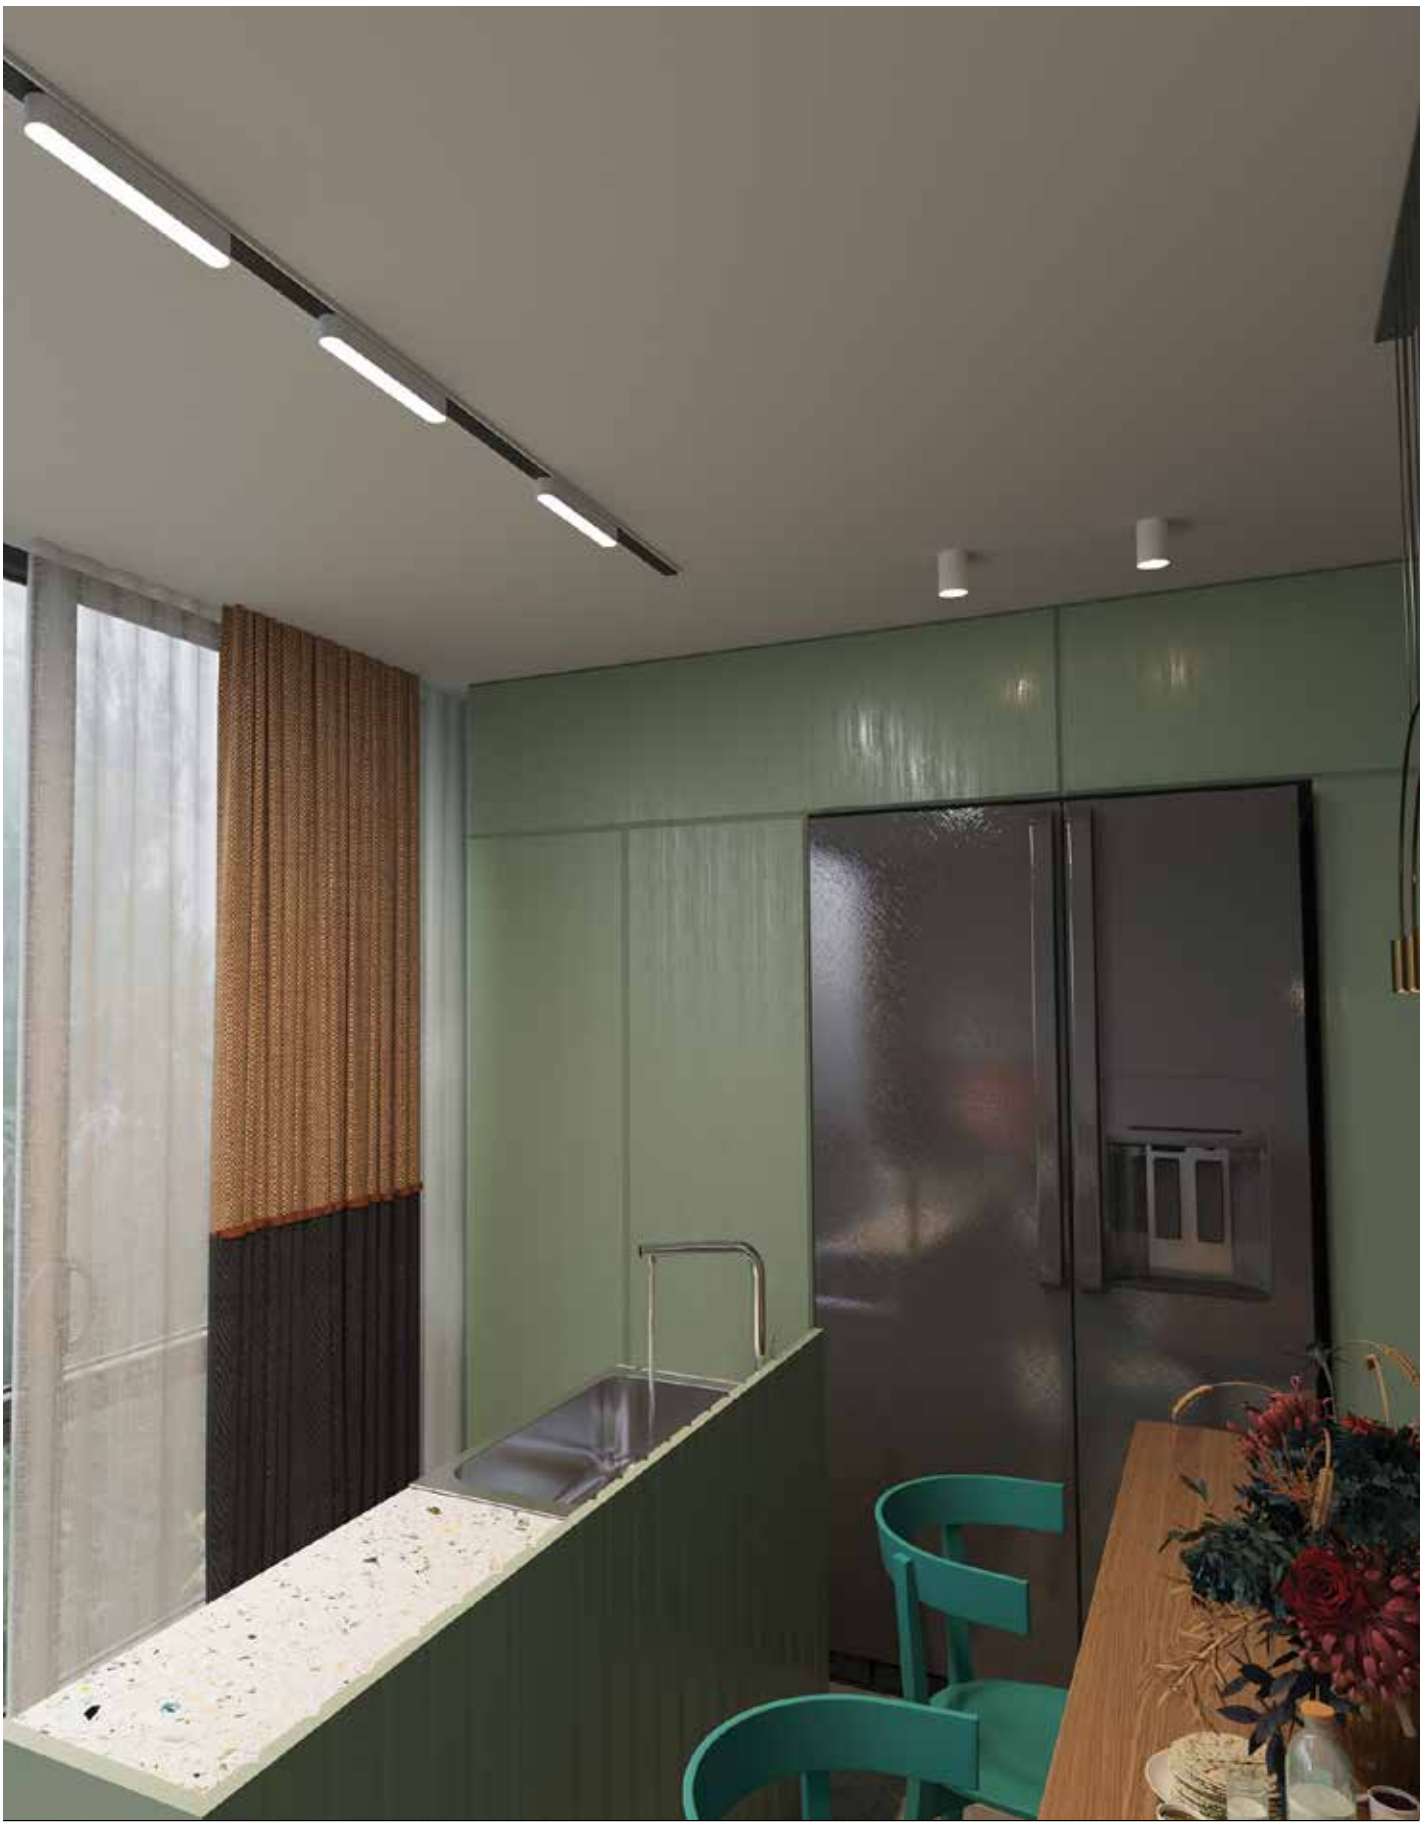


Bisqit



VK/04467/B/DW/12



VK/04467/W/DW/12



VK/04467/.../12

Code	Model	Box
71164-142721	**VK/04467/B/DW/12** ● **Black. 2700K-6000K. 8W. 626lm.** CRI>90	**50pcs**
71164-143721	**VK/04467/W/DW/12** ○ **White. 2700K-6000K. 8W. 626lm.** CRI>90	**50pcs**

Details

Input Voltage **40V**.
Input current **0.242A**.
Output Voltage **35.6V**.
Output current **300mA**.
Type of Led **San'an**. Numbers of Led **12.**
Beam angle **36°**.
Dimmable **yes**.

Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee




Bisqit



VK/04468/B/DW/12



VK/04468/W/DW/12



VK/04468/.../12

Code	Model	Box
71164-144721	**VK/04468/B/DW/12** ● **Black. 2700K-6000K. 8W. 342lm.** CRI>90	**50pcs**
71164-145721	**VK/04468/W/DW/12** ○ **White. 2700K-6000K. 8W. 342lm.** CRI>90	**50pcs**

Details

Input Voltage **40V**.
Input current **0.26A**.
Output Voltage **37.6V**.
Output current **300mA**.
Type of Led **San'an**. Numbers of Led **24.**
Beam angle **60º**.
Dimmable **yes**.


Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.





On-Off
Dimmable
CCT 2700K~6000K


operation only with WiFi android iOS zigbee

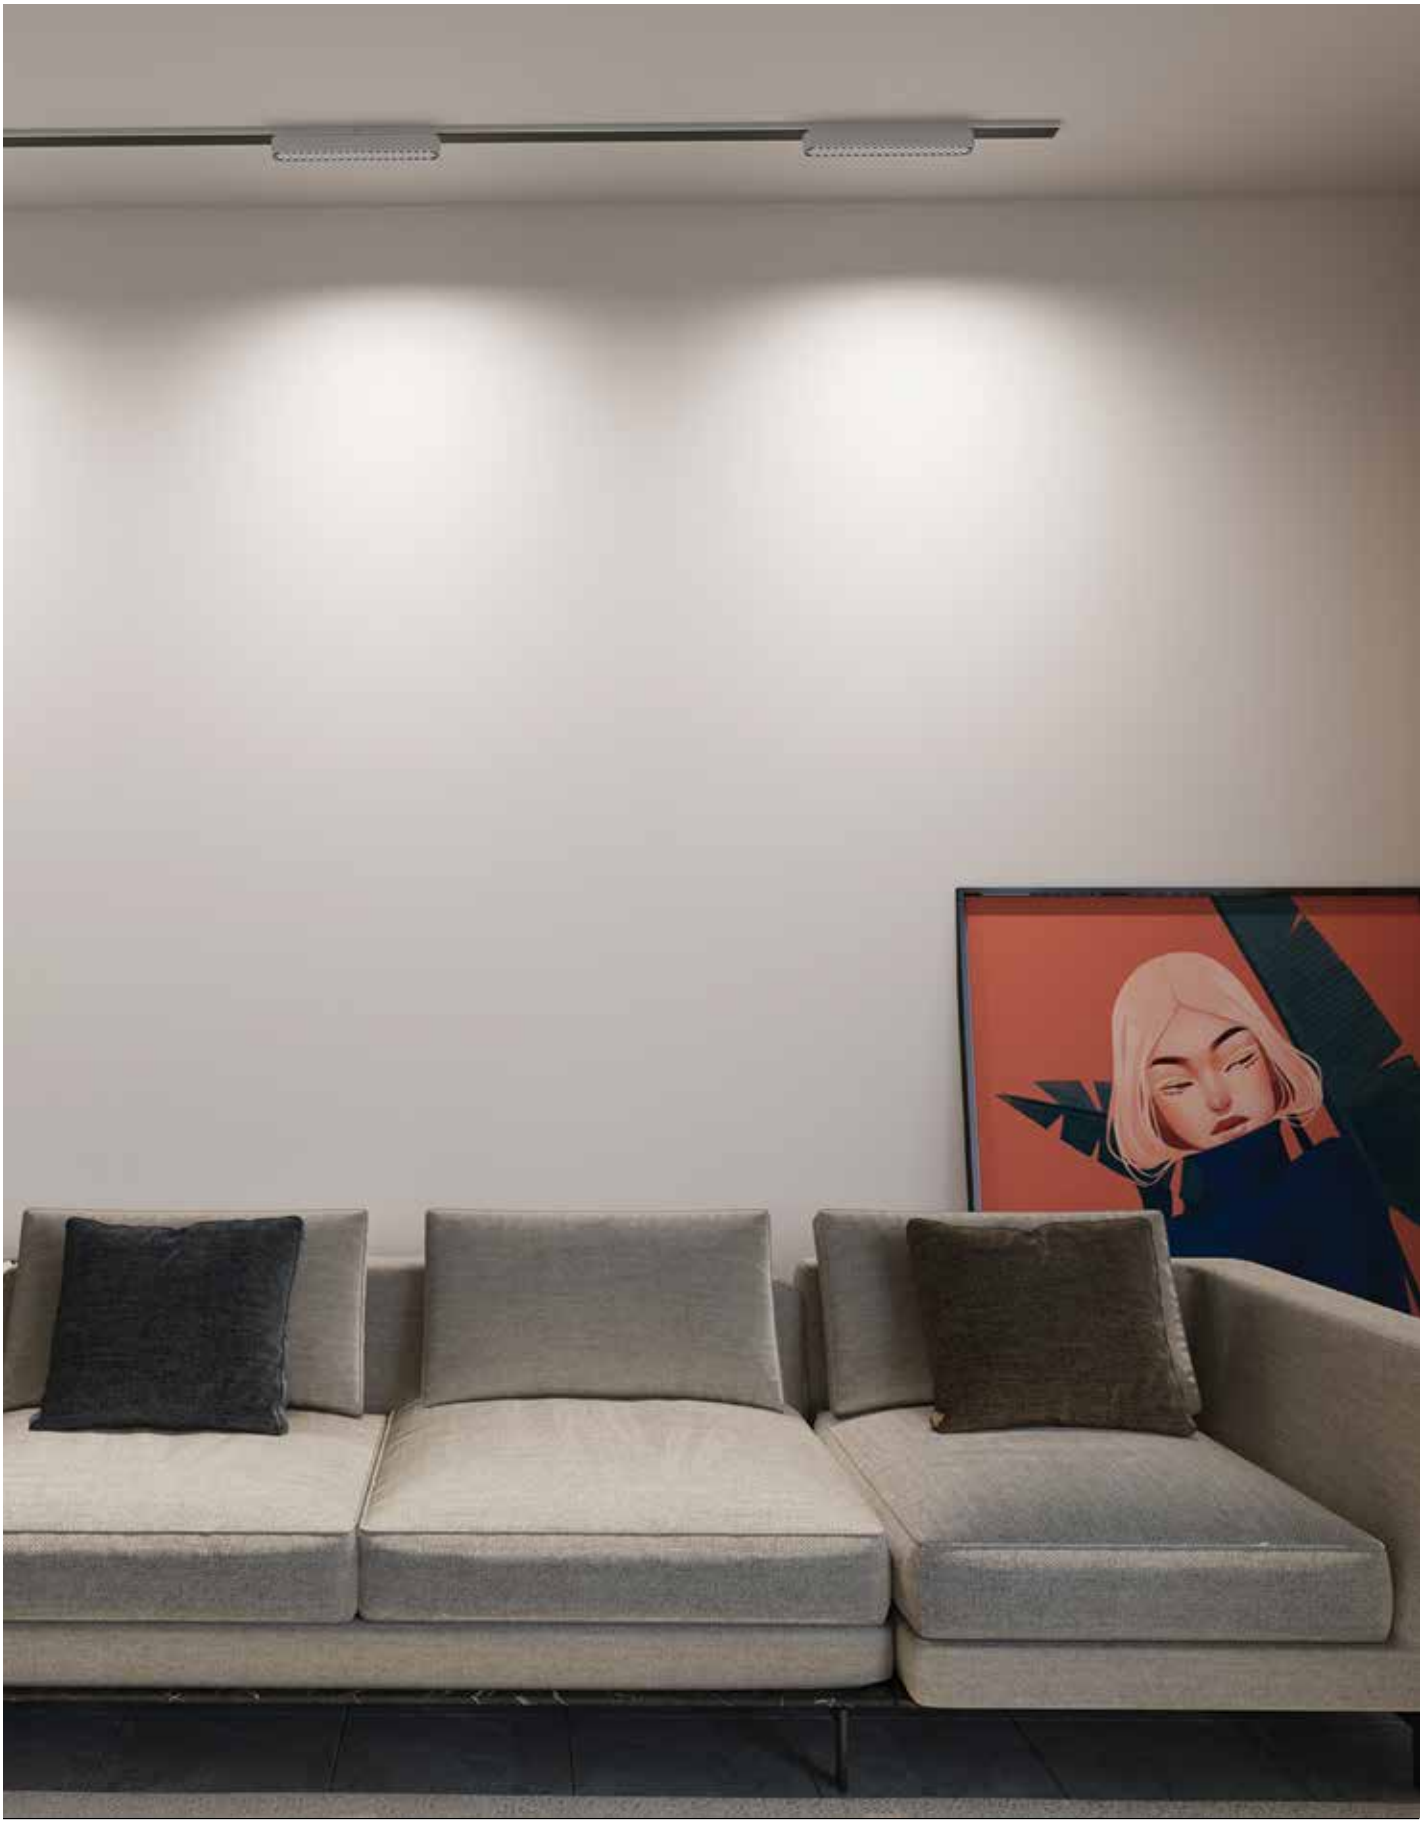








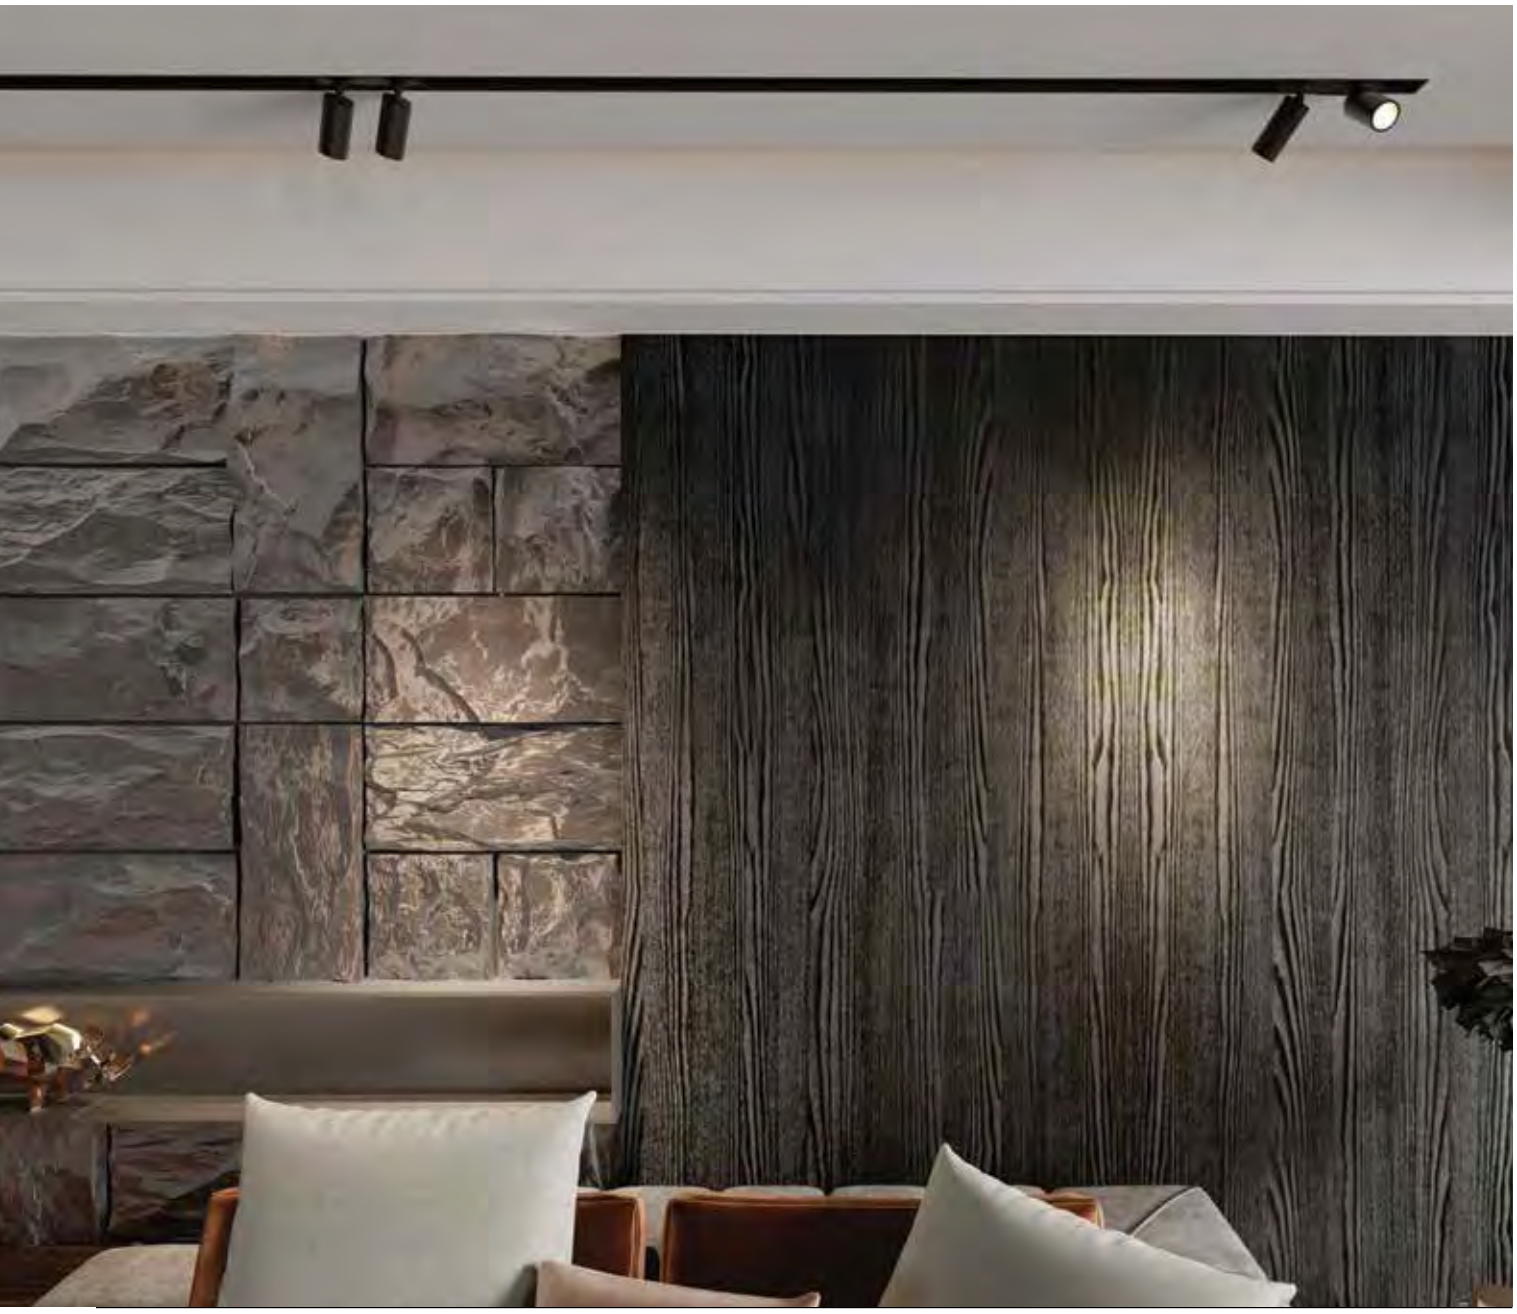

Bisqit




VK/04469/TR/DW/S





VK/04469/TR/DW/S/2



VK/04469/TR/S

Code	Model	Box
71164-146721	**VK/04469/TR/B/DW/S** ● **Black. 2700K-6000K. 4W. 234lm.** CRI>90	**30pcs**
71164-147721	**VK/04469/TR/W/DW/S** ○ **White. 2700K-6000K. 4W. 234lm.** CRI>90	**30pcs**
71164-148721	**VK/04469/TR/B/DW/S/2** ● **Black. 2700K-6000K. 2x4W. 518lm.** CRI>90	**30pcs**
71164-149721	**VK/04469/TR/W/DW/S/2** ○ **White. 2700K-6000K. 2x4W. 518lm.** CRI>90	**30pcs**

Details

Input Voltage **40V**.
Input current **0.107/0.2A.**
Output Voltage **33.8/33.4V**.
Output current **130/250mA**.
Type of Led bridgelux.
Numbers of Led **1/2**.
Beam angle **24°**.
Rotation angle **360°**

Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

Adjustable

IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee


Bisqit




VK/04469/TR/DW/L



VK/04469/TR/DW/L/2






VK/04469/TR/L

Code	Model	Box
71164-150721	**VK/04469/TR/B/DW/L** ● **Black. 2700K-6000K. 6W. 383lm.** CRI>90	**30pcs**
71164-151721	**VK/04469/TR/W/DW/L** ○ **White. 2700K-6000K. 6W. 383lm.** CRI>90	**30pcs**
71164-152721	**VK/04469/TR/B/DW/L/2** ● **Black. 2700K-6000K. 2x6W. 705lm.** CRI>90	**30pcs**
71164-153721	**VK/04469/TR/W/DW/L/2** ○ **White. 2700K-6000K. 2x6W. 705lm.** CRI>90	**30pcs**

Details

Input Voltage **40V**.
Input current **0.135/0.293A**.
Output Voltage **34.8/34.5V**.
Output current **170/350mA**.
Type of Led bridgelux.
Numbers of Led **1/2**.
Beam angle **24°**.
Rotation Angle **360°**

Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.



IP20.




On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

Bisqit




VK/04470/TR/DW/S





VK/04470/TR/DW/L



VK/04470/TR

Code	Model	Box
71164-154721	**VK/04470/TR/B/DW/S** ● **Black. 2700K-6000K. 8W. 507lm.** CRI>90	**30pcs**
71164-172721	**VK/04470/TR/W/DW/S** ○ **White. 2700K-6000K. 8W. 507lm.** CRI>90	**30pcs**
71164-155721	**VK/04470/TR/B/DW/L** ● **Black. 2700K-6000K. 11W. 685lm.** CRI>90	**30pcs**
71164-173721	**VK/04470/TR/W/DW/L** ○ **White. 2700K-6000K. 11W. 685lm.** CRI>90	**30pcs**

Details

Input Voltage **40V**.
Input current **0.239/0.322A**.
Output Voltage **37/36.1V**.
Output current **300/400mA**.
Type of Led bridgelux.
Numbers of Led **1**.
Beam angle **24°**.
Rotation angle **360°**

Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

Adjustable

IP20.




On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

Bisqit



VK/04471/TR/B/DW



VK/04471/TR

Code	Model	Box
71164-156721	**VK/04471/TR/B/DW** ● **Black. 2700K-6000K. 14W. 906lm**. CRI>90	**30pcs**
71164-157721	**VK/04471/TR/W/DW** ○ **White. 2700K-6000K. 14W. 906lm**. CRI>90	**30pcs**

Details

Input Voltage **40V**.
Input current **0.237A**.
Output Voltage **35V**.
Output current **300mA**.
Type of Led bridgelux.
Numbers of Led **1.**
Angle **24°**.
Rotation angle **360°**

Dimmable **yes**.
Lifetime 8000 hrs.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

Adjustable

IP20.




On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

Bisqit




VK/04472/TR/B/DW





VK/04472/TR/B/DW/2



VK/04472/TR

Code	Model	Box
71164-158721	**VK/04472/TR/B/DW** ● **Black. 2700K-6000K. 10W. 581lm.** CRI>90	**30pcs**
71164-159721	**VK/04472/TR/W/DW** ○ **White. 2700K-6000K. 10W. 581lm.** CRI>90	**30pcs**
71164-160721	**VK/04472/TR/B/DW/2** ● **Black. 2700K-6000K. 2x9W. 1.218lm.** CRI>90	**20pcs**
71164-161721	**VK/04472/TR/W/DW/2** ○ **White. 2700K-6000K. 2x9W. 1.218lm.** CRI>90	**20pcs**

Details

Input Voltage **40V**.
Input current **0.131/0.31A**.
Output Voltage **35.2/35.5V**.
Output current **300/400mA**.
Type of Led bridgelux.
Numbers of Led **1, 2.**
Beam angle **24°**.
Rotation Angle **360°**

Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.



IP20.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee


Bisqit




VK/04473/CE/B/DW



VK/04489/CE/B/DW





VK/04473/CE, VK/04489/CE

Code	Model	Box
71164-162721	**VK/04473/CE/B/DW** ● **Black. 2700K-6000K. 12W. 753lm. 24°.** CRI>90	**20pcs**
71164-163721	**VK/04473/CE/W/DW** ○ **White. 2700K-6000K. 12W. 753lm. 24°.** CRI>90	**20pcs**
71164-174721	**VK/04489/CE/B/DW** ● **Black. 2700K-6000K. 12W. 1.002lm. 120°.** CRI>90	**20pcs**
71164-175721	**VK/04489/CE/W/DW** ○ **White. 2700K-6000K. 12W. 1.002lm. 120°.** CRI>90	**20pcs**

Details

Rotation Angle **360°**
Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 60°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

VK/04473/CE:
Input Voltage **40V**.
Input current **0.243A**.
Output Voltage **37V**.
Output current **300mA**.
Type of Led **San'an**.
Numbers of Led **1**.
Beam angle **24°**.

VK/04489/CE:
Input Voltage **40V**.
Input current **0.191A**.
Output Voltage **34.5V**.
Output current **250mA**.
Type of Led **San'an**.
Numbers of Led **60**.
Beam angle **120°**.

IP20.




On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

Bisqit



VK/04474/PE/B/DW

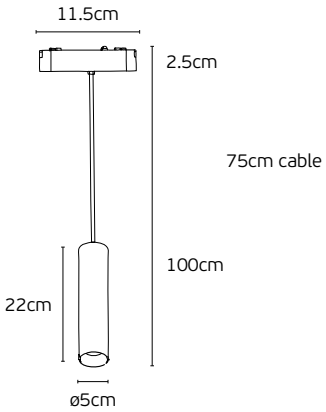

VK/04474/PE

Code	Model	Box
71164-166721	**VK/04474/PE/B/DW** ● **Black. 2700K-6000K. 11W. 678lm.** CRI>90	**20pcs**
71164-167721	**VK/04474/PE/W/DW** ○ **White. 2700K-6000K. 11W. 678lm.** CRI>90	**20pcs**

Details

Input Voltage **40V**.
Input current **0.207A**.
Output Voltage **36.7V**.
Output current **250mA**.
Type of Led bridgelux.
Numbers of Led **1**.
Beam angle **20°**.
Rotation angle **360°**

Dimmable **yes**.
Lifetime **8000 hrs**.
Clicks **30.000 clicks**.
Working temperature **< 70°C**.
Material **Aluminium**.
Installation **Track**.
Guarantee **3 years**.
Bluetooth, Zigbee.

IP20.



On-Off
Dimmable
CCT 2700K~6000K


operation only with WiFi android iOS zigbee




Bisqit



Base for magnetics lights



VK/04475/BASE



+



=





VK/04475

Code	Model	Box
71164-168721	**VK/04475/B/BASE** ● **Black.**	**50pcs**
71164-169721	**VK/04475/W/BASE** ○ **White.**	**50pcs**

Details

Input Voltage **DC40-48V.**
Rotation Angle **0-90°.**
Material **Aluminium.**

Installation **Track.**
Guarantee **3 years.**
Bluetooth, Zigbee.



On-Off
Dimmable
CCT 2700K~6000K

operation only with WiFi android iOS zigbee

LED Magnetic Track Lights Ultra Slim **Bases**









Bisqit



Base for magnetics lights

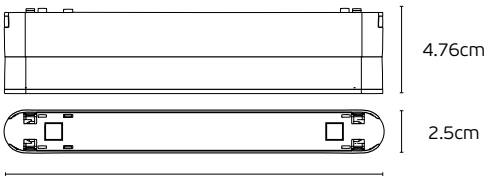

VK/04476/BASE





+



=



VK/04476

Code	Model	Box
71164-170721	**VK/04476/B/BASE** ● **Black.**	**50pcs**
71164-171721	**VK/04476/W/BASE** ○ **White.**	**50pcs**

Details

Input Voltage **DC40-48V.**
Rotation Angle **0-90°.**
Material **Aluminium.**

Installation **Track.**
Guarantee **3 years.**
Bluetooth, Zigbee.



On-Off
Dimmable
CCT 2700K~6000K


operation only with WiFi android iOS zigbee


LED Magnetic Track Lights Ultra Slim **Bases**







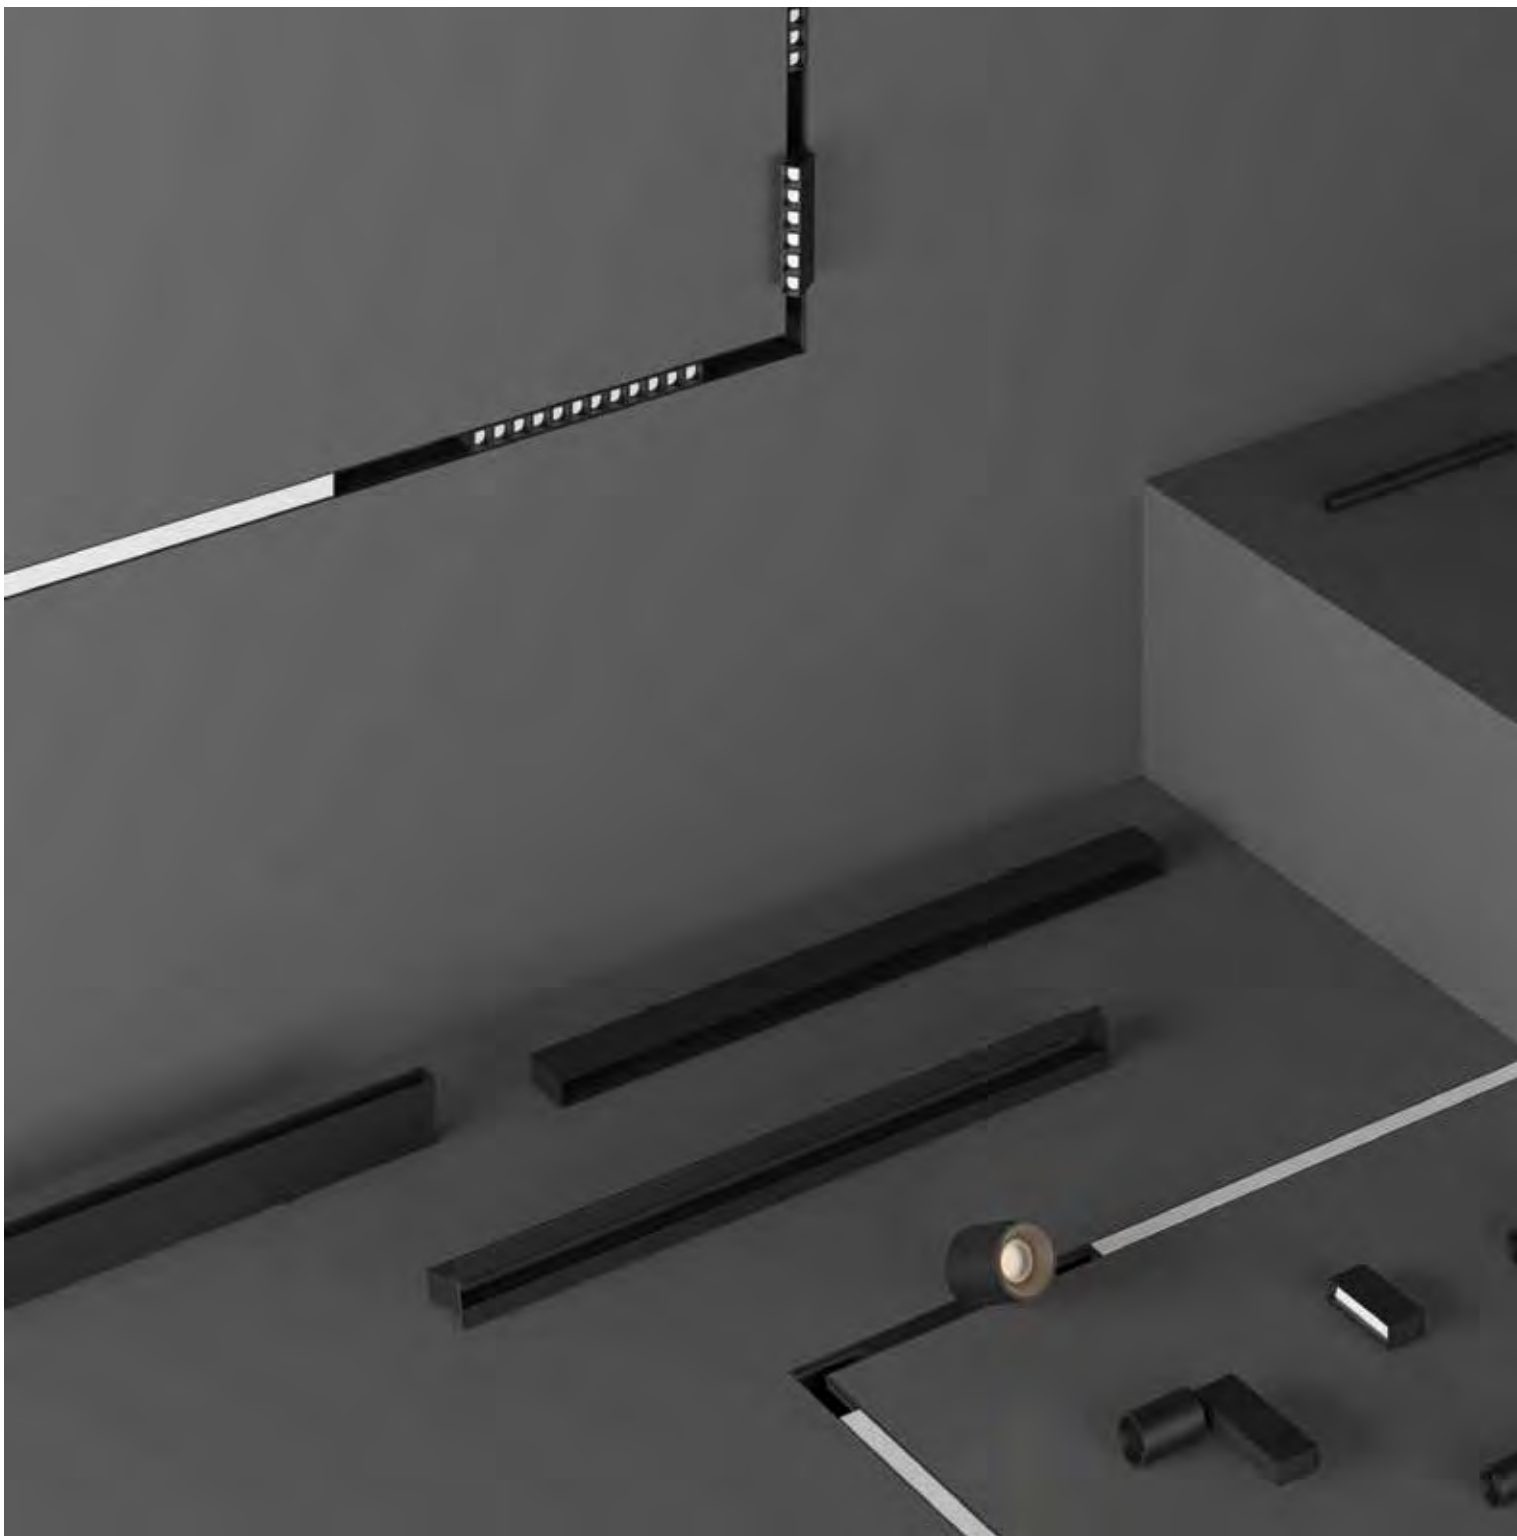

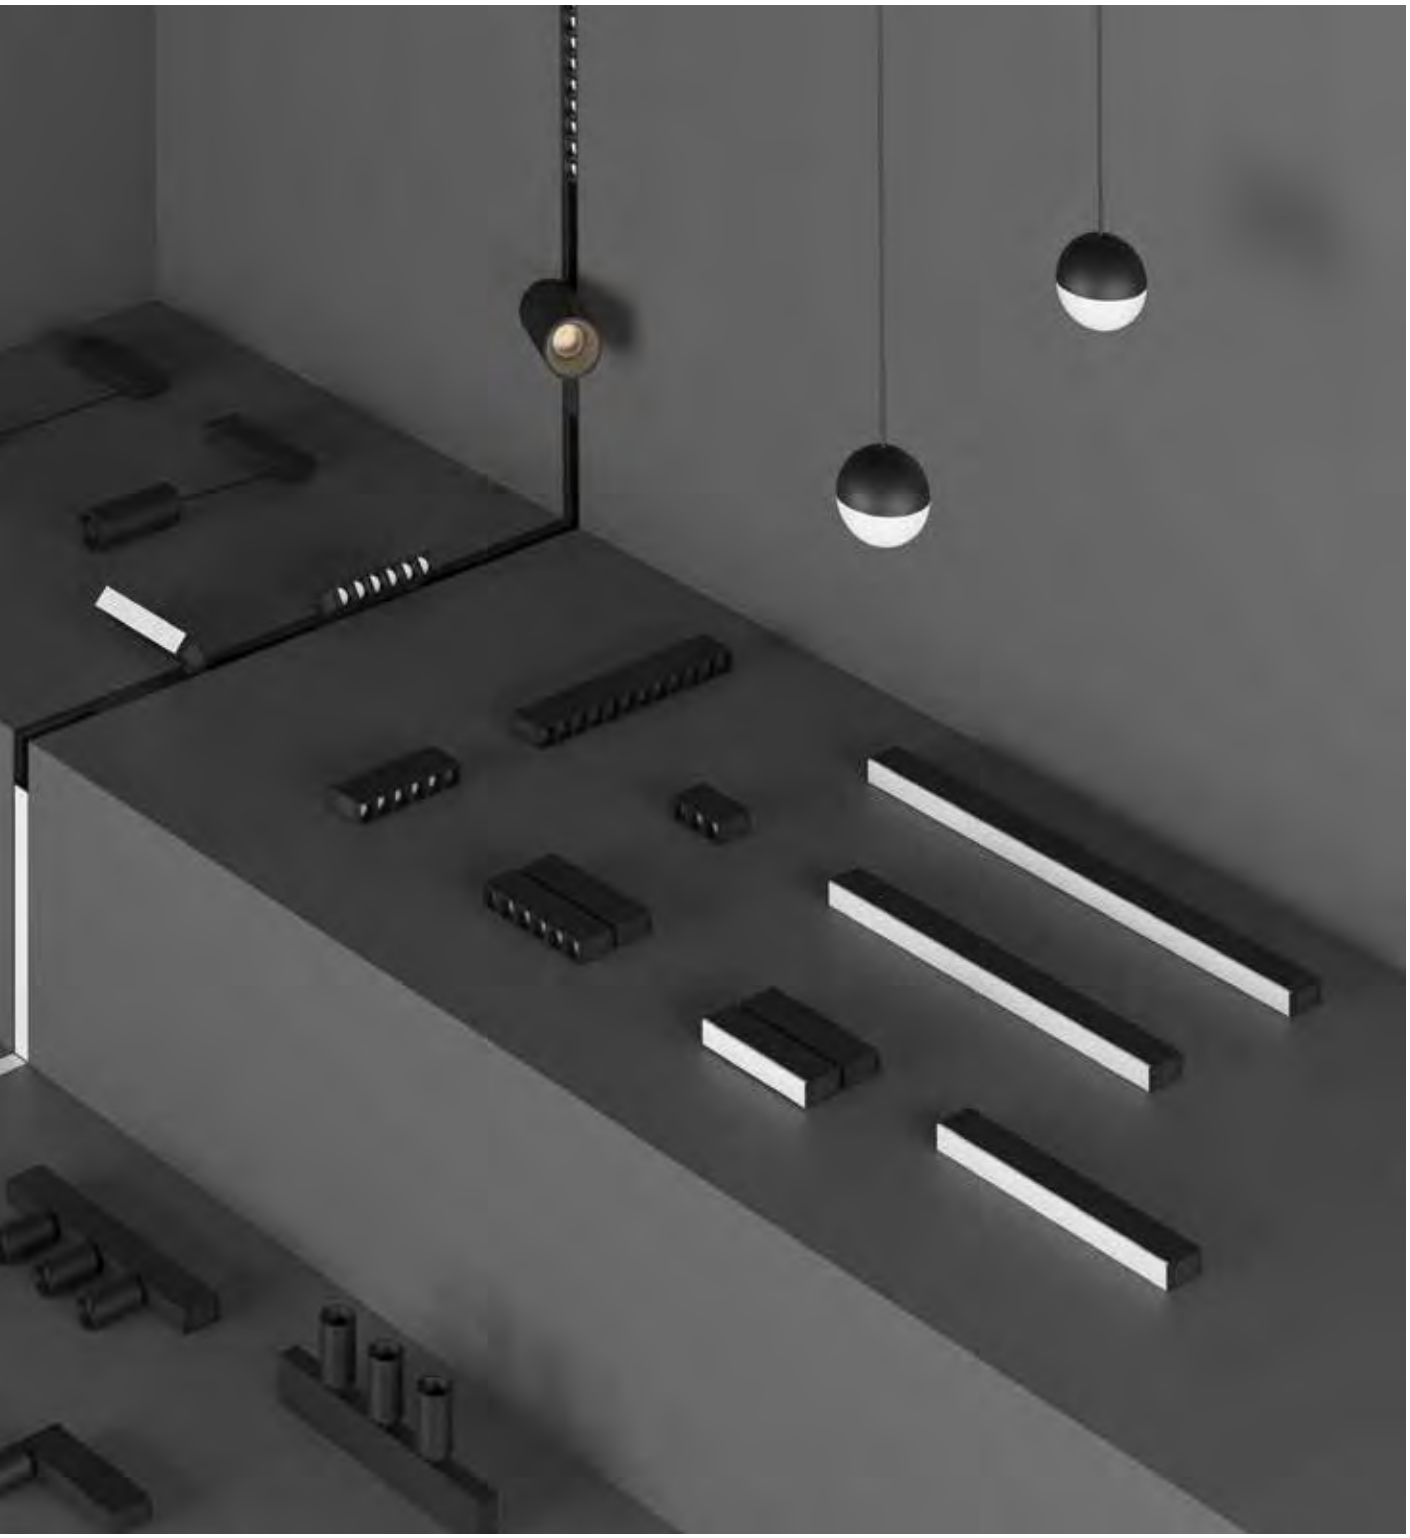


Kopi

LED Magnetic Track Lights 24V.


Kopi



VK/04203TR/S

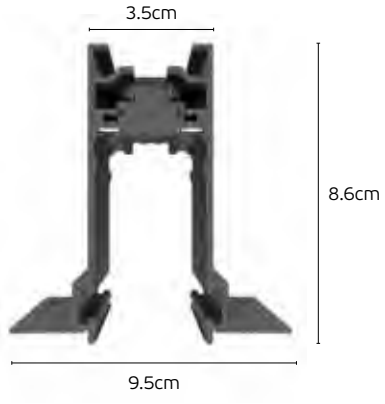

VK/04203TR/R



VK/04203TR/S

Code	Model	Box
71164-004721	**VK/04203TR/S/1/B** ● **Black**. 24V. 1m. (L100.5cm)	**8pcs**
71164-005721	**VK/04203TR/S/1.5/B** ● **Black**. 24V. 1.5m (L150.5cm)	**6pcs**
71164-006721	**VK/04203TR/S/2/B** ● **Black**. 24V. 2m. (L200.5cm)	**4pcs**

Details

Magnetic surface mounted track line **24V**.
Length **1-2m**.

Working temperature **< 45°C**.
Material **Aluminium**.

VK/04203TR/R

Code	Model	Box
71164-001721	**VK/04203TR/R/1/B** ● **Black**. 24V. 1m. (L100.5cm)	**6pcs**
71164-002721	**VK/04203TR/R/1.5/B** ● **Black**. 24V. 1.5m. (L150.5cm)	**4pcs**
71164-003721	**VK/04203TR/R/2/B** ● **Black**. 24V. 2m. (L200.5cm)	**4pcs**


Details

Magnetic recessed track line **24V**.
Length **1-2m**.
IP Rating **IP20**.

Working temperature **< 45°C**.
Material **Aluminium**.




VK/04203TR/S

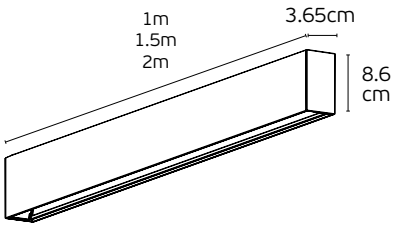




VK/04203TR/R

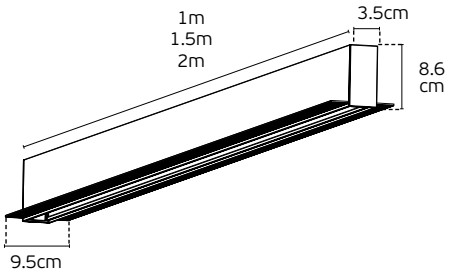

Kopi



VK/04215TR/S/L-R/B



VK/04215TR/S/L-R/B


Code	Model	Box
71164-028721	**VK/04215TR/S/L-R/B** ● **Sand Black**. Left/Right corner.	**20pcs**

Details

Left/Right Corner.
Material **Aluminium**.
Connects 2 rails link at an angle of **90°**.



VK/04214TR/S/INN/B

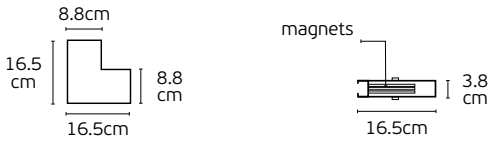

VK/04214TR/S/INN/B


Code	Model	Box
71164-026721	**VK/04214TR/S/INN/B** ● **Sand Black**. 24V. **Inner Corner surface**.	**20pcs**

Details

Inner corner.
Material **Aluminium**.
Connects 2 rails link at an angle of **90°**.



VK/04214TR/S/OUT/B

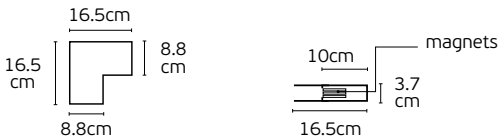

VK/04214TR/S/OUT/B


Code	Model	Box
71164-027721	**VK/04214TR/S/OUT/B** ● **Sand Black**. 24V. Outer Corner surface.	**20pcs**

Details

Outer corner.
Material **Aluminium**.
Connects 2 rails link at an angle of **90°**.



VK/04213TR/R/L-R/B

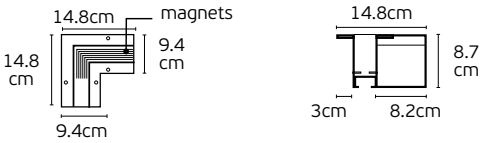

VK/04213TR/R/L-R/B

Code	Model	Box
71164-024721	**VK/04213TR/R/L-R/B**	**20pcs**

● **Sand Black**. 24V. **Left/Right Corner** recessed.


Details

Left/Right corner recessed.
Connects 2 rails link at an angle of **90°**.

Material **Aluminium**.



VK/04212TR/R/INN/B

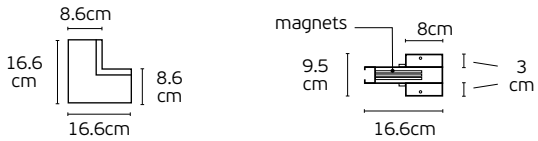

VK/04212TR/R/INN/B

Code	Model	Box
71164-022721	**VK/04212TR/R/INN/B**	**20pcs**

● **Sand black**. 24V. **Inner Corner** recessed.


Details

Inner corner recessed.
Connects 2 rails link at an angle of **90°**.

Material **Aluminium**.



VK/04212TR/R/OUT/B

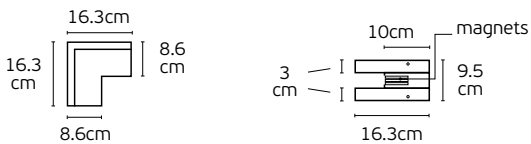

VK/04212TR/R/OUT/B

Code	Model	Box
71164-023721	**VK/04212TR/R/OUT/B**	**20pcs**

● **Sand Black**. 24V. **Outer Corner** recessed.

Details

Outer corner recessed.
Connects 2 rails link at an angle of **90°**.

Material **Aluminium**.

Kopi



VK/04216TR/R/CON/B

VK/04216TR/R/CON/B

Code	Model	Box
71164-030721	**VK/04216TR/R/CON/B** ● **Sand Black**. 24V. Connection accessory.	**1pc**

Details

Connection accessory for magnetic **recessed track**.

Material **Aluminium**.



VK/04216TR/P/CON/B

VK/04216TR/P/CON/B

Code	Model	Box
71164-031721	**VK/04216TR/P/CON/B** ● **Sand Black**. 24V. Connection accessory.	**1pc**

Details

Connection accessory for magnetic **recessed track**.

Material **Aluminium**.



VK/04217TR/PC/B

VK/04217TR/PC/B

Code	Model	Box
71164-032721	**VK/04217TR/PC/B** ● **Sand Black**. 24V. Power Connection.	**50pcs**

Details

Power Connection accessory for magnetic **recessed track 24V**.

Material Aluminium.

Kopi



VK/04218TR/COV/B


VK/04218TR/COV/B


Code	Model	Box
71164-033721	**VK/04218TR/COV/B** ● **Black sand**. 24V. Cover 1 meter.	**1pc**

Details

Cover for magnetic track lights 24V, decoration bar for **recessed** or **surface** tracks.

Working temperature **< 45°C**.
Material **Acrylic**.



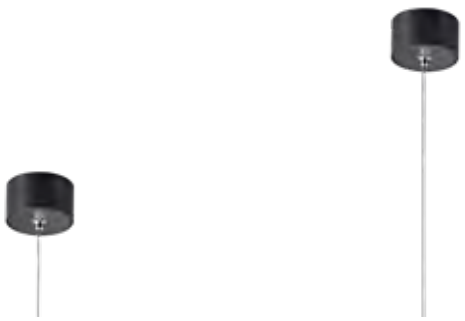

VK/04203TR/SRK


VK/04203TR/SRK

Code	Model	Box
71164-007721	**VK/04203TR/SRK** ● **Sand Black**. 24V. 1m hanging kit.	**20pcs**

Details

Material **Aluminium**.


1m hanging kit.



LED Magnetic Track Lights 24V Drivers



VK/LPV-60



VK/LPV-60

Code
78000-595663

Model
VK/LPV-60-24
2.5A. **60W.** 24V.

Box
32pcs


Details
Voltage **100-240V.**
Watt **60W.**
Material **Plastic housing.**

5 years guarantee

IP67.



VK/LPV-100



VK/LPV-100

Code
78000-660255

Model
VK/LPV-100-24
4.2A. **100W. 24V.**

Box
20pcs


Details
Voltage **100-240V.**
Watt **100W.**
Material **Plastic housing.**

5 years guarantee

IP67.



VK/LPV-150



VK/LPV-150

Code
78000-635255

Model
VK/LPV-150-24
6.3A. **150W. 24V.**

Box
20pcs

Details
Voltage **180-305V.**
Watt **150W.**
Material **Plastic housing.**


5 years guarantee

IP67.




Kopi






VK/04207TR/LIN37





VK/04207TR/LIN56






VK/04207TR/LIN74


VK/04207TR

Code	Model	Box
71164-013721	**VK/04207TR/W/LIN37/B** ● **Black sand**. 3000K. **1.142lm. 9W**. CRI>90	**20pcs**
71164-040721	**VK/04207TR/C/LIN37/B** ● **Black sand**. 4000K. **1.262lm 9W**. CRI>90	**20pcs**
71164-014721	**VK/04207TR/W/LIN56/B** ● **Black sand**. 3000K. **1.651lm. 12W**. CRI>90	**20pcs**
71164-041721	**VK/04207TR/C/LIN56/B** ● **Black sand**. 4000K. **1.725lm. 12W**. CRI>90	**20pcs**
71164-015721	**VK/04207TR/W/LIN74/B** ● **Black sand**. 3000K. **2.377lm. 19W**. CRI>90	**12pcs**
71164-042721	**VK/04207TR/C/LIN74/B** ● **Black sand**. 4000K. **2.527lm. 18W**. CRI>90	**12pcs**


VK/04207TR/LIN37



VK/04207TR/LIN56



VK/04207TR/LIN74



Details

Led magnetic track light
DC driver 24V (included).
Type of Led **2835 with driver**.
Dimmable **No**.
Beam Angle **110°**.


Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

IP20.




Kopi






VK/04204TR/3





VK/04204TR/6






VK/04204TR/12


VK/04204TR

Code	Model	Box
71164-008721	**VK/04204TR/W/3/B** ● **Black sand**. 3000K. **535lm. 4W**. CRI>90	**30pcs**
71164-043721	**VK/04204TR/C/3/B** ● **Black sand**. 4000K. **610lm. 4W**. CRI>90	**30pcs**
71164-009721	**VK/04204TR/W/6/B** ● **Black sand**. 3000K. **1.072m. 9W**. CRI>90	**30pcs**
71164-044721	**VK/04204TR/C/6/B** ● **Black sand**. 4000K. **1.233lm. 9W**. CRI>90	**30pcs**
71164-010721	**VK/04204TR/W/12/B** ● **Black sand**. 3000K. **2.375lm. 15W**. CRI>90	**20pcs**
71164-046721	**VK/04204TR/C/12/B** ● **Black sand**. 4000K. **2.223lm. 15W**. CRI>90	**20pcs**


VK/04204TR/3



VK/04204TR/6



VK/04204TR/12



Details

Led magnetic track light **DC driver 24V** (included).
Type of Led **2835 with driver**.
Dimmable **No**.
Beam Angle **8°**.


Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

IP20.

Kopi




VK/04205TR/6






VK/04206TR




VK/04205TR/6, VK/04206TR

Code	Model	Box
71164-011721	**VK/04205TR/W/6/B** ● **Black sand**. 3000K. **1.072lm. 9W**. **8°**. CRI>90	**30pcs**
71164-045721	**VK/04205TR/C/6/B** ● **Black sand**. 4000K. **1.233lm. 9W**. **8°**. CRI>90	**30pcs**
71164-012721	**VK/04206TR/W/LIN/B** ● **Black sand**. 3000K. **869lm. 7W. 18°**. CRI>90	**30pcs**
71164-039721	**VK/04206TR/C/LIN/B** ● **Black sand**. 4000K. **1.002lm. 7W. 18°**. CRI>90	**30pcs**

VK/04205TR/6



VK/04206TR



Details

Led magnetic track light **DC driver 24V** (included).
Type of Led bridgelux **with driver**.
Dimmable **No**.

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

IP20.

Kopi




VK/04208TR/SP





VK/04209TR/SP



VK/04210TR/SP









VK/04208TR/SP, VK/04209TR/SP, VK/04210TR/SP

Code	Model	Box
71164-016721	**VK/04208TR/W/SP/B** ● **Black sand**. 3000K. **614lm. 6W**. bridgelux led CRI>90	**30pcs**
71164-047721	**VK/04208TR/C/SP/B** ● **Black sand**. 4000K. **729lm. 7W**. bridgelux led CRI>90	**30pcs**
71164-017721	**VK/04209TR/W/SP/B** ● **Black sand**. 3000K. **1.001lm. 11W.** bridgelux led CRI>90	**20pcs**
71164-038721	**VK/04209TR/C/SP/B** ● **Black sand**. 4000K. **1.224lm. 11W.** bridgelux led CRI>90	**20pcs**
71164-018721	**VK/04210TR/W/SP/B** ● **Black sand**. 3000K. **2.488lm. 27W. CREE led**. CRI>90	**12pcs**
71164-048721	**VK/04210TR/C/SP/B** ● **Black sand**. 4000K. **3.022lm. 26W. CREE led**. CRI>90	**12pcs**


VK/04208TR/SP



VK/04209TR/SP



VK/04210TR/SP



Details

Led magnetic track light **DC driver 24V** (included).
Dimmable **No**.
Beam angle **24°**

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.




IP20.






VK/04208TR/SP/3

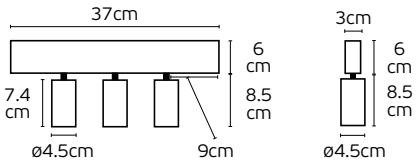

VK/04208TR/SP/3

Code	Model	Box
71164-019721	**VK/04208TR/W/SP/3/B** ● **Black sand**. 3000K. **2.016lm. 24W**. CRI>90	**12pcs**
71164-049721	**VK/04208TR/C/SP/3/B** ● **Black sand**. 4000K. **1.833lm. 23W**. CRI>90	**12pcs**

VK/04208TR/SP/3



Details


Led magnetic track light **DC driver 24V** (included).
Type of led bridgelux **with driver**
Dimmable **No**.
Beam angle **24°.**

Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.




IP20.

Kopi

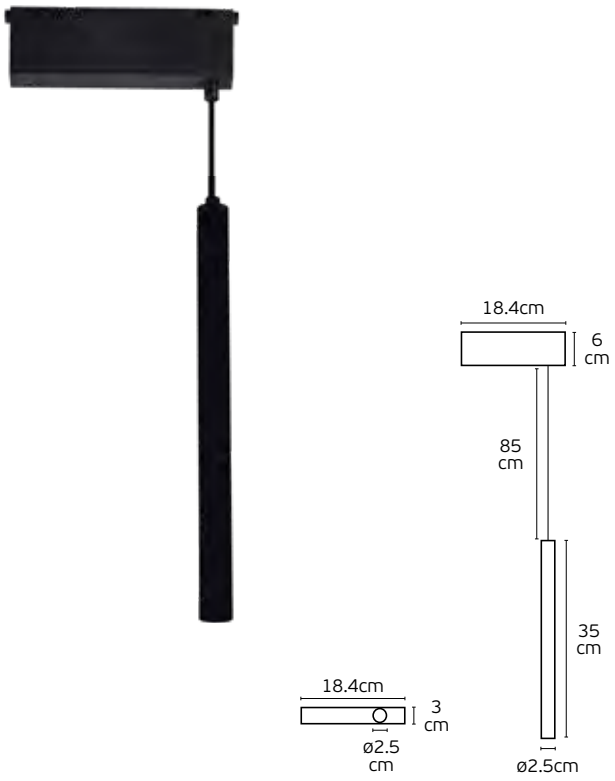

VK/04210TR/PE

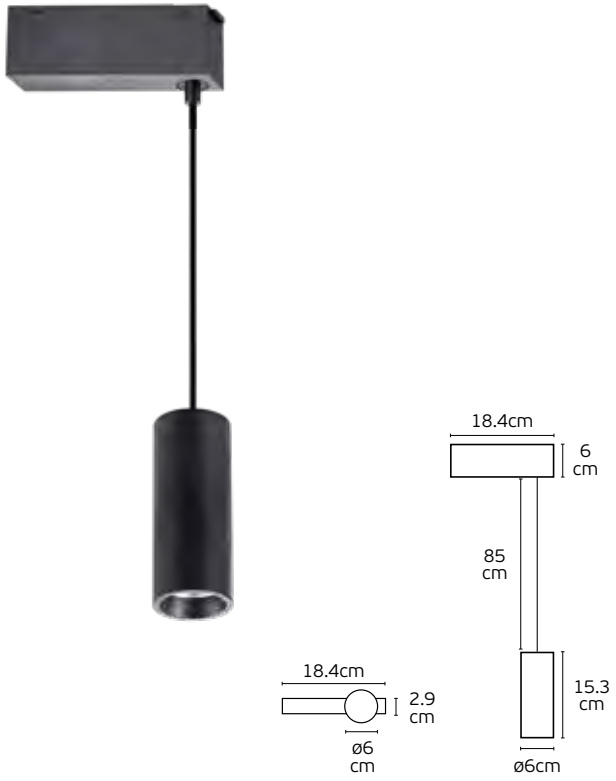


VK/04211TR/PE


VK/04210TR/PE, VK/04211TR/PE

Code	Model	Box
71164-020721	**VK/04210TR/W/PE/B** ● **Black sand**. 3000K. **236lm. 2W. 15°**. CRI>90	**12pcs**
71164-050721	**VK/04210TR/C/PE/B** ● **Black sand**. 4000K. **253lm. 2W. 15°**. CRI>90	**12pcs**
71164-021721	**VK/04211TR/W/PE/B** ● **Black sand**. 3000K. **614lm. 6W. 24°**. CRI>90	**20pcs**
71164-051721	**VK/04211TR/C/PE/B** ● **Black sand**. 4000K. **792lm. 6W. 24°**. CRI>90	**20pcs**

VK/04210TR/PE



VK/04211TR/PE



Details

Led magnetic track Pendant Light **with DC driver 24V** (included).
Type of Led **CREE** with driver.
Dimmable **No**.


Lifetime **50.000 hrs**.
Working temperature **< 45ºC**.
Material **Aluminium**.
Guarantee **3 years**.

IP20.



LED Magnetic Track Lights 24V Instruction


Συνδεσμολογία Μαγνητικής Ράγας
Magnet Track System Electrical Diagram

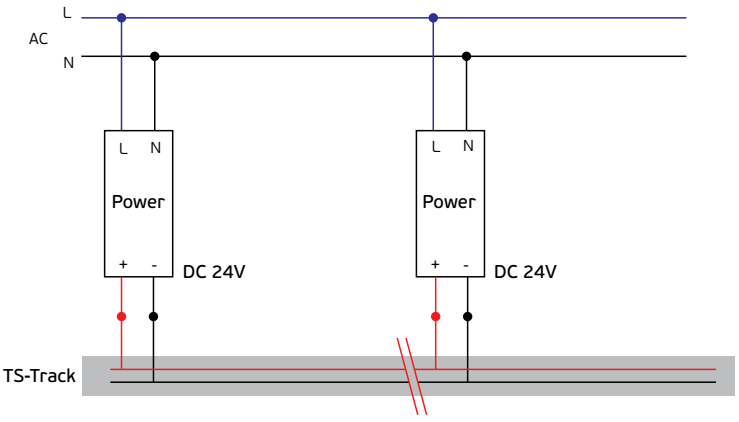

Note: When all lights power is bigger than load power, need to add one new driver into track.

(driver is near track installation position easily to install)






Before install track, put the driver into ceiling, caculate driver power and lights power. Lights power must be smaller than driver's power. If is bigger, need to add one more driver.

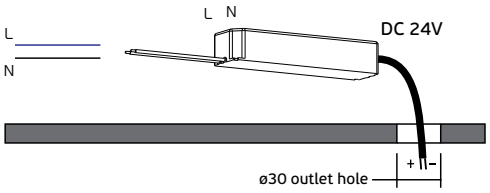


Driver
LPV-60-24//AC:100-240V DC:60W 24V
LPV-100-24//AC:100-240V DC:100W 24V
LPV-150-24//AC:100-240V DC:150W 24V

Cut off electric supply before installation!


Πίνακας Διαστάσεων Κοπής
Built-in Magnet Track System Cut out size List

Product diagram	Model	Cut out size	Cut out figure
	TS-TR Track/1m TS-TR Track/1.5m TS-TR Track/2m	L1010xw 50mm L1510xw 50mm L2010xw 50mm	
	TR-R Inner Corner	L100xw 50mm	
	TR-R Out Corner	L100xw 50mm	
	TR-R90 Left Corner	L125xw 50mm	
	TR-R90 Right Corner	L125xw 50mm	


4a. Check cut out size, then cut the hole in position.




4b. Connect driver output side with track line.

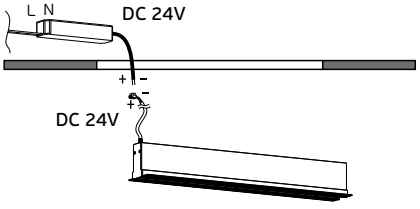

4c. Put the track into the hole, use screw to fix and instal this decorative film into track.

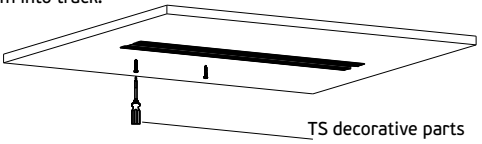


4d. Apply plaster ont the track




Οδηγίες Εγκατάστασης Χωνευτής Μαγνητικής Ράγας

Recessed Magnet Track Installation Diagram

Product detail

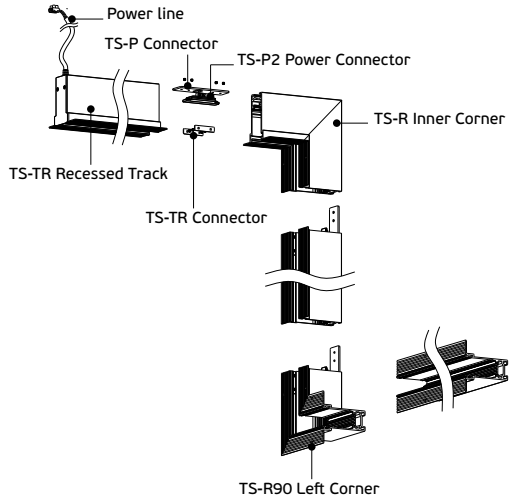

New connect driver: output line diagram



Recessed magnet track system connect

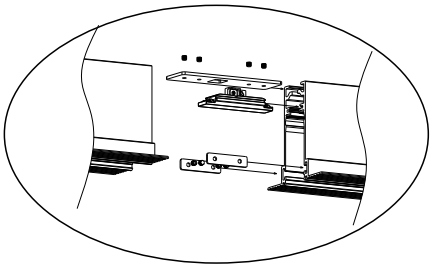
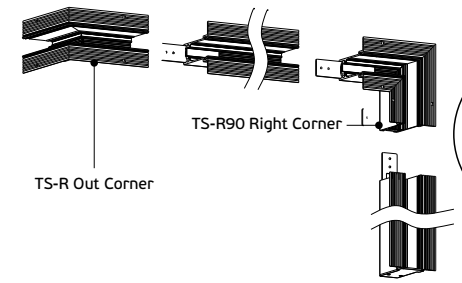


Figure 1




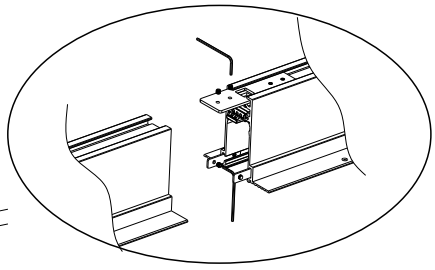


Figure 2


Οδηγίες Εγκατάστασης Επιτοίχιας Μαγνητικής Ράγας

Surface Mounted Magnet Track System Installation diagram

Product detail

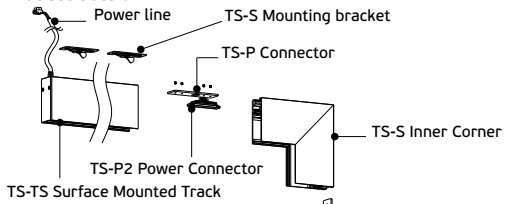

New connect driver: output line diagram



Surface mounted magnet track system connection diagram




Figure 1







Figure 2

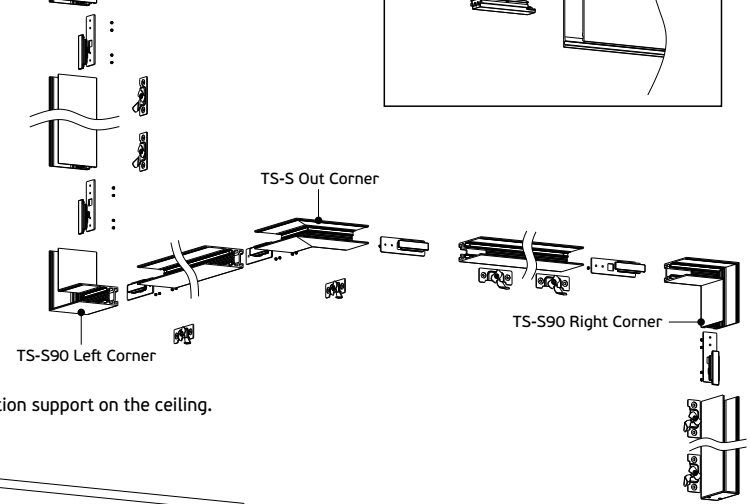

A. Use screw fix TS-S installation support on the ceiling.

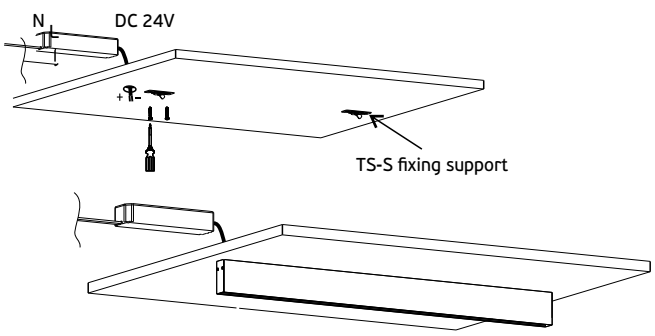


B. Connect driver output side with track power line, then fix TS-TS track with TS-TS support.

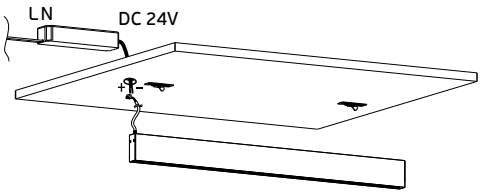


LED Magnetic Track Lights 24V Instruction

Οδηγίες Εγκατάστασης Κρεμαστής Μαγνητικής Ράγας
Hanging Magnet Track System Installation Diagram

Product detail

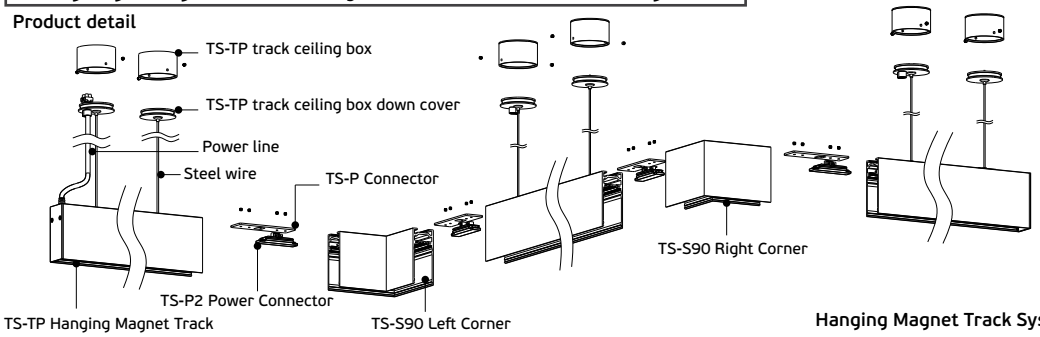

New connect driver: output line diagram



Hanging Magnet Track System Connection Diagram




Figure 1







Figure 2

A. Fixed TS-TP track ceiling box on ceiling with screw.

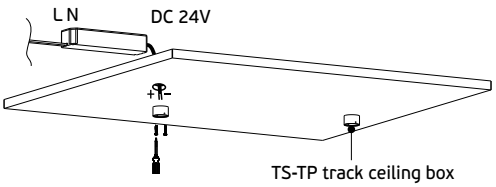


B. Connect driver output side with track line, and fixed TS-TP ceiling cover and TS-TP box cover with M4 screw.

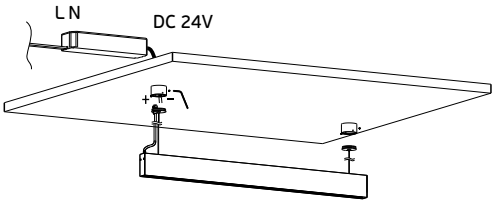

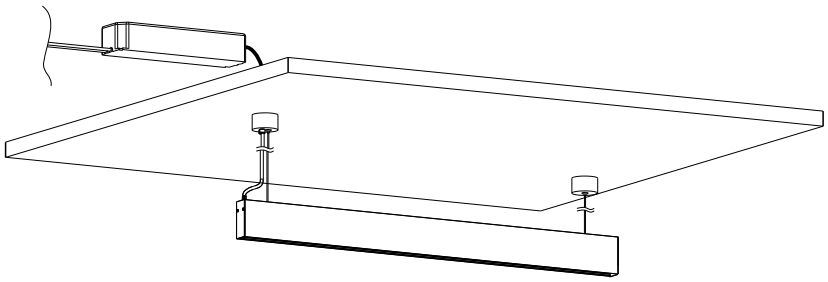

Τρόπος Τοποθέτησης Φωτιστικών
Magnet Track System-lights Installation


Magnet track system, lights installation has Magnet and buckle style

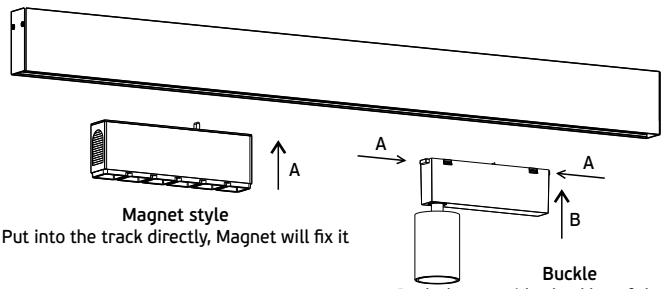

Magnet style
Put into the track directly, Magnet will fix it

Buckle
Push the two sides buckles of the box, then put into the track and relax the hand



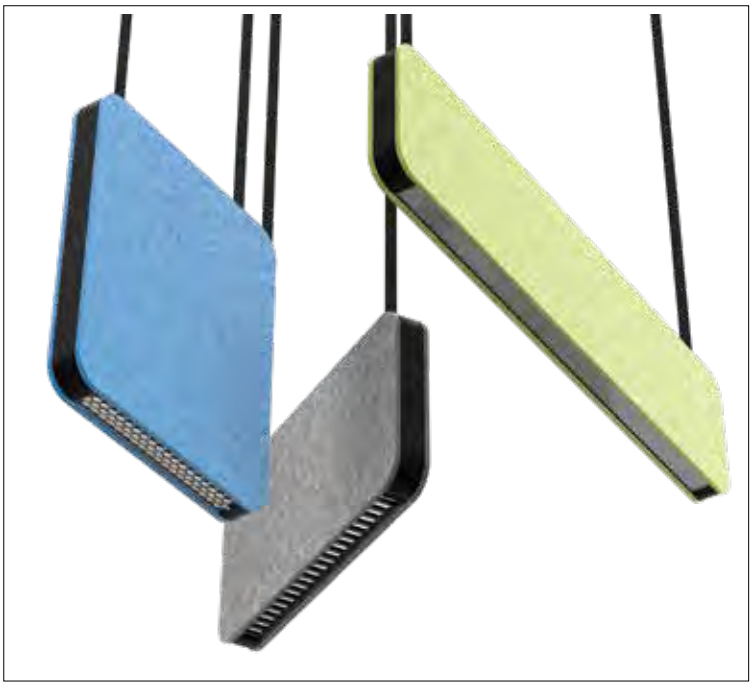

Sound absorbing it's just one of our many many features.
Have a look and see for yourself...

Mute

Acoustic Led Lights





Mute



VK/04561/45/BL



VK/04561/45/OR


VK/04561/45

Code	Model	Box
75168-108773	**VK/04561/45/BL/W/DA** ● **Blue.** 3000K. 22W. 3200lm. CRI>80.	**1pc**
75168-109773	**VK/04561/45/OR/W/DA** ● **Orange.** 3000K. 22W. 3200lm. CRI>80.	**1pc**
75168-110773	**VK/04561/45/BL/C/DA** ● **Blue.** 4000K. 22W. 3200lm. CRI>80.	**1pc**
75168-111773	**VK/04561/45/OR/C/DA** ● **Orange.** 4000K. 22W. 3200lm. CRI>80.	**1pc**

Details

Input Voltage **AC 220-240V**.
Led driver **BOKE DALI**.
Type of Led **Chip SAMSUNG 2835**.
Dimmable **DALI**.
Beam angle **Up 130°/Down 65°**
Working temperature **-20°C~40°C**.

Cable **Black fabric 1.5m**.
Lifetime **50.000hrs**.
Material **Polyester Fiber Acoustic + Aluminium alloy**.
Location **Ceiling-Pendant.**
Guarantee **3 years**.

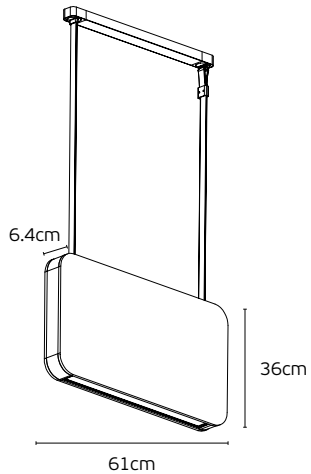

DALI Dim DALI **IP20**



Mute




VK/04562/120/G



VK/04562/120/GR

VK/04562/120

Code	Model	Box
75168-112773	**VK/04562/120/G/W/DA** ● **Grey.** 3000K. 45W. 6300lm. CRI>80.	**1pc**
75168-113773	**VK/04562/120/GR/W/DA** ● **Green.** 3000K. 45W. 6300lm. CRI>80.	**1pc**
75168-114773	**VK/04562/120/G/C/DA** ● **Grey.** 4000K. 45W. 6300lm. CRI>80.	**1pc**
75168-115773	**VK/04562/120/GR/C/DA** ● **Green.** 4000K. 45W. 6300lm. CRI>80.	**1pc**

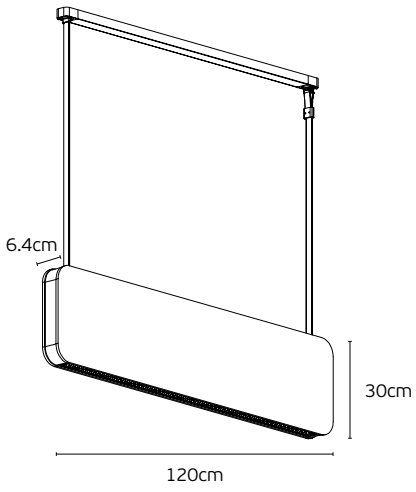

Details

Input Voltage **AC 220-240V**.
Led driver **BOKE DALI**.
Type of Led **Chip SAMSUNG 2835**.
Dimmable **DALI**.
Beam angle **Up 130°/Down 65°**
Working temperature **-20°C~40°C**.

Cable **Black fabric 1.5m**.
Lifetime **50.000hrs**.
Material **Polyester Fiber Acoustic + Aluminium alloy**.
Location **Ceiling-Pendant.**
Guarantee **3 years**.

DALI Dim DALI **IP20**







Mute



VK/04563/132/B-G




Down



Up

VK/04563/132

Code	Model	Box
75168-116773	**VK/04563/132/B-G/W/DA** ● **Black-Grey.** 3000K. 60W. 7200lm. CRI>80.	**1pc**
75168-117773	**VK/04563/132/B-G/C/DA** ● **Black-Grey.** 4000K. 60W. 7200lm. CRI>80.	**1pc**

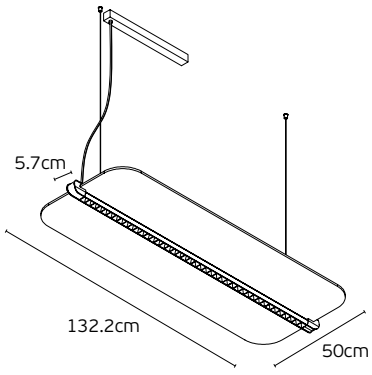

Details

Input Voltage **AC 220-240V**.
Led driver **BOKE DALI**.
Type of Led **Chip SAMSUNG 2835**.
Dimmable **DALI**.
Beam angle **Up 125°/Down 60°**
Working temperature **-20°C~40°C**.

Cable **1.5m & suspension wire**.
Lifetime **50.000hrs**.
Material **Polyester Fiber Acoustic + Aluminium alloy**.
Location **Ceiling-Pendant.**
Guarantee **3 years.**



IP20








Mute




VK/04564

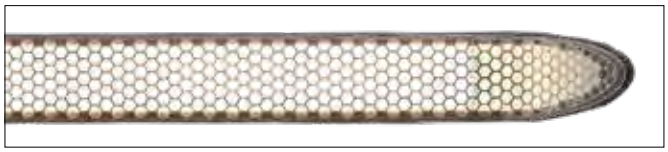

VK/04564

Code	Model	Box
75168-118773	**VK/04564/138G/W/DA** ● **Grey.** 3000K. **36W**. **4400lm**. CRI>80. **L. 138.2cm**	**1pc**
75168-120773	**VK/04564/138G/C/DA** ● **Grey.** 4000K. **36W**. **4400lm**. CRI>80. **L. 138.2cm**	**1pc**
75168-119773	**VK/04564/242G/W/DA** ● **Grey.** 3000K. **60W**. **7400lm**. CRI>80. **L. 242.5cm**	**1pc**
75168-121773	**VK/04564/242G/C/DA** ● **Grey.** 4000K. **60W**. **7400lm**. CRI>80. **L. 242.5cm**	**1pc**

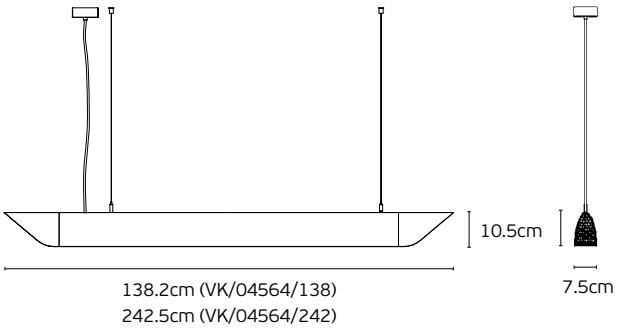

Details

Input Voltage **AC 220-240V**.
Led driver **BOKE DALI**.
Type of Led **Chip SAMSUNG 2835**.
Dimmable **DALI**.
Beam angle **75°**
Working temperature **-20°C~40°C**.
Cable **1.5m & suspension wire,**
white honeycomb.
Lifetime **50.000hrs**.
Material **Polyester Fiber Acoustic + Aluminium alloy**.
Location **Ceiling-Pendant.**
Guarantee **3 years**.



IP20







Round Led Linear Lights

Round Led Linear Lights

VK/04462


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75167-037210	VK/04462/60/W/W	○ White	3000K	22W	4.750lm	ø60cm	1pc
75167-038210	VK/04462/60/B/W	● Black	3000K	22W	4.750lm	ø60cm	1pc
75167-039210	VK/04462/60/W/C	○ White	4000K	22W	4.750lm	ø60cm	1pc
75167-040210	VK/04462/60/B/C	● Black	4000K	22W	4.750lm	ø60cm	1pc
75167-041210	VK/04462/90/W/W	○ White	3000K	33W	7.340lm	ø90cm	1pc
75167-042210	VK/04462/90/B/W	● Black	3000K	33W	7.340lm	ø90cm	1pc
75167-043210	VK/04462/90/W/C	○ White	4000K	33W	7.340lm	ø90cm	1pc
75167-044210	VK/04462/90/B/C	● Black	4000K	33W	7.340lm	ø90cm	1pc
75167-045210	VK/04462/120/W/W	○ White	3000K	43W	9.490lm	ø120cm	1pc
75167-046210	VK/04462/120/B/W	● Black	3000K	43W	9.490lm	ø120cm	1pc
75167-047210	VK/04462/120/W/C	○ White	4000K	43W	9.490lm	ø120cm	1pc
75167-048210	VK/04462/120/B/C	● Black	4000K	43W	9.490lm	ø120cm	1pc
75167-049210	VK/04462/140/W/W	○ White	3000K	58W	13.000lm	ø140cm	1pc
75167-050210	VK/04462/140/B/W	● Black	3000K	58W	13.000lm	ø140cm	1pc
75167-051210	VK/04462/140/W/C	○ White	4000K	58W	13.000lm	ø140cm	1pc
75167-052210	VK/04462/140/B/C	● Black	4000K	58W	13.000lm	ø140cm	1pc
75167-053210	VK/04462/180/W/W	○ White	3000K	72W	16.380lm	ø180cm	1pc
75167-054210	VK/04462/180/B/W	● Black	3000K	72W	16.380lm	ø180cm	1pc
75167-055210	VK/04462/180/W/C	○ White	4000K	72W	16.380lm	ø180cm	1pc
75167-056210	VK/04462/180/B/C	● Black	4000K	72W	16.380lm	ø180cm	1pc

» TRIDONIC LLE-G2
» TRIDONIC LED driver


Details

Voltage **220-240V**.
CRI>80.
Type of LED TRIDONIC.
Beam angle **120º.**
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.




VK/04462/60/W/C





5 years guarantee


IP20

Round Led Linear Lights

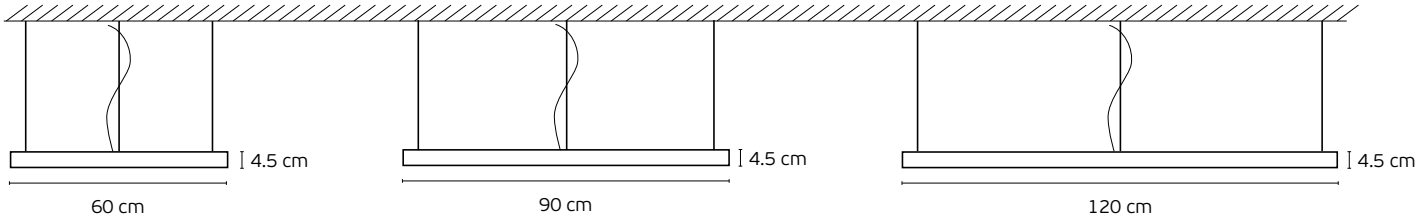

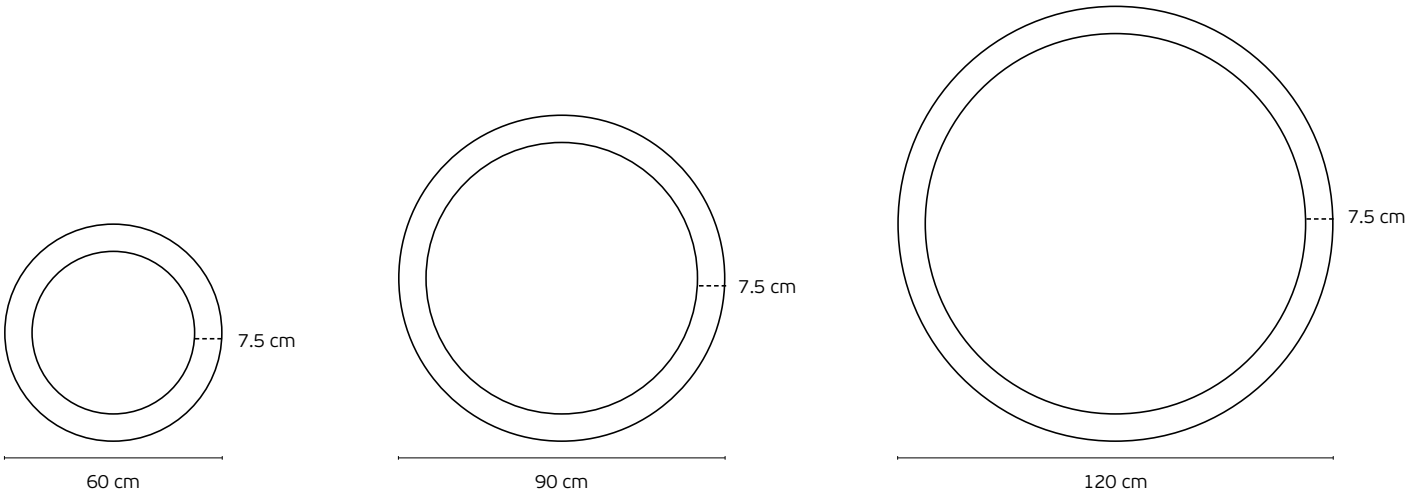

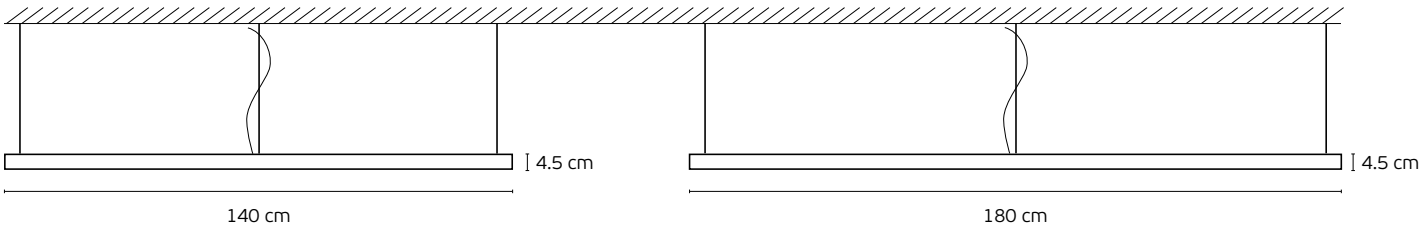

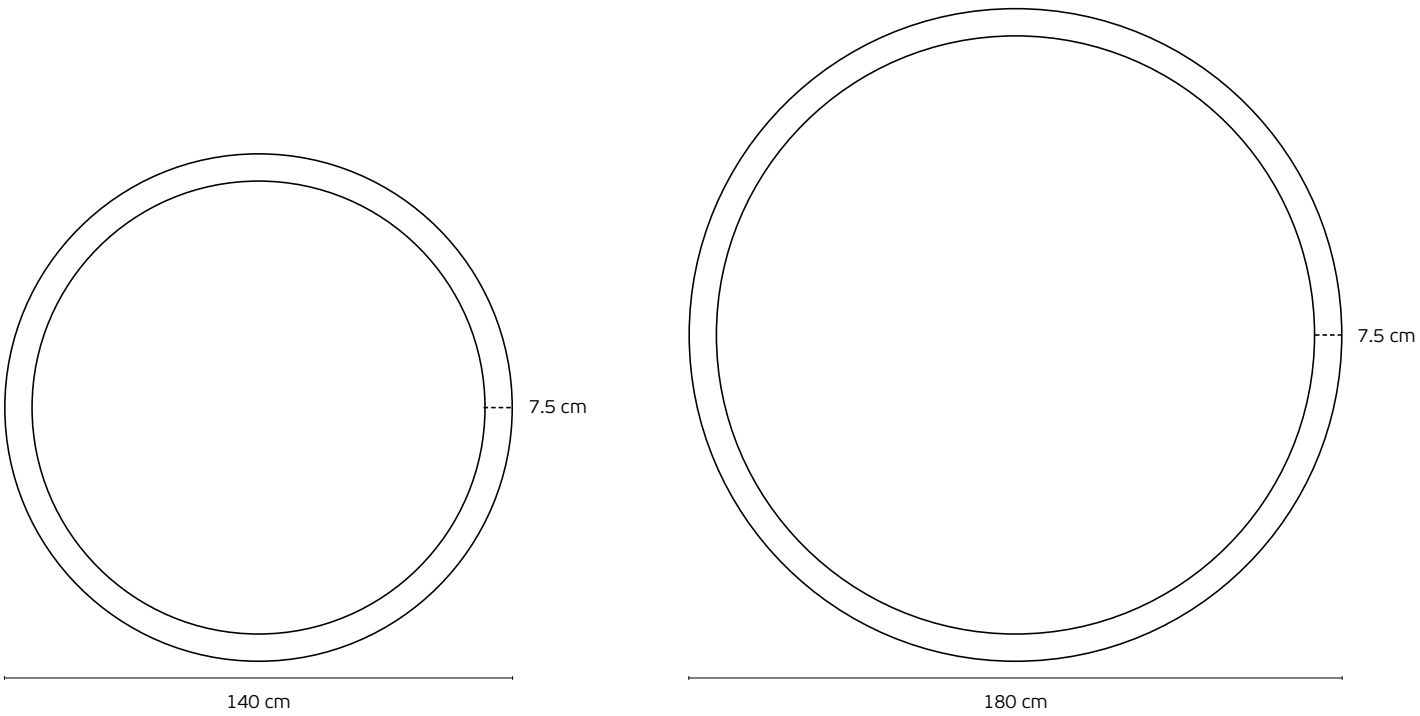





Slim Led Linear Lights


Slim Led Linear Lights





VK/04157


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-423210	VK/04157/57/AL/W	Aluminium	3000K	11W	1.600lm	57cm	1pc
75165-424210	VK/04157/57/W/W	White	3000K	11W	1.600lm	57cm	1pc
75165-425210	VK/04157/57/B/W	Black	3000K	11W	1.600lm	57cm	1pc
75165-441210	VK/04157/57/AL/C	Aluminium	4000K	11W	1.600lm	57cm	1pc
75165-442210	VK/04157/57/W/C	White	4000K	11W	1.600lm	57cm	1pc
75165-443210	VK/04157/57/B/C	Black	4000K	11W	1.600lm	57cm	1pc
75165-426210	VK/04157/85/AL/W	Aluminium	3000K	16W	2.400lm	85cm	1pc
75165-427210	VK/04157/85/W/W	White	3000K	16W	2.400lm	85cm	1pc
75165-428210	VK/04157/85/B/W	Black	3000K	16W	2.400lm	85cm	1pc
75165-444210	VK/04157/85/AL/C	Aluminium	4000K	16W	2.400lm	85cm	1pc
75165-445210	VK/04157/85/W/C	White	4000K	16W	2.400lm	85cm	1pc
75165-446210	VK/04157/85/B/C	Black	4000K	16W	2.400lm	85cm	1pc
75165-429210	VK/04157/113/AL/W	Aluminium	3000K	21W	3.200lm	113cm	1pc
75165-430210	VK/04157/113/W/W	White	3000K	21W	3.200lm	113cm	1pc
75165-431210	VK/04157/113/B/W	Black	3000K	21W	3.200lm	113cm	1pc
75165-447210	VK/04157/113/AL/C	Aluminium	4000K	21W	3.200lm	113cm	1pc
75165-448210	VK/04157/113/W/C	White	4000K	21W	3.200lm	113cm	1pc
75165-449210	VK/04157/113/B/C	Black	4000K	21W	3.200lm	113cm	1pc
75165-432210	VK/04157/141/AL/W	Aluminium	3000K	26W	4.000lm	141cm	1pc
75165-433210	VK/04157/141/W/W	White	3000K	26W	4.000lm	141cm	1pc
75165-434210	VK/04157/141/B/W	Black	3000K	26W	4.000lm	141cm	1pc
75165-450210	VK/04157/141/AL/C	Aluminium	4000K	26W	4.000lm	141cm	1pc
75165-451210	VK/04157/141/W/C	White	4000K	26W	4.000lm	141cm	1pc
75165-452210	VK/04157/141/B/C	Black	4000K	26W	4.000lm	141cm	1pc


Slim Led Linear Lights


















VK/04157/169/W/C




Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-435210	**VK/04157/169/AL/W**	**Aluminium**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-436210	**VK/04157/169/W/W**	**White**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-437210	**VK/04157/169/B/W**	**Black**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-453210	**VK/04157/169/AL/C**	**Aluminium**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-454210	**VK/04157/169/W/C**	**White**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-455210	**VK/04157/169/B/C**	**Black**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-438210	**VK/04157/197/AL/W**	**Aluminium**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-439210	**VK/04157/197/W/W**	**White**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-440210	**VK/04157/197/B/W**	**Black**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-456210	**VK/04157/197/AL/C**	**Aluminium**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-457210	**VK/04157/197/W/C**	**White**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-458210	**VK/04157/197/B/C**	**Black**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC.
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.

» TRIDONIC LLE-G2
» TRIDONIC LED driver



5 years guarantee

IP20

Accessories for ceiling & pendant



VK/04157/CE



VK/04157/SRK

VK/04157/CE (Ceiling)
VK/04157/SRK (Pendant)

Code	Model	Box
75165-198210	**VK/04157/CE** ● **Aluminium suspension of roof**	**1pc**
75165-176210	**VK/04157/AL/SRK/1** ● **Aluminium**	**1m.**
75165-177210	**VK/04157/W/SRK/1** ○ **White**	**1m.**
75165-322210	**VK/04157/B/SRK/1** ● **Black**	**1m.**
75165-544210	**VK/04157/AL/SRK/2** ● **Aluminium**	**2m.**
75165-335210	**VK/04157/W/SRK/2** ○ **White**	**2m.**
75165-543210	**VK/04157/B/SRK/2** ● **Black**	**2m.**
75165-547210	**VK/04157/AL/SRK/3** ● **Aluminium**	**3m.**
75165-545210	**VK/04157/W/SRK/3** ○ **White**	**3m.**
75165-546210	**VK/04157/B/SRK/3** ● **Black**	**3m.**

Details

Material **Aluminium.**



Slim Led Linear Lights **Up/Down**

VK/04463

Code	Model	Color	Kelvin	Watt-Down	Watt-Up	Lumen-Down	Lumen-Up	Length	Box
75167-057210	VK/04463/58/W/W	○ White	3000K	11W	6W	1.730lm	830lm	58cm	1pc
75167-058210	VK/04463/58/B/W	● Black	3000K	11W	6W	1.730lm	830lm	58cm	1pc
75167-059210	VK/04463/58/W/C	○ White	4000K	11W	6W	1.730lm	830lm	58cm	1pc
75167-060210	VK/04463/58/B/C	● Black	4000K	11W	6W	1.730lm	830lm	58cm	1pc
75167-061210	VK/04463/86/W/W	○ White	3000K	16W	11W	2.530lm	1.730lm	86cm	1pc
75167-062210	VK/04463/86/B/W	● Black	3000K	16W	11W	2.530lm	1.730lm	86cm	1pc
75167-063210	VK/04463/86/W/C	○ White	4000K	16W	11W	2.530lm	1.730lm	86cm	1pc
75167-064210	VK/04463/86/B/C	● Black	4000K	16W	11W	2.530lm	1.730lm	86cm	1pc
75167-065210	VK/04463/114/W/W	○ White	3000K	21W	16W	3.430lm	2.530lm	114cm	1pc
75167-066210	VK/04463/114/B/W	● Black	3000K	21W	16W	3.430lm	2.530lm	114cm	1pc
75167-067210	VK/04463/114/W/C	○ White	4000K	21W	16W	3.430lm	2.530lm	114cm	1pc
75167-068210	VK/04463/114/B/C	● Black	4000K	21W	16W	3.430lm	2.530lm	114cm	1pc
75167-069210	VK/04463/142/W/W	○ White	3000K	26W	21W	4.350lm	3.430lm	142cm	1pc
75167-070210	VK/04463/142/B/W	● Black	3000K	26W	21W	4.350lm	3.430lm	142cm	1pc
75167-071210	VK/04463/142/W/C	○ White	4000K	26W	21W	4.350lm	3.430lm	142cm	1pc
75167-072210	VK/04463/142/B/C	● Black	4000K	26W	21W	4.350lm	3.430lm	142cm	1pc
75167-073210	VK/04463/198/W/W	○ White	3000K	37W	31W	5.960lm	5.140lm	198cm	1pc
75167-074210	VK/04463/198/B/W	● Black	3000K	37W	31W	5.960lm	5.140lm	198cm	1pc
75167-075210	VK/04463/198/W/C	○ White	4000K	37W	31W	5.960lm	5.140lm	198cm	1pc
75167-076210	VK/04463/198/B/C	● Black	4000K	37W	31W	5.960lm	5.140lm	198cm	1pc
75167-077210	VK/04463/226/W/W	○ White	3000K	42W	37W	6.850lm	5.960lm	226cm	1pc
75167-078210	VK/04463/226/B/W	● Black	3000K	42W	37W	6.850lm	5.960lm	226cm	1pc
75167-079210	VK/04463/226/W/C	○ White	4000K	42W	37W	6.850lm	5.960lm	226cm	1pc
75167-080210	VK/04463/226/B/C	● Black	4000K	42W	37W	6.850lm	5.960lm	226cm	1pc


Details

Voltage **220-240V**.
Type of LED TRIDONIC.
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department. (included suspension kit 2m height)

» TRIDONIC LLE-G2
» TRIDONIC LED driver


5 years guarantee





IP20





Up/Down lighting

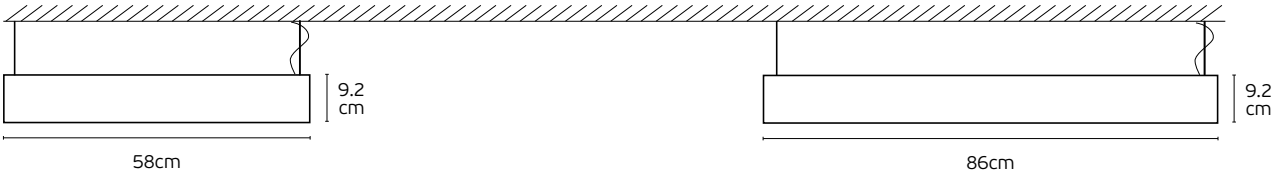

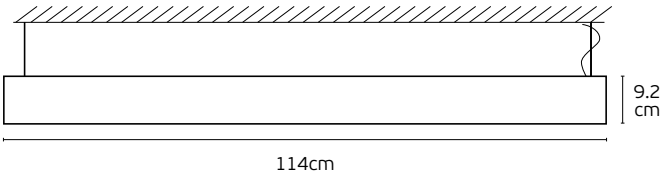


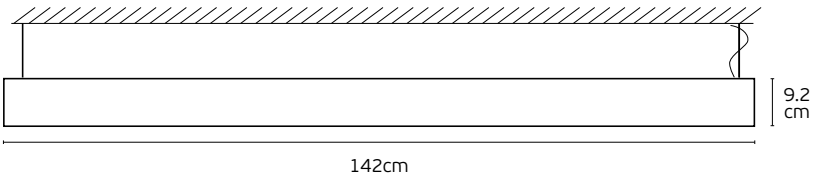




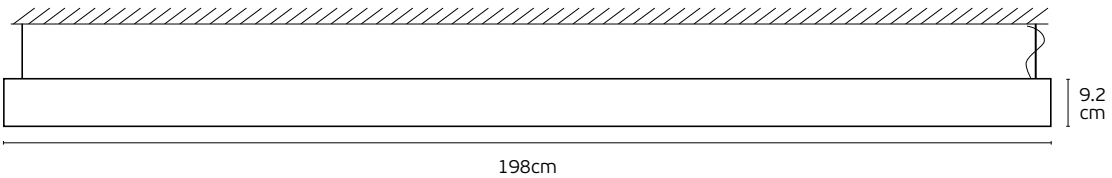

VK/04463/114/W/C



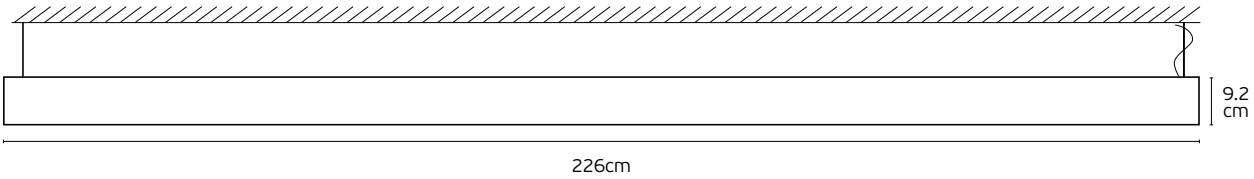





Basic Led Linear Lights


Basic Led Linear Lights





VK/04156


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-383210	VK/04156/56/AL/W	● Aluminium	3000K	11W	1.600lm	56cm	1pc
75165-384210	VK/04156/56/W/W	○ White	3000K	11W	1.600lm	56cm	1pc
75165-385210	VK/04156/56/B/W	● Black	3000K	11W	1.600lm	56cm	1pc
75165-401210	VK/04156/56/AL/C	● Aluminium	4000K	11W	1.600lm	56cm	1pc
75165-402210	VK/04156/56/W/C	○ White	4000K	11W	1.600lm	56cm	1pc
75165-403210	VK/04156/56/B/C	● Black	4000K	11W	1.600lm	56cm	1pc
75165-386210	VK/04156/84/AL/W	● Aluminium	3000K	16W	2.400lm	84cm	1pc
75165-387210	VK/04156/84/W/W	○ White	3000K	16W	2.400lm	84cm	1pc
75165-388210	VK/04156/84/B/W	● Black	3000K	16W	2.400lm	84cm	1pc
75165-404210	VK/04156/84/AL/C	● Aluminium	4000K	16W	2.400lm	84cm	1pc
75165-405210	VK/04156/84/W/C	○ White	4000K	16W	2.400lm	84cm	1pc
75165-406210	VK/04156/84/B/C	● Black	4000K	16W	2.400lm	84cm	1pc
75165-389210	VK/04156/112/AL/W	● Aluminium	3000K	21W	3.200lm	112cm	1pc
75165-390210	VK/04156/112/W/W	○ White	3000K	21W	3.200lm	112cm	1pc
75165-391210	VK/04156/112/B/W	● Black	3000K	21W	3.200lm	112cm	1pc
75165-407210	VK/04156/112/AL/C	● Aluminium	4000K	21W	3.200lm	112cm	1pc
75165-408210	VK/04156/112/W/C	○ White	4000K	21W	3.200lm	112cm	1pc
75165-409210	VK/04156/112/B/C	● Black	4000K	21W	3.200lm	112cm	1pc
75165-392210	VK/04156/140/AL/W	● Aluminium	3000K	26W	4.000lm	140cm	1pc
75165-393210	VK/04156/140/W/W	○ White	3000K	26W	4.000lm	140cm	1pc
75165-394210	VK/04156/140/B/W	● Black	3000K	26W	4.000lm	140cm	1pc
75165-410210	VK/04156/140/AL/C	● Aluminium	4000K	26W	4.000lm	140cm	1pc
75165-411210	VK/04156/140/W/C	○ White	4000K	26W	4.000lm	140cm	1pc
75165-412210	VK/04156/140/B/C	● Black	4000K	26W	4.000lm	140cm	1pc


Basic Led Linear Lights


















VK/04156/140/W/C




Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-395210	**VK/04156/168/AL/W**	**Aluminium**	**3000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-396210	**VK/04156/168/W/W**	**White**	**3000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-397210	**VK/04156/168/B/W**	**Black**	**3000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-413210	**VK/04156/168/AL/C**	**Aluminium**	**4000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-414210	**VK/04156/168/W/C**	**White**	**4000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-415210	**VK/04156/168/B/C**	**Black**	**4000K**	**31W**	**4.800lm**	**168cm**	**1pc**
75165-398210	**VK/04156/196/AL/W**	**Aluminium**	**3000K**	**37W**	**5.600lm**	**196cm**	**1pc**
75165-399210	**VK/04156/196/W/W**	**White**	**3000K**	**37W**	**5.600lm**	**196cm**	**1pc**
75165-400210	**VK/04156/196/B/W**	**Black**	**3000K**	**37W**	**5.600lm**	**196cm**	**1pc**
75165-416210	**VK/04156/196/AL/C**	**Aluminium**	**4000K**	**37W**	**5.600lm**	**196cm**	**1pc**
75165-417210	**VK/04156/196/W/C**	**White**	**4000K**	**37W**	**5.600lm**	**196cm**	**1pc**
75165-418210	**VK/04156/196/B/C**	**Black**	**4000K**	**37W**	**5.600lm**	**196cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC .
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.

» TRIDONIC LLE-G2
» TRIDONIC LED driver



5 years guarantee

IP20

Accessories for ceiling & pendant



VK/04156/CE



VK/04156/SRK

VK/04156/CE (Ceiling)
VK/04156/SRK (Pendant)

Code	Model	Box
75165-311210	**VK/04156/CE** ● **Aluminium suspension of roof**	**1pc**
75165-144210	**VK/04156/AL/SRK/1** ● **Aluminium**	**1m.**
75165-199210	**VK/04156/W/SRK/1** ○ **White**	**1m.**
75165-130210	**VK/04156/B/SRK/1** ● **Black**	**1m.**
75165-137210	**VK/04156/AL/SRK/2** ● **Aluminium**	**2m.**
75165-263210	**VK/04156/W/SRK/2** ○ **White**	**2m.**
75165-189210	**VK/04156/B/SRK/2** ● **Black**	**2m.**
75165-421210	**VK/04156/AL/SRK/3** ● **Aluminium**	**3m.**
75165-132210	**VK/04156/W/SRK/3** ○ **White**	**3m.**
75165-420210	**VK/04156/B/SRK/3** ● **Black**	**3m.**

Details

Material **Aluminium.**




Basic Led Linear Lights





VK/04158


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-459210	VK/04158/57/AL/W	Aluminium	3000K	11W	1.600lm	57cm	1pc
75165-460210	VK/04158/57/W/W	White	3000K	11W	1.600lm	57cm	1pc
75165-461210	VK/04158/57/B/W	Black	3000K	11W	1.600lm	57cm	1pc
75165-477210	VK/04158/57/AL/C	Aluminium	4000K	11W	1.600lm	57cm	1pc
75165-478210	VK/04158/57/W/C	White	4000K	11W	1.600lm	57cm	1pc
75165-479210	VK/04158/57/B/C	Black	4000K	11W	1.600lm	57cm	1pc
75165-462210	VK/04158/85/AL/W	Aluminium	3000K	16W	2.400lm	85cm	1pc
75165-463210	VK/04158/85/W/W	White	3000K	16W	2.400lm	85cm	1pc
75165-464210	VK/04158/85/B/W	Black	3000K	16W	2.400lm	85cm	1pc
75165-480210	VK/04158/85/AL/C	Aluminium	4000K	16W	2.400lm	85cm	1pc
75165-481210	VK/04158/85/W/C	White	4000K	16W	2.400lm	85cm	1pc
75165-482210	VK/04158/85/B/C	Black	4000K	16W	2.400lm	85cm	1pc
75165-465210	VK/04158/113/AL/W	Aluminium	3000K	21W	3.200lm	113cm	1pc
75165-466210	VK/04158/113/W/W	White	3000K	21W	3.200lm	113cm	1pc
75165-467210	VK/04158/113/B/W	Black	3000K	21W	3.200lm	113cm	1pc
75165-483210	VK/04158/113/AL/C	Aluminium	4000K	21W	3.200lm	113cm	1pc
75165-484210	VK/04158/113/W/C	White	4000K	21W	3.200lm	113cm	1pc
75165-485210	VK/04158/113/B/C	Black	4000K	21W	3.200lm	113cm	1pc
75165-468210	VK/04158/141/AL/W	Aluminium	3000K	26W	4.000lm	141cm	1pc
75165-469210	VK/04158/141/W/W	White	3000K	26W	4.000lm	141cm	1pc
75165-470210	VK/04158/141/B/W	Black	3000K	26W	4.000lm	141cm	1pc
75165-486210	VK/04158/141/AL/C	Aluminium	4000K	26W	4.000lm	141cm	1pc
75165-487210	VK/04158/141/W/C	White	4000K	26W	4.000lm	141cm	1pc
75165-488210	VK/04158/141/B/C	Black	4000K	26W	4.000lm	141cm	1pc


Basic Led Linear Lights


















VK/04158/113/AL/C




Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-471210	**VK/04158/169/AL/W**	**Aluminium**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-472210	**VK/04158/169/W/W**	**White**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-473210	**VK/04158/169/B/W**	**Black**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-489210	**VK/04158/169/AL/C**	**Aluminium**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-490210	**VK/04158/169/W/C**	**White**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-491210	**VK/04158/169/B/C**	**Black**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-474210	**VK/04158/197/AL/W**	**Aluminium**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-475210	**VK/04158/197/W/W**	**White**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-476210	**VK/04158/197/B/W**	**Black**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-492210	**VK/04158/197/AL/C**	**Aluminium**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-493210	**VK/04158/197/W/C**	**White**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-494210	**VK/04158/197/B/C**	**Black**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC .
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.

» TRIDONIC LLE-G2
» TRIDONIC LED driver



5 years guarantee

IP20

Accessories for ceiling & pendant



VK/04157/CE



VK/04157/SRK

VK/04158/CE (Ceiling)
VK/04158/SRK (Pendant)

Code	Model	Box
75165-365210	**VK/04158/CE** ● **Aluminium suspension of roof**	**1pc**
75165-364210	**VK/04158/AL/SRK/1** ● **Aluminium**	**1m.**
75165-362210	**VK/04158/W/SRK/1** ○ **White**	**1m.**
75165-363210	**VK/04158/B/SRK/1** ● **Black**	**1m.**
75165-550210	**VK/04158/AL/SRK/2** ● **Aluminium**	**2m.**
75165-548210	**VK/04158/W/SRK/2** ○ **White**	**2m.**
75165-549210	**VK/04158/B/SRK/2** ● **Black**	**2m.**
75165-553210	**VK/04158/AL/SRK/3** ● **Aluminium**	**3m.**
75165-551210	**VK/04158/W/SRK/3** ○ **White**	**3m.**
75165-552210	**VK/04158/B/SRK/3** ● **Black**	**3m.**

Details


Material **Aluminium.**



Dark Led Linear Lights











VK/04634


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75168-188210	VK/04634/85/W/W	○ White	3000K	11W	2250lm	85cm	1pc
75168-189210	VK/04634/85/W/C	○ White	4000K	11W	2250lm	85cm	1pc
75168-190210	VK/04634/85/B/W	● Black	3000K	11W	2250lm	85cm	1pc
75168-191210	VK/04634/85/B/C	● Black	4000K	11W	2250lm	85cm	1pc
75168-192210	VK/04634/141/W/W	○ White	3000K	19W	3750lm	141cm	1pc
75168-193210	VK/04634/141/W/C	○ White	4000K	19W	3750lm	141cm	1pc
75168-194210	VK/04634/141/B/W	● Black	3000K	19W	3750lm	141cm	1pc
75168-195210	VK/04634/141/B/C	● Black	4000K	19W	3750lm	141cm	1pc
75168-196210	VK/04634/197/W/W	○ White	3000K	26W	5250lm	197cm	1pc
75168-197210	VK/04634/197/W/C	○ White	4000K	26W	5250lm	197cm	1pc
75168-198210	VK/04634/197/B/W	● Black	3000K	26W	5250lm	197cm	1pc
75168-199210	VK/04634/197/B/C	● Black	4000K	26W	5250lm	197cm	1pc
75168-200210	VK/04634/253/W/W	○ White	3000K	42W	6750lm	253cm	1pc
75168-201210	VK/04634/253/W/C	○ White	4000K	42W	6750lm	253cm	1pc
75168-202210	VK/04634/253/B/W	● Black	3000K	42W	6750lm	253cm	1pc
75168-203210	VK/04634/253/B/C	● Black	4000K	42W	6750lm	253cm	1pc

















Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75168-204210	**VK/04634/310/W/W**	○ **White**	**3000K**	**48W**	**8250lm**	**310cm**	**1pc**
75168-205210	**VK/04634/310/W/C**	○ **White**	**4000K**	**48W**	**8250lm**	**310cm**	**1pc**
75168-206210	**VK/04634/310/B/W**	● **Black**	**3000K**	**48W**	**8250lm**	**310cm**	**1pc**
75168-207210	**VK/04634/310/B/C**	● **Black**	**4000K**	**48W**	**8250lm**	**310cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC.
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.

» TRIDONIC LLE-G2
» TRIDONIC LED driver

5 years guarantee

IP20

VK/04157/CE (Ceiling)
VK/04157/SRK (Pendant)

Code	Model	Box
75165-198210	**VK/04157/CE** ● **Aluminium suspension of roof**	**1pc**
75165-177210	**VK/04157/W/SRK/1** ○ **White**	**1m.**
75165-322210	**VK/04157/B/SRK/1** ● **Black**	**1m.**
75165-335210	**VK/04157/W/SRK/2** ○ **White**	**2m.**
75165-543210	**VK/04157/B/SRK/2** ● **Black**	**2m.**
75165-545210	**VK/04157/W/SRK/3** ○ **White**	**3m.**
75165-546210	**VK/04157/B/SRK/3** ● **Black**	**3m.**




VK/04157/CE



VK/04157/SRK



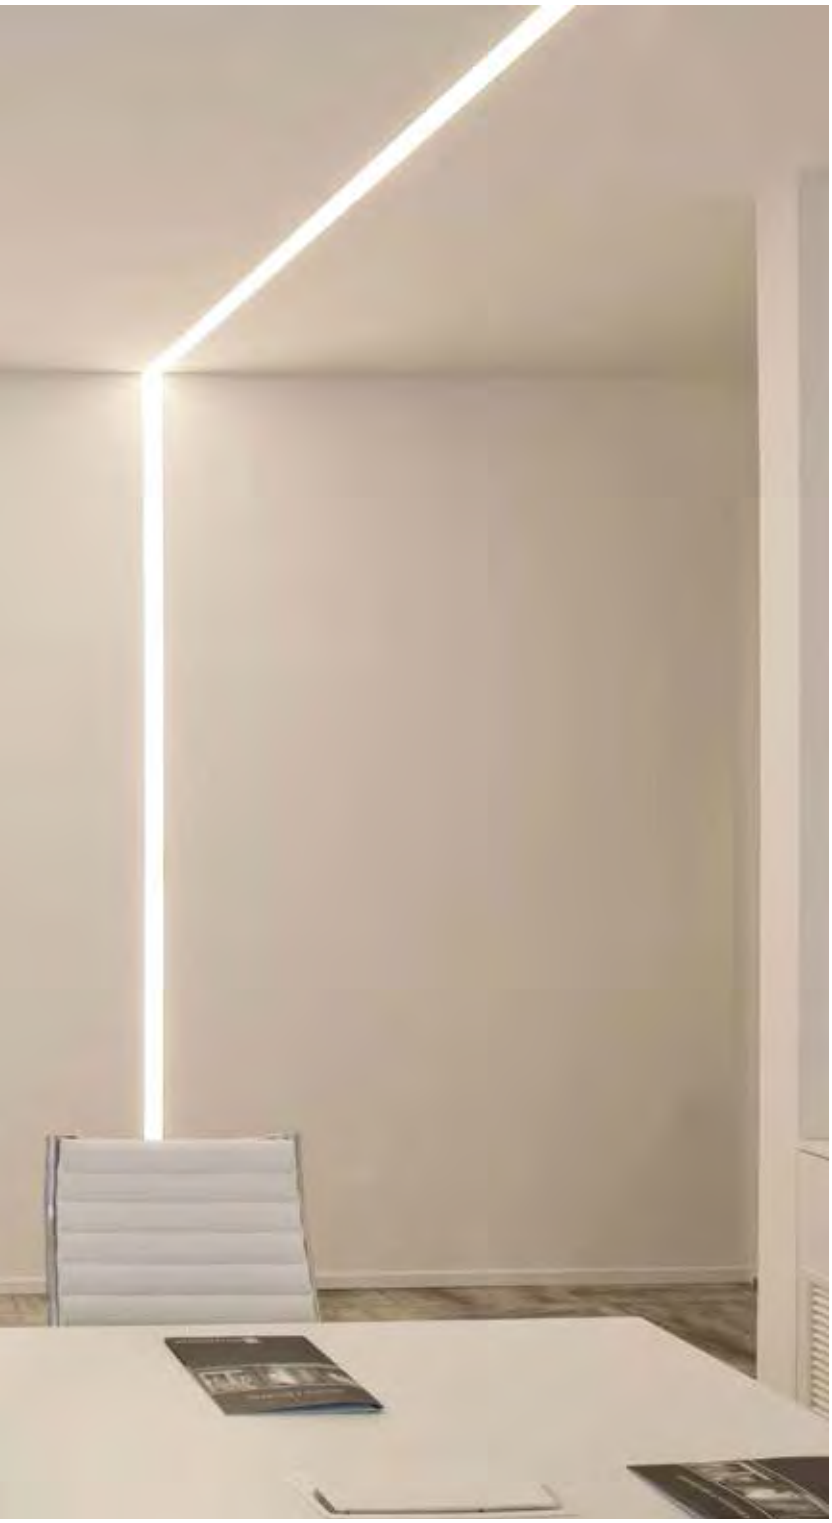

Recessed Led Linear Lights


Recessed Led Linear Lights




VK/04159


Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-495210	VK/04159/60/AL/W	● Aluminium	3000K	11W	1.600lm	59.5cm	1pc
75165-496210	VK/04159/60/W/W	○ White	3000K	11W	1.600lm	59.5cm	1pc
75165-497210	VK/04159/60/B/W	● Black	3000K	11W	1.600lm	59.5cm	1pc
75165-513210	VK/04159/60/AL/C	● Aluminium	4000K	11W	1.600lm	59.5cm	1pc
75165-514210	VK/04159/60/W/C	○ White	4000K	11W	1.600lm	59.5cm	1pc
75165-515210	VK/04159/60/B/C	● Black	4000K	11W	1.600lm	59.5cm	1pc
75165-498210	VK/04159/88/AL/W	● Aluminium	3000K	16W	2.400lm	87.5cm	1pc
75165-499210	VK/04159/88/W/W	○ White	3000K	16W	2.400lm	87.5cm	1pc
75165-500210	VK/04159/88/B/W	● Black	3000K	16W	2.400lm	87.5cm	1pc
75165-516210	VK/04159/88/AL/C	● Aluminium	4000K	16W	2.400lm	87.5cm	1pc
75165-517210	VK/04159/88/W/C	○ White	4000K	16W	2.400lm	87.5cm	1pc
75165-518210	VK/04159/88/B/C	● Black	4000K	16W	2.400lm	87.5cm	1pc
75165-501210	VK/04159/116/AL/W	● Aluminium	3000K	21W	3.200lm	115.5cm	1pc
75165-502210	VK/04159/116/W/W	○ White	3000K	21W	3.200lm	115.5cm	1pc
75165-503210	VK/04159/116/B/W	● Black	3000K	21W	3.200lm	115.5cm	1pc
75165-519210	VK/04159/116/AL/C	● Aluminium	4000K	21W	3.200lm	115.5cm	1pc
75165-520210	VK/04159/116/W/C	○ White	4000K	21W	3.200lm	115.5cm	1pc
75165-521210	VK/04159/116/B/C	● Black	4000K	21W	3.200lm	115.5cm	1pc
75165-504210	VK/04159/144/AL/W	● Aluminium	3000K	26W	4.000lm	143.5cm	1pc
75165-505210	VK/04159/144/W/W	○ White	3000K	26W	4.000lm	143.5cm	1pc
75165-506210	VK/04159/144/B/W	● Black	3000K	26W	4.000lm	143.5cm	1pc
75165-522210	VK/04159/144/AL/C	● Aluminium	4000K	26W	4.000lm	143.5cm	1pc
75165-523210	VK/04159/144/W/C	○ White	4000K	26W	4.000lm	143.5cm	1pc
75165-524210	VK/04159/144/B/C	● Black	4000K	26W	4.000lm	143.5cm	1pc

Recessed Led Linear Lights

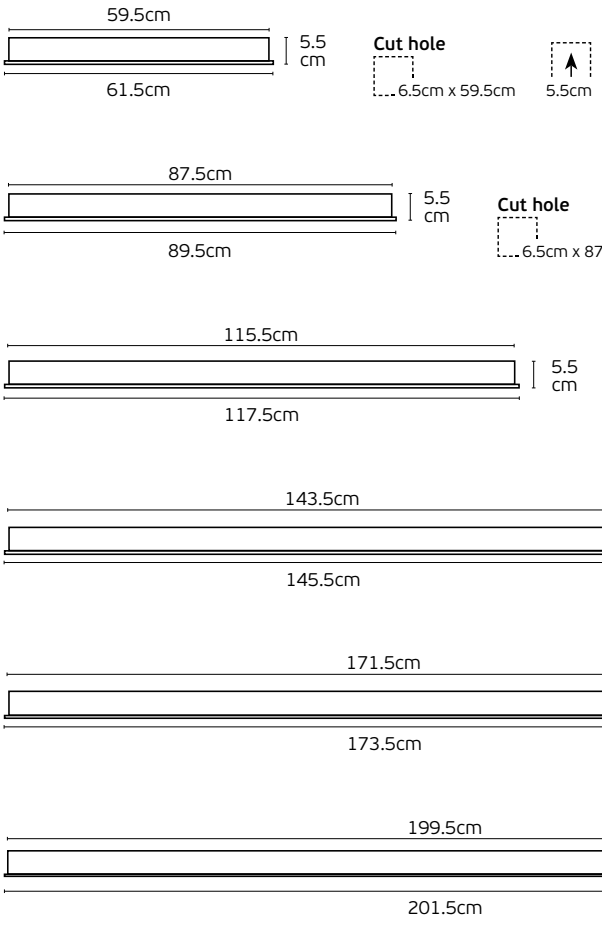



VK/04159/144/W/C




Code	Model	Color	Kelvin	Watt	Lumen	Length	Box
75165-507210	**VK/04159/172/AL/W**	● **Aluminium**	**3000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-508210	**VK/04159/172/W/W**	○ **White**	**3000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-509210	**VK/04159/172/B/W**	● **Black**	**3000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-525210	**VK/04159/172/AL/C**	● **Aluminium**	**4000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-526210	**VK/04159/172/W/C**	○ **White**	**4000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-527210	**VK/04159/172/B/C**	● **Black**	**4000K**	**31W**	**4.800lm**	**171.5cm**	**1pc**
75165-510210	**VK/04159/200/AL/W**	● **Aluminium**	**3000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**
75165-511210	**VK/04159/200/W/W**	○ **White**	**3000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**
75165-512210	**VK/04159/200/B/W**	● **Black**	**3000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**
75165-528210	**VK/04159/200/AL/C**	● **Aluminium**	**4000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**
75165-529210	**VK/04159/200/W/C**	○ **White**	**4000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**
75165-530210	**VK/04159/200/B/C**	● **Black**	**4000K**	**37W**	**5.600lm**	**199.5cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC .
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.


Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.

» TRIDONIC LLE-G2
» TRIDONIC LED driver



5 years guarantee

IP20

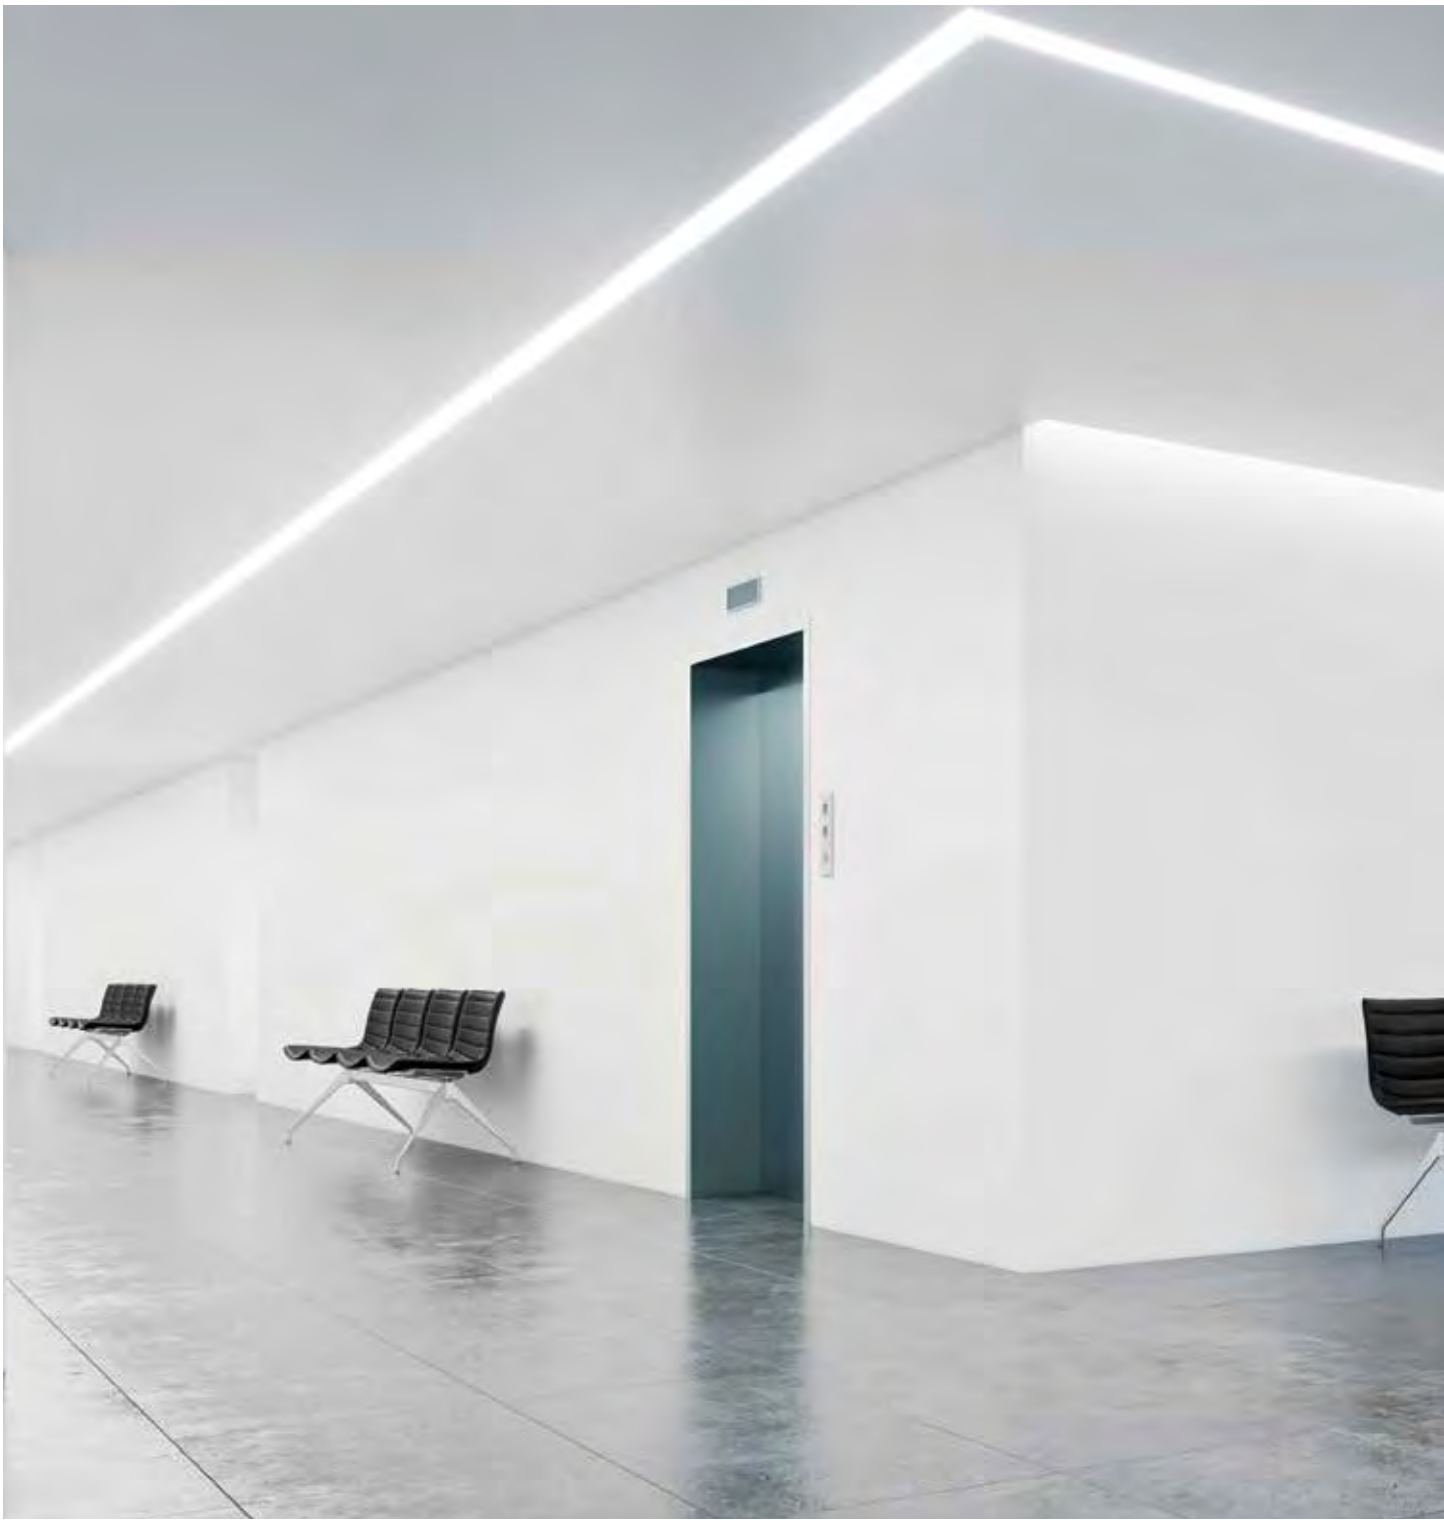



Recessed Trimless Led Linear Lights

Recessed Trimless Led Linear Lights



VK/04461


Code	Model	Kelvin	Watt	Lumen	Length	Box
75167-023210	**VK/04461/58/W**	**3000K**	**10W**	**1.700lm**	**58cm**	**1pc**
75167-024210	**VK/04461/58/C**	**4000K**	**10W**	**1.700lm**	**58cm**	**1pc**
75167-025210	**VK/04461/86/W**	**3000K**	**15W**	**2.550lm**	**86cm**	**1pc**
75167-026210	**VK/04461/86/C**	**4000K**	**15W**	**2.550lm**	**86cm**	**1pc**
75167-027210	**VK/04461/114/W**	**3000K**	**20W**	**3.445lm**	**114cm**	**1pc**
75167-028210	**VK/04461/114/C**	**4000K**	**20W**	**3.445lm**	**114cm**	**1pc**
75167-029210	**VK/04461/142/W**	**3000K**	**25W**	**5.160lm**	**142cm**	**1pc**
75167-030210	**VK/04461/142/C**	**4000K**	**25W**	**5.160lm**	**142cm**	**1pc**
75167-031210	**VK/04461/198/W**	**3000K**	**35W**	**6.840lm**	**198cm**	**1pc**
75167-032210	**VK/04461/198/C**	**4000K**	**35W**	**6.840lm**	**198cm**	**1pc**
75167-033210	**VK/04461/254/W**	**3000K**	**45W**	**8.530lm**	**254cm**	**1pc**
75167-034210	**VK/04461/254/C**	**4000K**	**45W**	**8.530lm**	**254cm**	**1pc**
75167-035210	**VK/04461/310/W**	**3000K**	**55W**	**10.120lm**	**310cm**	**1pc**
75167-036210	**VK/04461/310/C**	**4000K**	**55W**	**10.120lm**	**310cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC.
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.

Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.


» TRIDONIC LLE-G2
» TRIDONIC LED driver



5 years guarantee

IP20






58cm

Cut hole

5.6cm x 58cm

7cm




86cm

Cut hole

5.6cm x 86cm

7cm




114cm

Cut hole

5.6cm x 114cm

7cm




142cm

Cut hole

5.6cm x 142cm

7cm




198cm

Cut hole

5.6cm x 198cm

7cm




254cm

Cut hole

5.6cm x 254cm

7cm




310cm


Cut hole

5.6cm x 310cm

7cm



VK/04461/142/W/C



Recessed Trimless Led Linear Lights



VK/04160

Code	Model	Kelvin	Watt	Lumen	Length	Box
75165-531210	**VK/04160/57/W**	**3000K**	**11W**	**1.600lm**	**57cm**	**1pc**
75165-537210	**VK/04160/57/C**	**4000K**	**11W**	**1.600lm**	**57cm**	**1pc**
75165-532210	**VK/04160/85/W**	**3000K**	**16W**	**2.400lm**	**85cm**	**1pc**
75165-538210	**VK/04160/85/C**	**4000K**	**16W**	**2.400lm**	**85cm**	**1pc**
75165-533210	**VK/04160/113/W**	**3000K**	**21W**	**3.200lm**	**113cm**	**1pc**
75165-539210	**VK/04160/113/C**	**4000K**	**21W**	**3.200lm**	**113cm**	**1pc**
75165-534210	**VK/04160/141/W**	**3000K**	**26W**	**4.000lm**	**141cm**	**1pc**
75165-540210	**VK/04160/141/C**	**4000K**	**26W**	**4.000lm**	**141cm**	**1pc**
75165-535210	**VK/04160/169/W**	**3000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-541210	**VK/04160/169/C**	**4000K**	**31W**	**4.800lm**	**169cm**	**1pc**
75165-536210	**VK/04160/197/W**	**3000K**	**37W**	**5.600lm**	**197cm**	**1pc**
75165-542210	**VK/04160/197/C**	**4000K**	**37W**	**5.600lm**	**197cm**	**1pc**

Details

Voltage **220-240V**.
Type of LED TRIDONIC.
Beam angle **120º.** CRI>80.
Clicks **50.000.**
Working temperature **-25ºC→ 45ºC**.


Lifetime **50.000hrs**.
Material **Aluminium.**
No dimmable but can be dimmable after contact with our headquarter sales department.


» TRIDONIC LLE-G2
» TRIDONIC LED driver


5 years guarantee


IP20





















VK/04160/197/C







Tubes & Squares

Eco




VK/04342/CE/WB/W




VK/04344/CE/B/W

VK/04342/CE
VK/04344/CE

Code	Model	Box
71164-064721	**VK/04342/CE/WB/W** ○● **White-Black sand.** 3000K. 497lm. 5W. **OSRAM** led.	**30pcs**
71164-063721	**VK/04342/CE/B/W** ● **Black sand.** 3000K. 497lm. 5W. **OSRAM** led.	**30pcs**
71164-068721	**VK/04344/CE/WB/W** ○● **White-Black sand.** 3000K. 1.681lm. 13W. bridgelux. led.	**20pcs**
71164-067721	**VK/04344/CE/B/W** ● **Black sand.** 3000K. 1.681lm. 13W. bridgelux. led.	**20pcs**





Details

AC Driver **220-240V (Included)**.
CRI>**90**.
Beam Angle **24°.**
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Material **Aluminium**.
Guarantee **3 years**.

IP20



Eco



VK/04341/CE/BGD/W




VK/04343/CE/WB/W

VK/04341/CE
VK/04343/CE

Code	Model	Box
71164-062721	**VK/04341/CE/WB/W** ○● **White-Black sand.** 3000K. 497lm. 5W. OSRAM led.	30pcs
71164-061721	**VK/04341/CE/BGD/W** ●● **Black-Gold sand.** 3000K. 497lm. 5W. OSRAM led.	30pcs
71164-066721	**VK/04343/CE/WB/W** ○● **White-Black sand.** 3000K. 1.794lm. 15W. bridgelux. led.	20pcs
71164-065721	**VK/04343/CE/BGD/W** ●● **Black-Gold sand.** 3000K. 1.794lm. 15W. bridgelux. led.	20pcs





Details

AC Driver **220-240V (Included)**.
CRI>**90**.
Beam Angle **24°.**
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Material **Aluminium**.
Guarantee **3 years**.

IP20



Abi




VK/04301/B




VK/04303/B

VK/04301
VK/04303

Code	Model	Box
64174-099721	**VK/04301/W/W** ○ **White sand.** 3000K. 535lm. 4W.	**30pcs**
64174-100721	**VK/04301/W/C** ○ **White sand.** 4000K. 626lm. 4W.	**30pcs**
64174-101721	**VK/04301/B/W** ● **Black sand.** 3000K. 535lm. 4W.	**30pcs**
64174-102721	**VK/04301/B/C** ● **Black sand.** 4000K. 626lm. 4W.	**30pcs**
64174-107721	**VK/04303/W/W** ○ **White sand.** 3000K. 535lm. 4W.	**30pcs**
64174-108721	**VK/04303/W/C** ○ **White sand.** 4000K. 610lm. 4W.	**30pcs**
64174-109721	**VK/04303/B/W** ● **Black sand.** 3000K. 535lm. 4W.	**30pcs**
64174-110721	**VK/04303/B/C** ● **Black sand.** 4000K. 610lm. 4W.	**30pcs**





Details

AC Driver **220-240V (Included)**.
CRI>**90**.
Beam Angle **8°.**
Type of Led bridgelux
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Clicks **50.000**.
Material **Aluminium**.
Guarantee **3 years**.



IP20



Abi




VK/04302/W




VK/04304/B

VK/04302
VK/04304

Code	Model	Box
64174-103721	**VK/04302/W/W** ○ **White sand.** 3000K. 672lm. 6W.	**30pcs**
64174-104721	**VK/04302/W/C** ○ **White sand.** 4000K. 804lm. 6W.	**30pcs**
64174-105721	**VK/04302/B/W** ● **Black sand.** 3000K. 672lm. 6W.	**30pcs**
64174-106721	**VK/04302/B/C** ● **Black sand.** 4000K. 804lm. 6W.	**30pcs**
64174-111721	**VK/04304/W/W** ○ **White sand.** 3000K. 672lm. 6W.	**30pcs**
64174-112721	**VK/04304/W/C** ○ **White sand.** 4000K. 804lm. 6W.	**30pcs**
64174-113721	**VK/04304/B/W** ● **Black sand.** 3000K. 672lm. 6W.	**30pcs**
64174-114721	**VK/04304/B/C** ● **Black sand.** 4000K. 804lm. 6W.	**30pcs**





Details

AC Driver **220-240V (Included)**.
CRI>**90**.
Beam Angle **8°.**
Type of Led
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Clicks **50.000**.
Material **Aluminium**.
Guarantee **3 years**.

Adjustable

IP20



Baton




VK/04268CE/B




VK/04269CE/B

VK/04268CE
VK/04269CE

Code	Model	Box
64174-073721	**VK/04268CE/W/W** ○ **White.** 3000K. 214lm. 3W.	**20pcs**
64174-074721	**VK/04268CE/W/C** ○ **White.** 4000K. 233lm. 3W.	**20pcs**
64174-071721	**VK/04268CE/B/W** ● **Black.** 3000K. 214lm. 3W.	**20pcs**
64174-072721	**VK/04268CE/B/C** ● **Black.** 4000K. 233lm. 3W.	**20pcs**
64174-077721	**VK/04269CE/W/W** ○ **White.** 3000K. 624lm. 9W.	**20pcs**
64174-078721	**VK/04269CE/W/C** ○ **White.** 4000K. 644lm. 10W.	**20pcs**
64174-075721	**VK/04269CE/B/W** ● **Black.** 3000K. 624lm. 9W.	**20pcs**
64174-076721	**VK/04269CE/B/C** ● **Black.** 4000K. 644lm. 10W.	**20pcs**






Details

AC Driver **100-240V (Included)**.
CRI>**90**.
Beam Angle **8°**.
Type of Led **OSRAM**.

Working temperature **< 45°C**.
Lifetime **50.000 hrs**.
Material **Aluminium**.
Guarantee **3 years**.


IP20

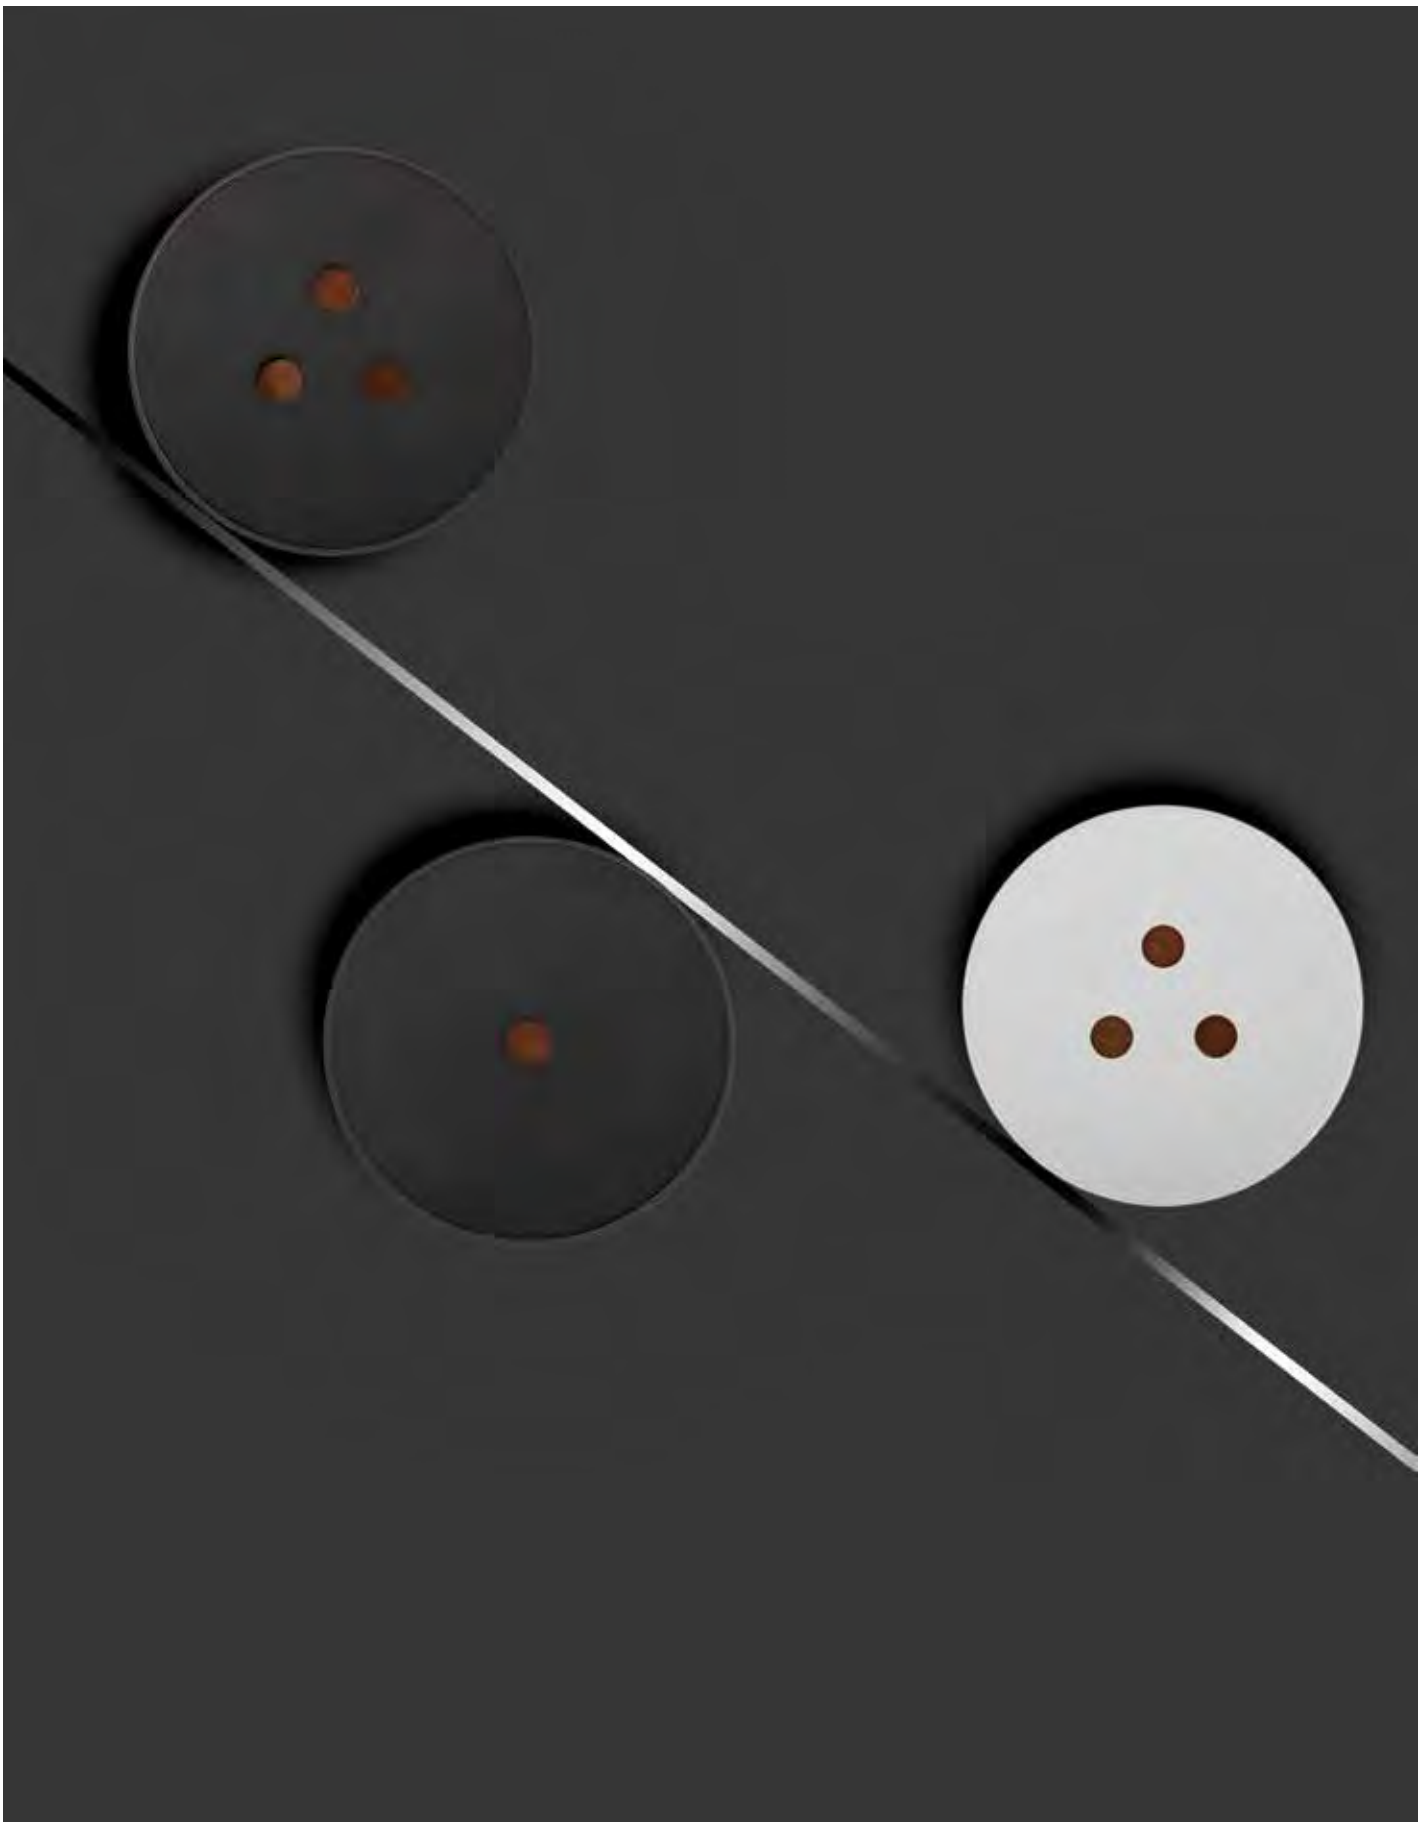

Anto




VK/04167CE/W




VK/04168CE/W

VK/04167CE
VK/04168CE

Code	Model	Box
64174-902739	**VK/04167CE/W/W** ❍ **White shanded.** 3000K. 580lm. 8W.	**1pc**
64174-903739	**VK/04167CE/W/C** ❍ **White shanded.** 4000K. 580lm. 8W.	**1pc**
64174-904739	**VK/04168CE/W/W** ❍ **White shanded.** 3000K. 1.160lm. 16W.	**1pc**
64174-905739	**VK/04168CE/W/C** ❍ **White shanded.** 4000K. 1.160lm. 16W.	**1pc**





Details

AC **110-240V** Driver **(Included)**.
CRI>**80**.
Beam Angle **25°.**
Type of Led **COB Citizen.**

Working temperature **-20°C ~ 40°C**.
Lifetime **30.000 hrs**.
Material **Aluminium die-cast**.
Guarantee **3 years**.



IP20

Gapo




VK/04169CE





VK/04170CE

VK/04169CE
VK/04170CE

Code	Model	Box
64174-906739	**VK/04169CE/W/W** ○ **White shanded.** 3000K. 1.080lm. 12W.	**1pc**
64174-907739	**VK/04169CE/W/C** ○ **White shanded.** 4000K. 1.080lm. 12W.	**1pc**
64174-908739	**VK/04169CE/B/W** ● **Black.** 3000K. 1.080lm. 12W.	**1pc**
64174-909739	**VK/04169CE/B/C** ● **Black.** 4000K. 1.080lm. 12W.	**1pc**
64174-910739	**VK/04170CE/W/W** ○ **White shanded.** 3000K. 1.080lm. 12W.	**1pc**
64174-911739	**VK/04170CE/W/C** ○ **White shanded.** 4000K. 1.080lm. 12W.	**1pc**
64174-912739	**VK/04170CE/B/W** ● **Black.** 3000K. 1.080lm. 12W.	**1pc**
64174-913739	**VK/04170CE/B/C** ● **Black.** 4000K. 1.080lm. 12W.	**1pc**









Details

AC **110-240V** Driver **(Included)**.
CRI>**90**.
Beam Angle **38º.**
Type of Led **COB Citizen.**

Working temperature **-20ºC ~ 40ºC**.
Lifetime **30.000 hrs**.
Material **Aluminium die-cast**.
Guarantee **3 years**.



IP20


Ian



VK/04300/W

VK/04300

Code	Model	Box
64174-095721	**VK/04300/W/W** ○ **White sand.** 3000K. 564lm. 5W.	**12pcs**
64174-096721	**VK/04300/W/C** ○ **White sand.** 4000K. 660lm. 5W.	**12pcs**
64174-097721	**VK/04300/B/W** ● **Black sand.** 3000K. 564lm. 5W.	**12pcs**
64174-098721	**VK/04300/B/C** ● **Black sand.** 4000K. 660lm. 5W.	**12pcs**



Details

AC Driver **100-250V (Included)**.
CRI>**90**.
Beam Angle **24º**.
Adjustable **25º, 175º**.
Type of Led **E6-CA**.

Working temperature **< 45°C**.
Lifetime **50.000hrs**.
Clicks **50.000**. Material **Aluminium**.
Guarantee **3 years**.




IP20



Kumu




VK/02235/CB-B





VK/02236/TB-B



VK/02235

Code	Model	Box
64174-049776	VK/02235/W-B/W ○ White+black. 3000K. 1.860lm. 15W. 24°.	1pc
64174-050776	VK/02235/B-B/W ● Black+black. 3000K. 1.860lm. 15W. 24°.	1pc
64174-051776	VK/02235/CB-B/W ● Chrome black+black. 3000K. 1.860lm. 15W. 24°.	1pc
64174-052776	VK/02235/TB-B/W ● Titanium bronze+black. 3000K. 1.860lm. 15W. 24°.	1pc
64174-053776	VK/02235/GD-B/W ● Gold+black. 3000K. 1.860lm. 15W. 24°.	1pc

VK/02236

Code	Model	Box
64174-054776	VK/02236/W-B/W ○ White+black. 3000K. 3.693lm. 30W. 36°.	1pc
64174-055776	VK/02236/B-B/W ● Black+black. 3000K. 3.693lm. 30W. 36°.	1pc
64174-056776	VK/02236/CB-B/W ● Chrome black+black. 3000K. 3.693lm. 30W. 36°.	1pc
64174-057776	VK/02236/TB-B/W ● Titanium bronze+black. 3000K. 3.693lm. 30W. 36°.	1pc
64174-058776	VK/02236/GD-B/W ● Gold+black. 3000K. 3.693lm. 30W. 36°.	1pc

Details

Voltage **220-240V**.
Material **Aluminium**.
Type of Led bridgelux .
Lifetime **50.000 hrs**.

Working temperature **< 45°C**.
Dimmable **No**.
CRI**>90**
Flicker **free.**

5 years guarantee

IP65.




Zoe



VK/09037

VK/09036, VK/09037, VK/09038

Code	Model	Box
64174-255131	**VK/09036** ❍ **White. GU10.** Max 12W (LED). **L 9cm**.	**1pc**
64174-256131	**VK/09037** ❍ **White. GU10.** Max 12W (LED). **L 13cm**.	**1pc**
64174-257131	**VK/09038** ❍ **White. GU10.** Max 12W (LED). **L 17cm**.	**1pc**

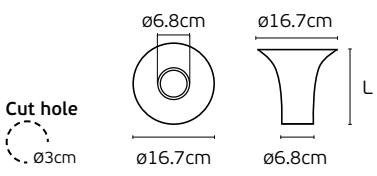

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Material **Gypsum.**
Possibility to paint.

IP20




Poul



VK/09039

VK/09039

Code	Model	Box
64174-286131	**VK/09039/12** ❍ **White. GU10.** Max 12W (LED). **L 11.2cm**.	**18pcs**
64174-302131	**VK/09039/14** ❍ **White. GU10.** Max 12W (LED). **L 14c**m.	**18pcs**
64174-258131	**VK/09039/17** ❍ **White. GU10.** Max 12W (LED). **L 17cm**.	**18pcs**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Gypsum.**
Possibility to paint.

IP20



Rein



VK/03087CE/13/COP




VK/03087CE/20/B





VK/03087CE/30/W

VK/03087CE/13, VK/03087CE/20, VK/03087CE/30

Code	Model	Box
75169-233108	**VK/03087CE/13/W** ○ **White sanded.** GU10. Max 12W (LED).	**50pcs**
75169-234108	**VK/03087CE/13/B** ● **Black sanded.** GU10. Max 12W (LED).	**50pcs**
75169-235108	**VK/03087CE/13/COP** ● **Copper.** GU10. Max 12W (LED).	**50pcs**
75169-236108	**VK/03087CE/20/W** ○ **White sanded.** GU10. Max 12W (LED).	**40pcs**
75169-237108	**VK/03087CE/20/B** ● **Black sanded.** GU10. Max 12W (LED).	**40pcs**
75169-238108	**VK/03087CE/20/COP** ● **Copper.** GU10. Max 12W (LED).	**40pcs**
75169-239108	**VK/03087CE/30/W** ○ **White sanded.** GU10. Max 12W (LED).	**30pcs**
75169-240108	**VK/03087CE/30/B** ● **Black sanded.** GU10. Max 12W (LED).	**30pcs**
75169-241108	**VK/03087CE/30/COP** ● **Copper.** GU10. Max 12W (LED).	**30pcs**







Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**



IP20



Rein




VK/03091CE/25/BGD




VK/03091CE/50/WGD

VK/03091CE/25
VK/03091CE/50

Code	Model	Box
75169-245108	**VK/03091CE/25/WGD** ○ **White+Gold sanded.** GU10. Max 12W (LED).	**18pcs**
75169-246108	**VK/03091CE/25/BGD** ● **Black+Gold sanded.** GU10. Max 12W (LED).	**18pcs**
75169-247108	**VK/03091CE/50/WGD** ○ **White+Gold sanded.** GU10. Max 12W (LED).	**12pcs**
75169-248108	**VK/03091CE/50/BGD** ● **Black+Gold sanded.** GU10. Max 12W (LED).	**12pcs**

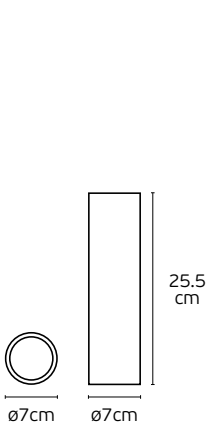

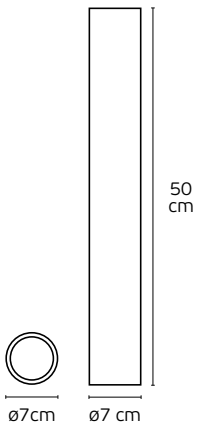

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20



Heep



VK/03140CE




VK/03140/R



VK/03140CE
VK/03140/R

Code	Model	Box
75169-384121	**VK/03140CE/W** ○ **White.** GU10. Max 12W (LED).	**60pcs**
75169-385121	**VK/03140CE/B** ● **Black.** GU10. Max 12W (LED).	**60pcs**
75169-386121	**VK/03140/R/G** ● **Gold ring.** Can be used to VK/03140CE.	**200pcs**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20

Heep



VK/03139CE/W




VK/03139/R/G





VK/03139CE
VK/03139/R

Code	Model	Box
75169-381121	**VK/03139CE/W** ○ **White.** GU10. Max 12W (LED).	**60pcs**
75169-382121	**VK/03139CE/B** ● **Black.** GU10. Max 12W (LED).	**60pcs**
75169-383121	**VK/03139/R/G** ● **Gold ring.** Can be used to VK/03139CE.	**200pcs**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20

Keed




VK/03084CE/COP



VK/03006/AL

VK/03084CE
VK/03006

Code	Model	Box
75169-230108	**VK/03084CE/COP** ● **Copper.** GU10. Max 12W (LED).	**20pcs**
75169-192108	**VK/03006/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
75169-208108	**VK/03006/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
75169-207108	**VK/03006/AL** ● **Aluminium.** GU10. Max 12W (LED).	**1pc**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20



Keed




VK/03056/W




VK/04062CE/B

VK/03056
VK/04062CE

Code	Model	Box
75169-215108	**VK/03056/W** ○ **White.** GU10. Max 12W (LED).	**60pcs**
75169-216108	**VK/03056/B** ● **Black.** GU10. Max 12W (LED).	**60pcs**
64174-379269	**VK/04062CE/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-378269	**VK/04062CE/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-380269	**VK/04062CE/G** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-381269	**VK/04062CE/AN** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20

Keed




VK/04052CE/AN/S




VK/04052CE/G/L

VK/04052CE/S
VK/04052CE/L

Code	Model	Box
64174-343269	**VK/04052CE/W/S** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-342269	**VK/04052CE/B/S** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-344269	**VK/04052CE/G/S** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-345269	**VK/04052CE/AN/S** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
64174-346269	**VK/04052CE/MC/S** ● **Brushed chrome.** GU10. Max 12W (LED).	**1pc**



64174-338269	**VK/04052CE/W/L** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-337269	**VK/04052CE/B/L** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-339269	**VK/04052CE/G/L** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-340269	**VK/04052CE/AN/L** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
64174-341269	**VK/04052CE/MC/L** ● **Brushed chrome.** GU10. Max 12W (LED).	**1pc**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**



IP20

Keed




VK/03005/B



VK/03081CE/COP

VK/03005
VK/03081CE

Code	Model	Box
75169-205108	**VK/03005/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
75169-206108	**VK/03005/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
75169-191108	**VK/03005/AL** ● **Aluminium.** GU10. Max 12W (LED).	**1pc**
75169-227108	**VK/03081CE/COP** ● **Copper.** GU10. Max 12W (LED).	**20pcs**

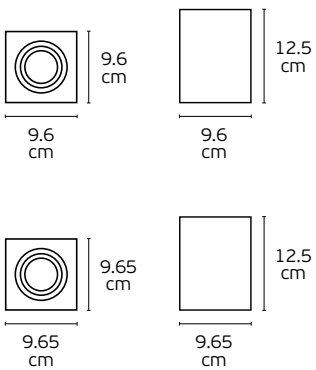

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20°C ~ 40°C**.
Material **Aluminium.**

Adjustable

IP20

Keed




VK/03082CE/COP



VK/03054/CH-GD

VK/03082CE
VK/03054

Code	Model	Box
75169-228108	**VK/03082CE/COP** ● **Copper.** GU10. Max 12W (LED).	**20pcs**
75169-211108	**VK/03054/W** ○ **White.** GU10. Max 12W (LED).	**30pcs**
75169-212108	**VK/03054/B** ● **Black.** GU10. Max 12W (LED).	**30pcs**
64174-951121	**VK/03054/CH-GD** ● **Champaign Gold.** GU10. Max 12W (LED).	**30pcs**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC.**
Material **Aluminium.**

Adjustable

IP20


Keed



VK/03055/CH-GD

VK/03055

Code	Model	Box
75169-213108	**VK/03055/W** ○ **White.** GU10. Max 12W (LED).	**30pcs**
75169-214108	**VK/03055/B** ● **Black.** GU10. Max 12W (LED).	**30pcs**
64174-952121	**VK/03055/CH-GD** ● **Champaign Gold.** GU10. Max 12W (LED).	**30pcs**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC.**
Material **Aluminium.**

Adjustable

IP20

Keed




VK/03083CE/COP



VK/03057/W

VK/03083CE
VK/03057

Code	Model	Box
75169-229108	**VK/03083CE/COP** ● **Copper.** GU10. Max 12W (LED).	**20pcs**
75169-217108	**VK/03057/W** ○ **White.** GU10. Max 12W (LED).	**60pcs**
75169-218108	**VK/03057/B** ● **Black.** GU10. Max 12W (LED).	**60pcs**



Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

IP20

Loke




VK/03190CE/W/70




VK/03190/B/70

VK/03190CE
VK/03190

Code	Model	Box
64174-331131	**VK/03190CE/W/40** ○ **White.** GU10. Max 12W (LED). **L55cm**.	**30pcs**
64174-330131	**VK/03190CE/B/40** ● **Black.** GU10. Max 12W (LED). **L55cm**.	**30pcs**
64174-329131	**VK/03190CE/W/70** ○ **White.** GU10. Max 12W (LED). **L85c**m.	**30pcs**
64174-328131	**VK/03190CE/B/70** ● **Black.** GU10. Max 12W (LED). **L85cm**.	**30pcs**
64174-323131	**VK/03190/W/40** ○ **White.** GU10. Max 12W (LED). **L55cm**.	**30pcs**
64174-322131	**VK/03190/B/40** ● **Black.** GU10. Max 12W (LED). **L55cm**.	**30pcs**
64174-321131	**VK/03190/W/70** ○ **White.** GU10. Max 12W (LED). **L85cm**.	**30pcs**
64174-320131	**VK/03190/B/70** ● **Black.** GU10. Max 12W (LED). **L85c**m.	**30pcs**



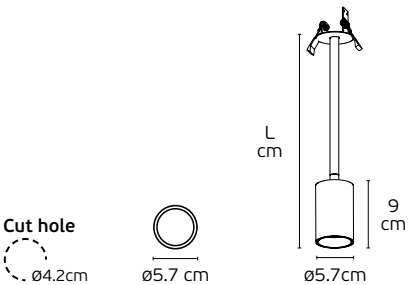

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**

Adjustable

IP20

Loke



VK/04194CE/CH-GD





VK/04195CE/W



VK/04194CE
VK/04195CE

Code	Model	Box
64174-938121	**VK/04194CE/W** ○ **White.** GU10. Max 12W (LED).	**30pcs**
64174-939121	**VK/04194CE/B** ● **Black.** GU10. Max 12W (LED).	**30pcs**
64174-953121	**VK/04194CE/CH-GD** ● **Champaign Gold.** GU10. Max 12W (LED).	**30pcs**
64174-940121	**VK/04195CE/W** ○ **White.** GU10. Max 12W (LED).	**30pcs**
64174-941121	**VK/04195CE/B** ● **Black.** GU10. Max 12W (LED).	**30pcs**



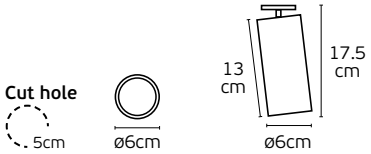

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Working temperature **-20ºC ~ 40ºC**.
Material **Aluminium.**



IP20

Tia




VK/03090CE/W



VK/03110CE/W

VK/03090CE

Code	Model	Box
75169-242108	**VK/03090CE/W** ○ **White sanded.** GU10. Max 12W (LED).	**20pcs**
75169-243108	**VK/03090CE/B** ● **Black sanded.** GU10. Max 12W (LED).	**20pcs**
75169-244108	**VK/03090CE/COP** ● **Copper.** GU10. Max 12W (LED).	**20pcs**



Details


Included lampholder **GU10.**
Match also with lamps: **GU10/50, Par16.**

Material **Aluminium**

IP20

VK/03110CE

Code	Model	Box
75169-268108	**VK/03110CE/W** ○ **White.** GX53. Max 7W (LED).	**25pcs**



Details

Included lampholder **GX53.**
Match with lamps: **GX53-MLF.**

Material **Aluminium**

IP20


COFFEE

Emi



VK/03302G/CE/W



VK/03302G/CE/B


VK/03302G/CE


Code	Model	Box
64174-970121	**VK/03302G/CE/W** ○ **White.** GU10. Max. 12W (LED).	**1pc**
64174-971121	**VK/03302G/CE/B** ● **Black.** GU10. Max. 12W (LED).	**1pc**

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Pure aluminium**







IP20



Arya




VK/03095CE/B



VK/03095CE/W

VK/03095CE

Code	Model	Box
64174-013108	**VK/03095CE/W** ○ **White.** GU10. Max. 12W. (LED).	**30pcs**
64174-014108	**VK/03095CE/B** ● **Black.** GU10. Max. 12W. (LED).	**30pcs**

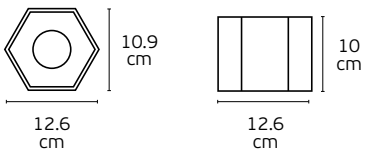

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Pure aluminium.**
Working temperature **-20°C ~ 40°C.**

IP20

Eden




VK/03108CE/B



VK/03108CE/W

VK/03108CE

Code	Model	Box
75169-266108	**VK/03108CE/W** ○ **White sanded.** GU10x2. Max. 2x12W. (LED).	**20pcs**
75169-267108	**VK/03108CE/B** ● **Black sanded.** GU10x2. Max. 2x12W. (LED).	**20pcs**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Aluminium.**
Working temperature **-20°C ~ 40°C.**



IP20


Hana



VK/03309/CE/B

VK/03309/CE

Code	Model	Box
75169-286108	**VK/03309/CE/W** ○ **Sanded white.** Max. 20W (LED).	**16pcs**
75169-287108	**VK/03309/CE/B** ● **Sanded black.** Max. 20W (LED).	**16pcs**



Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20ºC ~ 40ºC.**



IP20




Leia




VK/03111CE/B



VK/03111CE/2/W



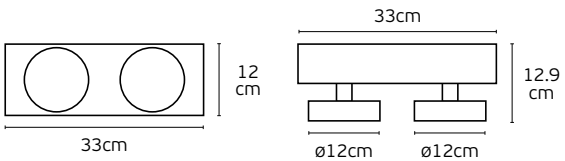

VK/03111CE
VK/03111CE/2

Code	Model	Box
75169-269108	**VK/03111CE/W** ○ **White sanded.** GU10. Max. 20W (LED).	**12pcs**
75169-270108	**VK/03111CE/B** ● **Black sanded.** GU10. Max. 20W (LED).	**12pcs**
75169-271108	**VK/03111CE/2/W** ○ **White sanded.** GU10x2. Max. 2x20W (LED).	**9pcs**
75169-272108	**VK/03111CE/2/B** ● **Black sanded.** GU10x2. Max. 2x20W (LED).	**9pcs**

Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium, metal.**
Working temperature **-20ºC ~ 40ºC.**


Adjustable

IP20

Leia



VK/03111CE/3/B

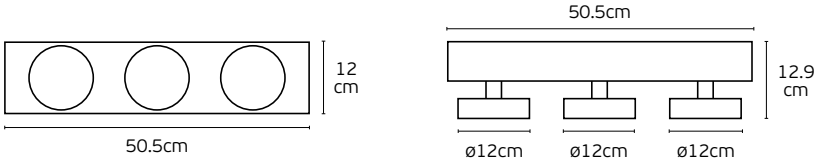

VK/03111CE/3

Code	Model	Box
75169-273108	**VK/03111CE/3/W** ○ **White sanded.** GU10x3. Max. 3x20W (LED).	**6pcs**
75169-274108	**VK/03111CE/3/B** ● **Black sanded.** GU10x3. Max. 3x20W (LED).	**6pcs**

Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium, metal.**
Working temperature **-20°C ~ 40°C.**

Adjustable

IP20

Myra




VK/03107CE/W



VK/03107CE/2/B

VK/03107CE
VK/03107CE/2

Code	Model	Box
75169-260108	**VK/03107CE/W** ○ **White sanded.** GU10. Max. 20W (LED).	**16pcs**
75169-261108	**VK/03107CE/B** ● **Black sanded.** GU10. Max. 20W (LED).	**16pcs**
75169-262108	**VK/03107CE/2/W** ○ **White sanded.** GU10x2. Max. 2x20W (LED).	**8pcs**
75169-263108	**VK/03107CE/2/B** ● **Black sanded.** GU10x2. Max. 2x20W (LED).	**8pcs**

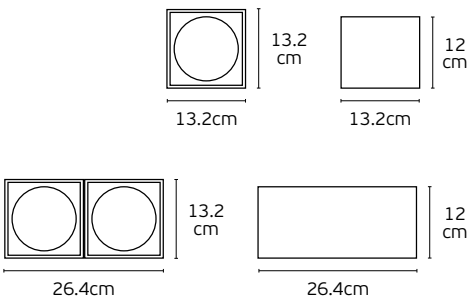

Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20ºC ~ 40ºC.**


Adjustable

IP20

Myra



VK/03107CE/3/W



VK/03107CE/3

Code	Model	Box
75169-264108	**VK/03107CE/3/W** ○ **White sanded.** GU10x3. Max. 3x20W (LED).	**6pcs**
75169-265108	**VK/03107CE/3/B** ● **Black sanded.** GU10x3. Max. 3x20W (LED).	**6pcs**

Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20°C ~ 40°C.**

Adjustable

IP20

Mae




VK/04053CE/W/S




VK/04053CE/B/L

VK/04053CE/S
VK/04053CE/L

Code	Model	Box
64174-358269	**VK/04053CE/W/S** ○ **White.** GU10. Max. 20W (LED).	**1pc**
64174-357269	**VK/04053CE/B/S** ● **Black.** GU10. Max. 20W (LED).	**1pc**
64174-359269	**VK/04053CE/G/S** ● **Grey.** GU10. Max. 20W (LED).	**1pc**
64174-360269	**VK/04053CE/AN/S** ● **Anthracite.** GU10. Max. 20W (LED).	**1pc**
64174-361269	**VK/04053CE/MC/S** ● **Brushed Chrome.** GU10. Max. 20W (LED).	**1pc**
64174-363269	**VK/04053CE/W/L** ○ **White.** GU10. Max. 20W (LED).	**1pc**
64174-362269	**VK/04053CE/B/L** ● **Black.** GU10. Max. 20W (LED).	**1pc**
64174-364269	**VK/04053CE/G/L** ● **Grey.** GU10. Max. 20W (LED).	**1pc**
64174-365269	**VK/04053CE/AN/L** ● **Anthracite.** GU10. Max. 20W (LED).	**1pc**
64174-366269	**VK/04053CE/MC/L** ● **Brushed Chrome.** GU10. Max. 20W (LED).	**1pc**





Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20ºC ~ 40ºC.**

IP20

Mae




VK/03109CE/B




VK/03097CE/W

VK/03109CE
VK/03097CE

Code	Model	Box
64174-024108	**VK/03109CE/W** ○ **White.** GU10. Max. 20W (LED).	**10pcs**
64174-025108	**VK/03109CE/B** ● **Black.** GU10. Max. 20W (LED).	**10pcs**
64174-016108	**VK/03097CE/W** ○ **White.** GU10. Max. 20W (LED).	**20pcs**
64174-017108	**VK/03097CE/B** ● **Black.** GU10. Max. 20W (LED).	**20pcs**

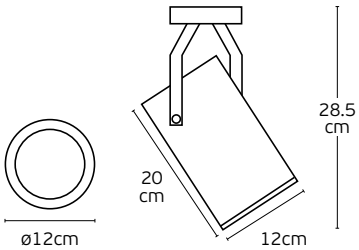



Details

Included lampholder **GU10/ES111.**
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20ºC ~ 40ºC.**



IP20

Ace




VK/03093WA/W




VK/04052WA/W

VK/03093WA
VK/04052WA

Code	Model	Box
64174-007108	**VK/03093WA/W** ○ **White sanded.** GU10. Max 12W (LED).	**50pcs**
64174-008108	**VK/03093WA/B** ● **Black sanded.** GU10. Max 12W (LED).	**50pcs**
64174-333269	**VK/04052WA/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-332269	**VK/04052WA/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-334269	**VK/04052WA/G** ● **Grey.** GU10. Max 12W (LED).	**1pc**
64174-335269	**VK/04052WA/AN** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
64174-336269	**VK/04052WA/MC** ● **Brushed chrome.** GU10. Max 12W (LED).	**1pc**





Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Material **Aluminium.**
Working temperature **-20°C ~ 40°C**.

Adjustable

IP20

Ace



VK/04350G/WA/GD



VK/04053WA/MC/L


VK/04350G/WA

Code	Model	Box
64174-511269	**VK/04350G/WA/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-707269	**VK/04350G/WA/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-708269	**VK/04350G/WA/GD** ● **Gold.** GU10. Max 12W (LED).	**1pc**

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Material **Aluminium.**
Working temperature **-20°C ~ 40°C**.



Adjustable **IP20**


VK/04053WA

Code	Model	Box
64174-420269	**VK/04053WA/B/L** ● **Black.** GU10. Max. 20W (LED).	**1pc**
64174-421269	**VK/04053WA/W/L** ○ **White.** GU10. Max. 20W (LED).	**1pc**
64174-422269	**VK/04053WA/G/L** ● **Grey.** GU10. Max. 20W (LED).	**1pc**
64174-423269	**VK/04053WA/AN/L** ● **Anthracite.** GU10. Max. 20W (LED).	**1pc**
64174-424269	**VK/04053WA/MC/L** ● **Brushed chrome.** GU10. Max. 20W (LED).	**1pc**

Details

Included lampholder **GU10/ES111**.
Match also with lamps: GU10/R111, R111.

Material **Aluminium.**
Working temperature **-20°C ~ 40°C**.



Adjustable **IP20**

Leo




VK/04350G/PE/B



VK/04350G/CE/W

VK/04350G/PE, VK/04350G/CE

Code	Model	Box
64174-705269	**VK/04350G/PE/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-512269	**VK/04350G/PE/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-706269	**VK/04350G/PE/GD** ● **Gold.** GU10. Max 12W (LED).	**1pc**
64174-703269	**VK/04350G/CE/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
64174-513269	**VK/04350G/CE/B** ● **Black.** GU10. Max 12W (LED).	**1pc**
64174-704269	**VK/04350G/CE/GD** ● **Gold.** GU10. Max 12W (LED).	**1pc**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Aluminium.**
Working temperature **-20ºC ~ 40ºC.**

IP20

Leo




VK/04477/WA/W



VK/04477/WA/B

VK/04477/WA ø4cm

Code	Model	Box
64174-956121	**VK/04477/WA/W** ○ **White.** GU10. Max 6W (LED).	**30pcs**
64174-957121	**VK/04477/WA/B** ● **Black.** GU10. Max 6W (LED).	**30pcs**



Details

Included lampholder **GU10/MR11.**
Match also with lamps: GU10/35, MR11, modules 35.
Inclination **90°.**

Rotation **350°.**
Material **Pure aluminium.**
Working temperature **-20ºC ~ 45ºC.**



MR11



OSRAM
MODULE 35



IP20.

Η VK Leading Light έχει αναπτύξει ειδική μονάδα παραγωγής και κατασκευής φωτιστικών οροφής και κρεμαστών με γρήγορους χρόνους παράδοσης. Υπάρχει δυνατότητα κατασκευής, σε διάφορα μήκη έτσι ώστε να προσαρμόζονται στις απαιτήσεις των έργων, ειδικές βαφές (RAL), CRI, πιο πολλά lumen και Kelvin σύμφωνα με τις ανάγκες των μελετών.

VK Leading Light has developed a special unit for the production and manufacture of ceiling and suspended luminaires with fast delivery times. It is possible to build, in different lengths so as to adapt to the requirements of the projects, special paints (RAL), CRI, more lumens and Kelvin according to the needs of the studies.



led ceiling/pendant lighting

Tubes & Squares Led








VK/04350/CE/.../15

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-029269	VK/04350/CE/W/18/927/15	○ White	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64175-030269	VK/04350/CE/W/18/930/15	○ White	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64175-031269	VK/04350/CE/W/18/935/15	○ White	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64175-032269	VK/04350/CE/W/18/940/15	○ White	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64175-033269	VK/04350/CE/B/18/927/15	● Black	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64175-034269	VK/04350/CE/B/18/930/15	● Black	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64175-035269	VK/04350/CE/B/18/935/15	● Black	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64175-036269	VK/04350/CE/B/18/940/15	● Black	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64175-037269	VK/04350/CE/G/18/927/15	● Grey	2700K	18.5W	1.958lm	18º	CRI>90	HEP 500mA	6pcs
64175-038269	VK/04350/CE/G/18/930/15	● Grey	3000K	17.1W	2.052lm	18º	CRI>90	HEP 500mA	6pcs
64175-039269	VK/04350/CE/G/18/935/15	● Grey	3500K	16.4W	2.124lm	18º	CRI>90	HEP 500mA	6pcs
64175-040269	VK/04350/CE/G/18/940/15	● Grey	4000K	16.0W	2.167lm	18º	CRI>90	HEP 500mA	6pcs
64175-041269	VK/04350/CE/W/24/927/15	○ White	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64175-042269	VK/04350/CE/W/24/930/15	○ White	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64175-043269	VK/04350/CE/W/24/935/15	○ White	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64175-044269	VK/04350/CE/W/24/940/15	○ White	4000K	16.0W	2.167lm	24º	CRI>90	HEP 500mA	6pcs
64175-045269	VK/04350/CE/B/24/927/15	● Black	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64175-046269	VK/04350/CE/B/24/930/15	● Black	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64175-047269	VK/04350/CE/B/24/935/15	● Black	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64175-048269	VK/04350/CE/B/24/940/15	● Black	4000K	16.0W	2.164lm	24º	CRI>90	HEP 500mA	6pcs
64175-049269	VK/04350/CE/G/24/927/15	● Grey	2700K	18.5W	1.958lm	24º	CRI>90	HEP 500mA	6pcs
64175-050269	VK/04350/CE/G/24/930/15	● Grey	3000K	17.1W	2.052lm	24º	CRI>90	HEP 500mA	6pcs
64175-051269	VK/04350/CE/G/24/935/15	● Grey	3500K	16.4W	2.124lm	24º	CRI>90	HEP 500mA	6pcs
64175-052269	VK/04350/CE/G/24/940/15	● Grey	4000K	16.0W	2.164lm	24º	CRI>90	HEP 500mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-053269	VK/04350/CE/W/40/927/15	○ White	2700K	18.5W	1.958lm	40º	CRI>90	HEP 500mA	6pcs
64175-054269	VK/04350/CE/W/40/930/15	○ White	3000K	17.1W	2.052lm	40º	CRI>90	HEP 500mA	6pcs
64175-055269	VK/04350/CE/W/40/935/15	○ White	3500K	16.4W	2.124lm	40º	CRI>90	HEP 500mA	6pcs
64175-056269	VK/04350/CE/W/40/940/15	○ White	4000K	16.0W	2.167lm	40º	CRI>90	HEP 500mA	6pcs
64175-057269	VK/04350/CE/B/40/927/15	● Black	2700K	18.5W	1.958lm	40º	CRI>90	HEP 500mA	6pcs
64175-058269	VK/04350/CE/B/40/930/15	● Black	3000K	17.1W	2.052lm	40º	CRI>90	HEP 500mA	6pcs
64175-059269	VK/04350/CE/B/40/935/15	● Black	3500K	16.4W	2.124lm	40º	CRI>90	HEP 500mA	6pcs
64175-060269	VK/04350/CE/B/40/940/15	● Black	4000K	16.0W	2.167lm	40º	CRI>90	HEP 500mA	6pcs
64175-061269	VK/04350/CE/G/40/927/15	● Grey	2700K	18.5W	1.958lm	40º	CRI>90	HEP 500mA	6pcs
64175-062269	VK/04350/CE/G/40/930/15	● Grey	3000K	17.1W	2.052lm	40º	CRI>90	HEP 500mA	6pcs
64175-063269	VK/04350/CE/G/40/935/15	● Grey	3500K	16.4W	2.124lm	40º	CRI>90	HEP 500mA	6pcs
64175-064269	VK/04350/CE/G/40/940/15	● Grey	4000K	16.0W	2.167lm	40º	CRI>90	HEP 500mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**




VK/04350/18



VK/04350/24



VK/04350/40



ø6cm
18° 24° 40°
Flicker free


VK/04350/HONEYCOMB



Black metal

Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04350**. Material **Metal.**



Tubes & Squares Led








VK/04350/CE/D/.../15

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-065269	VK/04350/CE/D/W/18/927/15	○ White	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-066269	VK/04350/CE/D/W/18/930/15	○ White	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-067269	VK/04350/CE/D/W/18/935/15	○ White	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-068269	VK/04350/CE/D/W/18/940/15	○ White	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-069269	VK/04350/CE/D/B/18/927/15	● Black	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-070269	VK/04350/CE/D/B/18/930/15	● Black	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-071269	VK/04350/CE/D/B/18/935/15	● Black	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-072269	VK/04350/CE/D/B/18/940/15	● Black	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-073269	VK/04350/CE/D/G/18/927/15	● Grey	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-074269	VK/04350/CE/D/G/18/930/15	● Grey	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-075269	VK/04350/CE/D/G/18/935/15	● Grey	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-076269	VK/04350/CE/D/G/18/940/15	● Grey	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-077269	VK/04350/CE/D/W/24/927/15	○ White	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-078269	VK/04350/CE/D/W/24/930/15	○ White	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-079269	VK/04350/CE/D/W/24/935/15	○ White	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-080269	VK/04350/CE/D/W/24/940/15	○ White	4000K	16.0W	2.167lm	24°	CRI>90	HEP 500mA	6pcs
64175-081269	VK/04350/CE/D/B/24/927/15	● Black	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-082269	VK/04350/CE/D/B/24/930/15	● Black	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-083269	VK/04350/CE/D/B/24/935/15	● Black	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-084269	VK/04350/CE/D/B/24/940/15	● Black	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs
64175-085269	VK/04350/CE/D/G/24/927/15	● Grey	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-086269	VK/04350/CE/D/G/24/930/15	● Grey	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-087269	VK/04350/CE/D/G/24/935/15	● Grey	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-088269	VK/04350/CE/D/G/24/940/15	● Grey	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-089269	VK/04350/CE/D/W/40/927/15	○ White	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-090269	VK/04350/CE/D/W/40/930/15	○ White	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-091269	VK/04350/CE/D/W/40/935/15	○ White	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-092269	VK/04350/CE/D/W/40/940/15	○ White	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-093269	VK/04350/CE/D/B/40/927/15	● Black	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-094269	VK/04350/CE/D/B/40/930/15	● Black	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-095269	VK/04350/CE/D/B/40/935/15	● Black	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-096269	VK/04350/CE/D/B/40/940/15	● Black	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-097269	VK/04350/CE/D/G/40/927/15	● Grey	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-098269	VK/04350/CE/D/G/40/930/15	● Grey	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-099269	VK/04350/CE/D/G/40/935/15	● Grey	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-100269	VK/04350/CE/D/G/40/940/15	● Grey	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**




VK/04350/18



VK/04350/24



VK/04350/40



ø6cm
18° 24° 40°
Flicker free


VK/04350/HONEYCOMB



Black metal

Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04350**. Material **Metal.**



Tubes & Squares Led







VK/04352/CE/.../17

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-101269	VK/04352/CE/W/18/927/17	○ White	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-102269	VK/04352/CE/W/18/930/17	○ White	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-103269	VK/04352/CE/W/18/935/17	○ White	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-104269	VK/04352/CE/W/18/940/17	○ White	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-105269	VK/04352/CE/W/18/865/17	○ White	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-106269	VK/04352/CE/B/18/927/17	● Black	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-107269	VK/04352/CE/B/18/930/17	● Black	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-108269	VK/04352/CE/B/18/935/17	● Black	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-109269	VK/04352/CE/B/18/940/17	● Black	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-110269	VK/04352/CE/B/18/865/17	● Black	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-111269	VK/04352/CE/G/18/927/17	● Grey	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-112269	VK/04352/CE/G/18/930/17	● Grey	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-113269	VK/04352/CE/G/18/935/17	● Grey	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-114269	VK/04352/CE/G/18/940/17	● Grey	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-115269	VK/04352/CE/G/18/865/17	● Grey	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-116269	VK/04352/CE/W/24/927/17	○ White	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-117269	VK/04352/CE/W/24/930/17	○ White	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-118269	VK/04352/CE/W/24/935/17	○ White	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-119269	VK/04352/CE/W/24/940/17	○ White	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-120269	VK/04352/CE/W/24/865/17	○ White	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-121269	VK/04352/CE/B/24/927/17	● Black	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-122269	VK/04352/CE/B/24/930/17	● Black	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-123269	VK/04352/CE/B/24/935/17	● Black	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-124269	VK/04352/CE/B/24/940/17	● Black	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-125269	VK/04352/CE/B/24/865/17	● Black	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-126269	VK/04352/CE/G/24/927/17	● Grey	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-127269	VK/04352/CE/G/24/930/17	● Grey	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-128269	VK/04352/CE/G/24/935/17	● Grey	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-129269	VK/04352/CE/G/24/940/17	● Grey	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-130269	VK/04352/CE/G/24/865/17	● Grey	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-131269	VK/04352/CE/W/40/927/17	○ White	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-132269	VK/04352/CE/W/40/930/17	○ White	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-133269	VK/04352/CE/W/40/935/17	○ White	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-134269	VK/04352/CE/W/40/940/17	○ White	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-135269	VK/04352/CE/W/40/865/17	○ White	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-136269	VK/04352/CE/B/40/927/17	● Black	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-137269	VK/04352/CE/B/40/930/17	● Black	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-138269	VK/04352/CE/B/40/935/17	● Black	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-139269	VK/04352/CE/B/40/940/17	● Black	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-140269	VK/04352/CE/B/40/865/17	● Black	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-141269	VK/04352/CE/G/40/927/17	● Grey	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-142269	VK/04352/CE/G/40/930/17	● Grey	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-143269	VK/04352/CE/G/40/935/17	● Grey	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-144269	VK/04352/CE/G/40/940/17	● Grey	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-145269	VK/04352/CE/G/40/865/17	● Grey	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**.
Clicks **100.000.** Material **Aluminium.**

5 years guarantee

IP20.


VK/04352/18




VK/04352/24



VK/04352/40



ø8cm
18° 24° 40°
Flicker free




VK/04352/HONEYCOMB



Black metal

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04352**. Material **Metal.**



Tubes & Squares Led







VK/04352/CE/D/.../17

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-146269	VK/04352/CE/D/W/18/927/17	○ White	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-147269	VK/04352/CE/D/W/18/930/17	○ White	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-148269	VK/04352/CE/D/W/18/935/17	○ White	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-149269	VK/04352/CE/D/W/18/940/17	○ White	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-150269	VK/04352/CE/D/W/18/865/17	○ White	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-151269	VK/04352/CE/D/B/18/927/17	● Black	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-152269	VK/04352/CE/D/B/18/930/17	● Black	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-153269	VK/04352/CE/D/B/18/935/17	● Black	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-154269	VK/04352/CE/D/B/18/940/17	● Black	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-155269	VK/04352/CE/D/B/18/865/17	● Black	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-156269	VK/04352/CE/D/G/18/927/17	● Grey	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-157269	VK/04352/CE/D/G/18/930/17	● Grey	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-158269	VK/04352/CE/D/G/18/935/17	● Grey	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-159269	VK/04352/CE/D/G/18/940/17	● Grey	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-160269	VK/04352/CE/D/G/18/865/17	● Grey	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-161269	VK/04352/CE/D/W/24/927/17	○ White	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-162269	VK/04352/CE/D/W/24/930/17	○ White	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-163269	VK/04352/CE/D/W/24/935/17	○ White	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-164269	VK/04352/CE/D/W/24/940/17	○ White	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-165269	VK/04352/CE/D/W/24/865/17	○ White	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-166269	VK/04352/CE/D/B/24/927/17	● Black	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-167269	VK/04352/CE/D/B/24/930/17	● Black	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-168269	VK/04352/CE/D/B/24/935/17	● Black	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-169269	VK/04352/CE/D/B/24/940/17	● Black	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-170269	VK/04352/CE/D/B/24/865/17	● Black	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-171269	VK/04352/CE/D/G/24/927/17	Grey	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-172269	VK/04352/CE/D/G/24/930/17	Grey	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-173269	VK/04352/CE/D/G/24/935/17	Grey	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-174269	VK/04352/CE/D/G/24/940/17	Grey	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-175269	VK/04352/CE/D/G/24/865/17	Grey	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-176269	VK/04352/CE/D/W/40/927/17	White	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-177269	VK/04352/CE/D/W/40/930/17	White	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-178269	VK/04352/CE/D/W/40/935/17	White	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-179269	VK/04352/CE/D/W/40/940/17	White	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-180269	VK/04352/CE/D/W/40/865/17	White	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-181269	VK/04352/CE/D/B/40/927/17	Black	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-182269	VK/04352/CE/D/B/40/930/17	Black	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-183269	VK/04352/CE/D/B/40/935/17	Black	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-184269	VK/04352/CE/D/B/40/940/17	Black	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-185269	VK/04352/CE/D/B/40/865/17	Black	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-186269	VK/04352/CE/D/G/40/927/17	Grey	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-187269	VK/04352/CE/D/G/40/930/17	Grey	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-188269	VK/04352/CE/D/G/40/935/17	Grey	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-189269	VK/04352/CE/D/G/40/940/17	Grey	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-190269	VK/04352/CE/D/G/40/865/17	Grey	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**.
Lifetime **60.000hrs**. Clicks **100.000.** Material **Aluminium.**

5 years guarantee

IP20.


VK/04352/18




VK/04352/24




VK/04352/40



ø8cm
18° 24° 40°
Flicker free




VK/04352/HONEYCOMB

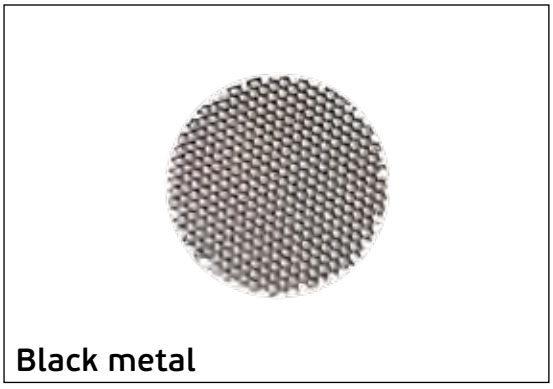

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04352**. Material **Metal.**



Tubes & Squares Led







VK/04354/CE/.../18


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-191269	VK/04354/CE/W/18/927/18	○ White	2700K	39.20W	4.257lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-192269	VK/04354/CE/W/18/930/18	○ White	3000K	39.10W	4.295lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-193269	VK/04354/CE/W/18/935/18	○ White	3500K	39.00W	4.377lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-194269	VK/04354/CE/W/18/940/18	○ White	4000K	38.80W	4.467lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-195269	VK/04354/CE/B/18/927/18	● Black	2700K	39.20W	4.257lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-196269	VK/04354/CE/B/18/930/18	● Black	3000K	39.10W	4.295lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-197269	VK/04354/CE/B/18/935/18	● Black	3500K	39.00W	4.377lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-198269	VK/04354/CE/B/18/940/18	● Black	4000K	38.80W	4.467lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-199269	VK/04354/CE/G/18/927/18	● Grey	2700K	39.20W	4.257lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-200269	VK/04354/CE/G/18/930/18	● Grey	3000K	39.10W	4.295lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-201269	VK/04354/CE/G/18/935/18	● Grey	3500K	39.00W	4.377lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-202269	VK/04354/CE/G/18/940/18	● Grey	4000K	38.80W	4.467lm	18°	CRI>90	OSRAM 1050mA	6pcs
64175-203269	VK/04354/CE/W/24/927/18	○ White	2700K	39.20W	4.257lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-204269	VK/04354/CE/W/24/930/18	○ White	3000K	39.10W	4.295lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-205269	VK/04354/CE/W/24/935/18	○ White	3500K	39.00W	4.377lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-206269	VK/04354/CE/W/24/940/18	○ White	4000K	38.80W	4.467lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-207269	VK/04354/CE/B/24/927/18	● Black	2700K	39.20W	4.257lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-208269	VK/04354/CE/B/24/930/18	● Black	3000K	39.10W	4.295lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-209269	VK/04354/CE/B/24/935/18	● Black	3500K	39.00W	4.377lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-210269	VK/04354/CE/B/24/940/18	● Black	4000K	38.80W	4.467lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-211269	VK/04354/CE/G/24/927/18	● Grey	2700K	39.20W	4.257lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-212269	VK/04354/CE/G/24/930/18	● Grey	3000K	39.10W	4.295lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-213269	VK/04354/CE/G/24/935/18	● Grey	3500K	39.00W	4.377lm	24°	CRI>90	OSRAM 1050mA	6pcs
64175-214269	VK/04354/CE/G/24/940/18	● Grey	4000K	38.80W	4.467lm	24°	CRI>90	OSRAM 1050mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-215269	VK/04354/CE/W/40/927/18	○ White	2700K	39.20W	4.257lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-216269	VK/04354/CE/W/40/930/18	○ White	3000K	39.10W	4.295lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-217269	VK/04354/CE/W/40/935/18	○ White	3500K	39.00W	4.377lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-218269	VK/04354/CE/W/40/940/18	○ White	4000K	38.80W	4.467lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-219269	VK/04354/CE/B/40/927/18	● Black	2700K	39.20W	4.257lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-220269	VK/04354/CE/B/40/930/18	● Black	3000K	39.10W	4.295lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-221269	VK/04354/CE/B/40/935/18	● Black	3500K	39.00W	4.377lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-222269	VK/04354/CE/B/40/940/18	● Black	4000K	38.80W	4.467lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-223269	VK/04354/CE/G/40/927/18	● Grey	2700K	39.20W	4.257lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-224269	VK/04354/CE/G/40/930/18	● Grey	3000K	39.10W	4.295lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-225269	VK/04354/CE/G/40/935/18	● Grey	3500K	39.00W	4.377lm	40°	CRI>90	OSRAM 1050mA	6pcs
64175-226269	VK/04354/CE/G/40/940/18	● Grey	4000K	38.80W	4.467lm	40°	CRI>90	OSRAM 1050mA	6pcs


Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**


VK/04354/18




VK/04354/24




VK/04354/40



ø12cm
18° 24° 40°
Flicker free




VK/04354/HONEYCOMB

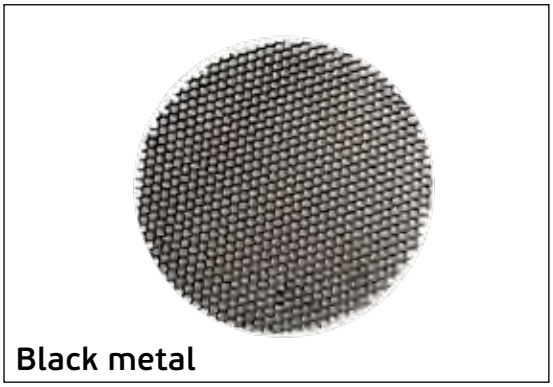

Code	Model	Box
64174-798269	**VK/04354/HONEYCOMB** ● Black. **Metal. Filter**.	**1pc**

Details
Can be used to **VK/04354**. Material **Metal.**



Tubes & Squares Led







VK/04354/CE/D/.../18


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-227269	VK/04354/CE/D/W/18/927/18	○ White	2700K	29.80W	3.163lm	18°	CRI>90	HEP 800mA	6pcs
64175-228269	VK/04354/CE/D/W/18/930/18	○ White	3000K	29.70W	3.512lm	18°	CRI>90	HEP 800mA	6pcs
64175-229269	VK/04354/CE/D/W/18/935/18	○ White	3500K	29.70W	3.265lm	18°	CRI>90	HEP 800mA	6pcs
64175-230269	VK/04354/CE/D/W/18/940/18	○ White	4000K	29.60W	3.344lm	18°	CRI>90	HEP 800mA	6pcs
64175-231269	VK/04354/CE/D/B/18/927/18	● Black	2700K	29.80W	3.163lm	18°	CRI>90	HEP 800mA	6pcs
64175-232269	VK/04354/CE/D/B/18/930/18	● Black	3000K	29.70W	3.512lm	18°	CRI>90	HEP 800mA	6pcs
64175-233269	VK/04354/CE/D/B/18/935/18	● Black	3500K	29.70W	3.265lm	18°	CRI>90	HEP 800mA	6pcs
64175-234269	VK/04354/CE/D/B/18/940/18	● Black	4000K	29.60W	3.344lm	18°	CRI>90	HEP 800mA	6pcs
64175-235269	VK/04354/CE/D/G/18/927/18	● Grey	2700K	29.80W	3.163lm	18°	CRI>90	HEP 800mA	6pcs
64175-236269	VK/04354/CE/D/G/18/930/18	● Grey	3000K	29.70W	3.512lm	18°	CRI>90	HEP 800mA	6pcs
64175-237269	VK/04354/CE/D/G/18/935/18	● Grey	3500K	29.70W	3.265lm	18°	CRI>90	HEP 800mA	6pcs
64175-238269	VK/04354/CE/D/G/18/940/18	● Grey	4000K	29.60W	3.344lm	18°	CRI>90	HEP 800mA	6pcs
64175-239269	VK/04354/CE/D/W/24/927/18	○ White	2700K	29.80W	3.163lm	24°	CRI>90	HEP 800mA	6pcs
64175-240269	VK/04354/CE/D/W/24/930/18	○ White	3000K	29.70W	3.512lm	24°	CRI>90	HEP 800mA	6pcs
64175-241269	VK/04354/CE/D/W/24/935/18	○ White	3500K	29.70W	3.265lm	24°	CRI>90	HEP 800mA	6pcs
64175-242269	VK/04354/CE/D/W/24/940/18	○ White	4000K	29.60W	3.344lm	24°	CRI>90	HEP 800mA	6pcs
64175-243269	VK/04354/CE/D/B/24/927/18	● Black	2700K	29.80W	3.163lm	24°	CRI>90	HEP 800mA	6pcs
64175-244269	VK/04354/CE/D/B/24/930/18	● Black	3000K	29.70W	3.512lm	24°	CRI>90	HEP 800mA	6pcs
64175-245269	VK/04354/CE/D/B/24/935/18	● Black	3500K	29.70W	3.265lm	24°	CRI>90	HEP 800mA	6pcs
64175-246269	VK/04354/CE/D/B/24/940/18	● Black	4000K	29.60W	3.344lm	24°	CRI>90	HEP 800mA	6pcs
64175-247269	VK/04354/CE/D/G/24/927/18	● Grey	2700K	29.80W	3.163lm	24°	CRI>90	HEP 800mA	6pcs
64175-248269	VK/04354/CE/D/G/24/930/18	● Grey	3000K	29.70W	3.512lm	24°	CRI>90	HEP 800mA	6pcs
64175-249269	VK/04354/CE/D/G/24/935/18	● Grey	3500K	29.70W	3.265lm	24°	CRI>90	HEP 800mA	6pcs
64175-250269	VK/04354/CE/D/G/24/940/18	● Grey	4000K	29.60W	3.344lm	24°	CRI>90	HEP 800mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-251269	VK/04354/CE/D/W/40/927/18	○ White	2700K	29.80W	3.163lm	40°	CRI>90	HEP 800mA	6pcs
64175-252269	VK/04354/CE/D/W/40/930/18	○ White	3000K	29.70W	3.512lm	40°	CRI>90	HEP 800mA	6pcs
64175-253269	VK/04354/CE/D/W/40/935/18	○ White	3500K	29.70W	3.265lm	40°	CRI>90	HEP 800mA	6pcs
64175-254269	VK/04354/CE/D/W/40/940/18	○ White	4000K	29.60W	3.344lm	40°	CRI>90	HEP 800mA	6pcs
64175-255269	VK/04354/CE/D/B/40/927/18	● Black	2700K	29.80W	3.163lm	40°	CRI>90	HEP 800mA	6pcs
64175-256269	VK/04354/CE/D/B/40/930/18	● Black	3000K	29.70W	3.512lm	40°	CRI>90	HEP 800mA	6pcs
64175-257269	VK/04354/CE/D/B/40/935/18	● Black	3500K	29.70W	3.265lm	40°	CRI>90	HEP 800mA	6pcs
64175-258269	VK/04354/CE/D/B/40/940/18	● Black	4000K	29.60W	3.344lm	40°	CRI>90	HEP 800mA	6pcs
64175-259269	VK/04354/CE/D/G/40/927/18	● Grey	2700K	29.80W	3.163lm	40°	CRI>90	HEP 800mA	6pcs
64175-260269	VK/04354/CE/D/G/40/930/18	● Grey	3000K	29.70W	3.512lm	40°	CRI>90	HEP 800mA	6pcs
64175-261269	VK/04354/CE/D/G/40/935/18	● Grey	3500K	29.70W	3.265lm	40°	CRI>90	HEP 800mA	6pcs
64175-262269	VK/04354/CE/D/G/40/940/18	● Grey	4000K	29.60W	3.344lm	40°	CRI>90	HEP 800mA	6pcs


Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**


VK/04354/18




VK/04354/24




VK/04354/40



ø12cm
18° 24° 40°
Flicker free




VK/04354/HONEYCOMB

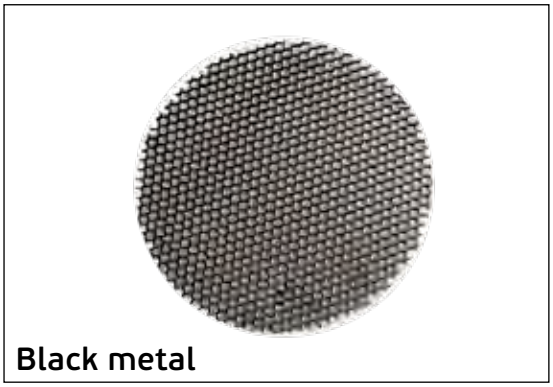

Code	Model	Box
64174-798269	**VK/04354/HONEYCOMB** ● Black. **Metal. Filter**.	**1pc**

Details
Can be used to **VK/04354**. Material **Metal.**



Tubes & Squares Led







VK/04350/PE/.../15


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-263269	VK/04350/PE/W/18/927/15	○ White	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-264269	VK/04350/PE/W/18/930/15	○ White	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-265269	VK/04350/PE/W/18/935/15	○ White	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-266269	VK/04350/PE/W/18/940/15	○ White	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-267269	VK/04350/PE/B/18/927/15	● Black	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-268269	VK/04350/PE/B/18/930/15	● Black	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-269269	VK/04350/PE/B/18/935/15	● Black	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-270269	VK/04350/PE/B/18/940/15	● Black	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-271269	VK/04350/PE/G/18/927/15	● Grey	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-272269	VK/04350/PE/G/18/930/15	● Grey	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-273269	VK/04350/PE/G/18/935/15	● Grey	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-274269	VK/04350/PE/G/18/940/15	● Grey	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-275269	VK/04350/PE/W/24/927/15	○ White	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-276269	VK/04350/PE/W/24/930/15	○ White	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-277269	VK/04350/PE/W/24/935/15	○ White	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-278269	VK/04350/PE/W/24/940/15	○ White	4000K	16.0W	2.167lm	24°	CRI>90	HEP 500mA	6pcs
64175-279269	VK/04350/PE/B/24/927/15	● Black	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-280269	VK/04350/PE/B/24/930/15	● Black	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-281269	VK/04350/PE/B/24/935/15	● Black	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-282269	VK/04350/PE/B/24/940/15	● Black	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs
64175-283269	VK/04350/PE/G/24/927/15	● Grey	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-284269	VK/04350/PE/G/24/930/15	● Grey	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-285269	VK/04350/PE/G/24/935/15	● Grey	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-286269	VK/04350/PE/G/24/940/15	● Grey	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-287269	VK/04350/PE/W/40/927/15	○ White	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-288269	VK/04350/PE/W/40/930/15	○ White	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-289269	VK/04350/PE/W/40/935/15	○ White	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-290269	VK/04350/PE/W/40/940/15	○ White	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-291269	VK/04350/PE/B/40/927/15	● Black	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-292269	VK/04350/PE/B/40/930/15	● Black	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-293269	VK/04350/PE/B/40/935/15	● Black	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-294269	VK/04350/PE/B/40/940/15	● Black	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-295269	VK/04350/PE/G/40/927/15	● Grey	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-296269	VK/04350/PE/G/40/930/15	● Grey	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-297269	VK/04350/PE/G/40/935/15	● Grey	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-298269	VK/04350/PE/G/40/940/15	● Grey	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**


VK/04350/18




VK/04350/24



VK/04350/40



ø6cm
18° 24° 40°
Flicker free




VK/04350/HONEYCOMB



Black metal

Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04350**. Material **Metal.**



Tubes & Squares Led







VK/04350/PE/D/.../15


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-299269	VK/04350/PE/D/W/18/927/15	○ White	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-300269	VK/04350/PE/D/W/18/930/15	○ White	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-301269	VK/04350/PE/D/W/18/935/15	○ White	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-302269	VK/04350/PE/D/W/18/940/15	○ White	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-303269	VK/04350/PE/D/B/18/927/15	● Black	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-304269	VK/04350/PE/D/B/18/930/15	● Black	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-305269	VK/04350/PE/D/B/18/935/15	● Black	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-306269	VK/04350/PE/D/B/18/940/15	● Black	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-307269	VK/04350/PE/D/G/18/927/15	● Grey	2700K	18.5W	1.958lm	18°	CRI>90	HEP 500mA	6pcs
64175-308269	VK/04350/PE/D/G/18/930/15	● Grey	3000K	17.1W	2.052lm	18°	CRI>90	HEP 500mA	6pcs
64175-309269	VK/04350/PE/D/G/18/935/15	● Grey	3500K	16.4W	2.124lm	18°	CRI>90	HEP 500mA	6pcs
64175-310269	VK/04350/PE/D/G/18/940/15	● Grey	4000K	16.0W	2.167lm	18°	CRI>90	HEP 500mA	6pcs
64175-311269	VK/04350/PE/D/W/24/927/15	○ White	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-312269	VK/04350/PE/D/W/24/930/15	○ White	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-313269	VK/04350/PE/D/W/24/935/15	○ White	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-314269	VK/04350/PE/D/W/24/940/15	○ White	4000K	16.0W	2.167lm	24°	CRI>90	HEP 500mA	6pcs
64175-315269	VK/04350/PE/D/B/24/927/15	● Black	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-316269	VK/04350/PE/D/B/24/930/15	● Black	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-317269	VK/04350/PE/D/B/24/935/15	● Black	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-318269	VK/04350/PE/D/B/24/940/15	● Black	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs
64175-319269	VK/04350/PE/D/G/24/927/15	● Grey	2700K	18.5W	1.958lm	24°	CRI>90	HEP 500mA	6pcs
64175-320269	VK/04350/PE/D/G/24/930/15	● Grey	3000K	17.1W	2.052lm	24°	CRI>90	HEP 500mA	6pcs
64175-321269	VK/04350/PE/D/G/24/935/15	● Grey	3500K	16.4W	2.124lm	24°	CRI>90	HEP 500mA	6pcs
64175-322269	VK/04350/PE/D/G/24/940/15	● Grey	4000K	16.0W	2.164lm	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-323269	VK/04350/PE/D/W/40/927/15	○ White	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-324269	VK/04350/PE/D/W/40/930/15	○ White	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-325269	VK/04350/PE/D/W/40/935/15	○ White	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-326269	VK/04350/PE/D/W/40/940/15	○ White	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-327269	VK/04350/PE/D/B/40/927/15	● Black	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-328269	VK/04350/PE/D/B/40/930/15	● Black	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-329269	VK/04350/PE/D/B/40/935/15	● Black	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-330269	VK/04350/PE/D/B/40/940/15	● Black	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs
64175-331269	VK/04350/PE/D/G/40/927/15	● Grey	2700K	18.5W	1.958lm	40°	CRI>90	HEP 500mA	6pcs
64175-332269	VK/04350/PE/D/G/40/930/15	● Grey	3000K	17.1W	2.052lm	40°	CRI>90	HEP 500mA	6pcs
64175-333269	VK/04350/PE/D/G/40/935/15	● Grey	3500K	16.4W	2.124lm	40°	CRI>90	HEP 500mA	6pcs
64175-334269	VK/04350/PE/D/G/40/940/15	● Grey	4000K	16.0W	2.167lm	40°	CRI>90	HEP 500mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**


VK/04350/18




VK/04350/24



VK/04350/40



ø6cm
18° 24° 40°
Flicker free




VK/04350/HONEYCOMB



Black metal

Code	Model	Box
64174-742269	**VK/04350/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04350**. Material **Metal.**



Tubes & Squares Led







VK/04352/PE/.../17


Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-335269	VK/04352/PE/W/18/927/17	○ White	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-336269	VK/04352/PE/W/18/930/17	○ White	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-337269	VK/04352/PE/W/18/935/17	○ White	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-338269	VK/04352/PE/W/18/940/17	○ White	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-339269	VK/04352/PE/W/18/865/17	○ White	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-340269	VK/04352/PE/B/18/927/17	● Black	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-341269	VK/04352/PE/B/18/930/17	● Black	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-342269	VK/04352/PE/B/18/935/17	● Black	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-343269	VK/04352/PE/B/18/940/17	● Black	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-344269	VK/04352/PE/B/18/865/17	● Black	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-345269	VK/04352/PE/G/18/927/17	● Grey	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-346269	VK/04352/PE/G/18/930/17	● Grey	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-347269	VK/04352/PE/G/18/935/17	● Grey	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-348269	VK/04352/PE/G/18/940/17	● Grey	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-349269	VK/04352/PE/G/18/865/17	● Grey	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-350269	VK/04352/PE/W/24/927/17	○ White	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-351269	VK/04352/PE/W/24/930/17	○ White	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-352269	VK/04352/PE/W/24/935/17	○ White	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-353269	VK/04352/PE/W/24/940/17	○ White	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-354269	VK/04352/PE/W/24/865/17	○ White	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-355269	VK/04352/PE/B/24/927/17	● Black	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-356269	VK/04352/PE/B/24/930/17	● Black	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-357269	VK/04352/PE/B/24/935/17	● Black	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-358269	VK/04352/PE/B/24/940/17	● Black	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-359269	VK/04352/PE/B/24/865/17	● Black	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-360269	VK/04352/PE/G/24/927/17	● Grey	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-361269	VK/04352/PE/G/24/930/17	● Grey	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-362269	VK/04352/PE/G/24/935/17	● Grey	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-363269	VK/04352/PE/G/24/940/17	● Grey	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-364269	VK/04352/PE/G/24/865/17	● Grey	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-365269	VK/04352/PE/W/40/927/17	○ White	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-366269	VK/04352/PE/W/40/930/17	○ White	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-367269	VK/04352/PE/W/40/935/17	○ White	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-368269	VK/04352/PE/W/40/940/17	○ White	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-369269	VK/04352/PE/W/40/865/17	○ White	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-370269	VK/04352/PE/B/40/927/17	● Black	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-371269	VK/04352/PE/B/40/930/17	● Black	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-372269	VK/04352/PE/B/40/935/17	● Black	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-373269	VK/04352/PE/B/40/940/17	● Black	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-374269	VK/04352/PE/B/40/865/17	● Black	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-375269	VK/04352/PE/G/40/927/17	● Grey	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-376269	VK/04352/PE/G/40/930/17	● Grey	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-377269	VK/04352/PE/G/40/935/17	● Grey	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-378269	VK/04352/PE/G/40/940/17	● Grey	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-379269	VK/04352/PE/G/40/865/17	● Grey	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs

Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee **IP20.**


VK/04352/18




VK/04352/24



VK/04352/40



ø8cm
18° 24° 40°
Flicker free




VK/04352/HONEYCOMB



Black metal

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04352**. Material **Metal.**



Tubes & Squares Led







VK/04352/PE/D/.../17

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-380269	VK/04352/PE/D/W/18/927/17	○ White	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-381269	VK/04352/PE/D/W/18/930/17	○ White	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-382269	VK/04352/PE/D/W/18/935/17	○ White	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-383269	VK/04352/PE/D/W/18/940/17	○ White	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-384269	VK/04352/PE/D/W/18/865/17	○ White	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-385269	VK/04352/PE/D/B/18/927/17	● Black	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-386269	VK/04352/PE/D/B/18/930/17	● Black	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-387269	VK/04352/PE/D/B/18/935/17	● Black	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-388269	VK/04352/PE/D/B/18/940/17	● Black	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-389269	VK/04352/PE/D/B/18/865/17	● Black	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-390269	VK/04352/PE/D/G/18/927/17	● Grey	2700K	27.0W	2.828lm	18°	CRI>90	HEP 700mA	6pcs
64175-391269	VK/04352/PE/D/G/18/930/17	● Grey	3000K	25.5W	2.959lm	18°	CRI>90	HEP 700mA	6pcs
64175-392269	VK/04352/PE/D/G/18/935/17	● Grey	3500K	24.3W	3.071lm	18°	CRI>90	HEP 700mA	6pcs
64175-393269	VK/04352/PE/D/G/18/940/17	● Grey	4000K	23.7W	3.137lm	18°	CRI>90	HEP 700mA	6pcs
64175-394269	VK/04352/PE/D/G/18/865/17	● Grey	6500K	18.7W	2.935lm	18°	CRI>80	HEP 550mA	6pcs
64175-395269	VK/04352/PE/D/W/24/927/17	○ White	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-396269	VK/04352/PE/D/W/24/930/17	○ White	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-397269	VK/04352/PE/D/W/24/935/17	○ White	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-398269	VK/04352/PE/D/W/24/940/17	○ White	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-399269	VK/04352/PE/D/W/24/865/17	○ White	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-400269	VK/04352/PE/D/B/24/927/17	● Black	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-401269	VK/04352/PE/D/B/24/930/17	● Black	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-402269	VK/04352/PE/D/B/24/935/17	● Black	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-403269	VK/04352/PE/D/B/24/940/17	● Black	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-404269	VK/04352/PE/D/B/24/865/17	● Black	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Driver	Box
64175-405269	VK/04352/PE/D/G/24/927/17	● Grey	2700K	27.0W	2.828lm	24°	CRI>90	HEP 700mA	6pcs
64175-406269	VK/04352/PE/D/G/24/930/17	● Grey	3000K	25.5W	2.959lm	24°	CRI>90	HEP 700mA	6pcs
64175-407269	VK/04352/PE/D/G/24/935/17	● Grey	3500K	24.3W	3.071lm	24°	CRI>90	HEP 700mA	6pcs
64175-408269	VK/04352/PE/D/G/24/940/17	● Grey	4000K	23.7W	3.137lm	24°	CRI>90	HEP 700mA	6pcs
64175-409269	VK/04352/PE/D/G/24/865/17	● Grey	6500K	18.7W	2.935lm	24°	CRI>80	HEP 550mA	6pcs
64175-410269	VK/04352/PE/D/W/40/927/17	○ White	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-411269	VK/04352/PE/D/W/40/930/17	○ White	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-412269	VK/04352/PE/D/W/40/935/17	○ White	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-413269	VK/04352/PE/D/W/40/940/17	○ White	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-414269	VK/04352/PE/D/W/40/865/17	○ White	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-415269	VK/04352/PE/D/B/40/927/17	● Black	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-416269	VK/04352/PE/D/B/40/930/17	● Black	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-417269	VK/04352/PE/D/B/40/935/17	● Black	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-418269	VK/04352/PE/D/B/40/940/17	● Black	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-419269	VK/04352/PE/D/B/40/865/17	● Black	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs
64175-420269	VK/04352/PE/D/G/40/927/17	● Grey	2700K	27.0W	2.828lm	40°	CRI>90	HEP 700mA	6pcs
64175-421269	VK/04352/PE/D/G/40/930/17	● Grey	3000K	25.5W	2.959lm	40°	CRI>90	HEP 700mA	6pcs
64175-422269	VK/04352/PE/D/G/40/935/17	● Grey	3500K	24.3W	3.071lm	40°	CRI>90	HEP 700mA	6pcs
64175-423269	VK/04352/PE/D/G/40/940/17	● Grey	4000K	23.7W	3.137lm	40°	CRI>90	HEP 700mA	6pcs
64175-424269	VK/04352/PE/D/G/40/865/17	● Grey	6500K	18.7W	2.935lm	40°	CRI>80	HEP 550mA	6pcs


Details
Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20ºC→ 50ºC**. Lifetime **60.000hrs**. Clicks **100.000.**
Material **Aluminium.**

5 years guarantee

IP20.




VK/04352/18




VK/04352/24



VK/04352/40



ø8cm
18° 24° 40°
Flicker free




VK/04352/HONEYCOMB



Black metal

Code	Model	Box
64174-770269	**VK/04352/HONEYCOMB** ● Black. **Metal. Filter.**	**1pc**

Details
Can be used to **VK/04352**. Material **Metal.**





Natu



Hello we are the Natu family.

We might look like we are made of wood,
but we are actually made of aluminum.

We are waterproof, watertight, and are suitable for gardens, terraces, and driveways. Our warm appearance of wood, makes us ideal for any style house. Try us out and see.

Outdoor lights


Natu



VK/02213/WD/60



VK/02213/WD/30

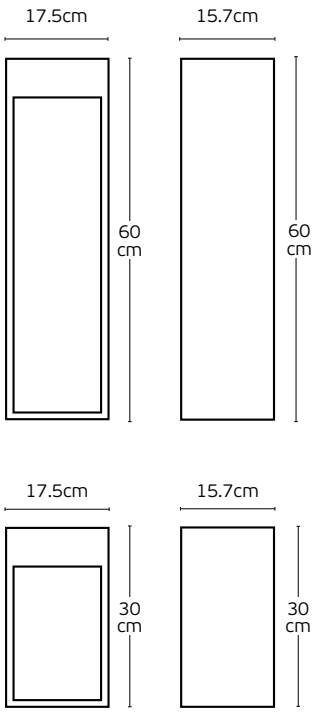

VK/02213/WD/W/60
VK/02213/WD/W/30

Code	Model	Box
75169-414694	**VK/02213/WD/W/60** ● **Wooden+Anthracite.** 3000K. 12W. 513lm. CRI>80	**2pcs**
75169-413694	**VK/02213/WD/W/30** ● **Wooden+Anthracite.** 3000K. 12W. 297lm. CRI>80	**2pcs**

Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **48°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.

IP65




Natu




VK/02214/WD/60



VK/02214/WD/30

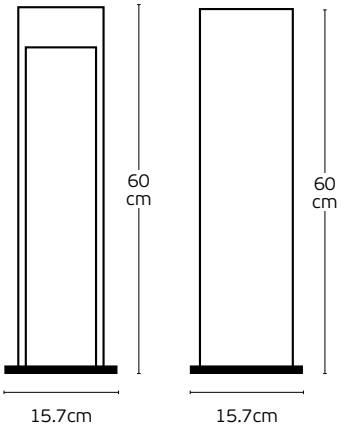



VK/02214/WD/W/60
VK/02214/WD/W/30

Code	Model	Box
75169-416694	**VK/02214/WD/W/60** ● **Wooden+Anthracite.** 3000K. 7W. 145lm. CRI>80	**2pcs**
75169-415694	**VK/02214/WD/W/30** ● **Wooden+Anthracite.** 3000K. 7W. 156lm. CRI>80	**4pcs**

Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **49°/ 48°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.


IP65



Natu



VK/02212/WD



VK/02212/WD/W

Code	Model	Box
75169-410694	VK/02212/WD/W ● **Wooden+Anthracite.** 3000K. 7W. 209lm. CRI>80	2pcs

Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **39°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.

IP54




Natu



VK/01117/WD



VK/01116/WD

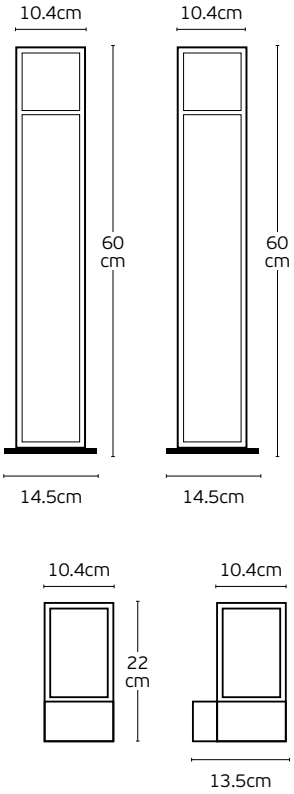

VK/01117/WD
VK/01116/WD

Code	Model	Box
75169-412694	**VK/01117/WD** ● **Wooden+Anthracite.** E27. Max 15W. **60cm.**	**2pcs**
75169-411694	**VK/01116/WD** ● **Wooden+Anthracite.** E27. Max 15W. **22cm.**	**6pcs**

Details

Input Voltage **AC220-240V**.
Lampholder **E27**.
Material **Die-cast aluminium, with SPC wood board & clear glass**.
Guarantee **3 years**.

IP54




Natu



VK/02083/WD

VK/02083/WD/W

Code	Model	Box
75169-407694	VK/02083/WD/W ● **Wooden+Anthracite.** 3000K. 7W. 667lm. CRI>80	8pcs




Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **100°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.



IP65

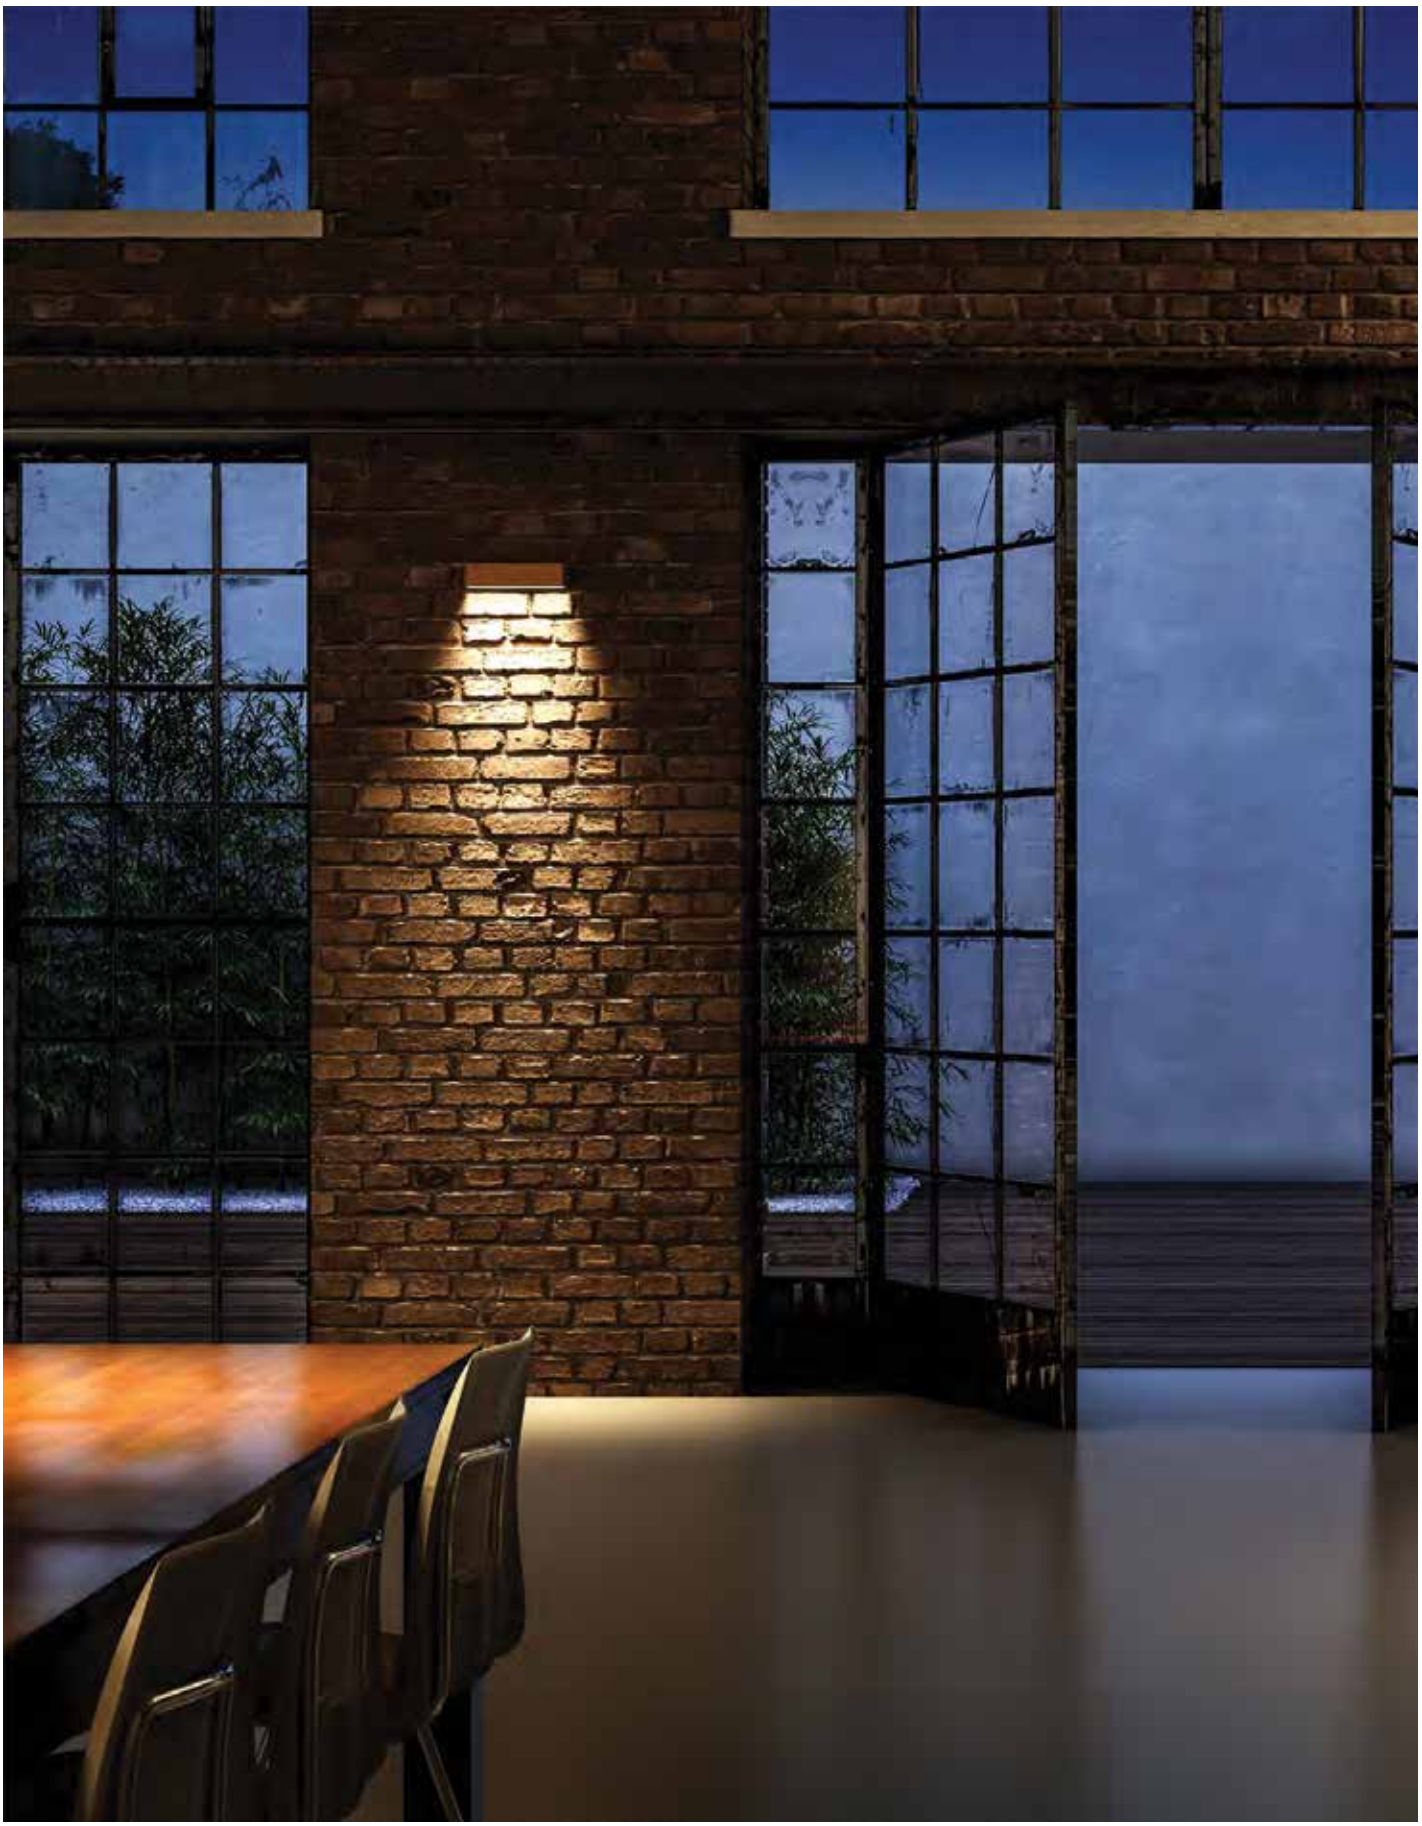

Natu




VK/02210/WD

Up/Down

VK/02210/WD/W

Code	Model	Box
75169-406694	VK/02210/WD/W	8pcs
	● **Wooden+Anthracite.** 3000K. 15W. 1.180lm. CRI>80	



Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **98°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.



IP65




Natu



VK/02082/WD

VK/02082/WD/W

Code	Model	Box
75169-405694	VK/02082/WD/W ● **Wooden+Anthracite.** 3000K. 15W. 1.263lm. CRI>80	4pcs




Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **107°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.



IP65

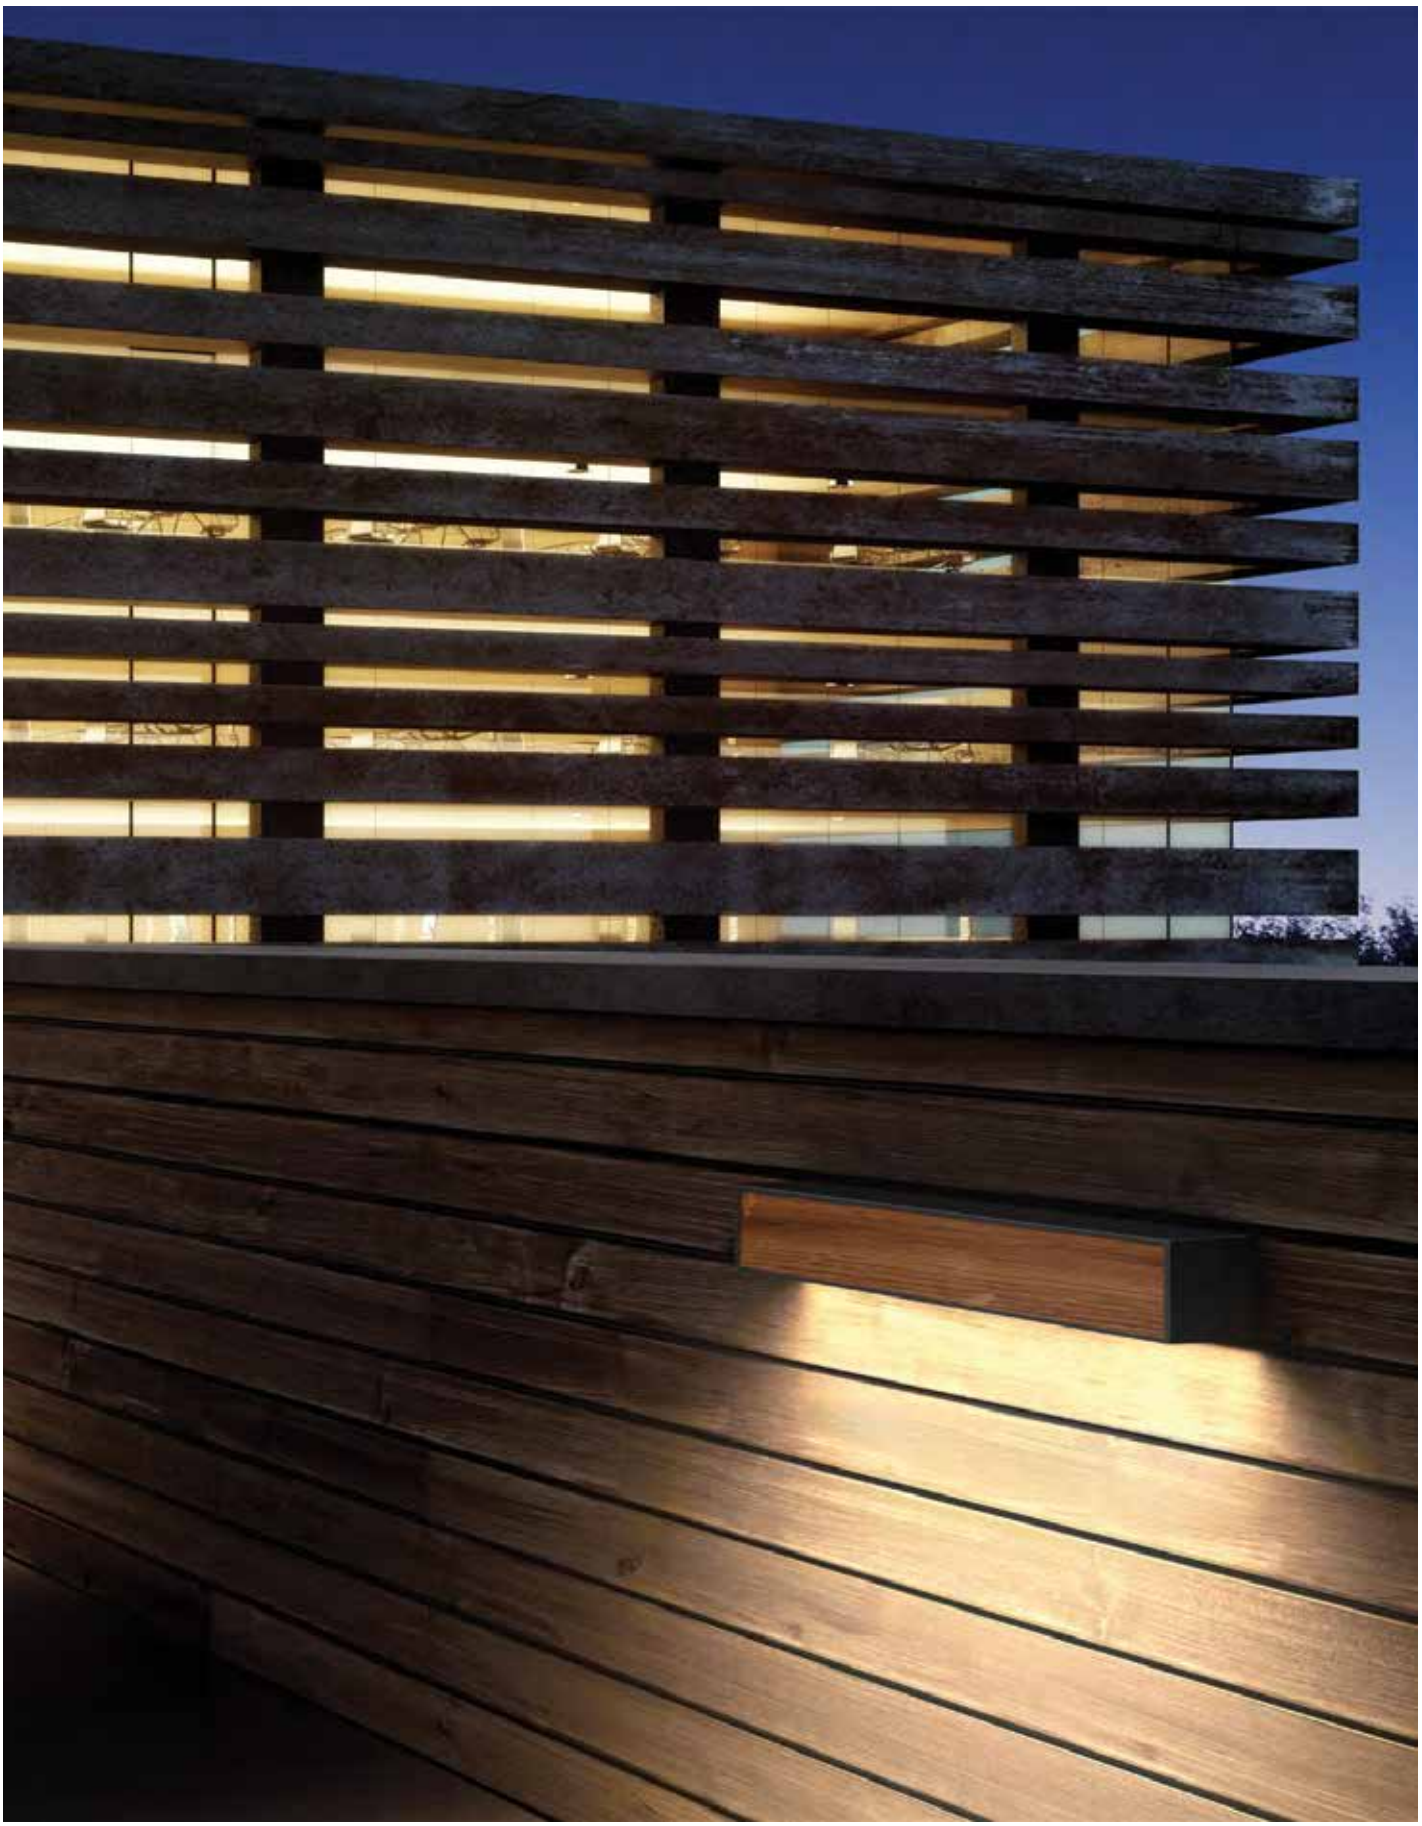

Natu




VK/02081/WD

Up/Down

VK/02081/WD/W

Code	Model	Box
75169-404694	VK/02081/WD/W	4pcs
	● **Wooden+Anthracite.** 3000K. 20W. 1.518lm. CRI>80	



Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **107°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.

IP65



Natu




VK/02211/WA/WD



VK/02155/WA/WD

VK/02211/WA/WD/W
VK/02155/WA/WD/W

Code	Model	Box
75169-408694	VK/02211/WA/WD/W ● **Wooden+Anthracite.** 3000K. 9W. 303lm. CRI>80	8pcs
75169-409694	VK/02155/WA/WD/W ● **Wooden+Anthracite.** 3000K. 7W. 277lm. CRI>84	8pcs

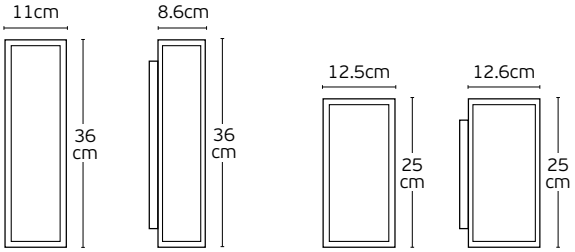

Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **68°/ 67°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.

IP54




Natu



VK/02215/WD/W

VK/02215/WD/W

Code	Model	Box
75169-417694	**VK/02215/WD/W**	**16pcs**
	● **Wooden+Anthracite.** 3000K. 5.4W. 312lm. CRI>80	



Details

Input Voltage **AC220-240V**.
Type of Led **SMD**.
Angle **53°**.
Lifetime **30.000 hrs**.

Material **Die-cast aluminium, with SPC wood board**.
Guarantee **3 years**.



IP65





Terra



We are Terra

As you can see we are very robust. We love everything Brutalist in architecture and lighting, and we can surely make our presence known everywhere we go.

We can withstand rain, sun, and wind and can stand our ground in any conditions.

Outdoor lights


Terra




VK/02201/G



VK/02202/G





Up/Down

VK/02201/G
VK/02202/G

Code	Model	Box
75169-339131	**VK/02201/G/W** ● **Dark grey.** 3000K. 13W. 408lm. CRI>80. ø11cm	**8pcs**
75169-340131	**VK/02202/G/W** ● **Dark grey.** 3000K. 13W. 408lm. CRI>80. 11x11cm	**8pcs**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **SMD**.
Angle **238.7°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Wall, Up/Down**.
Guarantee **3 years**.

IP65





Terra




VK/02193/G



VK/02194/G





VK/02193/G
VK/02194/G

Code	Model	Box
75169-347131	VK/02193/G/W ● **Dark grey.** 3000K. 10W. 909lm. CRI>80. ø10.2cm	8pcs
75169-327131	VK/02194/G/W ● **Dark grey.** 3000K. 10W. 909lm. CRI>80. 10.2x10.2cm	8pcs

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **Philips**.
Angle **56°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Surface-Ceiling**.
Guarantee **3 years**.

IP65


Terra




VK/02195/G



VK/02196/G

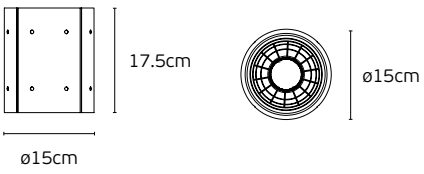

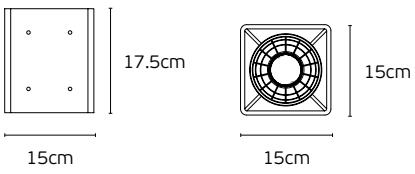

VK/02195/G
VK/02196/G

Code	Model	Box
75169-328131	VK/02195/G/W ● **Dark grey.** 3000K. 25W. 1978lm. CRI>80. ø15cm	4pcs
75169-329131	VK/02196/G/W ● **Dark grey.** 3000K. 25W. 1978lm. CRI>80. 15x15cm	4pcs

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **Philips**.
Angle **52°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Surface-Ceiling**.
Guarantee **3 years**.

IP65

Terra




VK/02203/G





VK/02204/G



VK/02205/G







VK/02203/G, VK/02204/G, VK/02205/G

Code	Model	Box
75169-341131	VK/02203/G/W ● **Dark grey.** 3000K. 12W. 879lm. CRI>80.	4pcs
75169-342131	VK/02204/G/W ● **Dark grey.** 3000K. 12W. 879lm. CRI>80.	8pcs
75169-343131	VK/02205/G/W ● **Dark grey.** 3000K. 12W. 879lm. CRI>80.	8pcs

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **3030 ledchips LUMILEDS**.
Angle **94°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20°C~45°C**.
Material **Concrete**.
Location **Wall**.
Guarantee **3 years**.

IP65




Terra



VK/02198/G/W/75



VK/02198/G/W/45

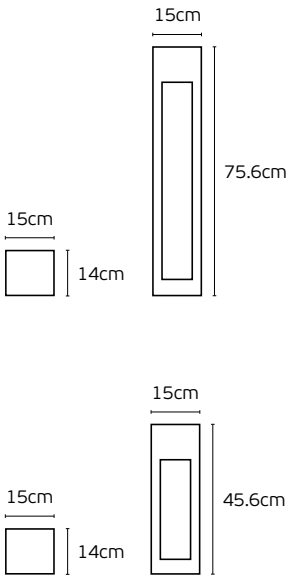


VK/02198

Code	Model	Box
75169-333131	**VK/02198/G/W/75** ● **Dark Grey.** 3000K. 653lm. 12W. CRI>80. **75cm**	**1pc**
75169-332131	**VK/02198/G/W/45** ● **Dark Grey.** 3000K. 653lm. 12W. CRI>80. **45.6cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **3030 ledchips LUMILEDS**.
Angle **64°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Floor**.
Guarantee **3 years**.



IP65




Terra



VK/02197/G/W/99



VK/02197/G/W/54

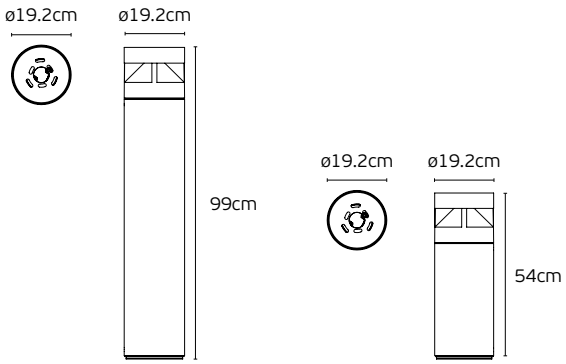

VK/02197

Code	Model	Box
75169-331131	**VK/02197/G/W/99** ● **Dark Grey.** 3000K. 677lm. 21W. CRI>80. **99cm**	**1pc**
75169-330131	**VK/02197/G/W/54** ● **Dark Grey.** 3000K. 677lm. 21W. CRI>80. **54cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **3030 ledchips LUMILEDS**.
Angle **273°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Floor**.
Guarantee **3 years**.

IP65



Terra




VK/02199/G/W/90



VK/02199/G/W/50



VK/02199/G/W/30

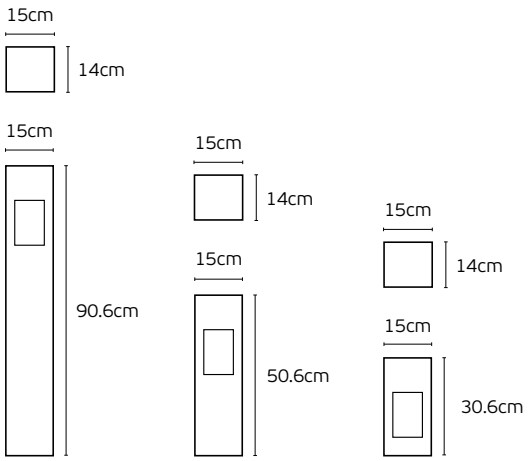


VK/02199

Code	Model	Box
75169-336131	**VK/02199/G/W/90** ● **Dark Grey.** 3000K. 653lm. 12W. CRI>80. **90.6cm**	**1pc**
75169-335131	**VK/02199/G/W/50** ● **Dark Grey.** 3000K. 653lm. 12W. CRI>80. **50.6cm**	**1pc**
75169-334131	**VK/02199/G/W/30** ● **Dark Grey.** 3000K. 653lm. 12W. CRI>80. **30.6cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **3030 ledchips LUMILEDS**.
Angle **64°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Floor**.
Guarantee **3 years**.



IP65




Terra




VK/02200/G/W/75



VK/02200/G/W/45





VK/02200

Code	Model	Box
75169-338131	**VK/02200/G/W/75** ● **Dark Grey.** 3000K. 1159lm. 23W. CRI>80. **70cm**	**1pc**
75169-337131	**VK/02200/G/W/45** ● **Dark Grey.** 3000K. 1159lm. 23W. CRI>80. **45cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **3030 ledchips LUMILEDS**.
Angle **106°**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Floor**.
Guarantee **3 years**.

IP65






Terra



VK/02142/AN/W/75



VK/02142/AN/W/45

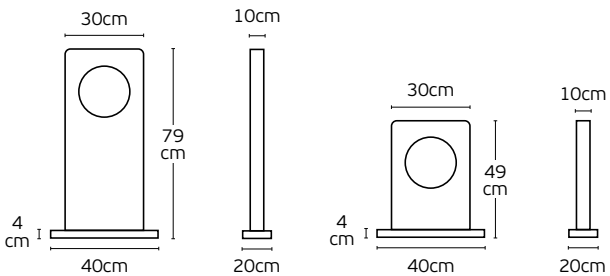


VK/02142

Code	Model	Box
75169-321131	**VK/02142/AN/W/75** ● **Grey.** 3000K. 514lm. 8W. CRI>80. **79cm**	**1pc**
75169-320131	**VK/02142/AN/W/45** ● **Grey.** 3000K. 514lm. 8W. CRI>80. **49cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **CREE 1304**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Concrete**.
Guarantee **2 years**.



IP65



Terra




VK/02132/G/W/45




VK/02132/G/W/25

VK/02132

Code	Model	Box
75169-319131	**VK/02132/G/W/45** ● **Grey.** 3000K. 450lm. 6.5W. CRI>80. **49cm**	**1pc**
75169-318131	**VK/02132/G/W/25** ● **Grey.** 3000K. 450lm. 6.5W. CRI>80. **29cm**	**1pc**





Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **CREE 1304**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Concrete**.
Guarantee **2 years**.



IP65




Terra



VK/02131/G/W/70



VK/02131/G/W/45

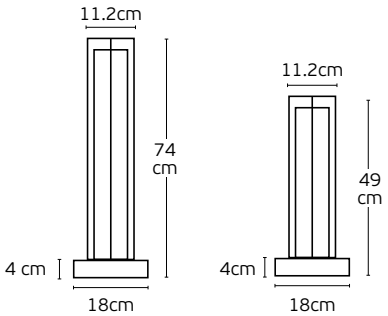

VK/02131

Code	Model	Box
75169-317131	**VK/02131/G/W/70** ● **Grey.** 3000K. 513lm. 9W. CRI>80. **74cm**	**1pc**
75169-316131	**VK/02131/G/W/45** ● **Grey.** 3000K. 514lm. 9W. CRI>80. **49cm**	**1pc**

Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **CREE 1304**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Concrete**.
Guarantee **2 years**.



IP65



Terra




VK/02206/G/W



VK/02207/G/W




VK/02208/G/W




Cut hole

8.5x8.5cm



Cut hole

8.5x8.5cm



Cut hole

8.5x8.5cm

VK/02206/G, VK/02207/G, VK/02208/G

Code	Model	Box
75169-344131	VK/02206/G/W ● **Grey smooth.** 3000K. 3W. 43lm. 61.4°. CRI>80.	24pcs
75169-345131	VK/02207/G/W ● **Grey smooth.** 3000K. 3W. 5lm. 47.5°. CRI>80.	24pcs
75169-346131	VK/02208/G/W ● **Grey smooth.** 3000K. 3W. 43lm. 61.4°. CRI>80.	24pcs


Details

AC Driver **Voltage 220-240V (included)**.
Type of Led **CREE XT-E**.
Dimmable **No**.
Lifetime **30.000 hrs**.

Working temperature **-20ºC~45ºC**.
Material **Concrete**.
Location **Wall**.
Guarantee **3 years**.

IP65



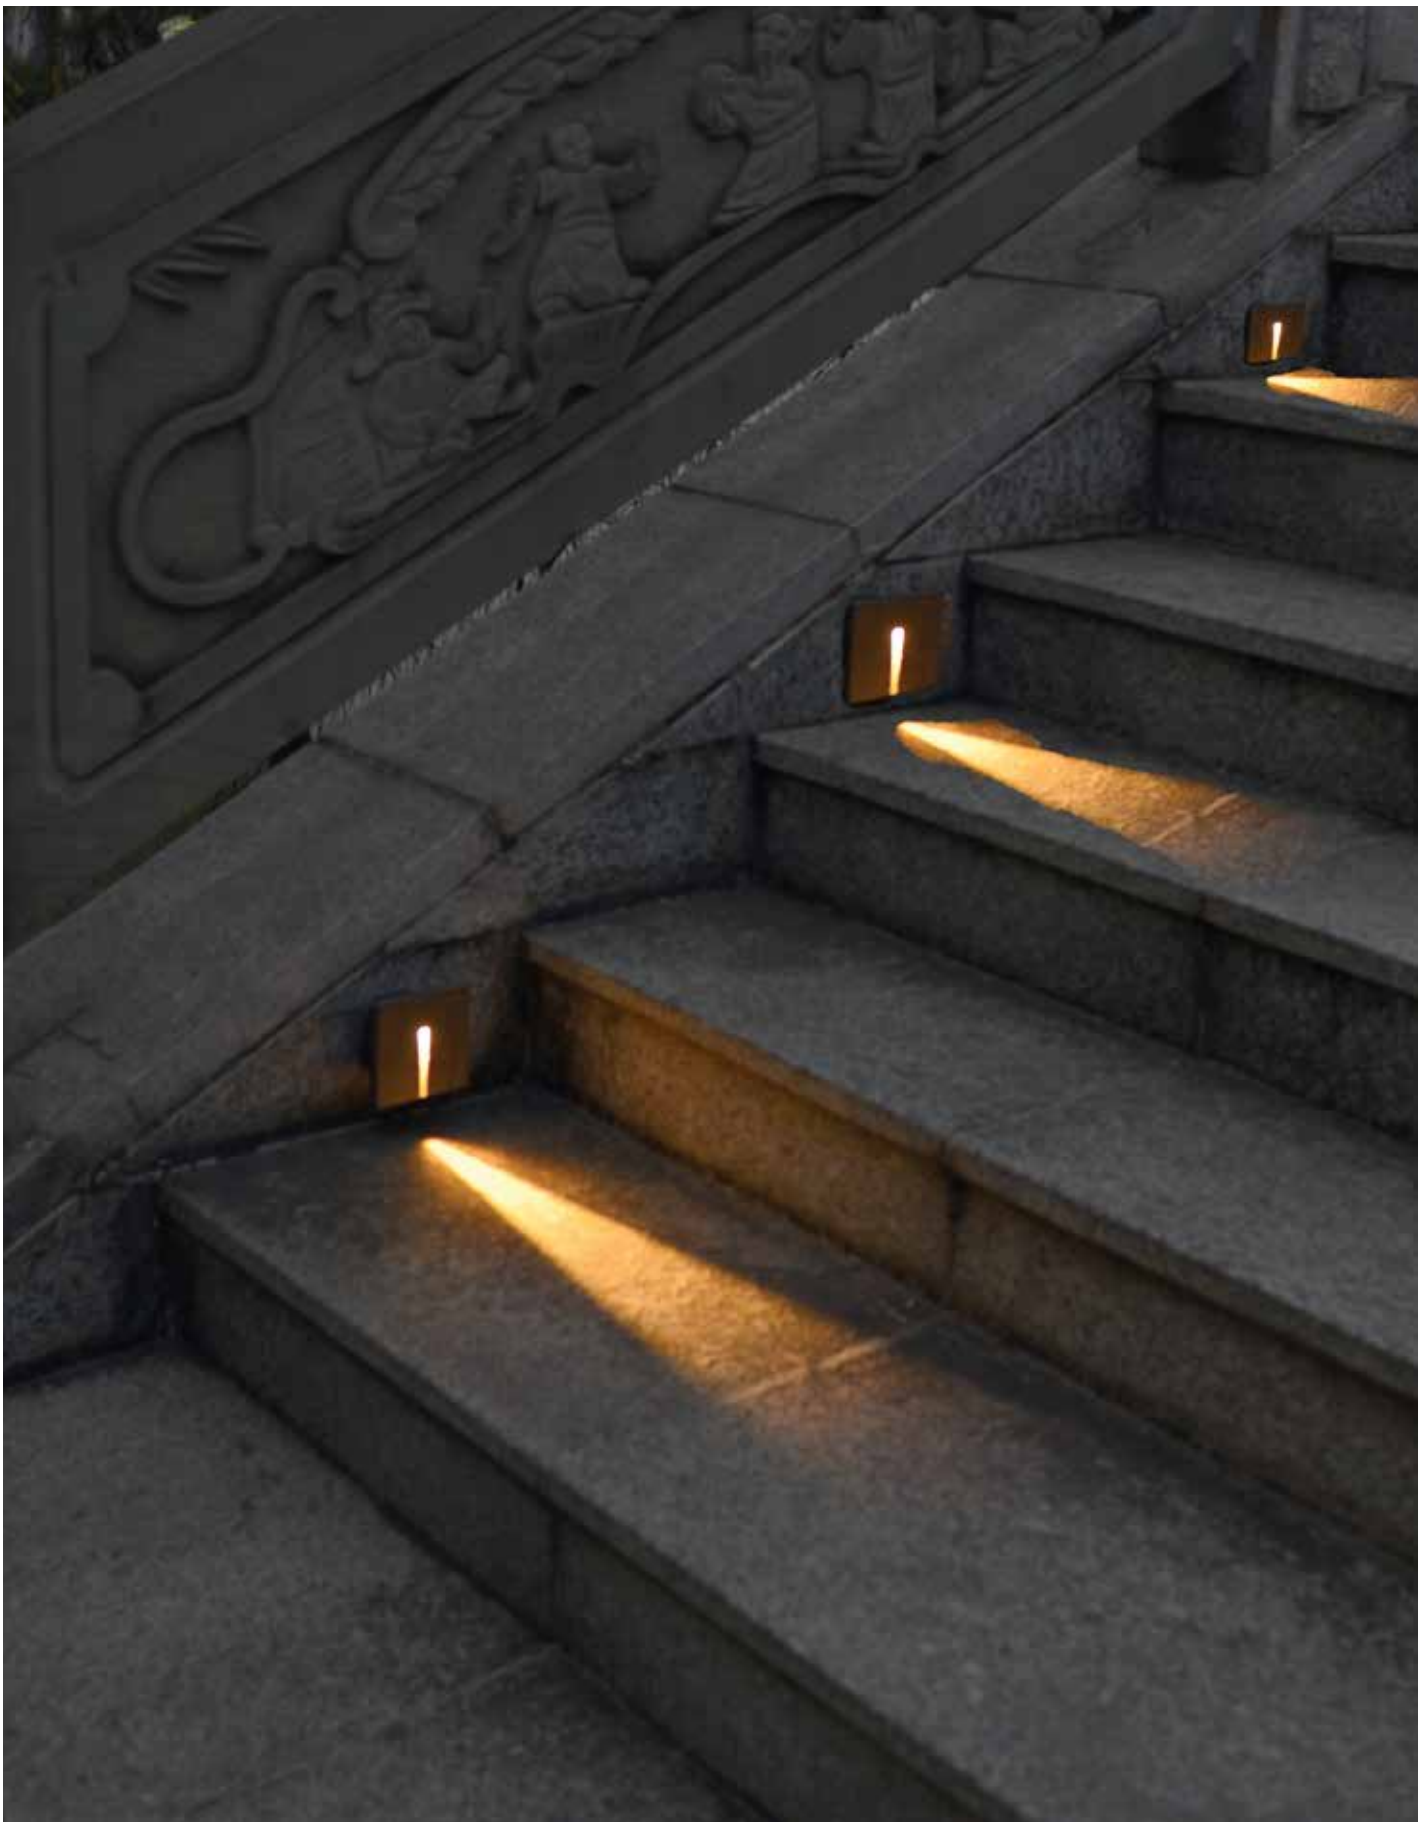





Portable

The rechargeables!

Freedom of movement is our motto
and practicality is our philosophy.

You can never go wrong with us.



Opos


VK/02216/W/20


VK/02216/TC/20


VK/02216/CB/20



VK/02216/B/20



VK/02216/GG/20


VK/02216/SD/20

VK/02216/20

Code	Model	Box
61171-263772	**VK/02216/W/WW/20** ○ **Matt White.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**
61171-264772	**VK/02216/TC/WW/20** ● **Terracotta.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**
61171-265772	**VK/02216/CB/WW/20** ● **Cobalt Blue.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**
61171-266772	**VK/02216/B/WW/20** ● **Matt Black.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**
61171-267772	**VK/02216/GG/WW/20** ● **Matt Green Grey.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**
61171-268772	**VK/02216/SD/WW/20** ● **Matt Sand.** 2200K/2700K. 2W. 216lm. CRI>80	**12pcs**








Details

2x1500mah lithium battery
Type of Led **SMD**.
Voltage **DC3.7V**
Material **Die-casting aluminum alloy**
Location **Outdoor**
Color led **2200K/2700K (switchable)**
Beam angle **120°**
Charge time **4.5 hours**

Work time **>9.5 hours**
With **Open switch**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Clicks **30.000**
Dimmable **Yes**
Guarantee **3 Years**
Without adapter



IP65






Opos



VK/02216/W/30 VK/02216/TC/30 VK/02216/CB/30 VK/02216/B/30 VK/02216/GG/30 VK/02216/SD/30

VK/02216/30

Code	Model	Box
61171-275772	**VK/02216/W/WW/30** ○ **Matt White.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**
61171-276772	**VK/02216/TC/WW/30** ● **Terracotta.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**
61171-277772	**VK/02216/CB/WW/30** ● **Cobalt Blue.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**
61171-278772	**VK/02216/B/WW/30** ● **Matt Black.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**
61171-279772	**VK/02216/GG/WW/30** ● **Matt Green Grey.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**
61171-280772	**VK/02216/SD/WW/30** ● **Matt Sand.** 2200K/2700K. 2W. 242lm. CRI>80	**6pcs**

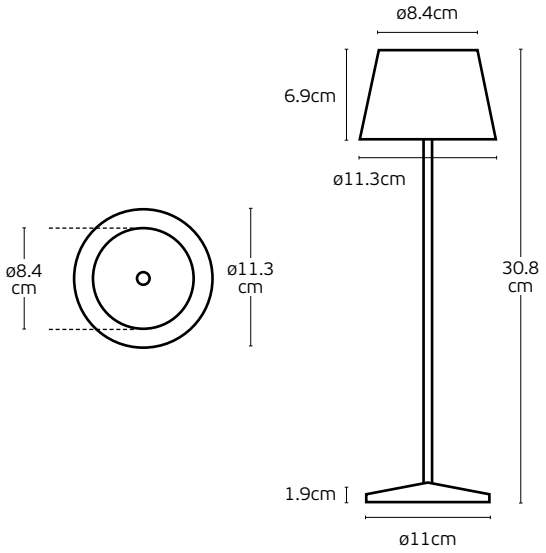


Details

2x2200mah lithium battery
Type of Led **SMD**
Voltage **DC3.7V**
Material **Die-casting aluminum alloy**
Location **Outdoor**
Color led **2200K/2700K (switchable)**
Beam angle **150°**
Charge time **6.5 hours**

Work time **>9 hours**
With **Open switch**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Clicks **30.000**
Dimmable **Yes**
Guarantee **3 Years**
Without adapter

Included

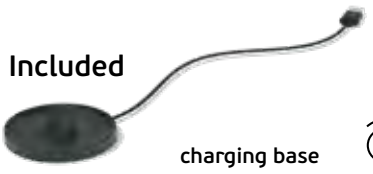

charging base

IP65



Opos


VK/02217/W/20


VK/02217/TC/20


VK/02217/CB/20


VK/02217/B/20


VK/02217/GG/20


VK/02217/SD/20


VK/02217/20


Code	Model	Box
61171-269772	**VK/02217/W/WW/20** ○ **Matt White.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**
61171-270772	**VK/02217/TC/WW/20** ● **Terracotta.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**
61171-271772	**VK/02217/CB/WW/20** ● **Cobalt Blue.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**
61171-272772	**VK/02217/B/WW/20** ● **Matt Black.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**
61171-273772	**VK/02217/GG/WW/20** ● **Matt Green Grey.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**
61171-274772	**VK/02217/SD/WW/20** ● **Matt Sand.** 2200K/2700K. 2W. 217lm. CRI>80	**12pcs**


Details

2x1500mah lithium battery
Type of Led **SMD.**
Voltage **DC3.7V**
Material **Die-casting aluminum alloy**
Location **Outdoor**
Color led **2200K/2700K (switchable)**
Beam angle **120°**
Charge time **4.5 hours**

Work time **>9.5 hours**
With **Open switch**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Clicks **30.000**
Dimmable **Yes**
Guarantee **3 Years**
Without adapter









IP65






Opos



VK/02217/W/30 VK/02217/TC/30 VK/02217/CB/30 VK/02217/B/30 VK/02217/GG/30 VK/02217/SD/30

VK/02217/30

Code	Model	Box
61171-281772	**VK/02217/W/WW/30** ○ **Matt White.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**
61171-282772	**VK/02217/TC/WW/30** ● **Terracotta.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**
61171-283772	**VK/02217/CB/WW/30** ● **Cobalt Blue.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**
61171-284772	**VK/02217/B/WW/30** ● **Matt Black.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**
61171-285772	**VK/02217/GG/WW/30** ● **Matt Green Grey.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**
61171-286772	**VK/02217/SD/WW/30** ● **Matt Sand.** 2200K/2700K. 2W. 241lm. CRI>80	**6pcs**

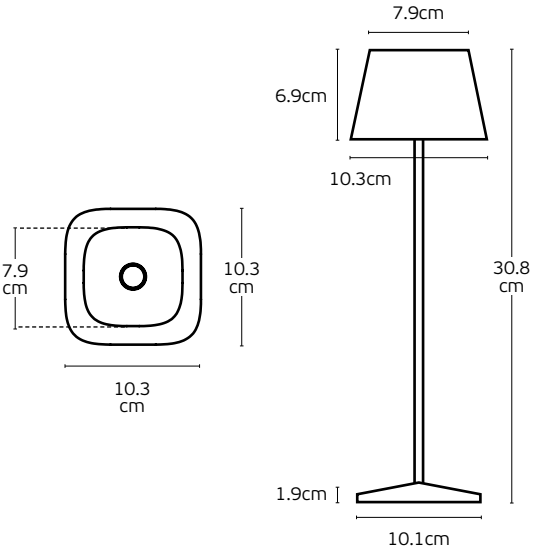


Details

2x2200mah lithium battery
Type of Led **SMD**
Voltage **DC3.7V**
Material **Die-casting aluminum alloy**
Location **Outdoor**
Color led **2200K/2700K (switchable)**
Beam angle **150°**
Charge time **6.5 hours**

Work time **>9 hours**
With **Open switch**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Clicks **30.000**
Dimmable **Yes**
Guarantee **3 Years**
Without adapter

Included

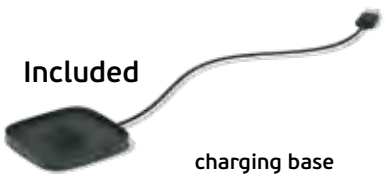

charging base

IP65



Nog-mos



VK/03214/W




VK/03214/B



VK/03214/RB

VK/03214

Code	Model	Box
61171-251694	**VK/03214/W/W** ❍ **White.** 3000K. 196lm. 2.2W. CRI>85	**1pc**
61171-252694	**VK/03214/B/W** ● **Black.** 3000K. 196lm. 2.2W. CRI>85	**1pc**
61171-253694	**VK/03214/RB/W** ● **Rusty brown.** 3000K. 196lm. 2.2W. CRI>85	**1pc**

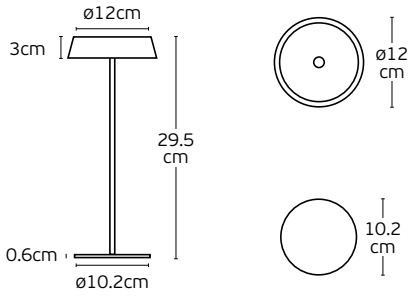

Details

Portable led light.
Voltage **2x2200mAh lithium baterry.**
Charge **5-7 hours.**
Work time **12 hours**.
Location **Outdoor table**.

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC**.
Material **Die-cast Aluminum.**
Guarantee **2 years**.

Included



Power adapter



usb type-C





IP54



Nog-mos



VK/03141/W



VK/03141/B



VK/03141/RB

VK/03141

Code	Model	Box
61171-237694	**VK/03141/W/W** ○ **White.** 3000K. 188lm. 2.2W. CRI>85	**6pcs**
61171-238694	**VK/03141/B/W** ● **Black.** 3000K. 188lm. 2.2W. CRI>85	**6pcs**
61171-239694	**VK/03141/RB/W** ● **Rusty brown.** 3000K. 188lm. 2.2W. CRI>85	**6pcs**

Details

Portable led light.
Voltage **2x2200mAh lithium baterry.**
Charge **5-7 hours.**
Work time **9 hours.**
Location **Outdoor table.**

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC.**
Material **Die-cast Aluminum.**
Guarantee **2 years.**


Included





USB micro



Power adapter

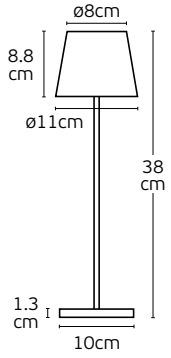







IP54



Nog-mos



VK/03247/W



VK/03247/B




VK/03247/RB



VK/03247/GD

VK/03247

Code	Model	Box
61171-254694	**VK/03247/W/W** ○ **White.** 2700/3000K. 2.2W. 180lm. CRI>80	**6pcs**
61171-255694	**VK/03247/B/W** ● **Black.** 2700/3000K. 2.2W. 180lm. CRI>80	**6pcs**
61171-256694	**VK/03247/RB/W** ● **Rusty Brown.** 2700/3000K. 2.2W. 180lm. CRI>80	**6pcs**
61171-257694	**VK/03247/GD/W** ● **Golden.** 2700/3000K. 2.2W. 180lm. CRI>80	6pcs

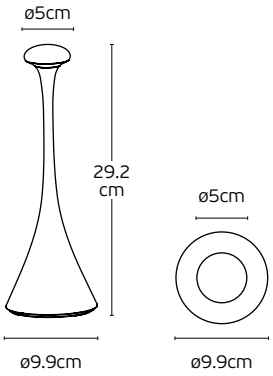

Details

LED Outdoor Portable
Light **2x2200mAh lithium battery**.
Beam angle **45°**.
Location **Outdoor table.**
Charge **6-8 hours.**
Work time **12 hours.**

With Touch switch, Dimmable.
Working temperature **0-40ºC.**
Material **Aluminium.**
The battery can be charged and discharged 300 times.
Guarantee **2 years**.

Included



Recharging base

IP54



Nog-mos



VK/02154/W



VK/02154/B

VK/02154

Code	Model	Box
75169-396694	**VK/02154/W/W** ○ **White shining.** 3000K. 192lm. 2.2W. CRI>84	**1pc**
75169-398694	**VK/02154/B/W** ● **Black shining.** 3000K. 192lm. 2.2W. CRI>84	**1pc**

Details

Portable led light.
Voltage **2x2200mAh lithium battery**.
Location **Outdoor table/pendant**.
Charge **5-7 hours**.
Work time **9 hours**.

Dimmable.
Working temperature **-20 ~ 50ºC**.
Material **Die-cast aluminium & clear PC.**
With **Touch switch.**
Guarantee **2 years**.


Included




USB micro



Power adapter









IP54



Nog-mos



VK/02154/B/PEN



VK/02154/B/PEN
+
VK/02154/B/W

VK/02154/PEN


Code	Model	Box
75169-397694	**VK/02154/W/PEN** **○ White shining suspension.**	**1pc**
75169-399694	**VK/02154/B/PEN** **● Black shining suspension.**	**1pc**


Details

Material **Die-cast Aluminum. Powder coated with pretreatment for outdoor use.**

With 2m wire rope.
Use **With VK/02154/W to be Pendant Light.**

IP54

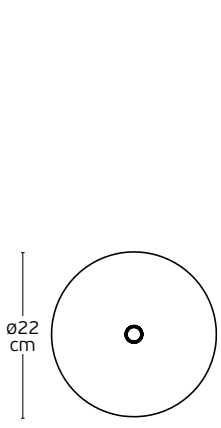

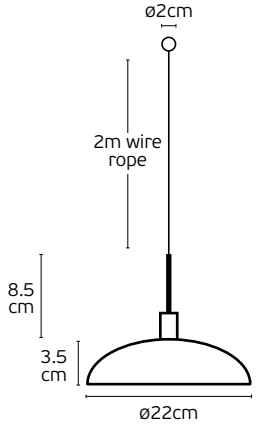




Nog-mos



VK/03210/W



VK/03211/B

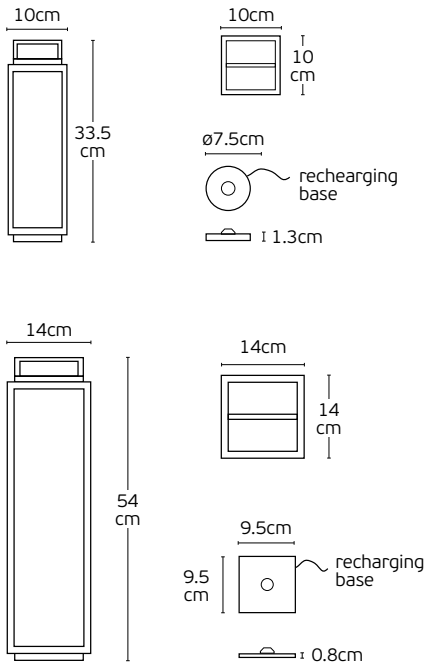

VK/03210
VK/03211

Code	Model	Box
61171-244694	**VK/03210/W/W** ○ **White.** 3000K. 204lm. 2.2W. CRI>85	**1pc**
61171-243694	**VK/03210/B/W** ● **Black.** 3000K. 204lm. 2.2W. CRI>85	**1pc**
61171-246694	**VK/03211/W/W** ○ **White.** 3000K. 180lm. 2.2W. CRI>85	**1pc**
61171-245694	**VK/03211/B/W** ● **Black.** 3000K. 180lm. 2.2W. CRI>85	**1pc**

Included



Power adapter

VK/03210/B/W



Recharging base

Included



Power adapter

VK/03211/B/W



Recharging base

Details

Portable led light.
Voltage **2x2200mAh lithium baterry.**
Charge **6-8 hours.**
Work time **12 hours**.
Location **Outdoor table/floor**.

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC**.
Material **Die-cast Aluminum.**
Guarantee **2 years**.




IP54



Otis


VK/02218/W/120


VK/02218/TC/120


VK/02218/B/120


VK/02218/GG/120


VK/02218/SD/120


VK/02218

Code	Model	Box
61171-287772	VK/02218/W/WW/120 ○ **Matt White.** 2200K/2700K. 3W. 264lm. CRI>80	6pcs
61171-288772	VK/02218/TC/WW/120 ● **Terracotta.** 2200K/2700K. 3W. 264lm. CRI>80	6pcs
61171-289772	VK/02218/B/WW/120 ● **Matt Black.** 2200K/2700K. 3W. 264lm. CRI>80	6pcs
61171-290772	VK/02218/GG/WW/120 ● **Matt Green Grey.** 2200K/2700K. 3W. 264lm. CRI>80	6pcs
61171-291772	VK/02218/SD/WW/120 ● **Matt Sand.** 2200K/2700K. 3W. 264lm. CRI>80	6pcs

Details

2x2200mah lithium battery
Type of Led **SMD**
Voltage **DC3.7V**
Material **Die-casting aluminum alloy**
Location **Outdoor**
Color led **2200K/2700K (switchable)**
Beam angle **70°**
Charge time **6.5 hours**

Work time **>9.5 hours**
With **Open switch**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Clicks **30.000**
Dimmable **Yes**
Guarantee **3 Years**
Without adapter

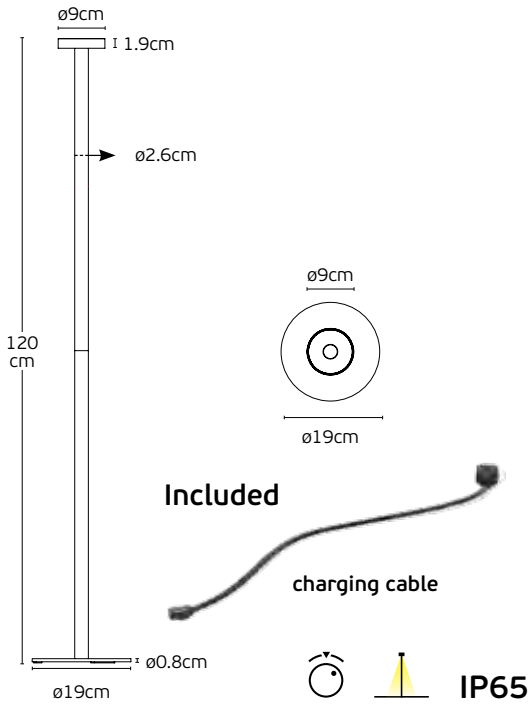



Nog-mos




VK/03209/W



VK/03209/B



VK/03209/BR

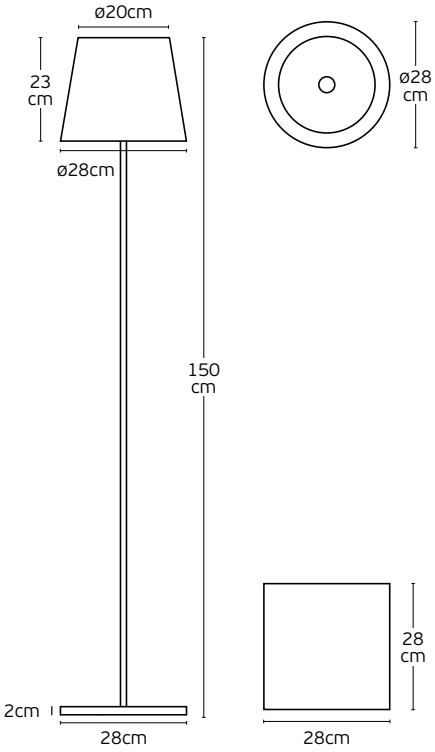

VK/03209

Code	Model	Box
61171-240694	**VK/03209/W/W** ○ **White.** 3000K. 530lm. 10W. CRI>83	**1pc**
61171-241694	**VK/03209/B/W** ● **Black.** 3000K. 530lm. 10W. CRI>83	**1pc**
61171-242694	**VK/03209/RB/W** ● **Rusty brown.** 3000K. 530lm. 10W. CRI>83	**1pc**

Details

Portable led light.
Voltage **6x2200mAh lithium baterry.**
Charge **18-20 hours.**
Work time **15 hours**.
Location **Outdoor floor**.

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC**.
Material **Die-cast Aluminum.**
Guarantee **2 years**.

Included



usb micro



Power adapter




Recharging base

IP54




Nog-mos

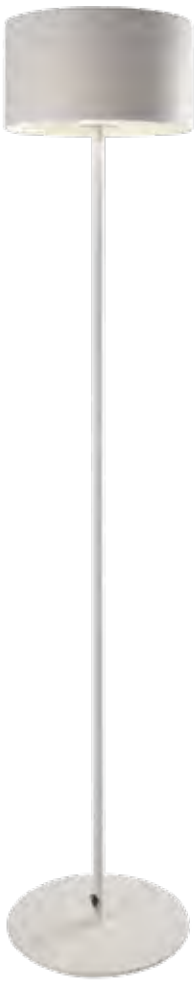

VK/03213/W



VK/03213/B

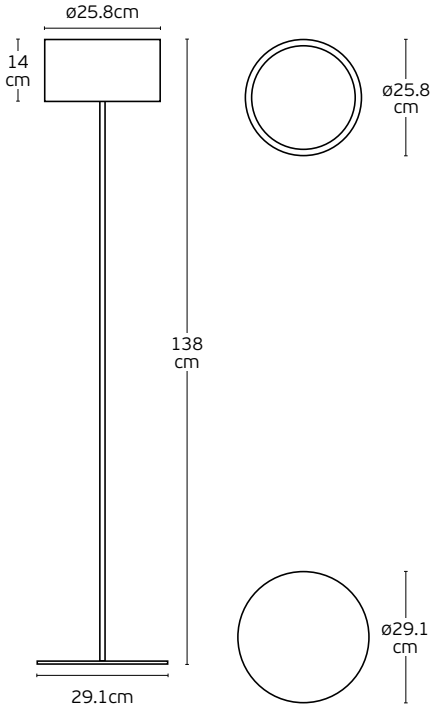

VK/03213

Code	Model	Box
61171-250694	**VK/03213/W/W** ○ **White.** 3000K. 406lm. 4.5W. CRI>84	**1pc**
61171-249694	**VK/03213/B/W** ● **Black.** 3000K. 406lm. 4.5W. CRI>84	**1pc**

Details

Portable led light.
Voltage **3x2200mAh lithium baterry.**
Charge **9 hours**.
Work time **9 hours**.
Location **Outdoor Floor**.

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC**.
Material **Die-cast Aluminum.**
Guarantee **2 years**.

Included



usb DC



Power adapter

IP54



Nog-mos



VK/03212/W



VK/03212/B

VK/03212

Code	Model	Box
61171-248694	**VK/03212/W/W** ○ **White.** 3000K. 393lm. 4.5W. CRI>84	**1pc**
61171-247694	**VK/03212/B/W** ● **Black.** 3000K. 393lm. 4.5W. CRI>84	**1pc**

Details

Portable led light.
Voltage **3x2200mAh lithium baterry.**
Charge **9 hours.**
Work time **9 hours.**
Location **Outdoor Table.**

With Touch switch.
Dimmable.
Working temperature **-20 ~ 50ºC.**
Material **Die-cast Aluminum.**
Guarantee **2 years.**


Included




Power adapter




usb DC

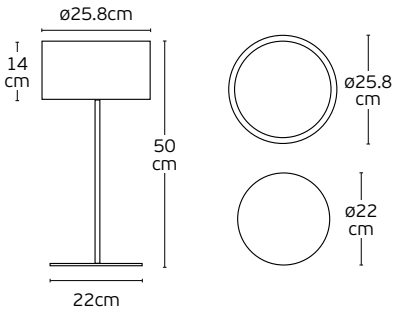

IP54

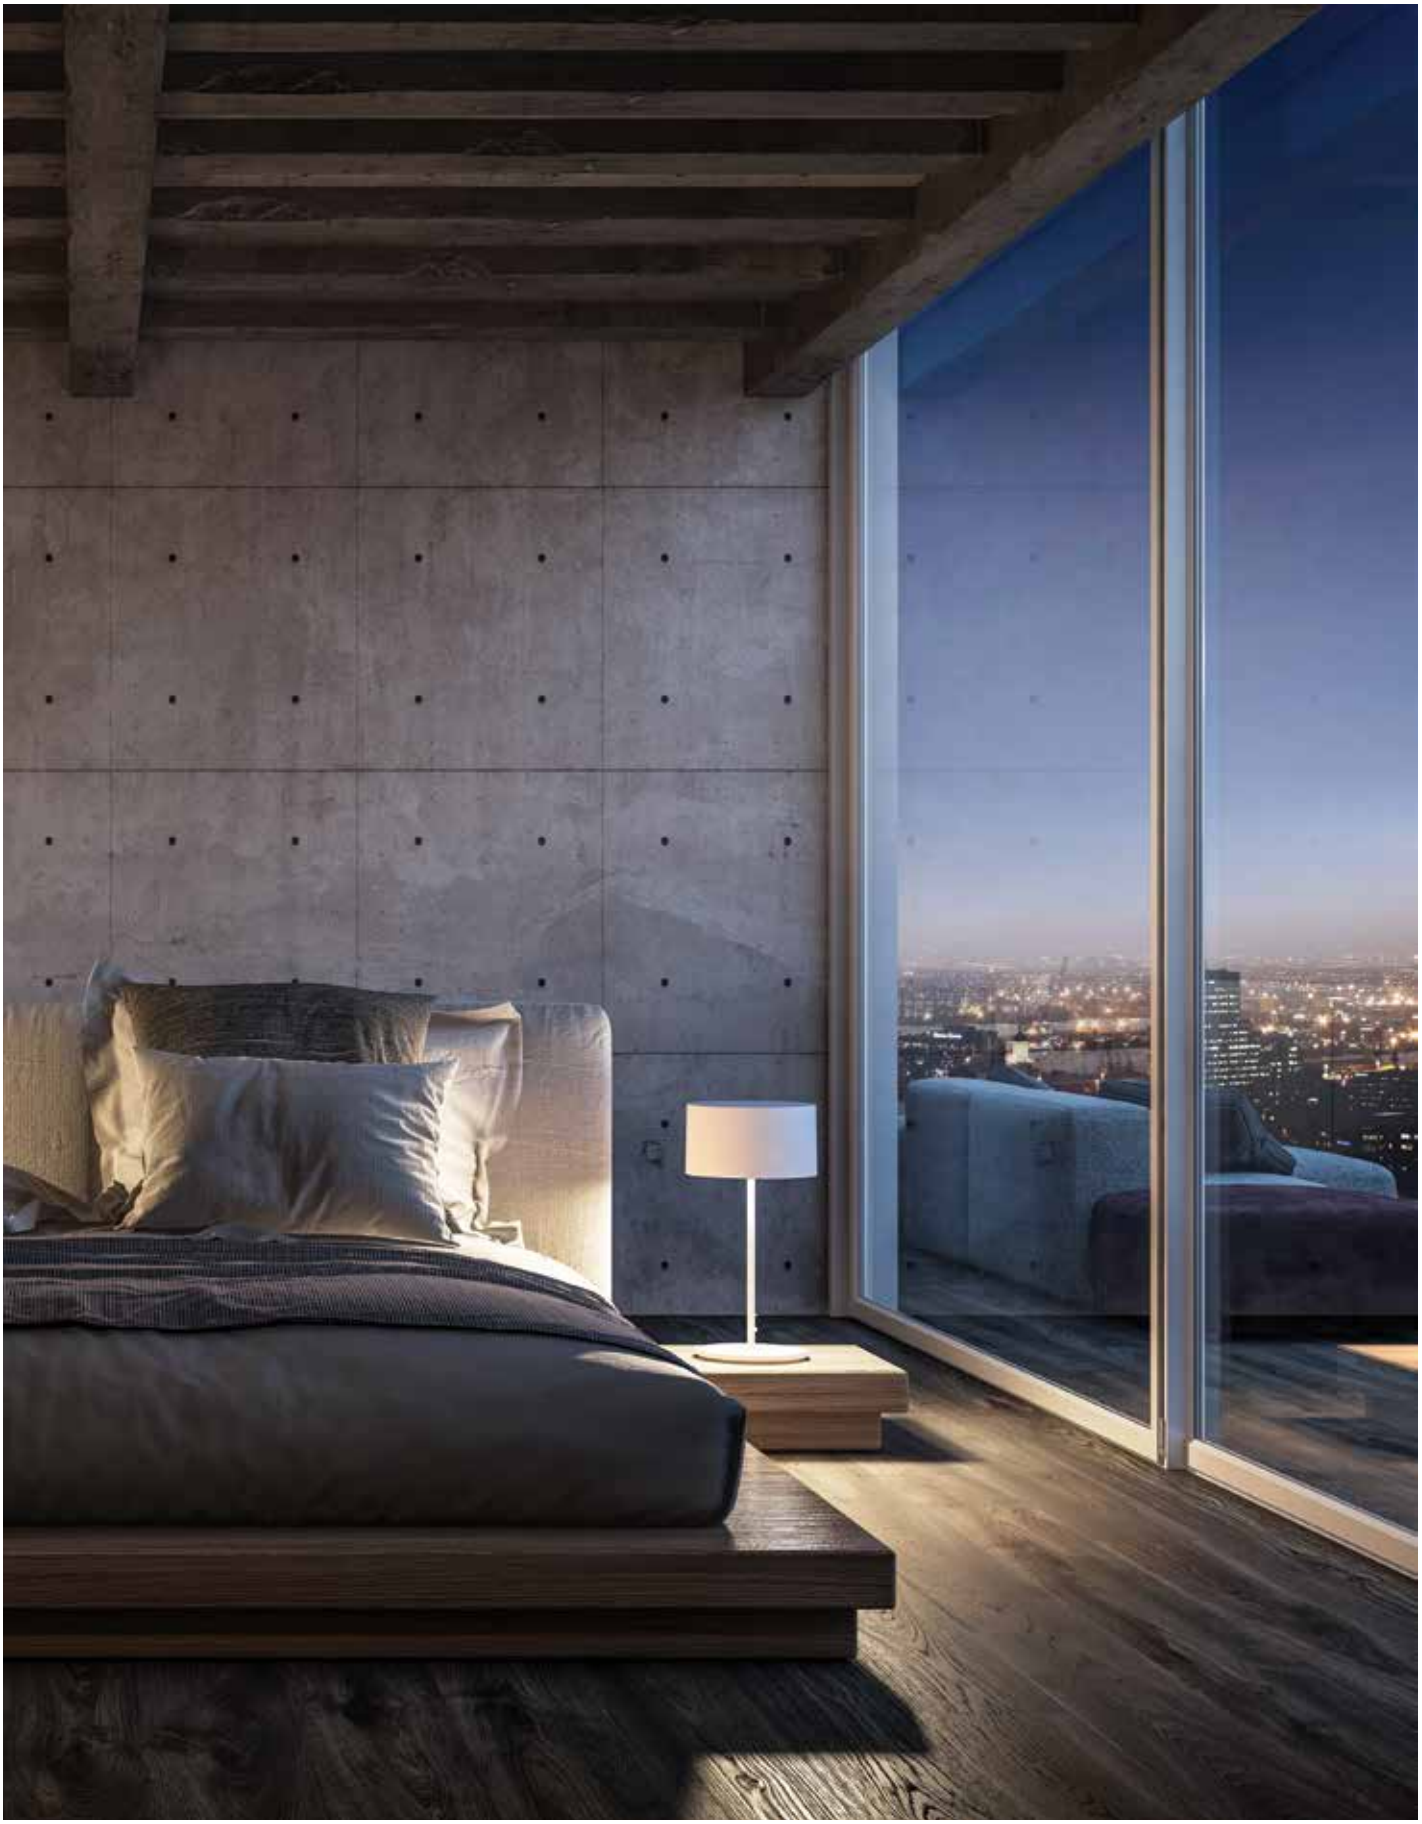



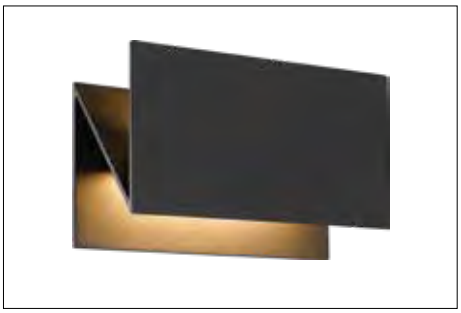


Outdoor wall lights

Irvi




VK/02109/G





VK/02110/G



VK/02109

Code	Model	Box
75169-339694	**VK/02109/G/W** ● **Grey.** 3000K. 75lm. 4W. CRI>80	**24pcs**
75169-338694	**VK/02109/W/W** ○ **White.** 3000K. 75lm. 4W. CRI>80	**24pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **33º.**
Type of Led **SMD 3014/PHILIPS**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **<45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP65

VK/02110


Code	Model	Box
75169-340694	**VK/02110/G/W** ● **Grey.** 3000K. 99lm. 3.6W. CRI>80	**24pcs**
75169-341694	**VK/02110/W/W** ○ **White.** 3000K. 84lm. 5.2W. CRI>80	**24pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **48º.**
Type of Led **SMD 3014/PHILIPS**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **<45°C**.
Material **Aluminium.**
Guarantee **2 years**.


IP65

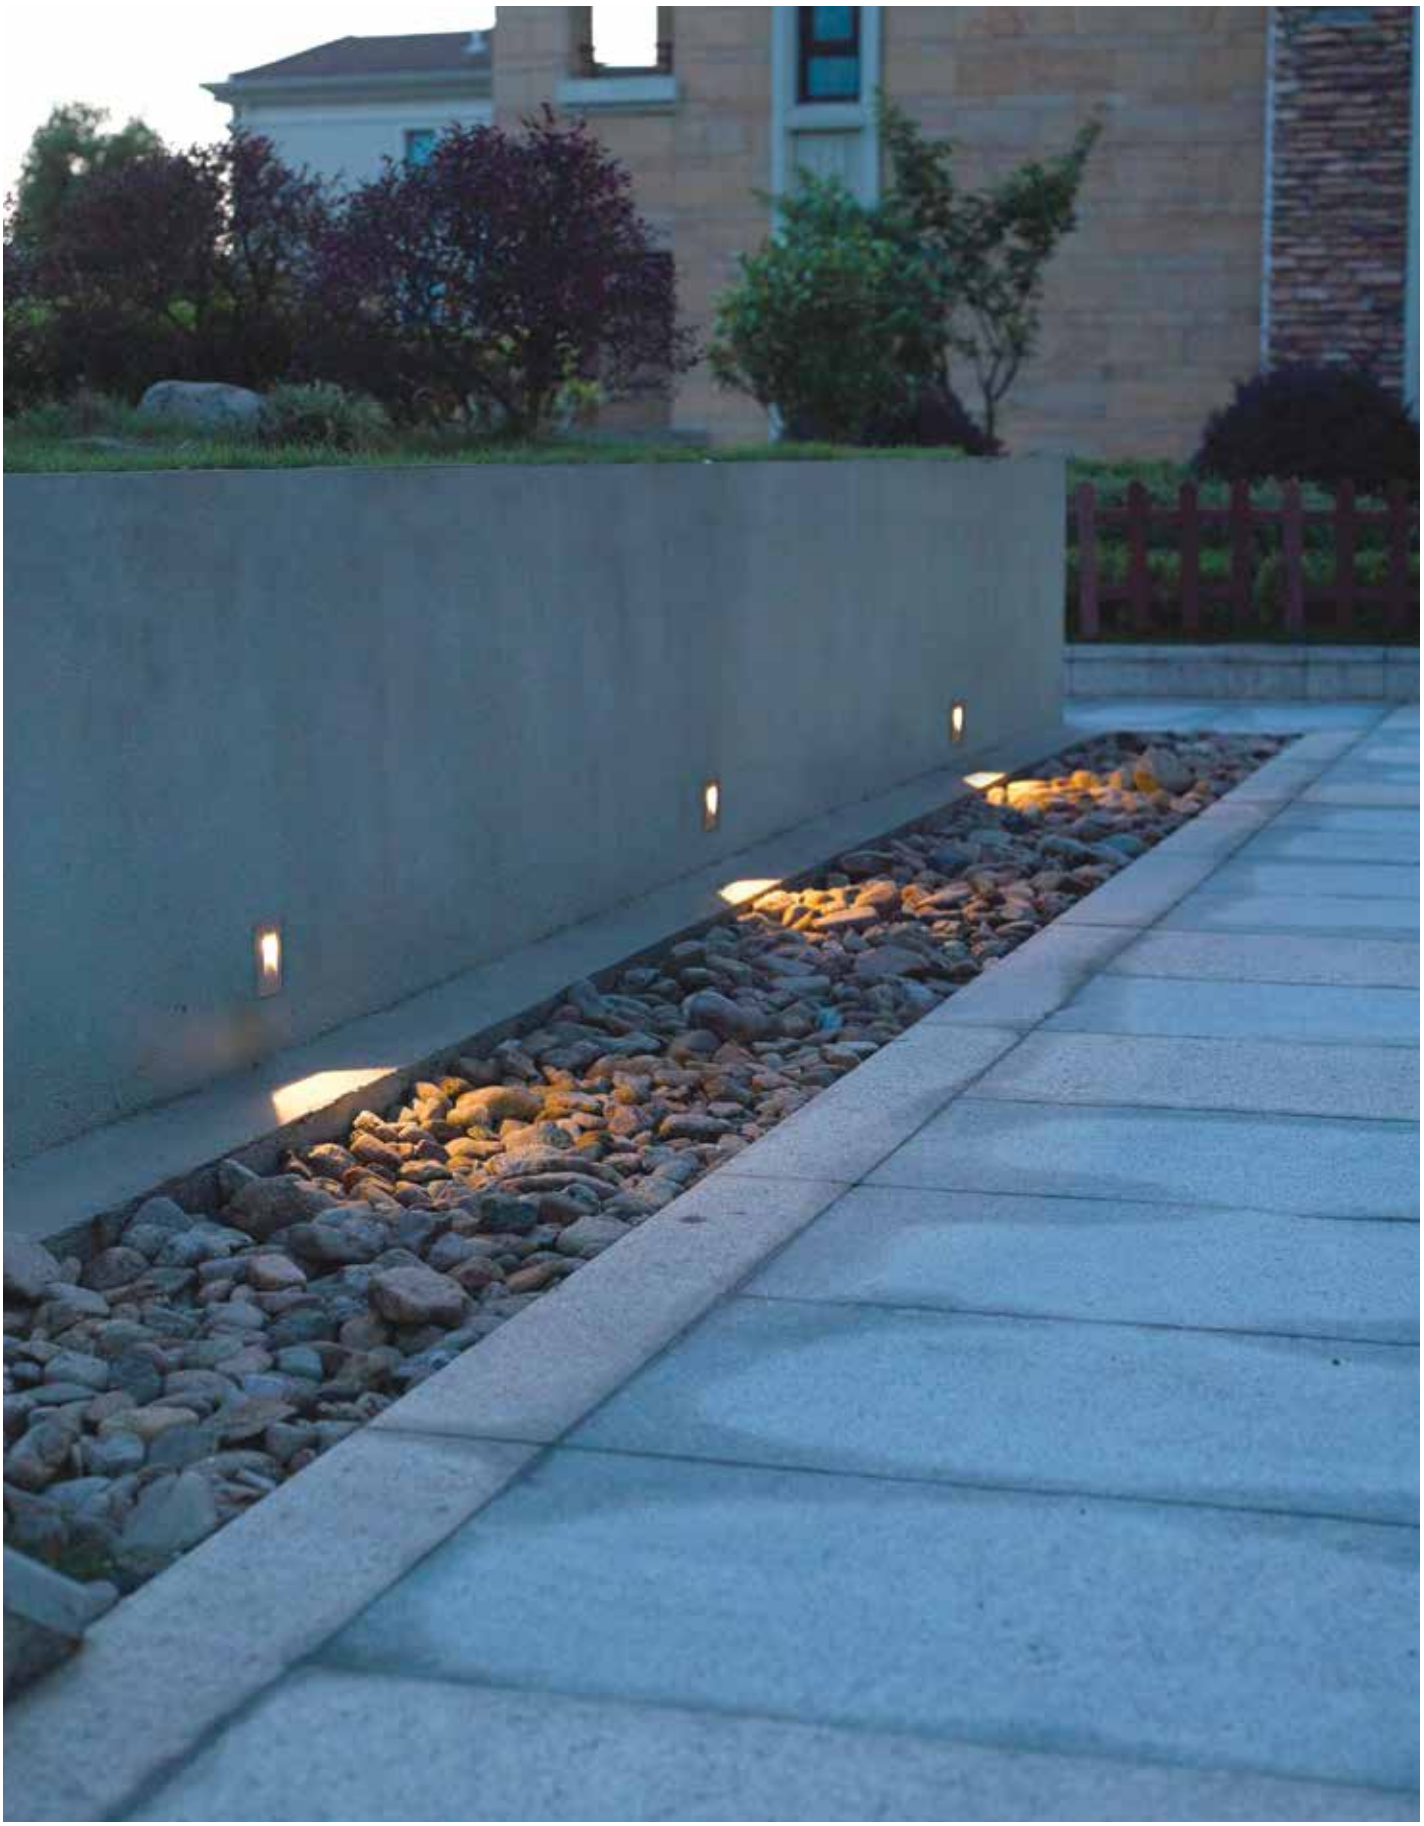

Irvi



VK/02108/AN



VK/02108


Code	Model	Box
75169-336694	**VK/02108/AN/W** ● **Anthracite.** 3000K. 280lm. 9W. CRI>82	**12pcs**
75169-337694	**VK/02108/W/W** ○ **White.** 3000K. 280lm. 9W. CRI>82	**12pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **42º.**
Type of Led **SMD 3014/PHILIPS**.
Lifetime **30.000hrs**.

Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP65

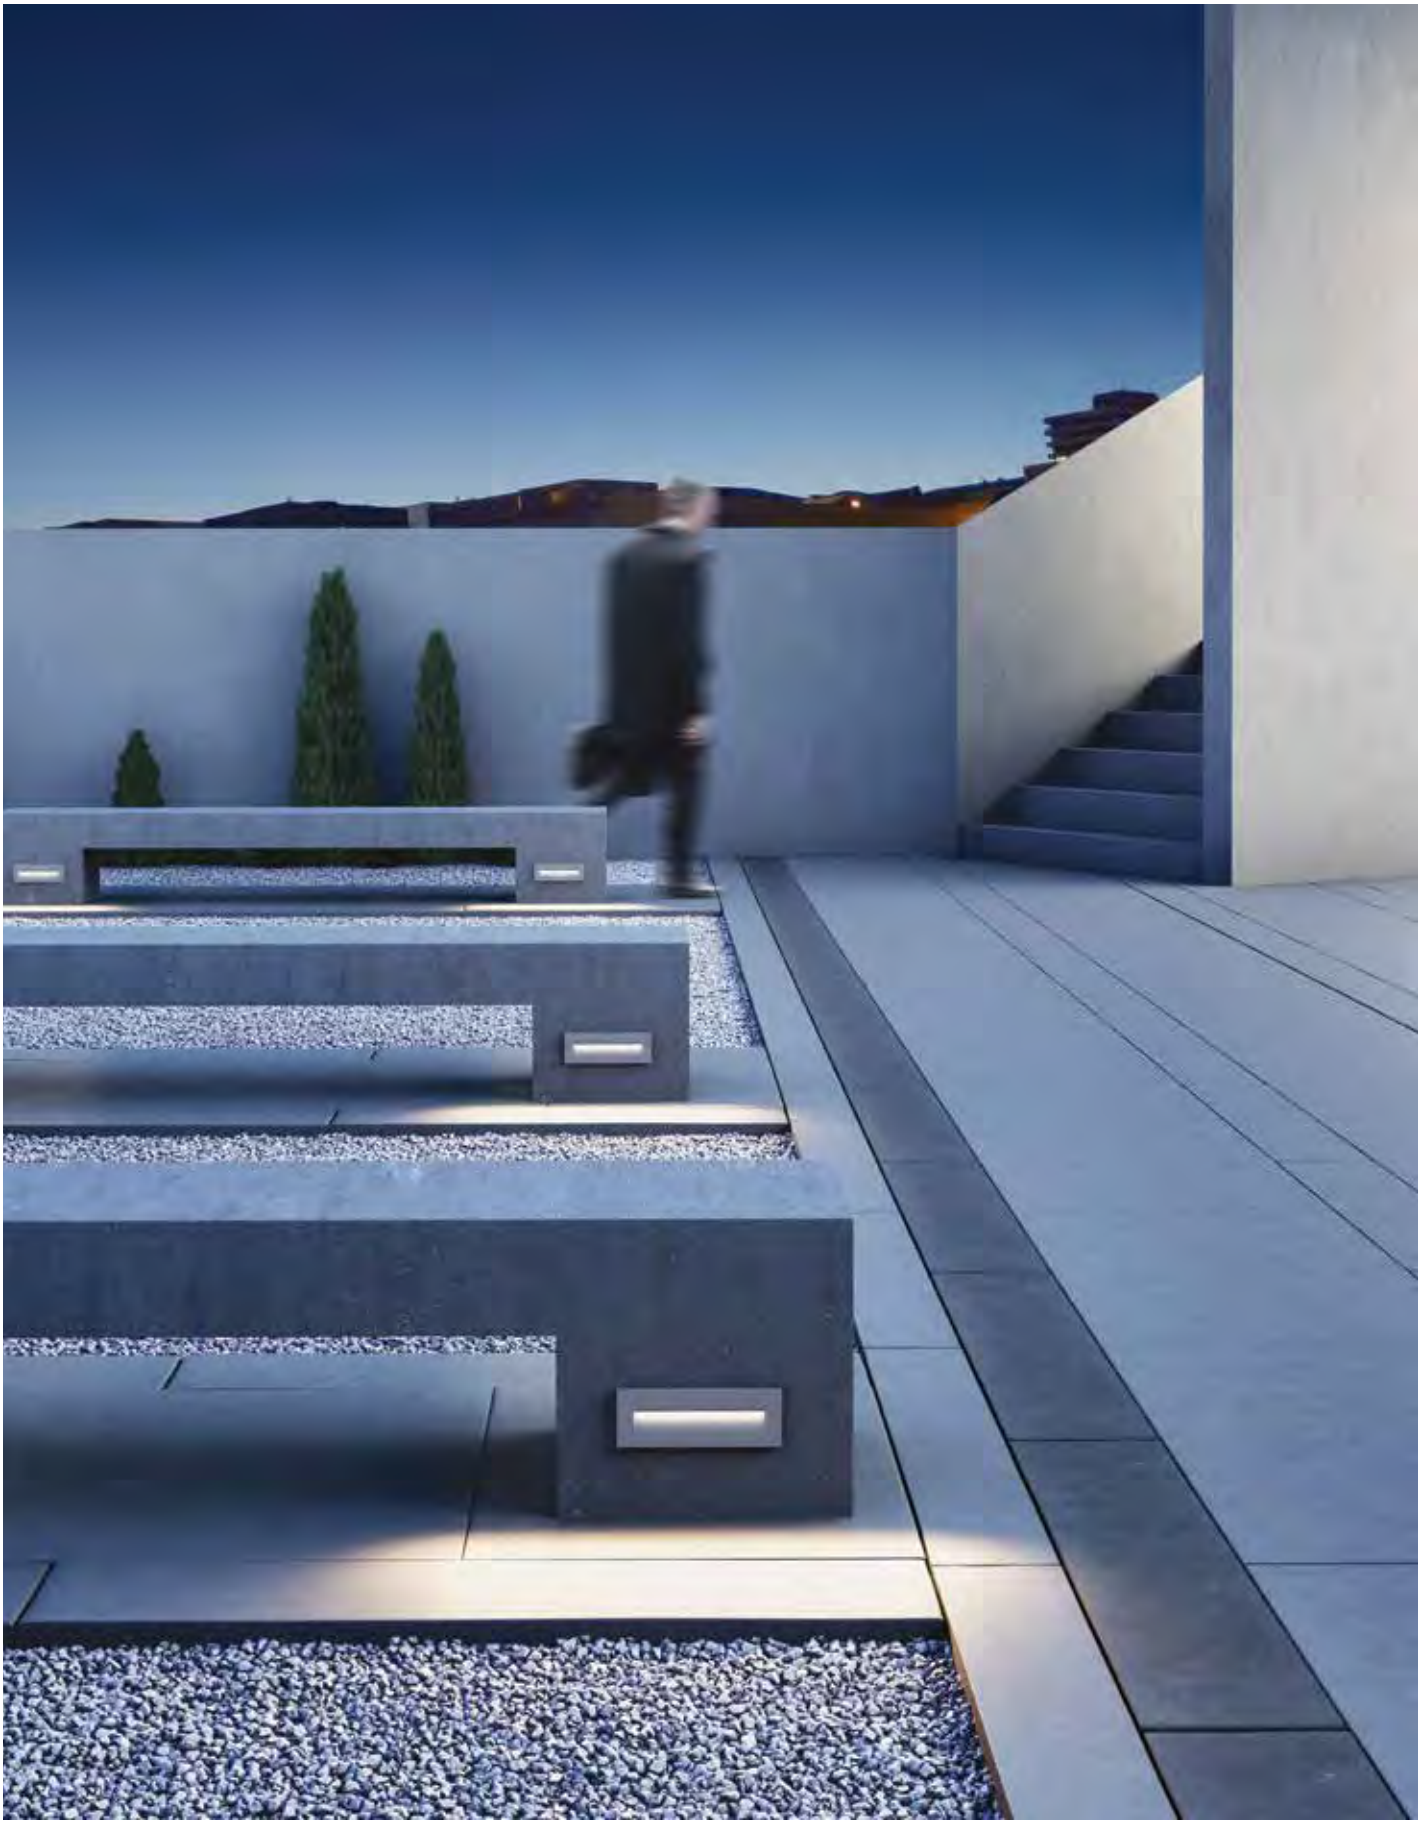


Fune



VK/02055/G

VK/02055

Code	Model	Box
75169-319692	**VK/02055/G/W** ● **Grey.** 3000K. 35lm. 3W. CRI>80	**25pcs**
75169-320692	**VK/02055/W/W** ○ **White.** 3000K. 35lm. 3W. CRI>80	**25pcs**

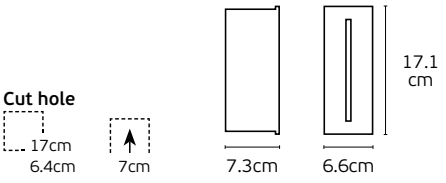

Details

AC Driver **100-240V (Included)**.
Beam Angle **51º.**
Type of Led **SMD 3535**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years.**

IP54



Fune



VK/02248/W

VK/02248

Code	Model	Box
75169-252115	**VK/02248/W/W** ○ **White.** 3000K. 3W. 268lm. CRI>80	**50pcs**
75169-251115	**VK/02248/B/W** ● **Black.** 3000K. 3W. 268lm. CRI>80	**50pcs**
75169-253115	**VK/02248/AN/W** ● **Anthracite.** 3000K. 3W. 268lm. CRI>80	**50pcs**

Cut hole



Details

Material **Aluminium**
Type of Led **SMD**
Lighting source **3535**
Voltage **AC220-240V**
Location **Recessed Wall**

Beam angle **40°**
Working temperature **≤35°C**
Lifetime **20.000hrs**
Guarantee **2 Years**



IP65



Hide



VK/02178/W



VK/02179/W




VK/02180/B


VK/02178, VK/02179
VK/02180

Code	Model	Box
75169-108721	**VK/02178/B/W** ● **Black sand.** 3000K. 1W. 127lm. ø5.8x3cm. CRI>90	**50pcs**
75169-109721	**VK/02178/W/W** ❍ **White sand.** 3000K. 1W. 127lm. ø5.8x3cm. CRI>90	**50pcs**
75169-110721	**VK/02179/B/W** ● **Black sand.** 3000K. 1W. 127lm. 5.6x5.6x3cm. CRI>90	**50pcs**
75169-111721	**VK/02179/W/W** ❍ **White sand.** 3000K. 1W. 127lm. 5.6x5.6x3cm. CRI>90	**50pcs**
75169-112721	**VK/02180/B** ● **Black sand.** ø6.1x5cm	**50pcs**


Cut hole
ø5cm **3cm**



Cut hole
ø5cm **3cm**



Cut hole
ø6.5cm **5cm**



Details

1W: Input current **350mA**.
Input Voltage **DC3V**.
Type of Led **OSRAM SMD with driver**.
Driver input **AC220-240V 50/60Hz**
output **DC 1.8-4V 350mA**.
No Dimmable.

Lifetime **20.000 hrs**.
Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC**.
Material **Aluminium, Plastic (accessoir)**.
Installation **Recessed**.
Guarantee **3 years**.



IP42



Kay



VK/02111/AL



VK/02147/W


VK/02111

Code	Model	Box
75169-342694	**VK/02111/AL/W** ● **Stainless.** 3000K. 77lm. 3W. CRI>80	**24pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **62º.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium. Steel.**
Guarantee **2 years**.

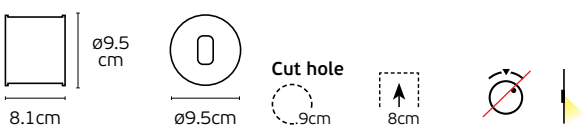


VK/02147

Code	Model	Box
75169-322997	**VK/02147/W/W** ○ **White.** 3000K. 120lm. 2W. CRI>80	**1pc**
75169-323997	**VK/02147/B/W** ● **Black.** 3000K. 120lm. 2W. CRI>80	**1pc**

Details

AC Driver **220-240V (Included)**.
Beam Angle **120º.**
Type of Led **COB**.
Lifetime **20.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.






Brea




VK/02106/G

VK/02106

Code	Model	Box
75169-334694	**VK/02106/G/W** ● **Grey.** 3000K. 169lm. 2W. CRI>80	**24pcs**





Details

AC Driver **200-240V (Included)**.
Beam Angle **29º.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.





Edda



VK/04138/G



VK/04139/AN


VK/04138

Code	Model	Box
75169-272997	**VK/04138/AN/W** ● **Anthracite.** 3000K. 105lm. 1.5W. CRI>80	**20pcs**
75169-273997	**VK/04138/G/W** ● **Grey.** 3000K. 105lm. 1.5W. CRI>80	**20pcs**
75169-276997	**VK/04138/W/W** ○ **White.** 3000K. 105lm. 1.5W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Type of Led **SMD 2835**.
Lifetime **20.000hrs**.
Working temperature **-20°C→45°C**.

Dimmable No.
Material **Aluminium. glass.**
Guarantee **2 years.**




VK/04139

Code	Model	Box
75169-274997	**VK/04139/AN/W** ● **Anthracite.** 3000K. 325lm. 2.8W. CRI>80	**20pcs**
75169-275997	**VK/04139/G/W** ● **Grey.** 3000K. 325lm. 2.8W. CRI>80	**20pcs**
75169-277997	**VK/04139/W/W** ○ **White.** 3000K. 325lm. 2.8W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Type of Led **SMD 2835**.
Lifetime **20.000hrs**.
Working temperature **-20°C→45°C**.

Dimmable No.
Material **Aluminium. glass.**
Guarantee **2 years.**






Bonk



VK/02107/G

VK/02107

Code	Model	Box
75169-335694	**VK/02107/G/W**	**18pcs**
	● **Grey.** 3000K. 46lm. 3.6W. CRI>80	



Details

AC Driver **100-240V (Included)**.
Beam Angle **56º.**
Type of Led **SMD 3014/PHILIPS**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

Cut hole





IP65




Demes




VK/02105/AN



VK/02083/AN





VK/02105

Code	Model	Box
75169-333694	**VK/02105/AN/W** ● **Anthracite.** 3000K. 300lm. 4W. CRI>83	**24pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **90°.**
Type of Led **SMD 3030**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP65

VK/02083

Code	Model	Box
75169-295694	**VK/02083/AN/W** ● **Anthracite.** 3000K. 667lm. 7W. CRI>84	**8pcs**
75169-296694	**VK/02083/W/W** ○ **White.** 3000K. 667lm. 7W. CRI>84	**8pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **110°.**
Type of Led **SMD PHILIPS 2835**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP65



Demes




VK/02082/AN



VK/02081/AN





Up/Down

VK/02082

Code	Model	Box
75169-293694	**VK/02082/AN/W** ● **Anthracite.** 3000K. 1.263lm. 15W. CRI>84	**4pcs**
75169-294694	**VK/02082/W/W** ○ **White.** 3000K. 1.263lm. 15W. CRI>84	**4pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **107°.**
Type of Led **SMD PHILIPS 2835**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP65

VK/02081


Code	Model	Box
75169-291694	**VK/02081/AN/W** ● **Anthracite.** 3000K. 1.818lm. 20W. CRI>84	**4pcs**
75169-292694	**VK/02081/W/W** ○ **White.** 3000K. 1.818lm. 20W. CRI>84	**4pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **107°.**
Type of Led **SMD PHILIPS 2835**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.


IP65

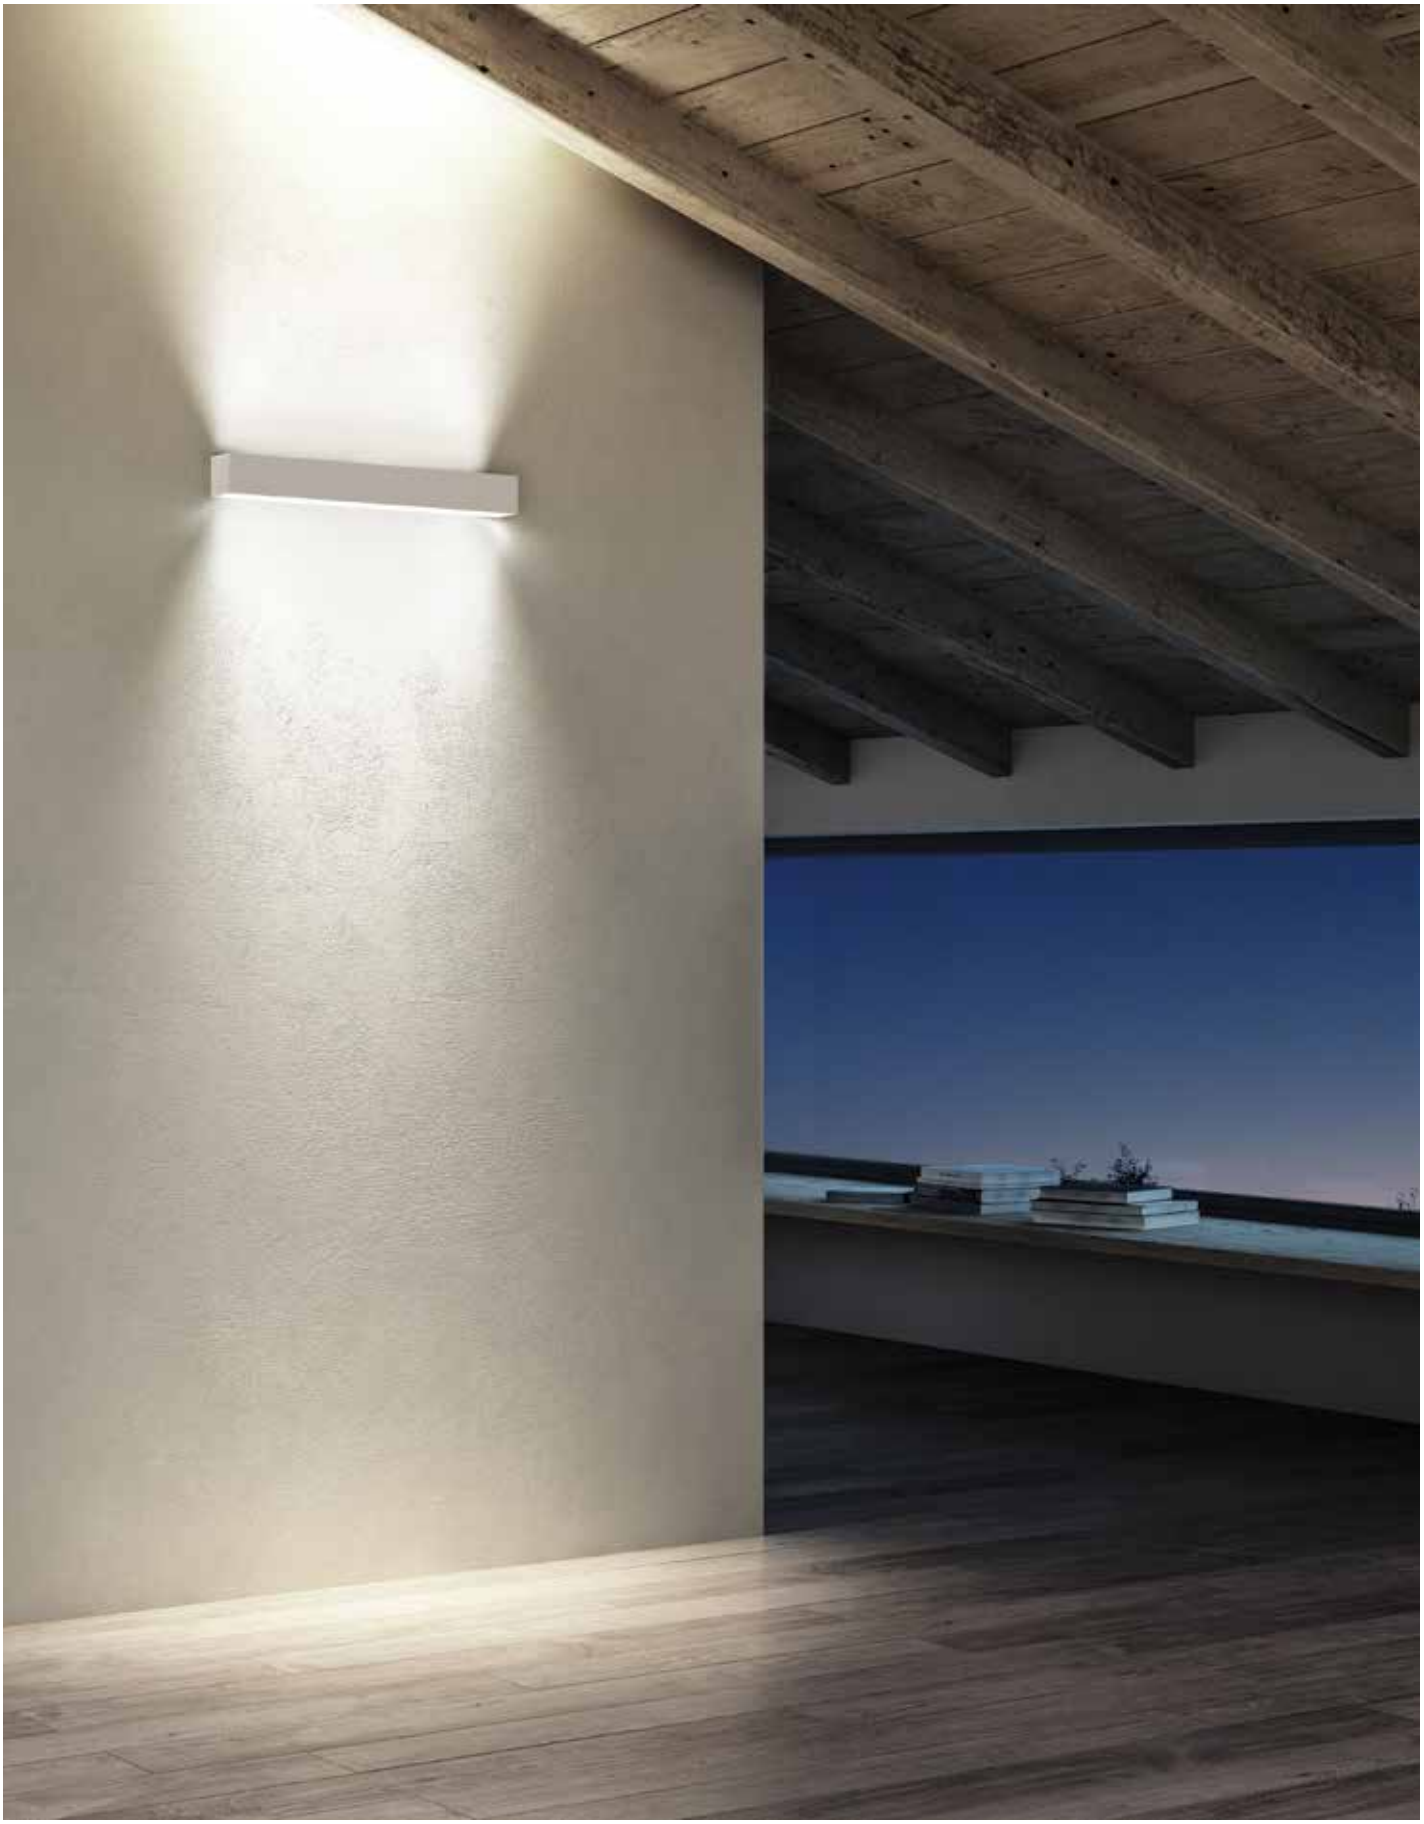


Emos




VK/02047/AN



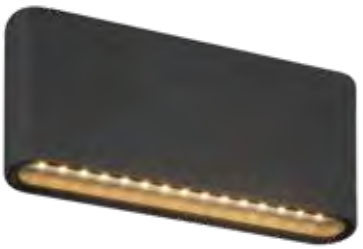

VK/02048/AN



Up/Down

VK/02047

Code	Model	Box
75169-306692	**VK/02047/AN/W** ● **Anthracite.** 3000K. 497lm. 4W. CRI>80	**20pcs**
75169-307692	**VK/02047/W/W** ○ **White.** 3000K. 497lm. 4W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **2x89°.**
Type of Led **SMD 5630**.
Working temperature **-20°C → 40°C**.
Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Up/Down

VK/02048

Code	Model	Box
75169-308692	**VK/02048/AN/W** ● **Anthracite.** 3000K. 1.095lm. 6W. CRI>80	**20pcs**
75169-309692	**VK/02048/W/W** ○ **White.** 3000K. 1.095lm. 6W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **2x89°.**
Type of Led **SMD 5630**.
Working temperature **-20°C → 40°C**.
Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54


Demes



VK/02192/W

VK/02192

Code	Model	Box
75169-361997	**VK/02192/AN/W** ● **Anthracite.** 3000K. 10W. 1.222lm. CRI Ra>84	**1pc**
75169-362997	**VK/02192/W/W** ○ **White.** 3000K. 10W. 1.222lm. CRI Ra>84	**1pc**



Details

Beam Angle **110°**
Type of LED **SMD**
IK Rating **IK08**
Lifetime **30.000hrs**
Working temperature **-20°~40°C**

Type of power supply **ON/OFF**
Material **Aluminum die casting body, glass diffuser. Accessories available plastic expension & selftapping screws.**
Guarantee **2 years**.

IP54

Flow



VK/02234/WA/AN

VK/02234/WA

Code	Model	Box
75169-418694	VK/02234/WA/AN/W ● **Anthracite.** 3000K. 9W. 806lm. CRI>80	4pcs


Details

Input Voltage **AC220-240V**.
Type of Led **Philips 4014**.
Angle **99°**.

Lifetime **30.000 hrs**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable

IP54

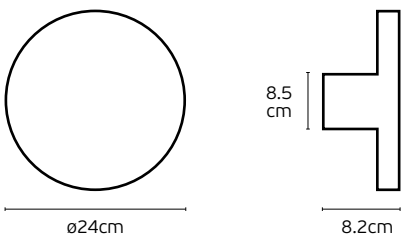




Ipos




VK/02080/G



VK/02085/AN





Up/Down

VK/02080

Code	Model	Box
75169-289694	**VK/02080/G/W** ● **Grey.** 3000K. 396lm. 20W. CRI>84	**4pcs**
75169-290694	**VK/02080/W/W** ○ **White.** 3000K. 396lm. 20W. CRI>84	**4pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **98°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.



IP54

VK/02085

Code	Model	Box
75169-299694	**VK/02085/AN/W** ● **Anthracite.** 3000K. 690lm. 15W. CRI>83	**4pcs**
75169-300694	**VK/02085/W/W** ○ **White.** 3000K. 690lm. 15W. CRI>83	**4pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **101°.**
Type of Led **SMD PHILIPS 3030**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.



IP54






Sun



VK/02112/AN

VK/02112

Code	Model	Box
75169-343694	**VK/02112/AN/W** ● **Anthracite.** 3000K. 906lm. 17W. CRI>82	**4pcs**




Details

AC Driver **100-240V (Included)**.
Beam Angle **100°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.



IP54

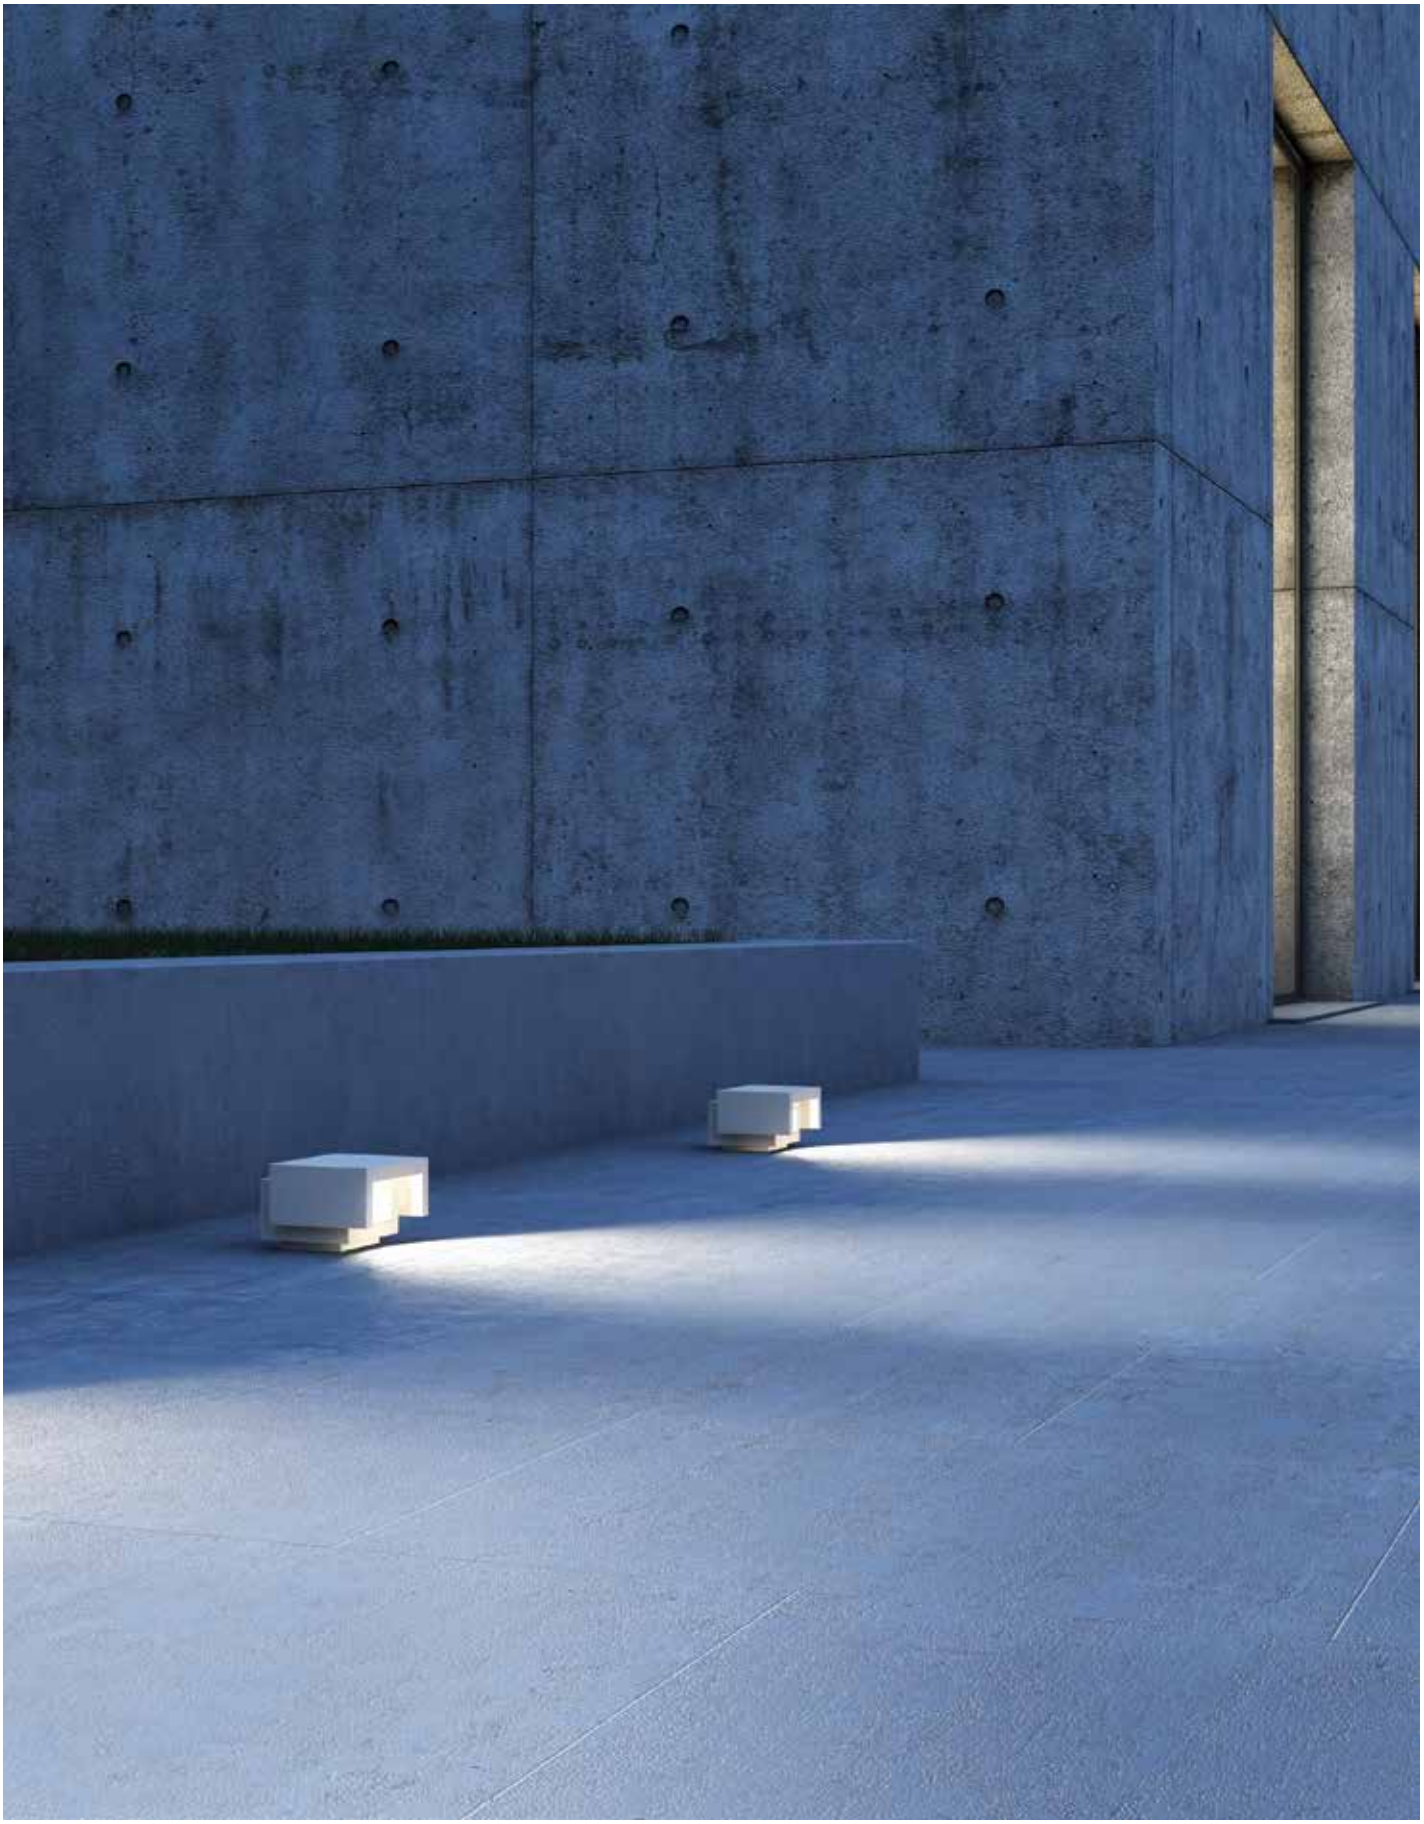


Cam




VK/02092/AN



VK/02087/W





Up/Down

VK/02092

Code	Model	Box
75169-314694	**VK/02092/AN/W** ● **Anthracite.** 3000K. 85lm. 3W. CRI>83	**24pcs**
75169-315694	**VK/02092/W/W** ○ **White.** 3000K. 85lm. 3W. CRI>83	**24pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **50°.**
Type of Led **CREE XBD**.
Working temperature **-20°C → 40°C**.
Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02087

Code	Model	Box
75169-305694	**VK/02087/AN/W** ● **Anthracite.** 3000K. 673lm. 12W. CRI>80	**12pcs**
75169-304694	**VK/02087/W/W** ○ **White.** 3000K. 673lm. 12W. CRI>80	**12pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **102°.**
Type of Led **CREE XBD**.
Working temperature **-20°C → 40°C**.
Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.


IP54




Pada




VK/02089/G





VK/02090/AN



Up/Down

VK/02089

Code	Model	Box
75169-308694	**VK/02089/G/W** ● **Grey.** 3000K. 187lm. 8W. CRI>80	**12pcs**
75169-309694	**VK/02089/W/W** ○ **White.** 3000K. 187lm. 8W. CRI>80	**12pcs**
75169-372694	**VK/02089/AN/W** ● **Anthracite.** 3000K. 187lm. 8W. CRI>80	**12pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **15°-78°.**
Type of Led **CREE LED MHB**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02090


Code	Model	Box
75169-310694	**VK/02090/AN/W** ● **Anthracite.** 3000K. 457lm. 9W. CRI>82	**12pcs**
75169-311694	**VK/02090/W/W** ○ **White.** 3000K. 457lm. 9W. CRI>82	**12pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **108°.**
Type of Led **CREE COB 1304**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

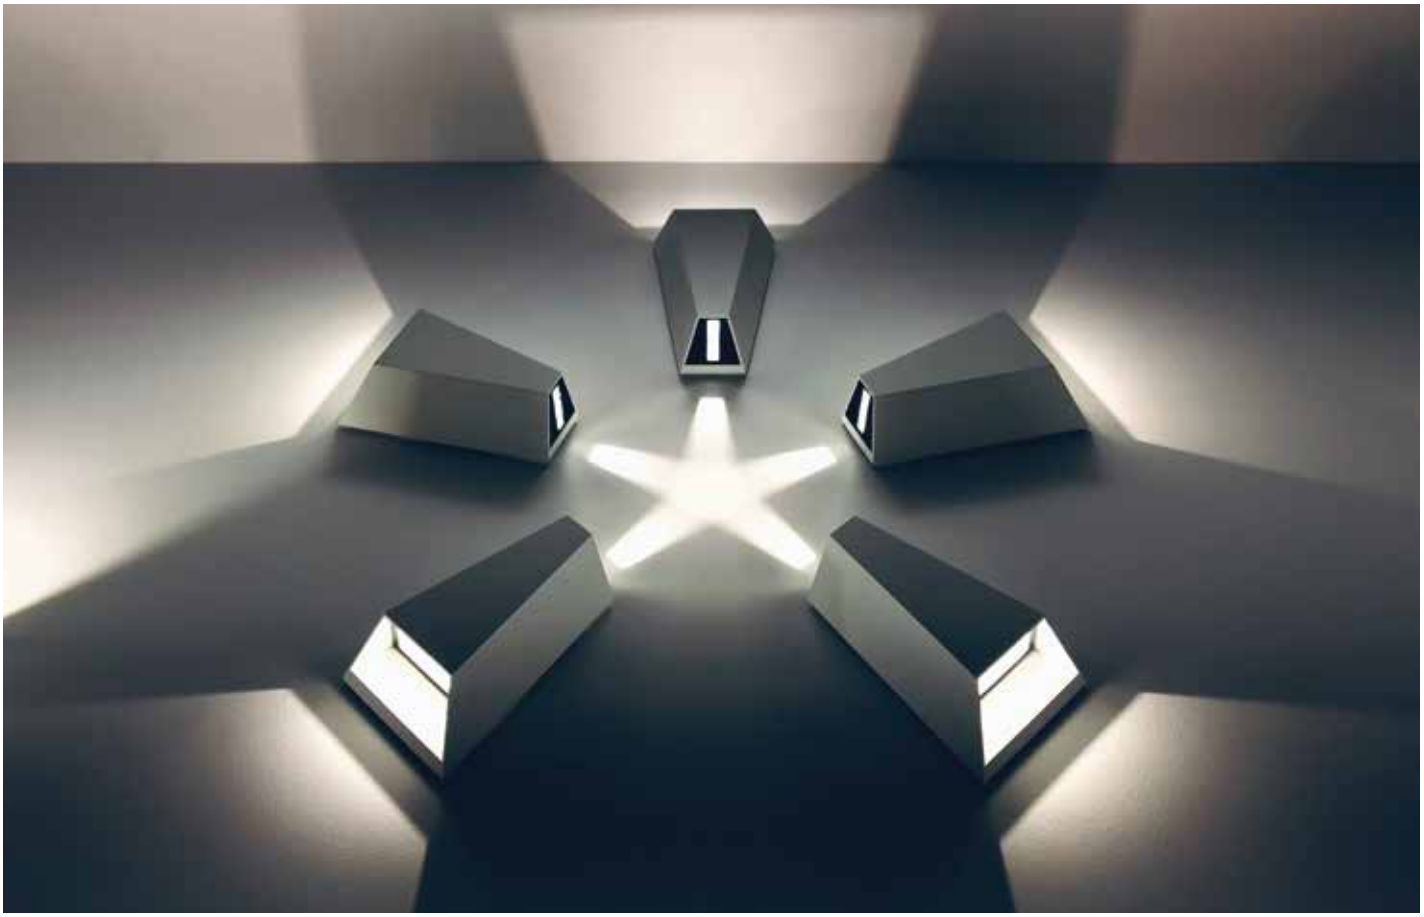





Lei




VK/02049/AN



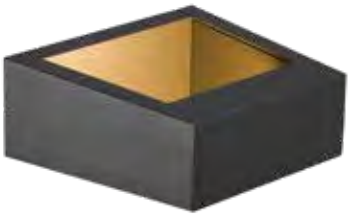

VK/02115/AN



Up/Down

VK/02049

Code	Model	Box
75169-310692	**VK/02049/AN/W** ● **Anthracite.** 3000K. 520lm. 10W. CRI>80	**20pcs**
75169-311692	**VK/02049/W/W** ○ **White.** 3000K. 520lm. 10W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **2x112°.**
Type of Led **SMD 2835**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Up/Down

VK/02115

Code	Model	Box
75169-346694	**VK/02115/AN/W** ● **Anthracite.** 3000K. 612lm. 18W. CRI>83	**6pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **28°.**
Type of Led **PHILIPS SMD 2835**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54



Nek




VK/02091/G/W





VK/02051/AN/W



VK/02088/W/W







Up/Down

VK/02091

Code	Model	Box
75169-312694	**VK/02091/G/W** ● **Grey.** 3000K. 346lm. 8W. CRI>83	**18pcs**
75169-313694	**VK/02091/W/W** ○ **White.** 3000K. 346lm. 8W. CRI>83	**18pcs**
75169-350694	**VK/02091/AN/W** ● **Anthracite.** 3000K. 346lm. 8W. CRI>83	**18pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **50°.**
Type of Led **CREE MHB**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years.**

IP54

Up/Down

VK/02051

Code	Model	Box
75169-314692	**VK/02051/AN/W** ● **Anthracite.** 3000K. 366lm. 6W. CRI>80	**20pcs**
75169-315692	**VK/02051/W/W** ○ **White.** 3000K. 366lm. 6W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **2x98°.**
Type of Led **SMD 3535**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years.**

IP54



Up/Down

VK/02088

Code	Model	Box
75169-307694	**VK/02088/AN/W** ● **Anthracite.** 3000K. 93lm. 7W. CRI>85	**24pcs**
75169-306694	**VK/02088/W/W** ○ **White.** 3000K. 93lm. 7W. CRI>85	**24pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **96°.**
Type of Led **SAMSUNG LED LH934A**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Ike




VK/02095/AN





VK/02054/W



VK/02053/W







VK/02095

Code	Model	Box
75169-320694	**VK/02095/AN/W** ● **Anthracite.** 3000K. 644lm. 14W. CRI>80	**8pcs**
75169-321694	**VK/02095/W/W** ○ **White.** 3000K. 644lm. 14W. CRI>80	**8pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **360°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02054

Code	Model	Box
75169-318692	**VK/02054/W/W** ○ **White.** 3000K. 891lm. 9W. CRI>80	**20pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **348°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54



VK/02053

Code	Model	Box
75169-317692	**VK/02053/W/W** ○ **White.** 3000K. 891lm. 9W. CRI>80.	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **348°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Kerv




VK/02074/BR

Up/Down

VK/02074

Code	Model	Box
75169-345692	**VK/02074/BR/W**	**10pcs**
	● **Brown.** 3000K. 589lm. 7W. CRI>80	



Details

AC Driver **230V (Included)**.
Beam Angle **337°.**
Type of Led **COB**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54




Tap



VK/02046/AN

VK/02046

Code	Model	Box
75169-304692	**VK/02046/AN/W** ● **Anthracite.** 3000K. 581lm. 7.3W. CRI>80	**20pcs**
75169-305692	**VK/02046/W/W** ○ **White.** 3000K. 581lm. 7.3W. CRI>80	**20pcs**



Details

AC Driver **220-240V (Included)**.
Beam Angle **85°.**
Type of Led **COB**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C → 40°C**.
Material **Aluminium.**
Guarantee **2 years.**

IP54



Hold




VK/02086/AN

Up/Down

VK/02086

Code	Model	Box
75169-374694	**VK/02086/W/W** ○ **White.** 3000K. 355lm. 9W. CRI>85	**6pcs**
75169-303694	**VK/02086/AN/W** ● **Anthracite.** 3000K. 355lm. 9W. CRI>85	**6pcs**




Details

AC Driver **100-240V (Included)**.
Beam Angle **100°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium**.
Guarantee **2 years.**

IP54

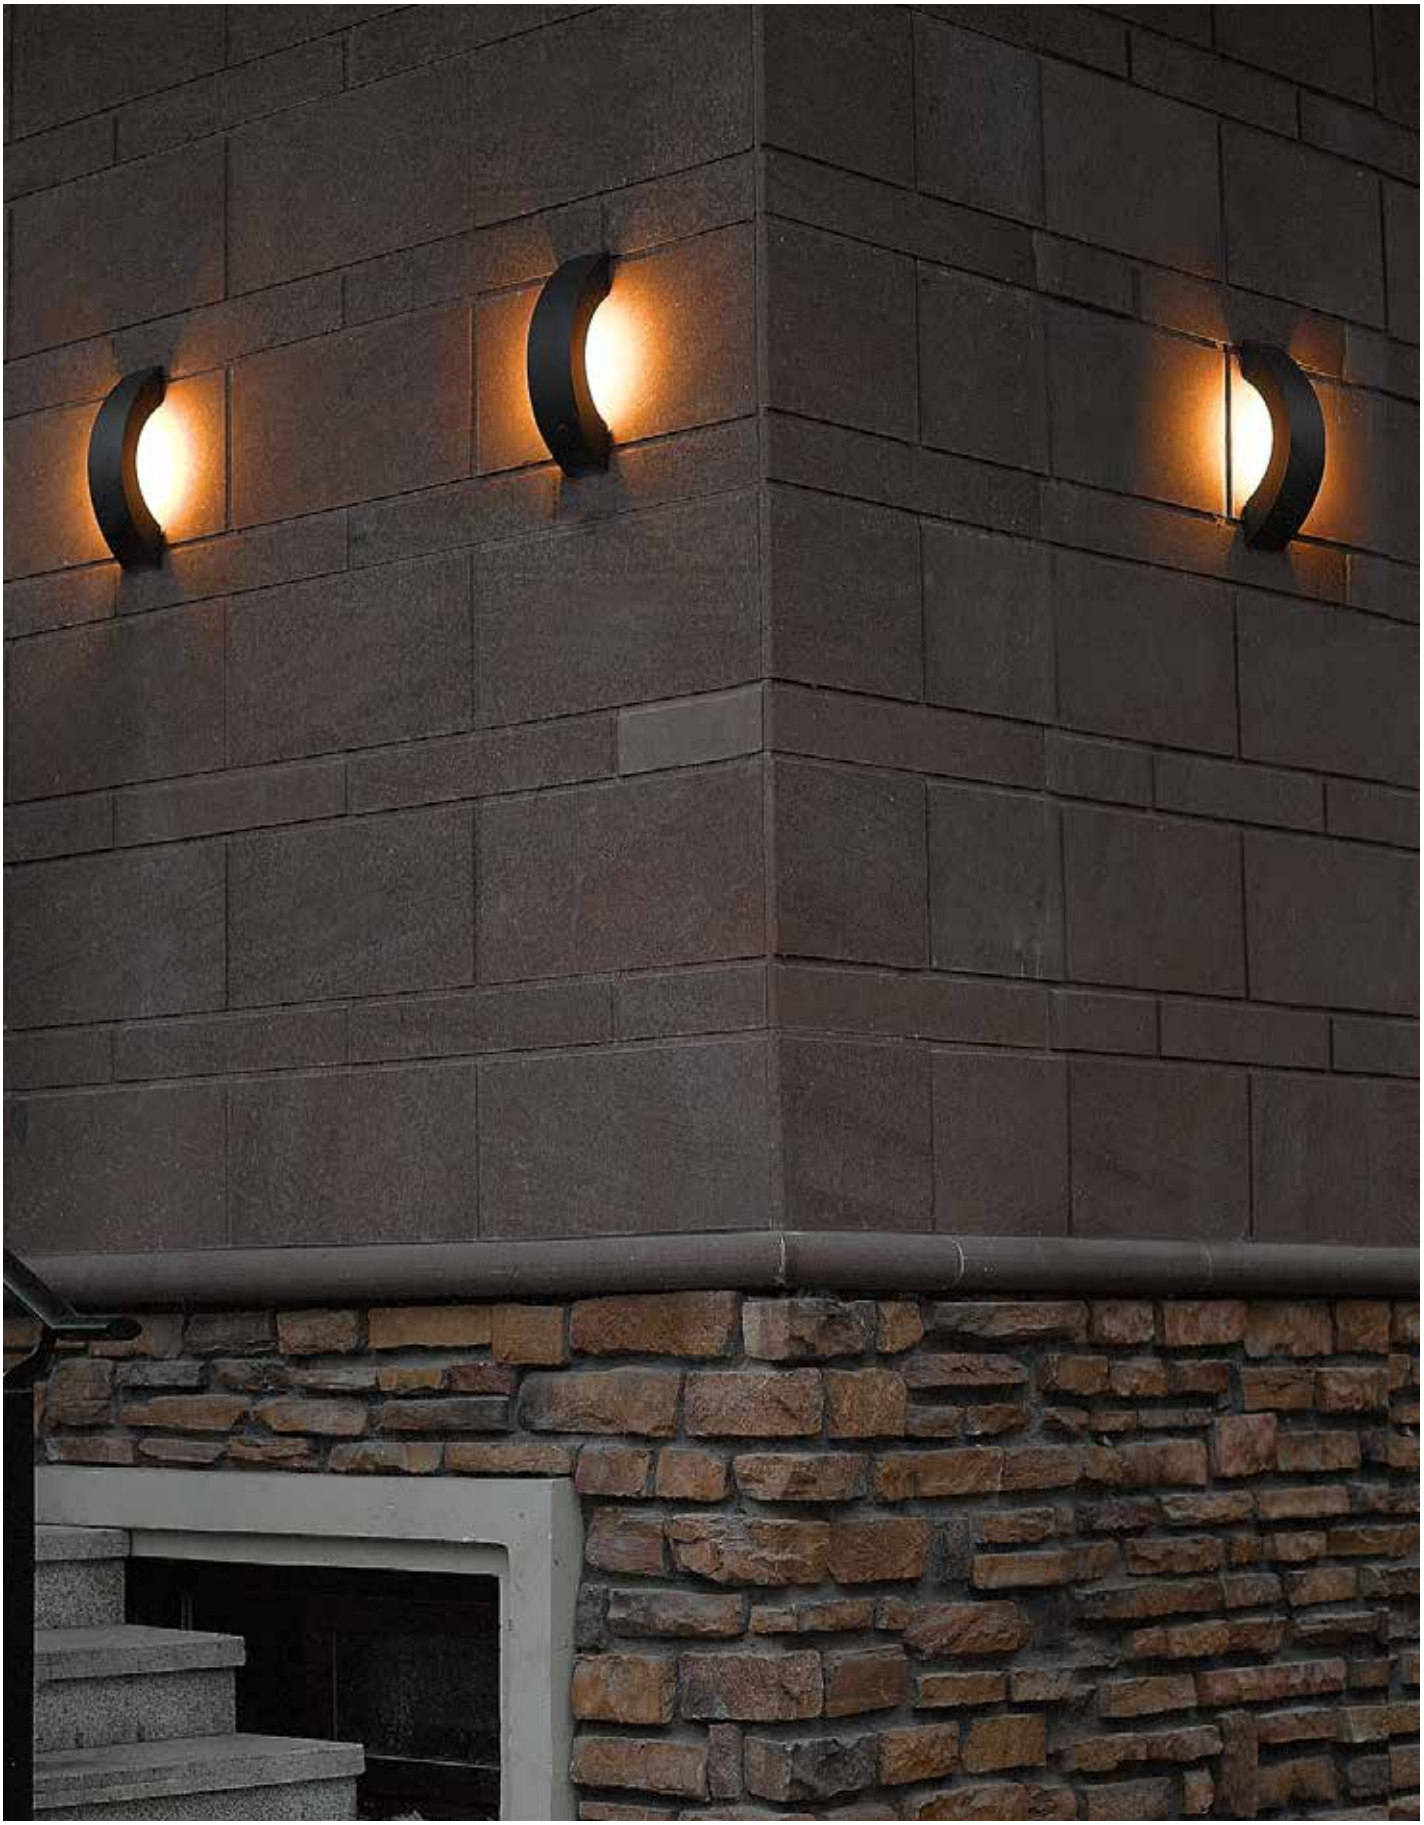


House




VK/02155/WA/W




VK/02156/AN/34





VK/02156/AN/34

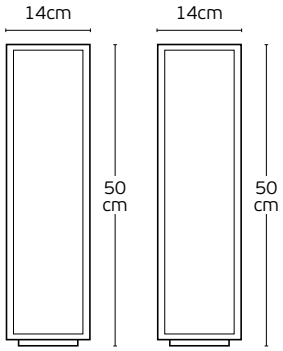

VK/02156/AN/50

VK/02155/WA

Code	Model	Box
75169-403694	**VK/02155/WA/W/W** ○ **White.** 3000K. 201lm. 7W. CRI>84	**8pcs**
75169-400694	**VK/02155/WA/AN/W** ● **Anthracite.** 3000K. 201lm. 7W. CRI>84	**8pcs**

Details

AC **220-240V**.
Beam Angle **67°**.
Type of Led **SMD**.
Lifetime **30.000hrs**.

Working temperature **-20°C→40°C**.
Dimmable No.
Material **Aluminium, opal PC**.
Guarantee **2 years**.

IP54

VK/02156

Code	Model	Box
75169-401694	**VK/02156/AN/W/34** ● **Anthracite.** 3000K. 388lm. 7W. CRI>85. **L34cm**.	**1pc**
75169-402694	**VK/02156/AN/W/50** ● **Anthracite.** 3000K. 388lm. 7W. CRI>85. **L50cm**.	**1pc**

Details

AC **220-240V**.
Beam Angle **66°**.
Type of Led **SMD**.
Lifetime **30.000hrs**.

Working temperature **-20°C→40°C**.
Dimmable No.
Material **Aluminium. opal PC**.
Guarantee **2 years**.


IP54



Glass




VK/02125/AN





VK/02127/AN



VK/02125

Code	Model	Box
75169-355694	**VK/02125/AN** ● **Anthracite.** E27. Max 15W.	**1pc**

Details

Voltage **200-240V**.
E27.

Working temperature **-20°C→40°C**.
Material **Alu diecast/Glass.**

IP54

VK/02127

Code	Model	Box
75169-357694	**VK/02127/AN** ● **Anthracite.** E27x2. Max 2x15W.	**1pc**

Details

Voltage **200-240V**.
E27.

Working temperature **-20°C→40°C**.
Material **Alu diecast/Glass.**

IP54





Glass



VK/02126/AN

VK/02126

Code
75169-356694


Model
VK/02126/AN
● **Anthracite. E27.** Max 15W.

Box
1pc


Details

Voltage **200-240V**.
E27.

Working temperature **-20°C→40°C**.
Material **Alu diecast/Glass.**



IP54

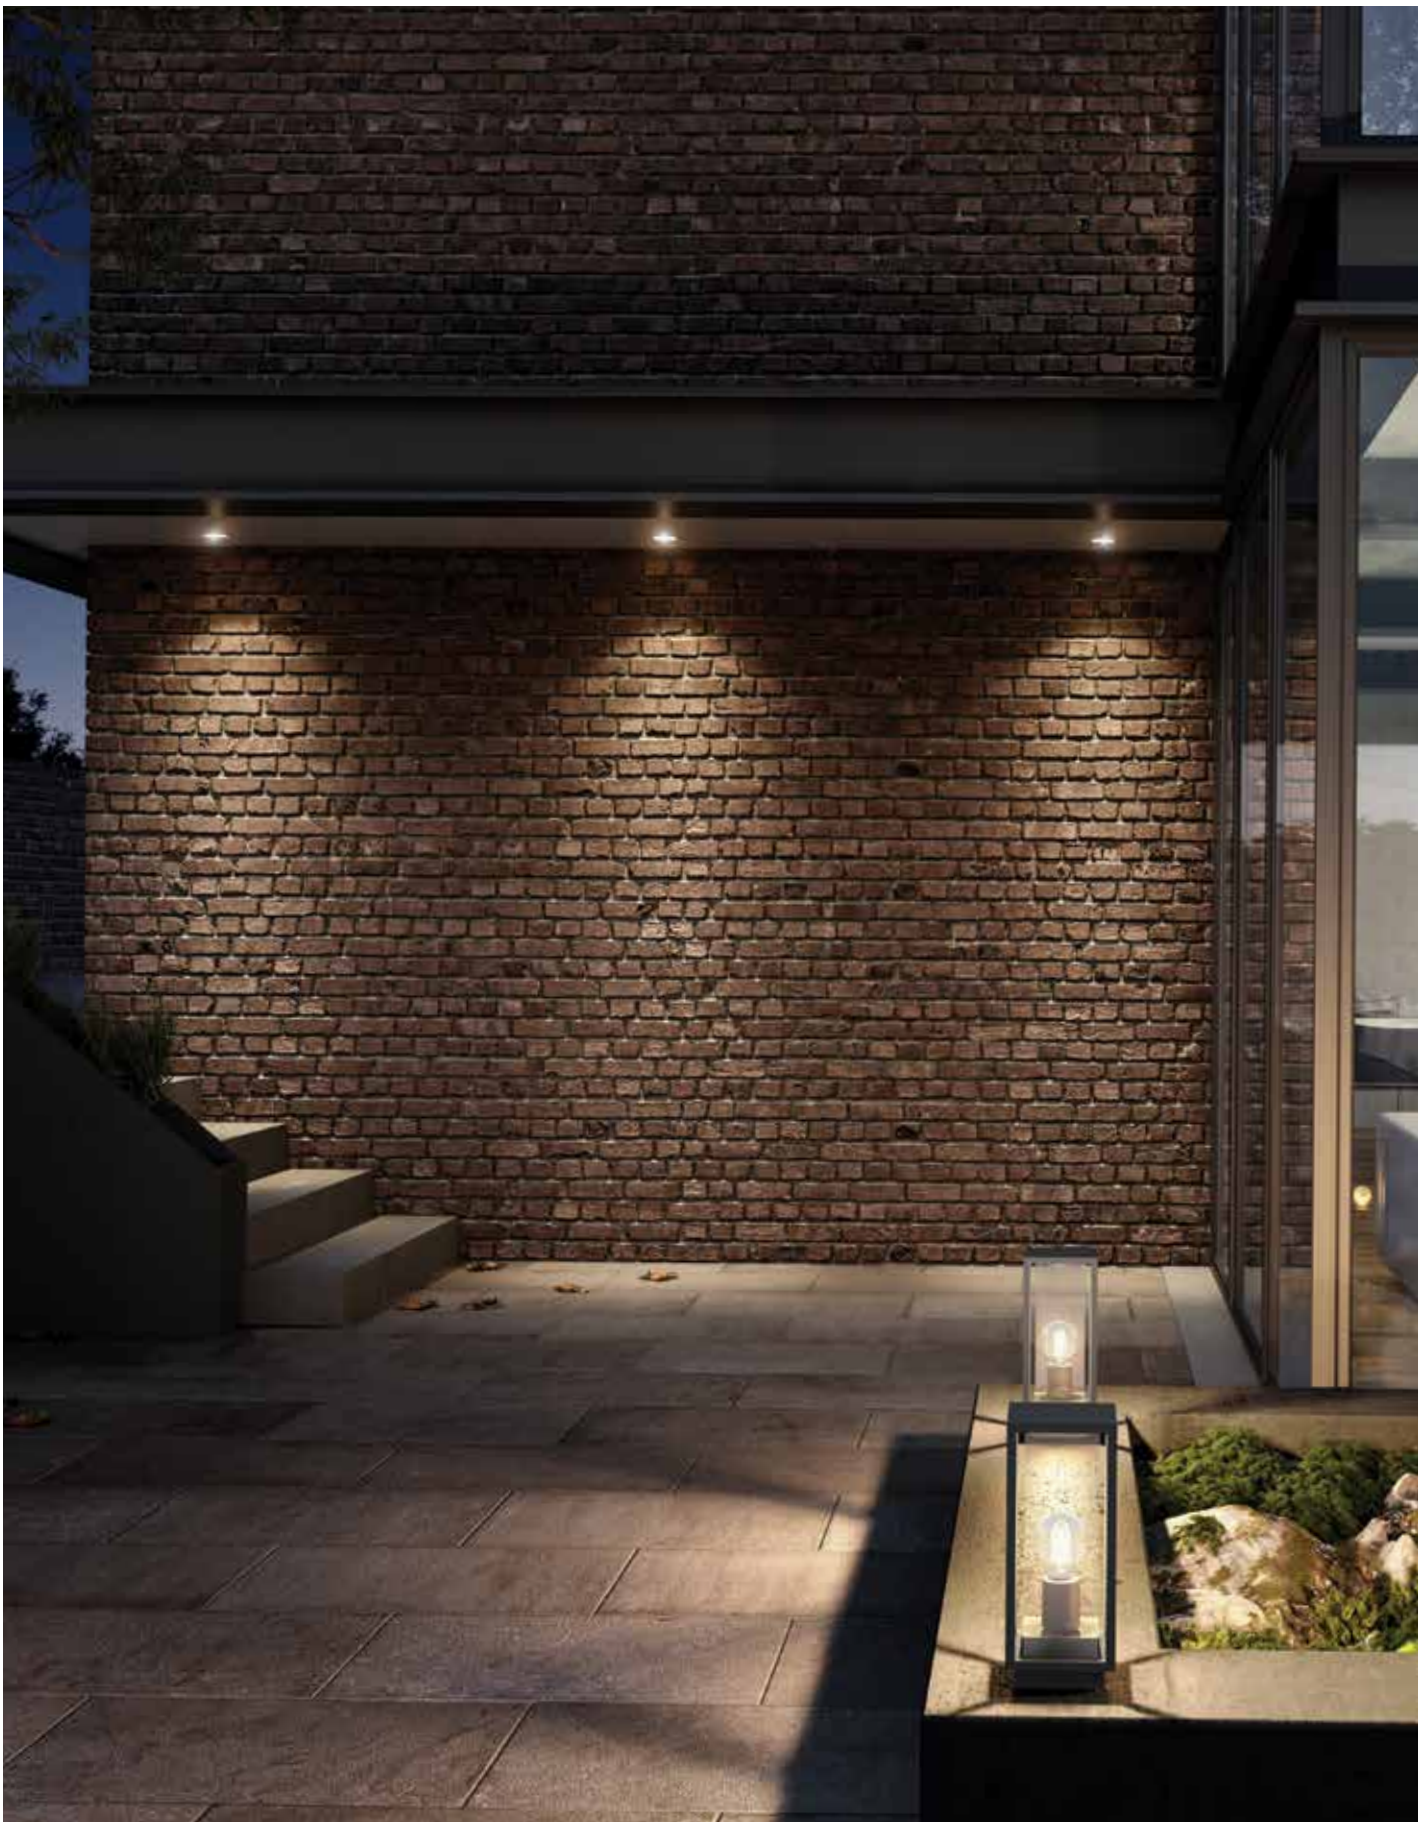


Olei



VK/02224/AN/W

VK/02224


Code	Model	Box
75169-675772	**VK/02224/AN/W** ● **Anthracite.** 3000K. 9W. 893lm. CRI>80	**8pcs**
75169-676772	**VK/02224/W/W** ○ **Matt White.** 3000K. 9W. 893lm. CRI>80	**8pcs**



Details

Material **Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**
Color led **3000K**

Beam angle **50°**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 Years**






Wino



VK/02133/AN/W

VK/02133

Code	Model	Box
75169-364694	**VK/02133/AN/W** ● **Anthracite.** 3000K. 77lm. 3W. CRI>80	**12pcs**
75169-363694	**VK/02133/W/W** ○ **White.** 3000K. 77lm. 3W. CRI>80	**12pcs**



Details

AC Driver **220-240V (Included)**.
Beam Angle **108°.**
Type of Led **CREE**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium diecast.**
Guarantee **2 years**.






Wino



VK/02176/W

VK/02176

Code	Model	Box
75169-083721	**VK/02176/W/W** ○ **White sand.** 3000K. 2W. 37lm. CRI>80	**12pcs**
75169-084721	**VK/02176/W/C** ○ **White sand.** 4000K. 2W. 37lm. CRI>80	**12pcs**
75169-085721	**VK/02176/B/W** ● **Black sand.** 3000K. 2W. 37lm. CRI>80	**12pcs**
75169-086721	**VK/02176/B/C** ● **Black sand.** 4000K. 2W. 37lm. CRI>80	**12pcs**
75169-087721	**VK/02176/BR/W** ● **Brown.** 3000K. 2W. 37lm. CRI>80	**12pcs**
75169-088721	**VK/02176/BR/C** ● **Brown.** 4000K. 2W. 37lm. CRI>80	**12pcs**




Details

Input Voltage **200-240VAC 50/60Hz.**
Driver: 3VDC 700mA 2W.
Type of Led **CREE.**
Angle **10x180°.**
No Dimmable.
Lifetime **20.000 hrs.**

Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC.**
Material **Aluminium.**
Installation **Ceiling/Wall/Ground.**
Guarantee **3 years.**




IP65

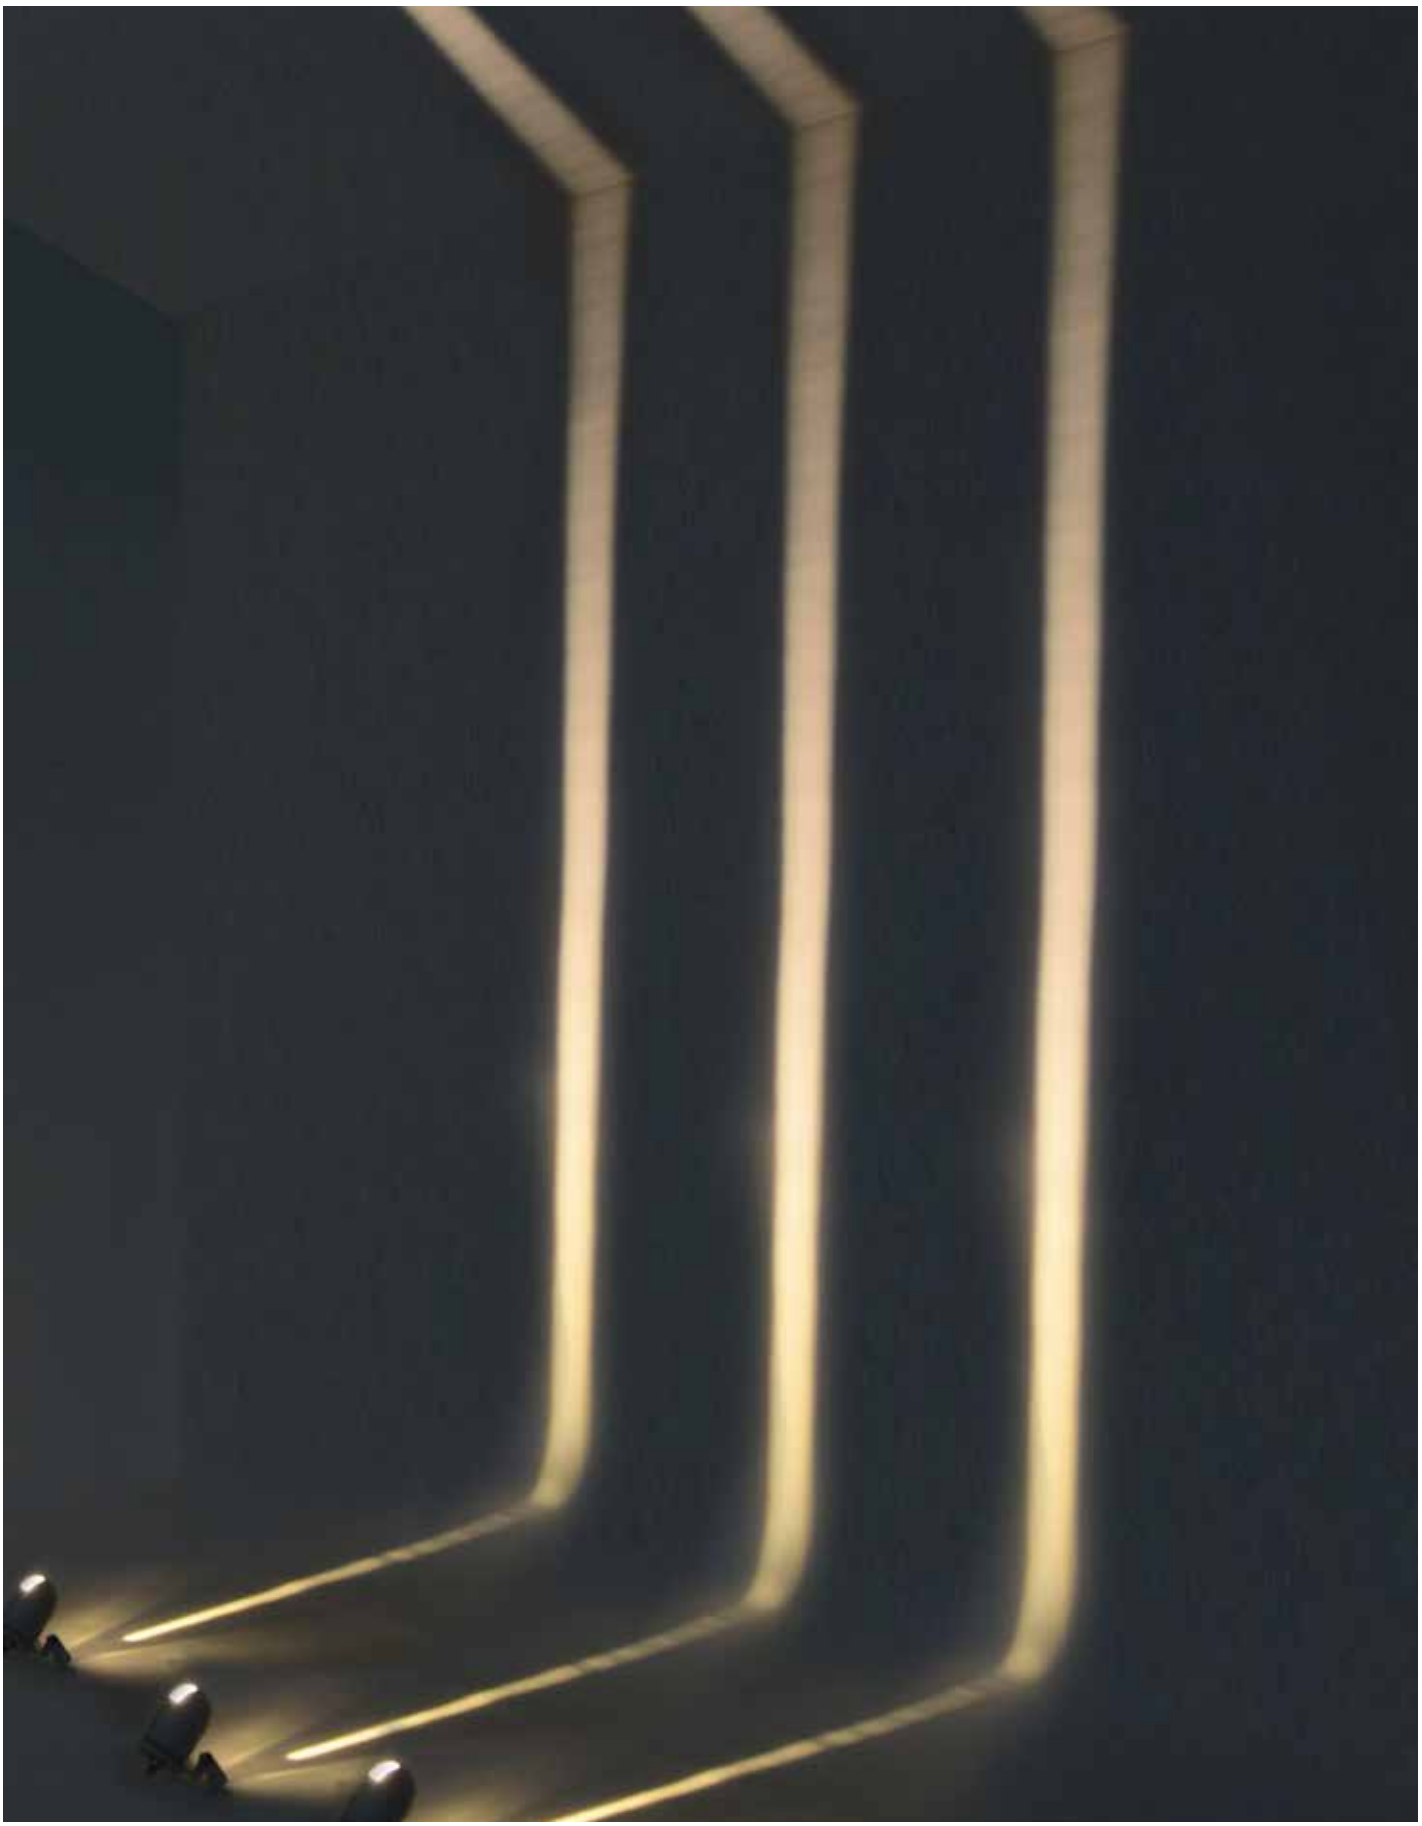

Wino




VK/02175/WA/B

Up/Down

VK/02175/WA

Code	Model	Box
75169-081721	**VK/02175/WA/B/W** ● **Black sand.** 3000K. 2x2W. 37lm. 1°+1°. CRI>80	**10pcs**
75169-082721	**VK/02175/WA/B/C** ● **Black sand.** 4000K. 2x2W. 37lm. 1°+1°. CRI>80	**10pcs**



Details

Input current **220-240VAC 50/60Hz.**
Driver: 6VDC 700mA 2x3W.
Type of Led **CREE**.
Angle **1° + 1°**.
No Dimmable.
Lifetime **20.000 hrs**.

Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC**.
Material **Aluminium**.
Installation **Ceiling**.
Guarantee **3 years**.



IP65



Wino




VK/04179WA/B





VK/02045/AN



VK/02044/AN







Up/Down

VK/04179WA

Code	Model	Box
75169-355695	**VK/04179WA/B/W** ● **Black.** 3000K. 836lm. 6W. CRI>80	**20pcs**
75169-359695	**VK/04179WA/W/W** ○ **White.** 3000K. 836lm. 6W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **2x2°.**
Type of Led **CREE 2pcs**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02045

Code	Model	Box
75169-302692	**VK/02045/AN/W** ● **Anthracite.** 3000K. 100lm. 5W. CRI>80	**20pcs**
75169-303692	**VK/02045/W/W** ○ **White.** 3000K. 100lm. 5W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x6°.**
Type of Led **SMD HIGH POWER**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54



VK/02044

Code	Model	Box
75169-300692	**VK/02044/AN/W** ● **Anthracite.** 3000K. 100lm. 5W. CRI>80	**20pcs**
75169-301692	**VK/02044/W/W** ○ **White.** 3000K. 100lm. 5W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x6°.**
Type of Led **SMD HIGH POWER**.
Lifetime **30.000hrs**.


Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Man




VK/02116/G





VK/02093/G



Up/Down

VK/02116

Code	Model	Box
75169-347694	**VK/02116/G/W** ● **Grey.** 3000K. 404lm. 8W. CRI>78	**18pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **22/90°.**
Type of Led **CREE MHB**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Up/Down

VK/02093

Code	Model	Box
75169-316694	**VK/02093/G/W** ● **Grey.** 3000K. 1.510lm. 14W. CRI>82	**8pcs**
75169-317694	**VK/02093/W/W** ○ **White.** 3000K. 1.510lm. 14W. CRI>82	**8pcs**
75169-371694	**VK/02093/AN/W** ● **Anthracite.** 3000K. 1.510lm. 14W. CRI>82	**8pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **0-130°.**
Type of Led **CREE 1304**.
Working temperature **-20°C → 40°C**.

Lifetime **30.000hrs**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54




VK/02093/W

Kid




VK/02075/G/W





VK/02050/AN/W



VK/02075

Code	Model	Box
75169-346692	**VK/02075/G/W** ● **Grey.** 3000K. 280lm. 12W. CRI>80	**10pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x68°.**
Type of Led **SMD HIGH POWER**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02050


Code	Model	Box
75169-312692	**VK/02050/AN/W** ● **Anthracite.** 3000K. 398lm. 11W. CRI>80	**20pcs**
75169-313692	**VK/02050/W/W** ○ **White.** 3000K. 398lm. 11W. CRI>80	**20pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x90°.**
Type of Led **SMD 2525**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years.**

IP54

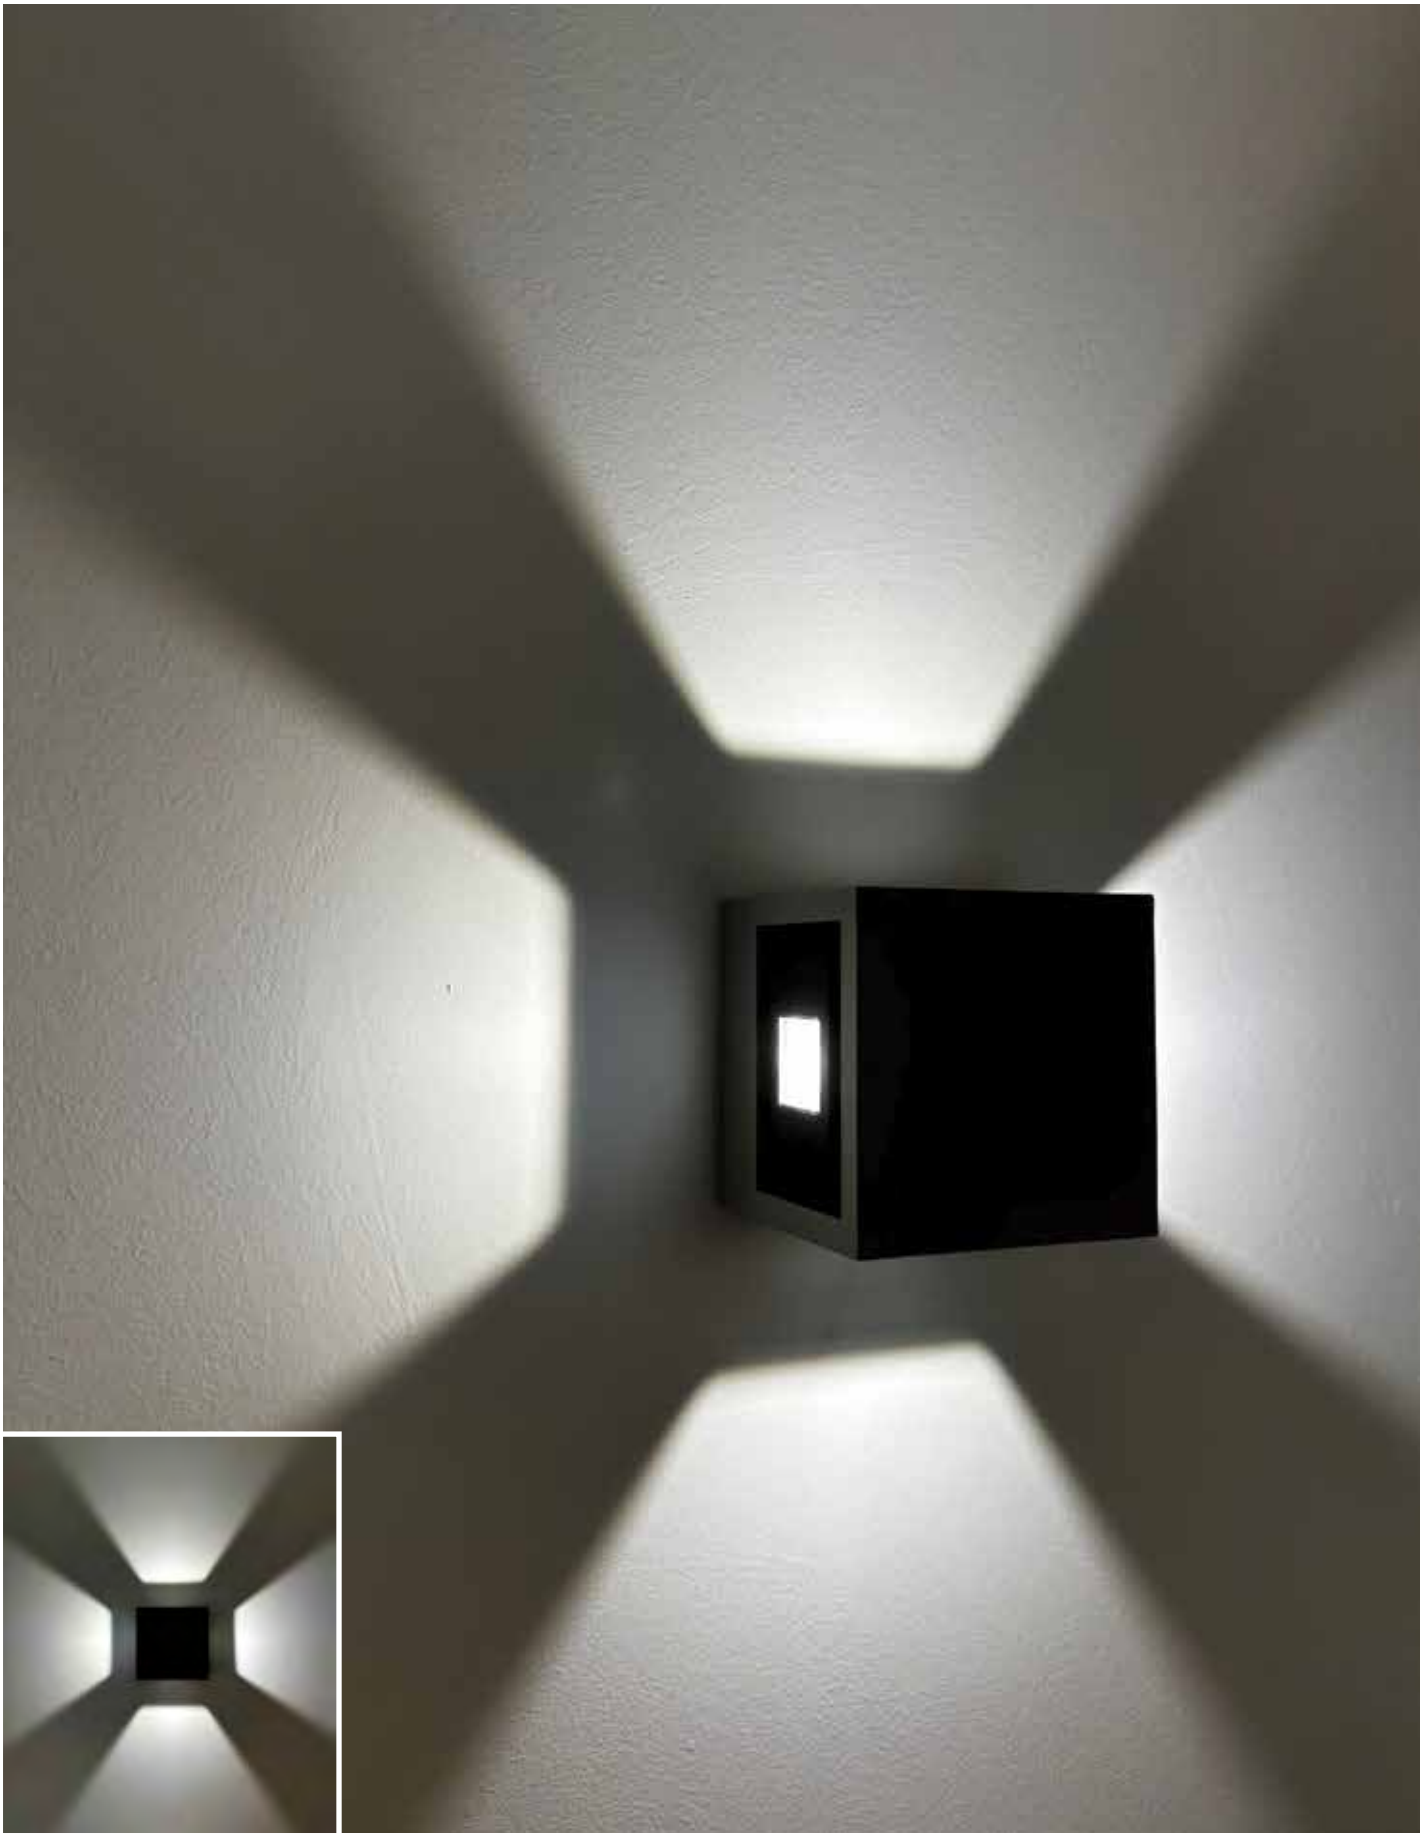


Kid




VK/02076/B



VK/02043/AN





VK/02076

Code	Model	Box
75169-347692	**VK/02076/B/W** ● **Black.** 3000K. 484lm. 14W. CRI>80	**10pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x60°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years.**

IP54

VK/02043

Code	Model	Box
75169-298692	**VK/02043/AN/W** ● **Anthracite.** 3000K. 478lm. 4W. CRI>80	**10pcs**
75169-299692	**VK/02043/W/W** ○ **White.** 3000K. 478lm. 4W. CRI>80	**10pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **4x29°.**
Type of Led **SMD HIGH POWER**.
Lifetime **30.000hrs**.

Working temperature **-20°C → 40°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54






Ster




VK/02058/W



VK/02094/W





VK/02058

Code	Model	Box
75169-323692	**VK/02058/W/W** ○ **White.** 3000K. 615lm. 6W. CRI>80	**15pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **115°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02094

Code	Model	Box
75169-318694	**VK/02094/G/W** ● **Grey.** 3000K. 329lm. 6W. CRI>82	**12pcs**
75169-319694	**VK/02094/W/W** ○ **White.** 3000K. 329lm. 6W. CRI>82	**12pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **30º.**
Type of Led **CREE LED XBD**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.

IP54



Clio





VK/02148/AN/W



VK/02149/W/W







VK/02148

Code	Model	Box
75169-328997	**VK/02148/W/W** ○ **White.** 3000K. 160lm. 4W. CRI>80	**1pc**
75169-329997	**VK/02148/AN/W** ● **Anthracite.** 3000K. 160lm. 4W. CRI>80	**1pc**

Details

Voltage **220-240V**.
Type of Led **SMD**.
Working temperature **-20°C → 40°C**.
Lifetime **50.000hrs**.

Dimmable No.
Material **Die casting aluminium + PC.**
Guarantee **2 years**.

IP54

VK/02149

Code	Model	Box
75169-330997	**VK/02149/W/W** ○ **White.** 3000K. 160lm. 4W. CRI>80	**1pc**
75169-331997	**VK/02149/AN/W** ● **Anthracite.** 3000K. 160lm. 4W. CRI>80	**1pc**

Details

Voltage **220-240V**.
Type of Led **SMD**.
Working temperature **-20°C → 40°C**.
Lifetime **50.000hrs**.

Dimmable No.
Material **Die casting aluminium + PC.**
Guarantee **2 years**.

IP54


Clio




VK/02057/W/W



VK/02056/W/W





VK/02057

Code	Model	Box
75169-322692	**VK/02057/W/W** ○ **White.** 3000K. 517lm. 4.5W. CRI>80	**30pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **118°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

VK/02056

Code	Model	Box
75169-321692	**VK/02056/W/W** ○ **White.** 3000K. 523lm. 4.5W. CRI>80	**30pcs**

Details

AC Driver **220-240V (Included)**.
Beam Angle **118°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **Aluminium.**
Guarantee **2 years**.

IP54

Pam




VK/02146/W

VK/02146

Code	Model	Box
75169-316997	**VK/02146/W/W** ○ **White.** 3000K. 380lm. 3W. CRI>80	**24pcs**
75169-317997	**VK/02146/G/W** ● **Grey.** 3000K. 380lm. 3W. CRI>80	**24pcs**
75169-318997	**VK/02146/AN/W** ● **Anthracite.** 3000K. 380lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Working temperature **-20°C → 45°C**.
Lifetime **20.000hrs**.
Dimmable No.
Material **ABS+PC**.
Guarantee **2 years**.



IP65



Pam







VK/02145/AN




VK/02144/G

VK/02145

Code	Model	Box
75169-313997	**VK/02145/W/W** ○ **White.** 3000K. 397lm. 3W. CRI>80	**24pcs**
75169-314997	**VK/02145/G/W** ● **Grey.** 3000K. 397lm. 3W. CRI>80	**24pcs**
75169-315997	**VK/02145/AN/W** ● **Anthracite.** 3000K. 397lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Working temperature **-20°C → 45°C**.
Lifetime **20.000hrs**.
Dimmable No.
Material **ABS+PC**.
Guarantee **2 years**.






IP65

VK/02144

Code	Model	Box
75169-310997	**VK/02144/W/W** ○ **White.** 3000K. 425lm. 3W. CRI>80	**24pcs**
75169-311997	**VK/02144/G/W** ● **Grey.** 3000K. 425lm. 3W. CRI>80	**24pcs**
75169-312997	**VK/02144/AN/W** ● **Anthracite.** 3000K. 425lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Working temperature **-20°C → 45°C**.
Lifetime **20.000hrs**.
Dimmable No.
Material **ABS+PC**.
Guarantee **2 years**.





IP65


Pam



VK/02027/W/W

VK/02027

Code	Model	Box
75169-268997	**VK/02027/G/W** ● **Grey.** 3000K. 586lm. 5W. CRI>80	**24pcs**
75169-269997	**VK/02027/G/D** ● **Grey.** 6000K. 603lm. 5W. CRI>80	**24pcs**
75169-270997	**VK/02027/AN/W** ● **Anthracite.** 3000K. 586lm. 5W. CRI>80	**24pcs**
75169-271997	**VK/02027/AN/D** ● **Anthracite.** 6000K. 603lm. 5W. CRI>80	**24pcs**
75169-305997	**VK/02027/W/W** ○ **White.** 3000K. 586lm. 5W. CRI>80	**24pcs**



Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS**.
Guarantee **1 year**.

IP65





Pam




VK/02017/W





VK/02018/AN



VK/02019/G







VK/02017

Code	Model	Box
75169-228997	**VK/02017/G/W** ● **Grey.** 3000K. 166lm. 1W. CRI>80	**24pcs**
75169-229997	**VK/02017/G/D** ● **Grey.** 6000K. 102lm. 1W. CRI>80	**24pcs**
75169-230997	**VK/02017/AN/W** ● **Anthracite.** 3000K. 166lm. 1W. CRI>80	**24pcs**
75169-231997	**VK/02017/AN/D** ● **Anthracite.** 6000K. 102lm. 1W. CRI>80	**24pcs**
75169-303997	**VK/02017/W/W** ○ **White.** 3000K. 166lm. 1W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

VK/02018

Code	Model	Box
75169-232997	**VK/02018/G/W** ● **Grey.** 3000K. 350lm. 3W. CRI>80	**24pcs**
75169-233997	**VK/02018/G/D** ● **Grey.** 6000K. 390lm. 3W. CRI>80	**24pcs**
75169-234997	**VK/02018/AN/W** ● **Anthracite.** 3000K. 350lm. 3W. CRI>80	**24pcs**
75169-235997	**VK/02018/AN/D** ● **Anthracite.** 6000K. 390lm. 3W. CRI>80	**24pcs**
75169-324997	**VK/02018/W/W** ○ **White.** 3000K. 350lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65



VK/02019

Code	Model	Box
75169-236997	**VK/02019/G/W** ● **Grey.** 3000K. 452lm. 3W. CRI>80	**24pcs**
75169-237997	**VK/02019/G/D** ● **Grey.** 6000K. 470lm. 3W. CRI>80	**24pcs**
75169-238997	**VK/02019/AN/W** ● **Anthracite.** 3000K. 452lm. 3W. CRI>80	**24pcs**
75169-239997	**VK/02019/AN/D** ● **Anthracite.** 6000K. 470lm. 3W. CRI>80	**24pcs**
75169-304997	**VK/02019/W/W** ○ **White.** 3000K. 452lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**. **Dimmable No**.


Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

Pam




VK/02020/AN





VK/02021/AN



VK/02020

Code	Model	Box
75169-240997	**VK/02020/G/W** ● **Grey.** 3000K. 292lm. 2W. CRI>80	**24pcs**
75169-241997	**VK/02020/G/D** ● **Grey.** 6000K. 286lm. 2W. CRI>80	**24pcs**
75169-242997	**VK/02020/AN/W** ● **Anthracite.** 3000K. 292lm. 2W. CRI>80	**24pcs**
75169-243997	**VK/02020/AN/D** ● **Anthracite.** 6000K. 286lm. 2W. CRI>80	**24pcs**
75169-308997	**VK/02020/W/W** ○ **White.** 3000K. 292lm. 2W CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

VK/02021

Code	Model	Box
75169-244997	**VK/02021/G/W** ● **Grey.** 3000K. 70lm. 1W. CRI>80	**24pcs**
75169-245997	**VK/02021/G/D** ● **Grey.** 6000K. 70lm. 1W. CRI>80	**24pcs**
75169-246997	**VK/02021/AN/W** ● **Anthracite.** 3000K. 70lm. 1W. CRI>80	**24pcs**
75169-247997	**VK/02021/AN/D** ● **Anthracite.** 6000K. 70lm. 1W. CRI>80	**24pcs**
75169-309997	**VK/02021/W/W** ○ **White.** 3000K. 70lm. 1W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65


Pam




VK/02022/W



VK/02023/G





VK/02022

Code	Model	Box
75169-248997	**VK/02022/G/W** ● **Grey.** 3000K. 144lm. 1W. CRI>80	**24pcs**
75169-249997	**VK/02022/G/D** ● **Grey.** 6000K. 154lm. 1W. CRI>80	**24pcs**
75169-250997	**VK/02022/AN/W** ● **Anthracite.** 3000K. 144lm. 1W. CRI>80	**24pcs**
75169-251997	**VK/02022/AN/D** ● **Anthracite.** 6000K. 154lm. 1W. CRI>80	**24pcs**
75169-307997	**VK/02022/W/W** ○ **White.** 3000K. 144lm. 1W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

VK/02023

Code	Model	Box
75169-252997	**VK/02023/G/W** ● **Grey.** 3000K. 160lm. 2W. CRI>80	**24pcs**
75169-253997	**VK/02023/G/D** ● **Grey.** 6000K. 160lm. 2W. CRI>80	**24pcs**
75169-254997	**VK/02023/AN/W** ● **Anthracite.** 3000K. 160lm. 2W. CRI>80	**24pcs**
75169-255997	**VK/02023/AN/D** ● **Anthracite.** 6000K. 160lm. 2W. CRI>80	**24pcs**
75169-306997	**VK/02023/W/W** ○ **White.** 3000K. 160lm. 2W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→45°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

Pam




VK/02024/G





VK/02025/AN



VK/02026/G







VK/02024

Code	Model	Box
75169-256997	**VK/02024/G/W** ● **Grey.** 3000K. 404lm. 3W. CRI>80	**24pcs**
75169-257997	**VK/02024/G/D** ● **Grey.** 6000K. 418lm. 3W. CRI>80	**24pcs**
75169-258997	**VK/02024/AN/W** ● **Anthracite.** 3000K. 404lm. 3W. CRI>80	**24pcs**
75169-259997	**VK/02024/AN/D** ● **Anthracite.** 6000K. 418lm. 3W. CRI>80	**24pcs**
75169-327997	**VK/02024/W/W** ○ **White.** 3000K. 404lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Beam Angle **120º**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→30°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65

VK/02025

Code	Model	Box
75169-260997	**VK/02025/G/W** ● **Grey.** 3000K. 393lm. 3W. CRI>80	**24pcs**
75169-261997	**VK/02025/G/D** ● **Grey.** 6000K. 431lm. 3W. CRI>80	**24pcs**
75169-262997	**VK/02025/AN/W** ● **Anthracite.** 3000K. 393lm. 3W. CRI>80	**24pcs**
75169-263997	**VK/02025/AN/D** ● **Anthracite.** 6000K. 431lm. 3W. CRI>80	**24pcs**
75169-326997	**VK/02025/W/W** ○ **White.** 3000K. 393lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Beam Angle **120º**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→30°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65



VK/02026

Code	Model	Box
75169-264997	**VK/02026/G/W** ● **Grey.** 3000K. 392lm. 3W. CRI>80	**24pcs**
75169-265997	**VK/02026/G/D** ● **Grey.** 6000K. 392lm. 3W. CRI>80	**24pcs**
75169-266997	**VK/02026/AN/W** ● **Anthracite.** 3000K. 392lm. 3W. CRI>80	**24pcs**
75169-267997	**VK/02026/AN/D** ● **Anthracite.** 6000K. 392lm. 3W. CRI>80	**24pcs**
75169-325997	**VK/02026/W/W** ○ **White.** 3000K. 392lm. 3W. CRI>80	**24pcs**

Details

Voltage **220-240V**.
Type of Led **SMD 2835**.
Beam Angle **120º**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Dimmable No.
Working temperature **-20°C→30°C**.
Material **ABS+PC**.
Guarantee **1 year**.

IP65


Pam




VK/02067/G



VK/02068/G

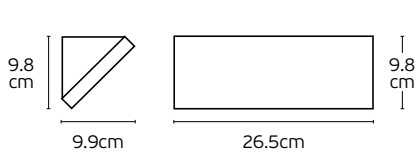

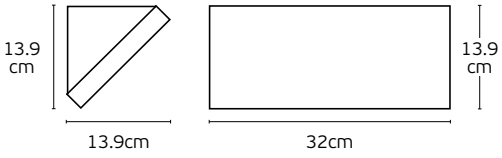

VK/02067

Code
75169-333692

Model
VK/02067/G/C
● **Grey.** 4000K. 1450lm. 12W. CRI>80.

Box
10pcs

Details

Voltage **230V**.
Type of Led **SMD 2835**.
Beam Angle **120º**.
Lifetime **30.000hrs**.
Dimmable No.

Working temperature **-20°C→45°C**.
Material **ABS & PC housing and PC diffuser**.
Guarantee **2 years**.

IP65

VK/02068

Code
75169-334692

Model
VK/02068/G/C
● **Grey.** 4000K. 2.400lm. 21W. CRI>80.

Box
6pcs

Details

Voltage **230V**.
Type of Led **SMD 2835**.
Beam Angle **120º**.
Lifetime **30.000hrs**.
Dimmable No.


Working temperature **-20°C→45°C**.
Material **ABS & PC housing and PC diffuser**.
Guarantee **2 years**.

IP65

Pam




VK/02069/G





VK/02070/AN



Up/Down

VK/02069

Code	Model	Box
75169-335692	**VK/02069/G/C** ● **Grey.** 4000K. 1.143lm. 9W. CRI>80	**10pcs**
75169-336692	**VK/02069/AN/C** ● **Anthracite.** 4000K. 1.143lm. 9W. CRI>80	**10pcs**

Details

Voltage **230V**.
Type of Led **SMD 2835**.
Beam Angle **110º**.
Lifetime **30.000hrs**.
Dimmable No.

Working temperature **-20°C→45°C**.
Material **ABS & PC housing and PC diffuser**.
Guarantee **2 years**.

IP65

Up/Down

VK/02070

Code	Model	Box
75169-337692	**VK/02070/G/C** ● **Grey.** 4000K. 700lm. 12W. CRI>80	**10pcs**
75169-338692	**VK/02070/AN/C** ● **Anthracite.** 4000K. 700lm. 12W. CRI>80	**10pcs**

Details

Voltage **230V**.
Type of Led **SMD 2835**.
Beam Angle **110º**.
Lifetime **30.000hrs**.
Dimmable No.

Working temperature **-20°C→45°C**.
Material **ABS & PC housing and PC diffuser**.
Guarantee **2 years**.

IP65


Cher




VK/02007/MC



VK/02013/MC





VK/02007

Code	Model	Box
75169-163997	**VK/02007/MC/W** ● **Nickel mat.** 3000K. 60lm. 1.2W. CRI>80	**40pcs**
75169-164997	**VK/02007/MC/D** ● **Nickel mat.** 6000K. 60lm. 1.2W. CRI>80	**40pcs**
75169-165997	**VK/02007/MC/BL** ● **Nickel mat.** BLUE. -lm. 1.2W. CRI>80	**40pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **120º.**
Type of Led **DIP 12pcs**.
Lifetime **20.000hrs**.

Working temperature **-20°C→35°C**.
Dimmable No.
Material **Steel. glass. plastic.**
Guarantee **2 years.**

IP54

VK/02013


Code	Model	Box
75169-177997	**VK/02013/MC/W** ● **Nickel mat.** 3000K. 90lm. 1.6W. CRI>80	**50pcs**
75169-178997	**VK/02013/MC/D** ● **Nickel mat.** 6000K. 90lm. 1.6W. CRI>80	**50pcs**
75169-179997	**VK/02013/MC/BL** ● **Nickel mat.** BLUE. -lm. 1.6W. CRI>80	**50pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **120º.**
Type of Led **DIP 16pcs**.
Lifetime **20.000hrs**.

Working temperature **-20°C→35°C**.
Dimmable No.
Material **Steel. glass. plastic.**
Guarantee **2 years.**

IP54

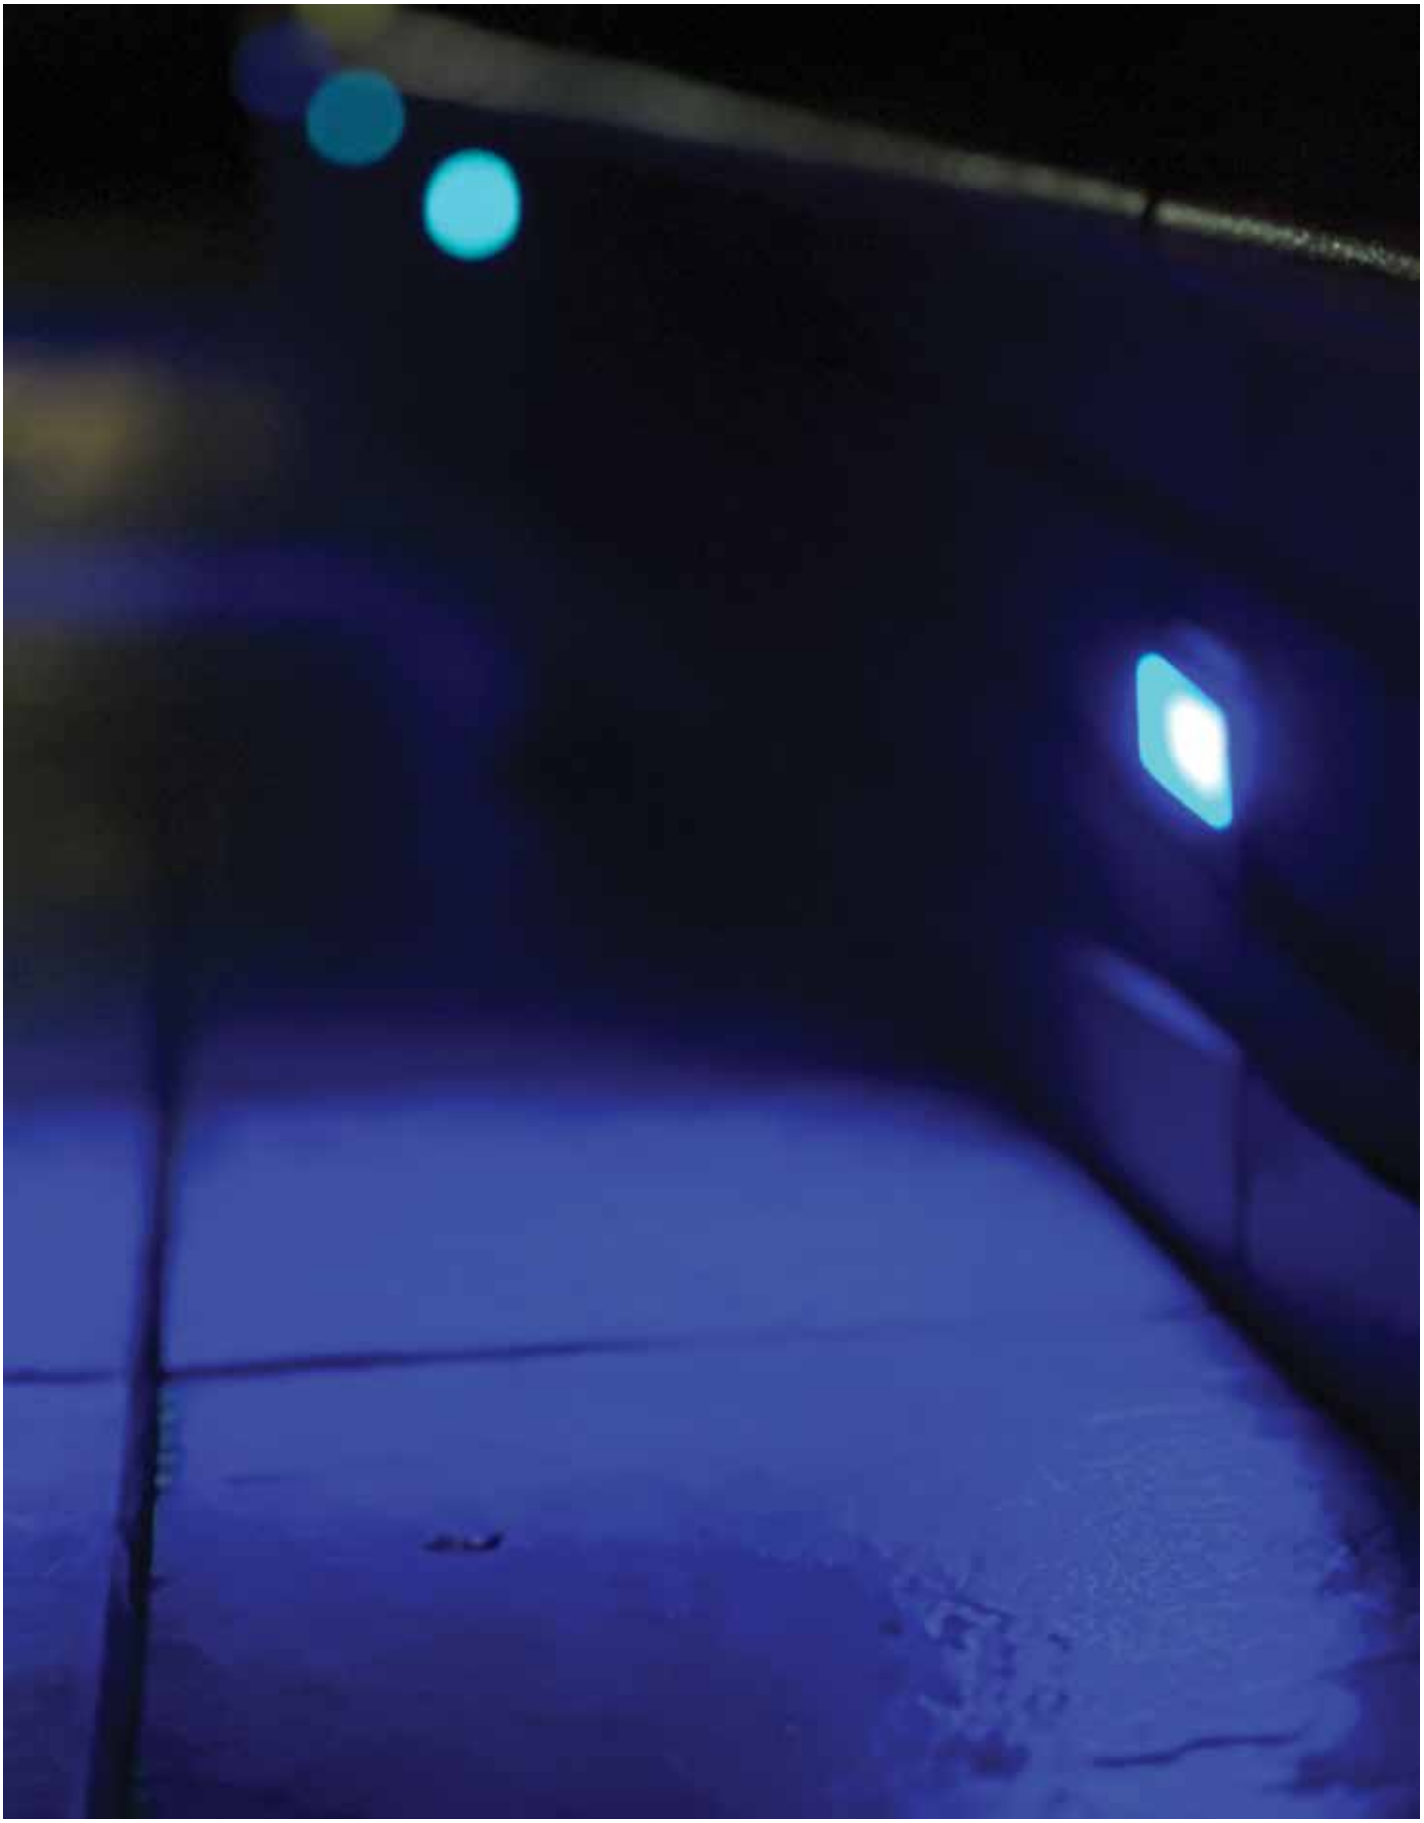

Nuun




VK/01121/WA/W



VK/01121/WA

Code	Model	Box
64171-298741	VK/01121/WA/B ● **Black.** GU10. Max. 12W (LED).	24pcs
64171-299741	VK/01121/WA/W ○ **White.** GU10. Max. 12W (LED).	24pcs



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Metal base, Metal shade**
Location **Wall**

IP44




Nuun



VK/01095/AN

VK/01095

Code	Model	Box
75169-319997	**VK/01095/W** ○ **White.** GU10. Max. 12W (LED).	**24pcs**
75169-320997	**VK/01095/B** ● **Black.** GU10. Max. 12W (LED).	**24pcs**
75169-321997	**VK/01095/AN** ● **Anthracite.** GU10. Max. 12W (LED).	**24pcs**
75169-332997	**VK/01095/BR** ● **Brown.** GU10. Max. 12W (LED).	**24pcs**



Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.

Material **Aluminium**
Location **Wall**

IP54



Edge




VK/01114/AN




VK/01115/W

VK/01114, VK/01115

Code	Model	Box
75169-368997	**VK/01114/AN** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
75169-369997	**VK/01114/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
75169-370997	**VK/01115/AN** ● **Anthracite.** 2xGU10. Max 2x12W (LED). **Up/down**	**1pc**
75169-371997	**VK/01115/W** ○ **White.** 2xGU10. Max 2x12W (LED). **Up/down**	**1pc**

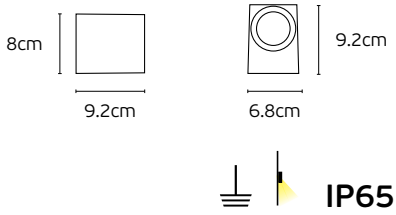

IP65

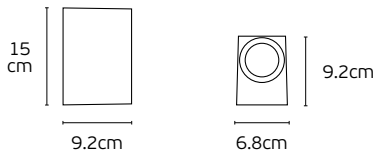

IP65

Details

Included lampholder **GU10.**
Match also with lamps: GU10/50, Par16.
Material **Die casting aluminium**

Location **Wall**
Working Temperature **-20°C → 45°C**

Edge




VK/01112/AN




VK/01113/W

VK/01112, VK/01113

Code	Model	Box
75169-364997	**VK/01112/AN** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
75169-365997	**VK/01112/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
75169-366997	**VK/01113/AN** ● **Anthracite.** 2xGU10. Max 2x12W (LED). **Up/down**.	**1pc**
75169-367997	**VK/01113/W** ○ **White.** 2xGU10. Max 2x12W (LED). **Up/down**.	**1pc**

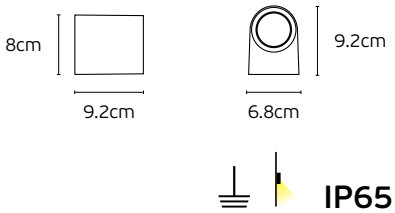

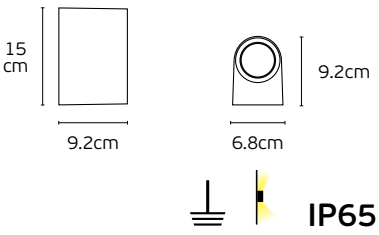

Details


Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.
Material **Die casting aluminium**

Location **Wall**
Working Temperature **-20°C → 45°C**

Let




VK/01057/B





VK/01056/W



Up/Down

VK/01057

Code	Model	Box
75169-184997	**VK/01057/W** ○ **White.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-185997	**VK/01057/B** ● **Black.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-186997	**VK/01057/AN** ● **Anthracite.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-187997	**VK/01057/G** ● **Grey.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-288997	**VK/01057/BR** ● **Rust Brown.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**

Details

Included lampholder **GU10x2**.
Match also with lamps: GU10/50, Par16.

Material **Alu diecast/Glass**
Location **Wall**

IP54

VK/01056

Code	Model	Box
75169-180997	**VK/01056/W** ○ **White.** GU10. Max 12W (LED).	**18pcs**
75169-181997	**VK/01056/B** ● **Black.** GU10. Max 12W (LED).	**18pcs**
75169-182997	**VK/01056/AN** ● **Anthracite.** GU10. Max 12W (LED).	**18pcs**
75169-183997	**VK/01056/G** ● **Grey.** GU10. Max 12W (LED).	**18pcs**
75169-287997	**VK/01056/BR** ● **Rust Brown.** GU10. Max 12W (LED).	**18pcs**

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.


Material **Alu diecast/Glass**
Location **Wall**

IP54

Let




VK/01068/BR





VK/01067/AN



Up/Down

VK/01068

Code	Model	Box
75169-220997	**VK/01068/W** ○ **White.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-221997	**VK/01068/B** ● **Black.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-222997	**VK/01068/AN** ● **Anthracite.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-223997	**VK/01068/G** ● **Grey.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**
75169-284997	**VK/01068/BR** ● **Rust Brown.** GU10x2. Max 2x12W (LED). **Up/down**.	**18pcs**

Details

Included lampholder **GU10x2**.
Match also with lamps: GU10/50, Par16.

Material **Alu diecast/Glass**
Location **Wall**

IP54

VK/01067

Code	Model	Box
75169-216997	**VK/01067/W** ○ **White.** GU10. Max 12W (LED).	**18pcs**
75169-217997	**VK/01067/B** ● **Black.** GU10. Max 12W (LED).	**18pcs**
75169-218997	**VK/01067/AN** ● **Anthracite.** GU10. Max 12W (LED).	**18pcs**
75169-219997	**VK/01067/G** ● **Grey.** GU10. Max 12W (LED).	**18pcs**
75169-283997	**VK/01067/BR** ● **Rust Brown.** GU10. Max 12W (LED).	**18pcs**

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.


Material **Alu diecast/Glass**
Location **Wall**

IP54

Let




VK/01059/B





VK/01058/W



Up/Down

VK/01059

Code	Model	Box
75169-192997	**VK/01059/W** ○ **White.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-193997	**VK/01059/B** ● **Black.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-194997	**VK/01059/AN** ● **Anthracite.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-195997	**VK/01059/G** ● **Grey.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-290997	**VK/01059/RB** ● **Rust Brown.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**

Details

Included lampholder **E27x2**.
Match also with lamps: E27/Par30.

Material **Alu diecast/Glass.**
Location **Wall**

IP54

VK/01058

Code	Model	Box
75169-188997	**VK/01058/W** ○ **White.** E27. Max 20W (LED).	**12pcs**
75169-189997	**VK/01058/B** ● **Black.** E27. Max 20W (LED).	**12pcs**
75169-190997	**VK/01058/AN** ● **Anthracite. E**27. Max 20W (LED).	**12pcs**
75169-191997	**VK/01058/G** ● **Grey.** E27. Max 20W (LED).	**12pcs**
75169-289997	**VK/01058/BR** ● **Rust Brown.** E27. Max 20W (LED).	**12pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/Par30.


Material **Alu diecast/Glass.**
Location **Wall**

IP54

Let




VK/01065/W

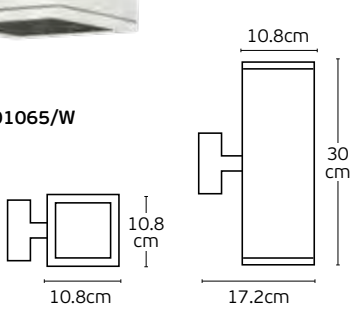



VK/01064/B

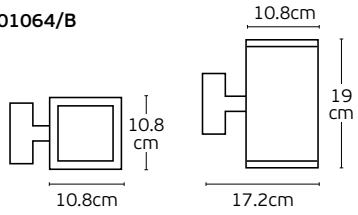

Up/Down

VK/01065

Code	Model	Box
75169-208997	**VK/01065/W** ○ **White.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-209997	**VK/01065/B** ● **Black.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-210997	**VK/01065/AN** ● **Anthracite.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-211997	**VK/01065/G** ● **Grey.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**
75169-286997	**VK/01065/BR** ● **Rust Brown.** E27x2. Max 2x20W (LED). **Up/down**.	**12pcs**

Details

Included lampholder **E27x2**.
Match also with lamps: E27/Par30.

Material **Alu diecast/Glass.**
Location **Wall**

IP54

VK/01064

Code	Model	Box
75169-204997	**VK/01064/W** ○ **White.** E27. Max 20W (LED).	**12pcs**
75169-205997	**VK/01064/B** ● **Black.** E27. Max 20W (LED).	**12pcs**
75169-206997	**VK/01064/AN** ● **Anthracite.** E27. Max 20W (LED).	**12pcs**
75169-207997	**VK/01064/G** ● **Grey.** E27. Max 20W (LED).	**12pcs**
75169-285997	**VK/01064/BR** ● **Rust Brown.** E27. Max 20W (LED).	**12pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/Par30.

Material **Alu diecast/Glass.**
Location **Wall**

IP54

White




VK/01079/AN





VK/01080/AN



VK/01081/AN







VK/01079, VK/01080, VK/01081

Code	Model	Box
75169-290692	**VK/01079/AN** ● **Anthracite.** E27. Max 20W (LED).	**10pcs**
75169-291692	**VK/01080/AN** ● **Anthracite.** E27. Max 20W (LED).	**4pcs**
75169-292692	**VK/01081/AN** ● **Anthracite.** E27. Max 20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Aluminium/PC.**
Location **Wall.**

IP54

Ena



VK/01090/W



VK/01090/AN




VK/01090/G



VK/01090/BR

VK/01090

Code	Model	Box
75169-291997	**VK/01090/W** ○ **White.** E27. Max 20W (LED).	**8pcs**
75169-292997	**VK/01090/AN** ● **Anthracite.** E27. Max 20W (LED).	**8pcs**
75169-293997	**VK/01090/G** ● **Grey.** E27. Max 20W (LED).	**8pcs**
75169-294997	**VK/01090/BR** ● **Rust Brown.** E27. Max 20W (LED).	**8pcs**



Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Alu diecast/Glass.**
Location **Wall.**

IP54

Gabi




VK/01086/AN

Up/Down

VK/01086

Code	Model	Box
75169-349694	**VK/01086/W** ○ **White.** G9. Max 9W (LED).	**1pc**
75169-348694	**VK/01086/AN** ● **Anthracite.** G9. Max 9W (LED).	**1pc**



Details

Included lampholder **G9**.
Match also with lamps: **G9**.

Material **Aluminium.**
Location **Wall.**

IP54


Nikel




VK/01037/S



VK/01038/S





Up/Down

VK/01037

Code
75169-173997

Model
VK/01037/S
● **Silver.** GU10. Max 12W (LED).

Box
16pcs

Details

Included lampholder **GU10**.
Match also with lamps: GU10/50, Par16.

Material **Stainless steel/Glass.**
Location **Wall.**

Adjustable **IP44**

VK/01038

Code
75169-174997

Model
VK/01038/S
● **Silver.** GU10x2. Max 2x12W (LED).

Box
12pcs

Details

Included lampholder **2xGU10**.
Match also with lamps: **GU10/50, Par16.**


Material **Stainless steel/Glass.**
Location **Wall.**

IP44

Eta




VK/01082/G





VK/01084/AN

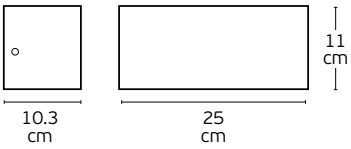

Up/Down

VK/01082

Code	Model	Box
75169-339692	**VK/01082/G** ● **Grey.** E27. Max 20W (LED).	**10pcs**
75169-348692	**VK/01082/W** ○ **White.** E27. Max 20W (LED).	**10pcs**
75169-349692	**VK/01082/AN** ● **Anthracite.** E27. Max 20W (LED).	**10pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **ABS/PC.**
Location **Wall.**

IP65

Up/Down

VK/01084

Code	Model	Box
75169-302694	**VK/01084/AN** ● **Anthracite.** E27. Max 20W (LED).	**8pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.


Material **Aluminium.**
Location **Wall.**

IP54

Eta




VK/01083/AN





VK/01001/G



VK/01083

Code	Model	Box
75169-301694	**VK/01083/AN** ● **Anthracite.** E27x2. Max 2x20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Aluminium.**
Location **Wall.**

IP54

VK/01001


Code	Model	Box
75169-002997	**VK/01001/W** ○ **White.** E27. Max 20W (LED).	**8pcs**
75169-001997	**VK/01001/G** ● **Grey.** E27. Max 20W (LED).	**8pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Alu diecast/PVC.**
Location **Wall.**

IP54

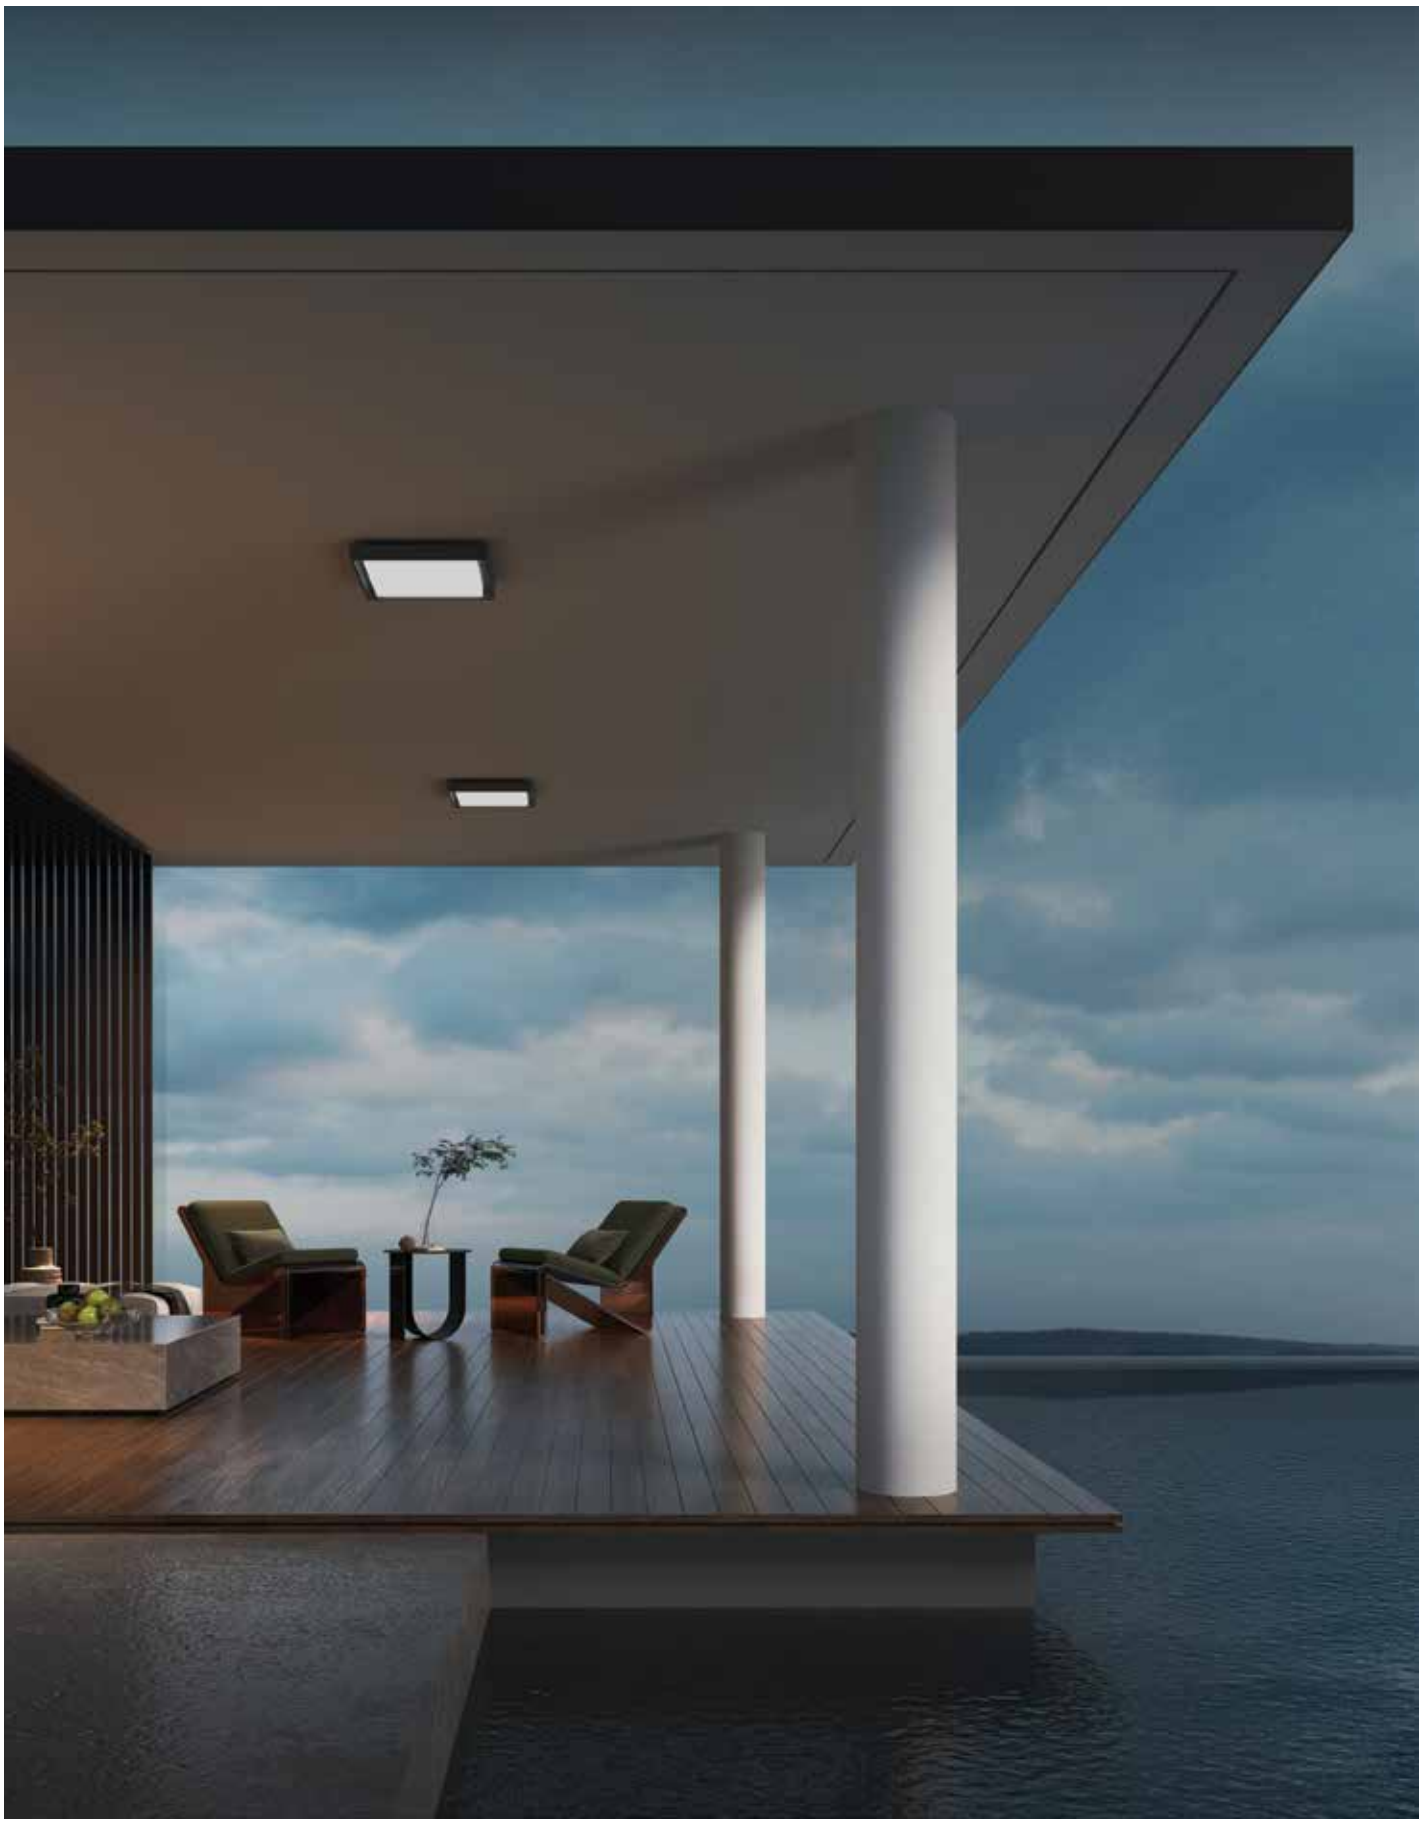



Outdoor ceiling lights


Mos




VK/02169/CE/W/185

VK/02169/CE/.../85-110

Code	Model	Box
75169-055721	**VK/02169/CE/W/W/85** ○ **White sand.** 3000K. 6W. 756lm. CRI>90. **ø8.5cm**	**30pcs**
75169-056721	**VK/02169/CE/W/C/85** ○ **White sand.** 4000K. 6W. 825lm. CRI>90. **ø8.5cm**	**30pcs**
75169-057721	**VK/02169/CE/B/W/85** ● **Black sand.** 3000K. 6W. 756lm. CRI>90. **ø8.5cm**	30pcs
75169-058721	**VK/02169/CE/B/C/85** ● **Black sand.** 4000K. 6W. 825lm. CRI>90. **ø8.5cm**	30pcs
75169-059721	**VK/02169/CE/W/W/110** ○ **White sand.** 3000K. 12W. 1581lm. CRI>90. **ø11cm**	**18pcs**
75169-060721	**VK/02169/CE/W/C/110** ○ **White sand.** 4000K. 12W. 1723lm. CRI>90. **ø11cm**	**18pcs**
75169-061721	**VK/02169/CE/B/W/110** ● **Black sand.** 3000K. 12W. 1581lm. CRI>90. **ø11cm**	**18pcs**
75169-062721	**VK/02169/CE/B/C/110** ● **Black sand.** 4000K. 12W. 1723lm. CRI>90. **ø11cm**	**18pcs**





Details

6W: Input Voltage **350mA**,
Input Voltage **DC 12V**.
Driver: Input AC**220-240V 50/60Hz, Output DC 12-21V 350mA**.
12W: Input Voltage **250mA**,
Input Voltage **DC 36V**.
Driver: Input AC**220-240V 50/60Hz, Output DC 30-42V 250mA**.


Type of Led bridgelux. **SMD with driver**.
Angle **80º**.
No Dimmable
Lifetime **20.000 hrs**.
Working temperature **-20ºC~45ºC**.
Material **Aluminium.**
Installation **Surface-Mounted.**
Guarantee **3 years**.

IP44



VK/02169/CE/.../185

Code	Model	Box
75169-063721	**VK/02169/CE/W/W/185** ○ **White sand.** 3000K. 17W. 2508lm. CRI>90. **ø18.5cm**	12pcs
75169-064721	VK/02169/CE/W/C/185 ○ **White sand.** 4000K. 17W. 2669lm. CRI>90. **ø18.5cm**	12pcs
75169-065721	VK/02169/CE/B/W/185 ● **Black sand.** 3000K.. 17W. 2508lm. CRI>90. **ø18.5cm**	12pcs
75169-066721	VK/02169/CE/B/C/185 ● **Black sand.** 4000K. 17W. 2669lm. CRI>90. **ø18.5cm**	12pcs



Details

17W: Input Voltage **500mA**,
Input Voltage **DC 36V**. Driver: Input AC**220-240V 50/60Hz, Output DC 27-38V 500mA**.
Type of Led bridgelux. **SMD with driver**.
Angle **80º**.
No Dimmable

Lifetime **20.000 hrs**.
Working temperature **-20ºC~45ºC**.
Material **Aluminium.**
Installation **Surface-Mounted.**
Guarantee **3 years**.




IP44

Fozy




VK/02152CE/B





VK/02151CE/B



VK/02152CE

Code	Model	Box
64174-085721	**VK/02152CE/W/W** ○ **White.** 3000K. 1209lm. 15W. CRI>90	**30pcs**
64174-086721	**VK/02152CE/W/C** ○ **White.** 4000K. 1340lm. 15W. CRI>90	**30pcs**
64174-083721	**VK/02152CE/B/W** ● **Black.** 3000K. 1209lm. 15W. CRI>90	**30pcs**
64174-084721	**VK/02152CE/B/C** ● **Black.** 4000K. 1340lm. 15W. CRI>90	**30pcs**

Details

AC Driver **220V (Included)**.
Beam Angle **35°**.
Type of Led **LUMENS**.
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Dimmable No.
Material **Aluminium**.
Guarantee **3 years**.

IP54

VK/02151CE


Code	Model	Box
64174-081721	**VK/02151CE/W/W** ○ **White.** 3000K. 583lm. 8W. CRI>90	**30pcs**
64174-082721	**VK/02151CE/W/C** ○ **White.** 4000K. 653lm. 8W. CRI>90	**30pcs**
64174-079721	**VK/02151CE/B/W** ● **Black.** 3000K. 583lm. 8W. CRI>90	**30pcs**
64174-080721	**VK/02151CE/B/C** ● **Black.** 4000K. 653lm. 8W. CRI>90	**30pcs**

Details

AC Driver **220V (Included)**.
Beam Angle **35°**.
Type of Led **LUMENS**.
Working temperature **< 45°C**.

Lifetime **50.000hrs**.
Dimmable No.
Material **Aluminium**.
Guarantee **3 years**.

IP54

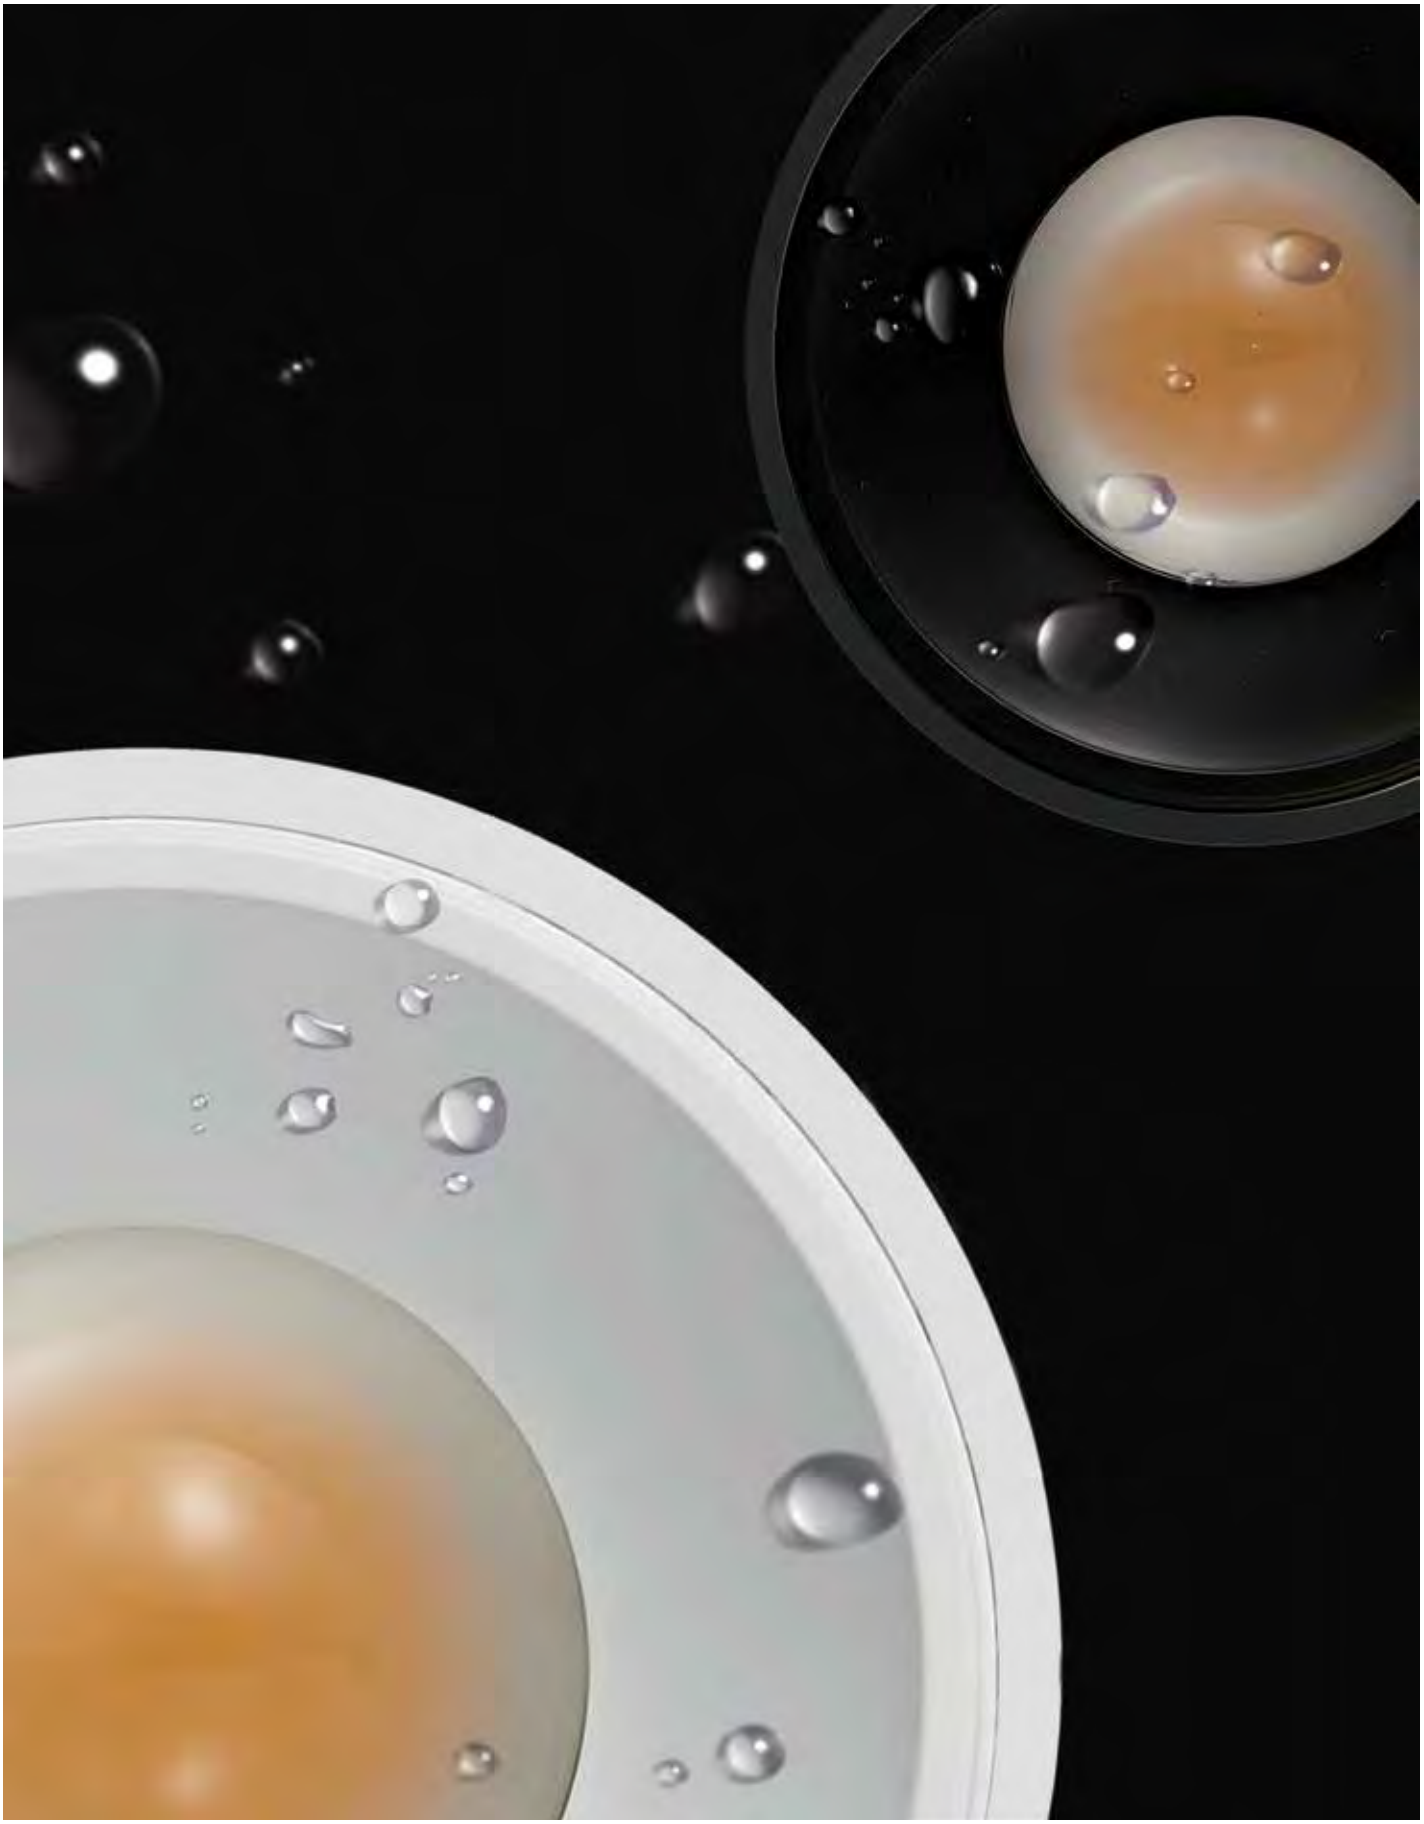


Fozy




VK/04451/W/95

VK/04451

Code	Model	Box
75169-093721	**VK/04451/B/W/95**	**20pcs**
	● **Black sand.** 3000K. 20W. 1.686lm. 45°. CRI>90. **ø9.5cm**	
75169-094721	**VK/04451/W/W/95**	**20pcs**
	○ **White sand.** 3000K. 20W. 1.686lm. 45°. CRI>90. **ø9.5cm**	
75169-095721	**VK/04451/B/W/120**	**20pcs**
	● **Black sand.** 3000K. 29W. 2.567lm. 50°. CRI>90. **ø12cm**	
75169-096721	**VK/04451/W/W/120**	**20pcs**
	○ **White sand.** 3000K. 29W. 2.567lm. 50°. CRI>90. **ø12cm**	





Details

20W/30W: Input Voltage **AC 220V**.
Driver: No.
Type of Led **LUMENS COB**.
Dimmable Triac.
Lifetime **20.000 hrs**.

Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC**.
Material **Aluminium**.
Installation **Surface-Mounted**.
Guarantee **3 years**.

IP54



Damma



VK/02222/W

VK/02222


Code	Model	Box
75169-671772	**VK/02222/AN/W** ● **Anthracite.** 3000K. 24W. 2624lm. CRI>80	**4pcs**
75169-672772	**VK/02222/W/W** ○ **Matt White.** 3000K. 24W. 2624lm. CRI>80	**4pcs**

Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Beam angle **110°**

Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 Years**

IP54

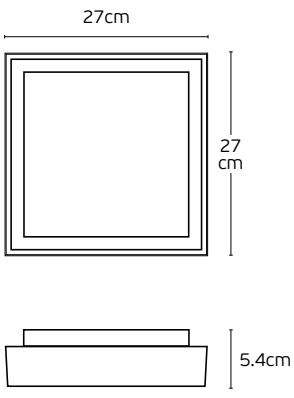



Damma



VK/02221/AN

VK/02221


Code	Model	Box
75169-669772	**VK/02221/AN/W** ● **Anthracite.** 3000K. 26W. 3075lm. CRI>80	**4pcs**
75169-670772	**VK/02221/W/W** ○ **Matt White.** 3000K. 26W. 3075lm. CRI>80	**4pcs**


Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Beam angle **110°**

Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 Years**

IP54

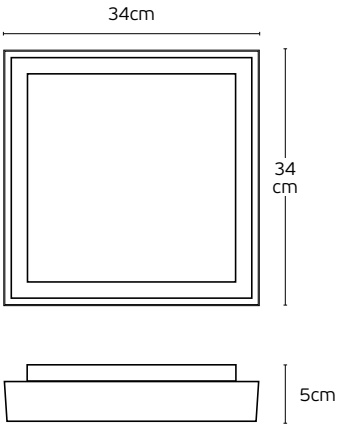

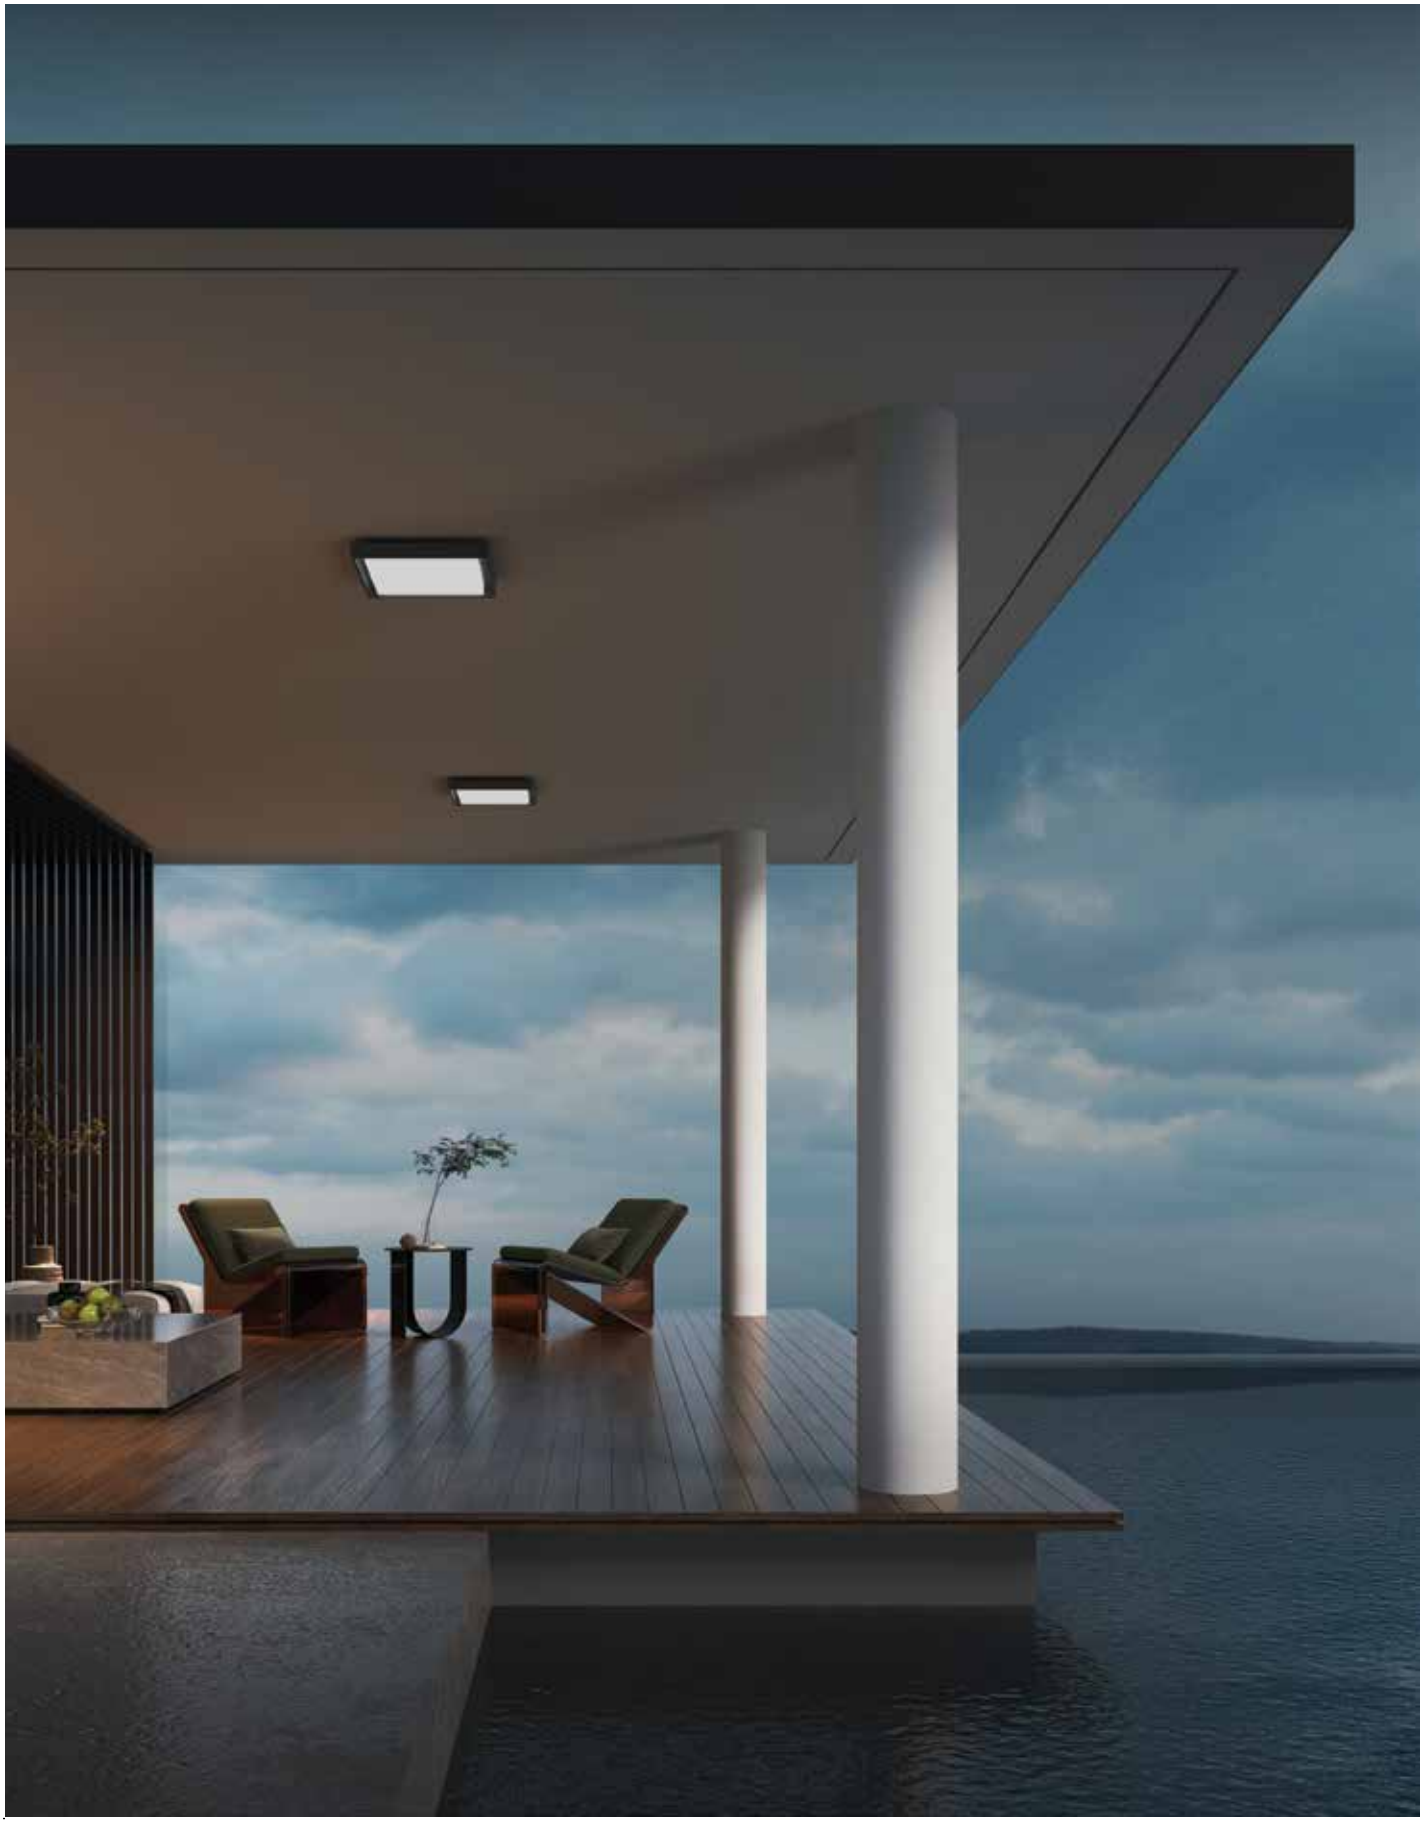

Damma



VK/02220/W

VK/02220


Code	Model	Box
75169-667772	**VK/02220/AN/W** ● **Anthracite.** 3000K. 24W. 2625lm. CRI>80	**4pcs**
75169-668772	**VK/02220/W/W** ○ **Matt White.** 3000K. 24W. 2625lm. CRI>80	**4pcs**


Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Beam angle **110°**

Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 Years**

IP54



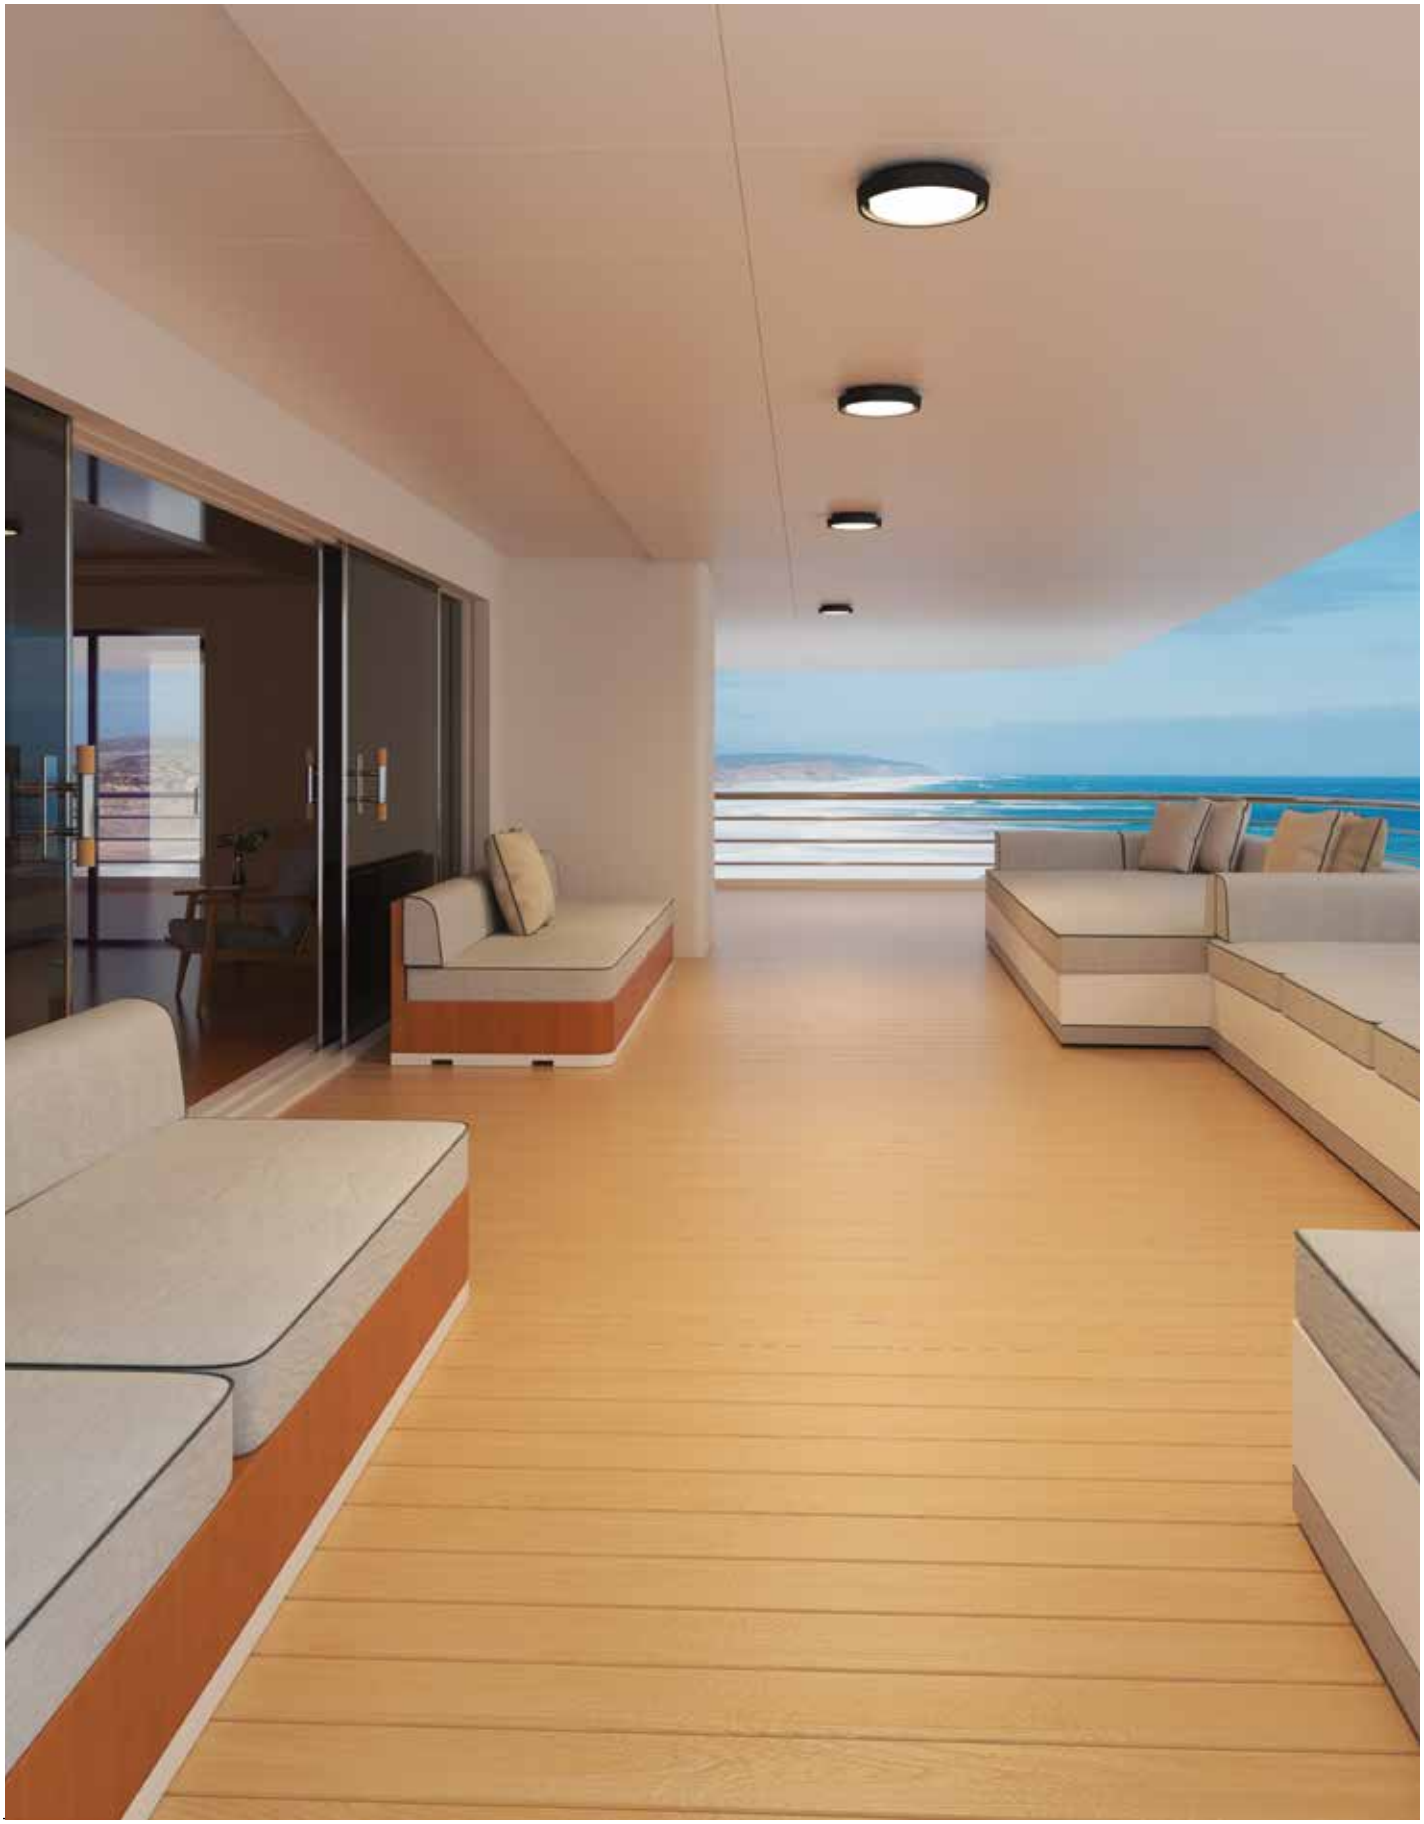

Damma



VK/02219/AN

VK/02219


Code	Model	Box
75169-665772	**VK/02219/AN/W** ● **Anthracite.** 3000K. 26W. 3089lm. CRI>80	**4pcs**
75169-666772	**VK/02219/W/W** ○ **Matt White.** 3000K. 26W. 3089lm. CRI>80	**4pcs**

Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Beam angle **110°**

Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 Years**

IP54

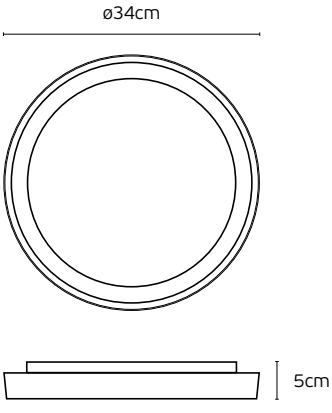




Box




VK/02065/G



VK/02066/G





VK/02065

Code
75169-331692

Model
VK/02065/G/C
● **Grey.** 4000K. 1.400lm. 12W. CRI>80

Box
10pcs

Details

AC Driver **230V (Included)**.
Beam Angle **120°.**
Type of Led **SMD 3014**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Plastic (ABS).**
Guarantee **2 years**.

IP65

VK/02066

Code
75169-332692

Model
VK/02066/G/C
● **Grey.** 4000K. 1.850lm. 16W. CRI>80

Box
10pcs

Details

AC Driver **230V (Included)**.
Beam Angle **120°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Plastic (ABS).**
Guarantee **2 years**.

IP65



Lima




VK/02062/G





VK/02063/G



VK/02064/G







VK/02062, VK/02063, VK/02064

Code	Model	Box
75169-328692	**VK/02062/G/C** ● **Grey.** 4000K. 1.650lm. 15W. CRI>80	**10pcs**
75169-329692	**VK/02063/G/C** ● **Grey.** 4000K. 2.400lm. 18W. CRI>80	**10pcs**
75169-330692	**VK/02064/G/C** ● **Grey.** 4000K. 3.200lm. 24W. CRI>80	**10pcs**

Details

AC Driver **230V (Included)**.
Beam Angle 12**0°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Plastic (ABS).**
Guarantee **2 years**.

IP65




Lima



VK/02061/W

VK/02061

Code	Model	Box
75169-326692	**VK/02061/W/W** ❍ **White.** 3000K. 2.500lm. 18W. CRI>80	**10pcs**
75169-327692	**VK/02061/W/C** ❍ **White.** 4000K. 2.400lm. 21W. CRI>80	**10pcs**

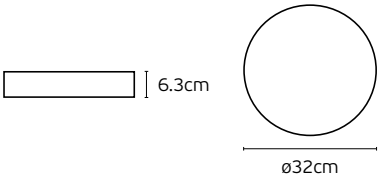

Details

AC Driver **230V (Included)**.
Beam Angle **96°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **ABS PC.**
Guarantee **2 years**.



IP65


Levo



VK/02079/G

VK/02079

Code	Model	Box
75169-287694	**VK/02079/G/W** ● **Grey.** 3000K. 591lm. 18W. CRI>85	**6pcs**
75169-288694	**VK/02079/W/W** ○ **White.** 3000K. 591lm. 18W. CRI>85	**6pcs**



Details

AC Driver **200-240V (Included)**.
Beam Angle **108°.**
Type of Led **SMD PHILIPS 3030**.
Lifetime **30.000hrs**.

No Dimmable.
Working temperature **-20°C→45°C.**
Material **ABS PC.**
Guarantee **2 years**.



IP54


Bop




VK/02078/G

VK/02078

Code	Model	Box
75169-285694	**VK/02078/G/W** ● **Grey.** 3000K. 927lm. 18W. CRI>81	**4pcs**
75169-286694	**VK/02078/W/W** ○ **White.** 3000K. 927lm. 18W. CRI>81	**4pcs**





Details

AC Driver **200-240V (Included)**.
Beam Angle **160°.**
Type of Led **SMD PHILIPS 3030**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.

IP54




Are




VK/01077/AN



VK/01078/AN





VK/01077

Code	Model	Box
75169-286692	**VK/01077/AN** ● **Anthracite.** E27. Max 20W (LED).	**4pcs**
75169-287692	**VK/01077/W** ○ **White.** E27. Max 20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27.

Material **Aluminium/PC.**
Location **Ceiling.**

IP54

VK/01078

Code	Model	Box
75169-288692	**VK/01078/AN** ● **Anthracite.** E27. Max 20W (LED).	**4pcs**
75169-289692	**VK/01078/W** ○ **White.** E27. Max 20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27.

Material **Aluminium/PC.**
Location **Ceiling.**

IP54




Pin



VK/02077/AN/W

VK/02077

Code	Model	Box
75169-283694	**VK/02077/AN/W** ● **Anthracite.** 3000K. 588lm. 9W. CRI>83	**6pcs**
75169-284694	**VK/02077/W/W** ❍ **White.** 3000K. 588lm. 9W. CRI>83	**6pcs**



Details

AC Driver **100-240V (Included)**.
Beam Angle **55°.**
Type of Led **COB CREE 1340**.
Lifetime **30.000hrs**.

Dimmable No.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.



IP65



Cee




VK/01106/W

PLASTIC

VK/01106

Code	Model	Box
75169-343997	**VK/01106/W** ○ **White.** GU10. Max 12W (LED).	**1pc**
75169-344997	**VK/01106/B** ●**Black.** GU10. Max 12W (LED).	**1pc**



Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50, Par16**.


Material **ABS+PC.**
Location **Ceiling.**

IP44

Pal




VK/01061/W





VK/01060/AN



VK/01061

Code	Model	Box
75169-200997	**VK/01061/W** ○ **White.** GU10. Max 12W (LED).	**24pcs**
75169-201997	**VK/01061/B** ● **Black.** GU10. Max 12W (LED).	**24pcs**
75169-202997	**VK/01061/AN** ● **Anthracite.** GU10. Max 12W (LED).	**24pcs**
75169-203997	**VK/01061/G** ● **Grey.** GU10. Max 12W (LED).	**24pcs**
75169-279997	**VK/01061/BR** ● **Rust Brown.** GU10. Max 12W (LED).	**24pcs**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50, Par16**.

Material **Alu diecast/Glass.**
Location **Ceiling.**

IP54

VK/01060

Code	Model	Box
75169-196997	**VK/01060/W** ○ **White.** E27. Max 20W (LED).	**18pcs**
75169-197997	**VK/01060/B** ● **Black.** E27. Max 20W (LED).	**18pcs**
75169-198997	**VK/01060/AN** ● **Anthracite.** E27. Max 20W (LED).	**18pcs**
75169-199997	**VK/01060/G** ● **Grey.** E27. Max 20W (LED).	**18pcs**
75169-281997	**VK/01060/BR** ● **Rust Brown.** E27. Max 20W (LED).	**18pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/Par30.

Material **Alu diecast/Glass.**
Location **Ceiling.**

IP54

Hana




VK/03301G/CE/B



VK/03300G/CE/B

VK/03301G

Code	Model	Box
75169-389121	**VK/03301G/CE/W** ○ **White.** GX53. Max. 7W. (LED).	**1pc**
75169-390121	**VK/03301G/CE/B** ● **Black.** GX53. Max. 7W. (LED).	**1pc**



Details


Included lampholder **GX53**.
Match also with lamps: **GX53/MLF**.

Material **Pure aluminium.**
Location **Ceiling.**

IP65

VK/03300G

Code	Model	Box
75169-387121	**VK/03300G/CE/W** ○ **White.** GU10. Max. 12W. (LED).	**1pc**
75169-388121	**VK/03300G/CE/B** ● **Black.** GU10. Max. 12W. (LED).	**1pc**



Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50, Par16**.

Material **Pure aluminium.**
Location **Ceiling.**


IP65



Met




VK/01069/AN





VK/01066/G



VK/01069

Code	Model	Box
75169-224997	**VK/01069/W** ○ **White.** GU10. Max 12W (LED).	**24pcs**
75169-225997	**VK/01069/B** ● **Black.** GU10. Max 12W (LED).	**24pcs**
75169-226997	**VK/01069/AN** ● **Anthracite.** GU10. Max 12W (LED).	**24pcs**
75169-227997	**VK/01069/G** ● **Grey.** GU10. Max 12W (LED).	**24pcs**
75169-280997	**VK/01069/BR** ● **Rust Brown.** GU10. Max 12W (LED).	**24pcs**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50, Par16**.

Material **Alu diecast/Glass.**
Location **Ceiling.**

IP54

VK/01066

Code	Model	Box
75169-212997	**VK/01066/W** ○ **White.** E27. Max 20W (LED).	**18pcs**
75169-213997	**VK/01066/B** ● **Black.** E27. Max 20W (LED).	**18pcs**
75169-214997	**VK/01066/AN** ● **Anthracite.** E27. Max 20W (LED).	**18pcs**
75169-215997	**VK/01066/G** ● **Grey.** E27. Max 20W (LED).	**18pcs**
75169-282997	**VK/01066/BR** ● **Rust Brown.** E27. Max 20W (LED).	**18pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/Par30, A60.

Material **Alu diecast/Glass.**
Location **Ceiling.**

IP54








Outdoor Floor lights

Coda



VK/02232/AN/W

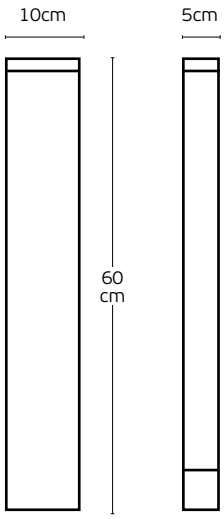

VK/02232

Code	Model	Box
75169-689772	VK/02232/AN/W ● **Anthracite.** 3000K. 10W. 1037lm. CRI>80	4pcs
75169-690772	VK/02232/W/W ○ **Matt White.** 3000K. 10W. 1037lm. CRI>80	4pcs

Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **115°**

Dimmable **No**
Lifetime **25.000hrs**
Working temperature **-20°C - 40°C**
Guarantee **3 years**


IP54



Coda



VK/02231/W/W

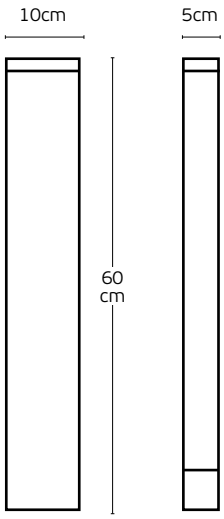

VK/02231

Code	Model	Box
75169-687772	VK/02231/AN/W ● **Anthracite.** 3000K. 6W. 604lm. CRI>80	4pcs
75169-688772	VK/02231/W/W ○ **Matt White.** 3000K. 6W. 604lm. CRI>80	4pcs

Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **100°**

Dimmable **No**
Lifetime **25.000hrs**
Working temperature **-20°C - 40°C**
Guarantee **3 years**

IP54



Coda



VK/02099/AN/W

VK/02099


Code	Model	Box
75169-325694	**VK/02099/AN/W** ● **Anthracite.** 3000K. 112lm. 8W. CRI>81	**4pcs**

Details

AC Driver **Voltage 100-240V (Included)**.
Beam Angle **70°**.
Type of Led **CREE XBD**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **30.000hrs.**
Guarantee **2 years**.

IP54





Ark




VK/02124/80/AN/W



VK/02124/50/AN/W

VK/02124

Code	Model	Box
75169-354694	**VK/02124/80/AN/W**	**1pc**
	● **Anthracite.** 3000K. 561lm. 15W. 98°. CRI>82. Height (L) **80cm.**	
75169-353694	**VK/02124/50/AN/W**	**1pc**
	● **Anthracite.** 3000K. 500lm. 12W. 98°. CRI>82. Height (L) **50cm.**	

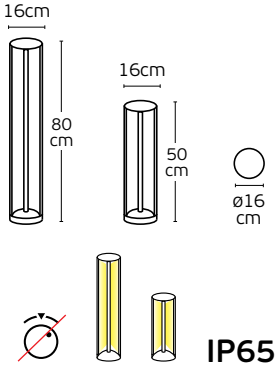

Details

AC Driver **Voltage 220-240V (included)**.
Beam Angle **98°**.
Type of Led **SMD**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium diecast**.
Lifetime **30.000hrs.**
Guarantee **2 years**.

IP65



Loft




VK/02097/AN



VK/02098/AN

VK/02097, VK/02098

Code	Model	Box
75169-323694	**VK/02097/AN/W** ● **Anthracite.** 3000K. 212lm. 8W. CRI>82. **L. 65cm**.	**4pcs**
75169-324694	**VK/02098/AN/W** ● **Anthracite.** 3000K. 202lm. 9W. CRI>82. **L. 35cm**.	**6pcs**

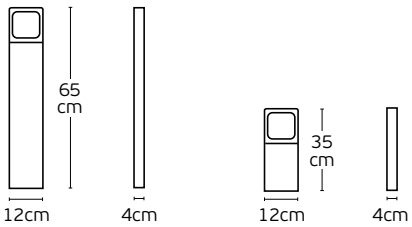


Details

AC Driver **Voltage 200-240V (Included)**.
Beam Angle **49°**.
Type of Led **SMD PHILIPS 3014**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **30.000hrs.**
Guarantee **2 years**.



IP54

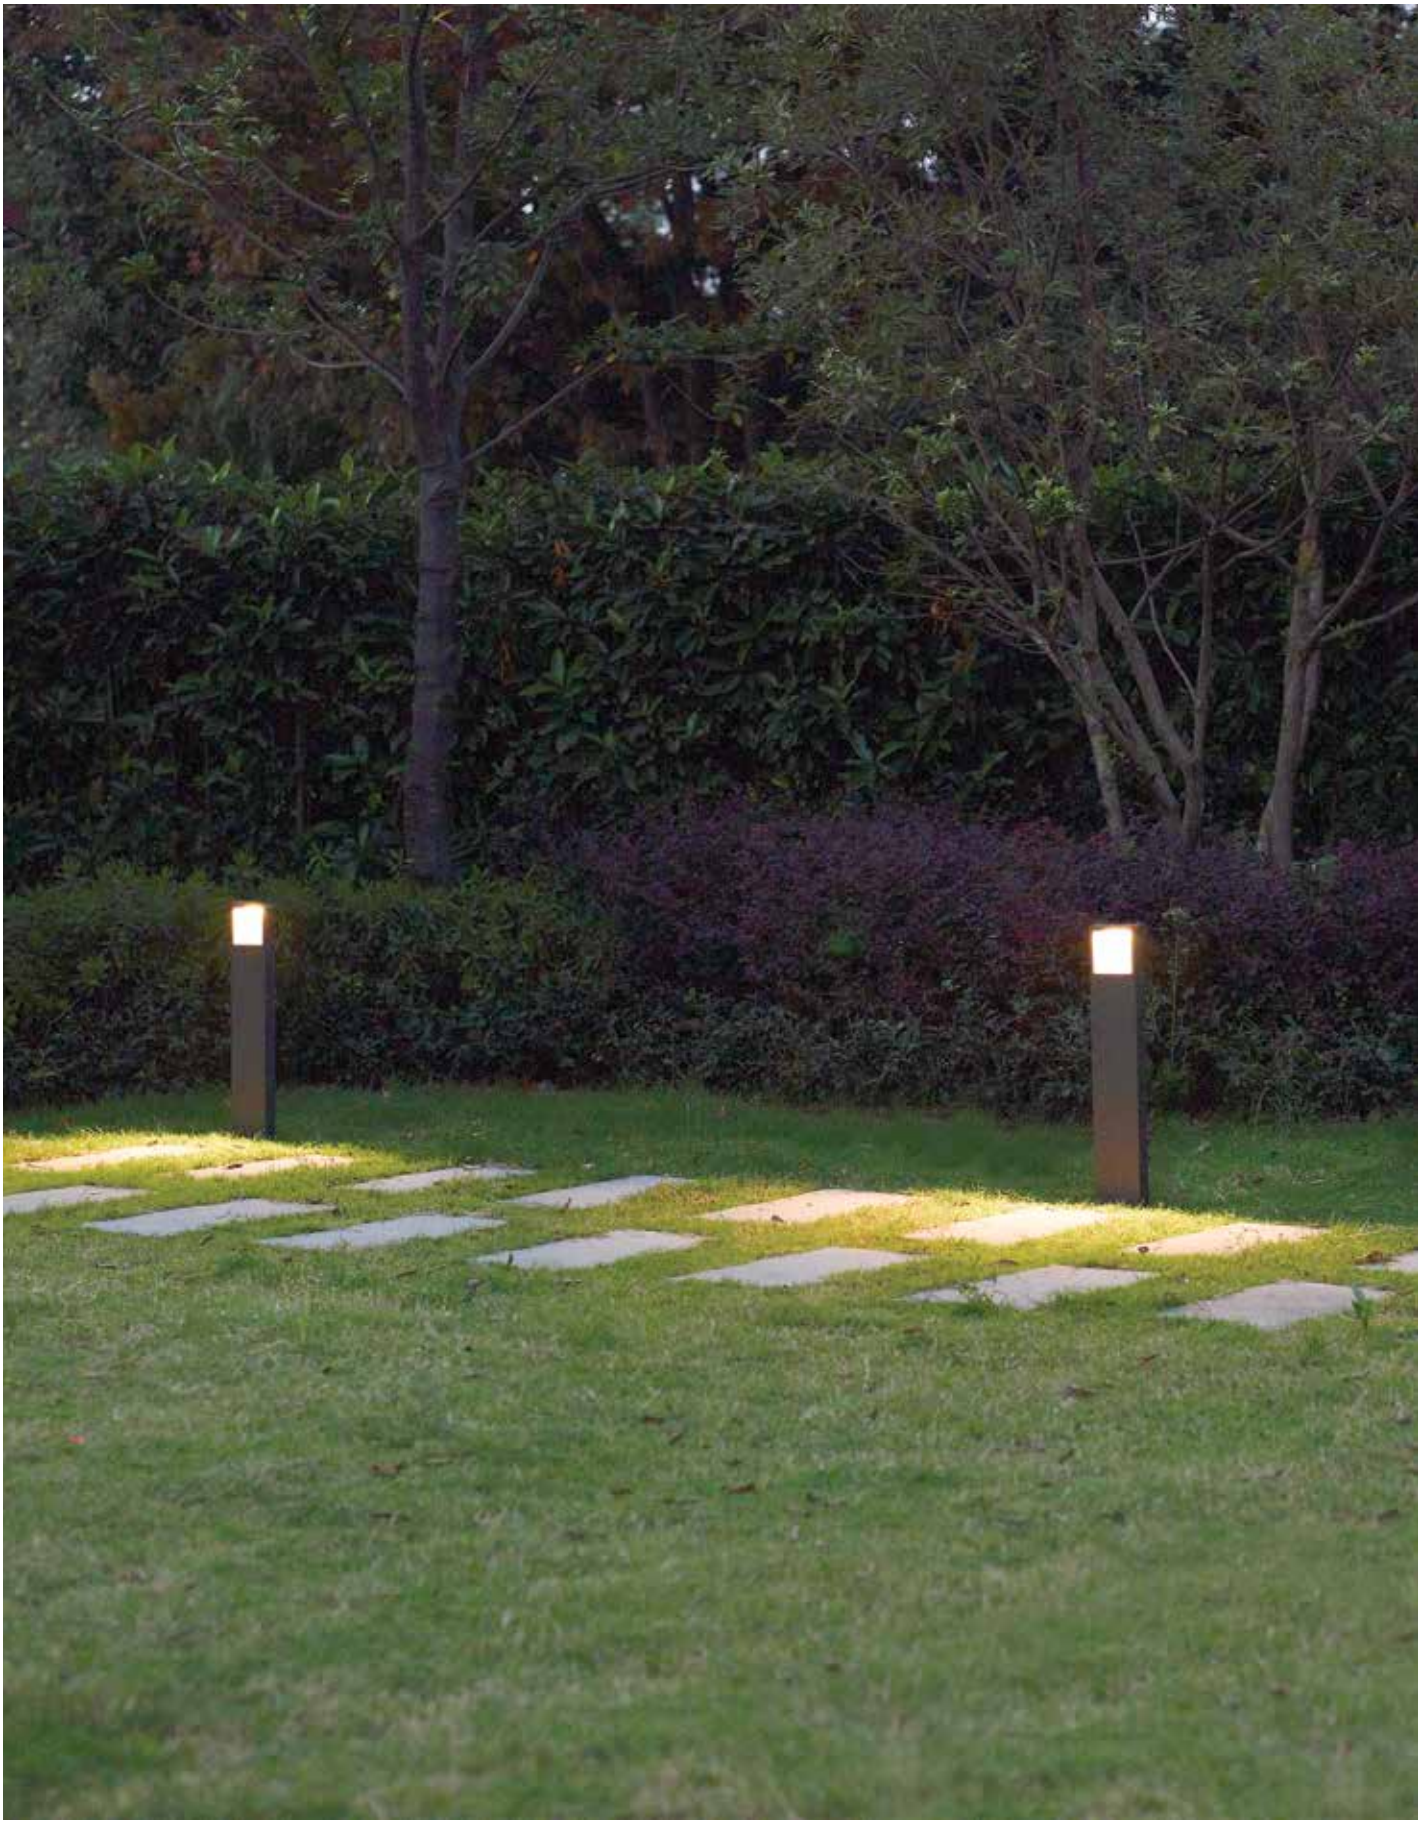

Loka



VK/02102/AN



VK/02102


Code	Model	Box
75169-329694	**VK/02102/AN/W** ● **Anthracite.** 3000K. 413lm. 7W. CRI>82	**8pcs**

Details

AC Driver **Voltage 100-240V (Included)**.
Beam Angle **50°**.
Type of Led **COB CREE 1304**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **30.000hrs.**
Guarantee **2 years**.

IP65



Loka



VK/02101/AN

VK/02101


Code	Model	Box
75169-328694	**VK/02101/AN/W**	**4pcs**
	● **Anthracite.** 3000K. 525lm. 9W. CRI>84	

Details

AC Driver **Voltage 100-240V (Included)**.
Beam Angle **33°**.
Type of Led **COB CREE 1304**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **50.000hrs.**
Guarantee **2 years**.

IP54



Max



VK/02104/AN

VK/02104

Code	Model	Box
75169-332694	**VK/02104/AN/W** ● **Anthracite.** 3000K. 1.115lm. 17W. CRI>83	**1pc**


Details

AC Driver **Voltage 200-240V (Included)**.
Beam Angle **35°**.
Type of Led **SMD PHILIPS 3030**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **30.000hrs.**
Guarantee **2 years**.



IP65





Cel



VK/02103/AN/W

VK/02103


Code	Model	Box
75169-331694	**VK/02103/AN/W** ● **Anthracite.** 3000K. 737lm. 18W. CRI>84	**2pcs**

Details

AC Driver **Voltage 200-240V (Included)**.
Beam Angle **81°**.
Type of Led **SMD PHILIPS 3030**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **30.000hrs.**
Guarantee **2 years**.

IP65






Toso



VK/02229/AN/W/60

VK/02229/60


Code	Model	Box
75169-681772	**VK/02229/AN/W/60** ● **Anthracite.** 3000K. 20W. 2169lm. CRI>80	**2pcs**
75169-682772	**VK/02229/W/W/60** ○ **Matt White.** 3000K. 20W. 2169lm. CRI>80	**2pcs**



Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **180°**

Dimmable **No**
Lifetime **25.000hrs**
Working temperature **-20°C - 40°C**
Guarantee **3 years**



IP65




Toso




VK/02229/W/W/20

VK/02229/20

Code	Model	Box
75169-683772	**VK/02229/AN/W/20** ● **Anthracite.** 3000K. 20W. 2154lm. CRI>80	**4pcs**
75169-684772	**VK/02229/W/W/20** ○ **Matt White.** 3000K. 20W. 2154lm. CRI>80	**4pcs**





Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **180°**

Dimmable **No**
Lifetime **25.000hrs**
Working temperature **-20°C - 40°C**
Guarantee **3 years**



IP65




Koni



VK/02230/AN/W

VK/02230

Code	Model	Box
75169-685772	VK/02230/AN/W ● **Anthracite.** 3000K. 9W. 1051lm. CRI>80	2pcs
75169-686772	VK/02230/W/W ○ **Matt White.** 3000K. 9W. 1051lm. CRI>80	2pcs

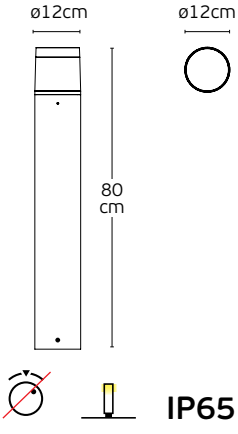

Details

Material **Die-casting aluminum alloy**
Type of Led **SMD**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **170°**

Dimmable **No**
Lifetime **25.000hrs**
Working temperature **-20°C - 40°C**
Guarantee **3 years**

IP65




Air



VK/02140/AN/W

VK/02140

Code	Model	Box
75169-373694	**VK/02140/AN/W**	**6pcs**
	● **Anthracite.** 3000K. 420lm. 7W. CRI>82	




Details

AC Driver **Voltage 200-240V (Included)**.
Beam Angle **41°**.
Type of Led **CREE**.
Working temperature **-20 ~ 30°C**.

Dimmable **No**.
Material **Aluminium diecast**.
Lifetime **30.000hrs.**
Guarantee **2 years**.




IP54

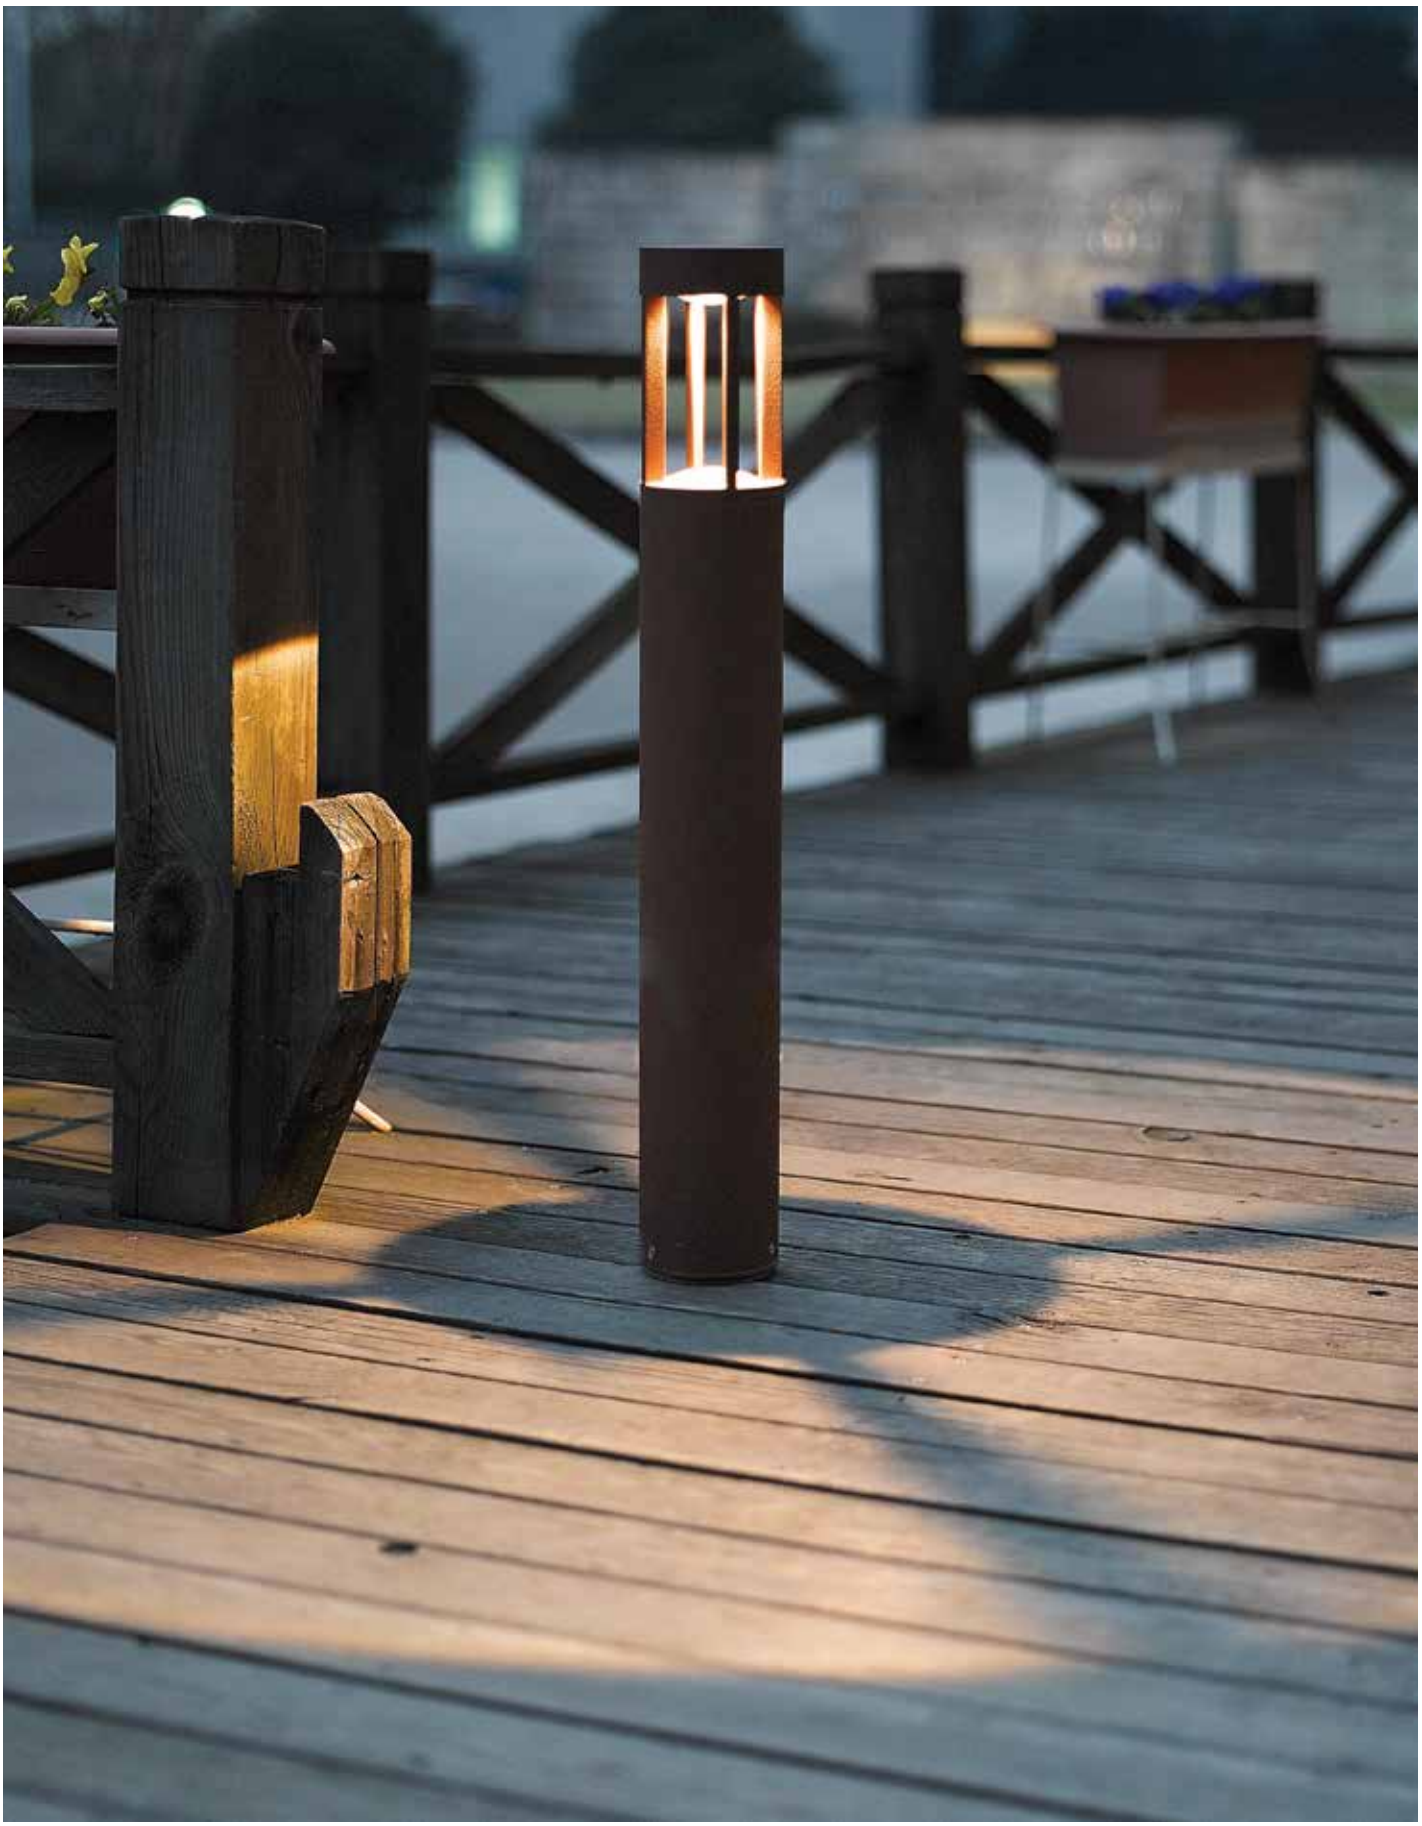


Mot



VK/02181/B

VK/02181

Code	Model	Box
75169-113721	VK/02181/W/W ○ **White sand.** 3000K. 7W. 228lm. CRI>80	6pcs
75169-114721	VK/02181/W/C ○ **White sand.** 4000K. 7W. 228lm. CRI>80	6pcs
75169-115721	VK/02181/B/W ● **Black sand.** 3000K. 7W. 228lm. CRI>80	6pcs
75169-116721	VK/02181/B/C ● **Black sand.** 4000K. 7W. 228lm. CRI>80	6pcs
75169-117721	VK/02181/G/W ● **Grey.** 3000K. 7W. 228lm. CRI>80	6pcs
75169-118721	VK/02181/G/C ● **Grey.** 4000K. 7W. 228lm. CRI>80	6pcs
75169-119721	VK/02181/BR/W ● **Brown.** 3000K. 7W. 228lm. CRI>80	6pcs
75169-120721	VK/02181/BR/C ● **Brown.** 4000K. 7W. 228lm. CRI>80	6pcs



Details

7W: Input Voltage **220-240VAC 50/60Hz**
Output DC300mA 18V.
Driver: Built-in.
Type of Led **Edison**.
Angle **120°**.
No Dimmable.

Lifetime **20.000 hrs**.
Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC**.
Material **Aluminium**.
Installation **Ground**.
Guarantee **3 years**.



IP65



Mot



VK/02173/B

VK/02173

Code	Model	Box
75169-067721	**VK/02173/W/W** ○ **White sand.** 3000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-068721	**VK/02173/W/C** ○ **White sand.** 4000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-069721	**VK/02173/B/W** ● **Black sand.** 3000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-070721	**VK/02173/B/C** ● **Black sand.** 4000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-071721	**VK/02173/G/W** ● **Grey.** 3000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-072721	**VK/02173/G/C** ● **Grey.** 4000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-073721	**VK/02173/BR/W** ● **Brown.** 3000K. 7.2W. 228lm. CRI>80	**6pcs**
75169-074721	**VK/02173/BR/C** ● **Brown.** 4000K. 7.2W. 228lm. CRI>80	**6pcs**




Details

7.2W: Input Voltage **100-240VAC 50/60Hz.**
Driver: 18VDC 300mA 7W.
Type of Led **Edison**.
Angle **120°**.
No Dimmable.
Lifetime **20.000 hrs**.

Clicks **50.000 clicks.**
Working temperature **-20°C~45°C**.
Material **Aluminium**.
Installation **Ground**.
Guarantee **3 years**.

IP65

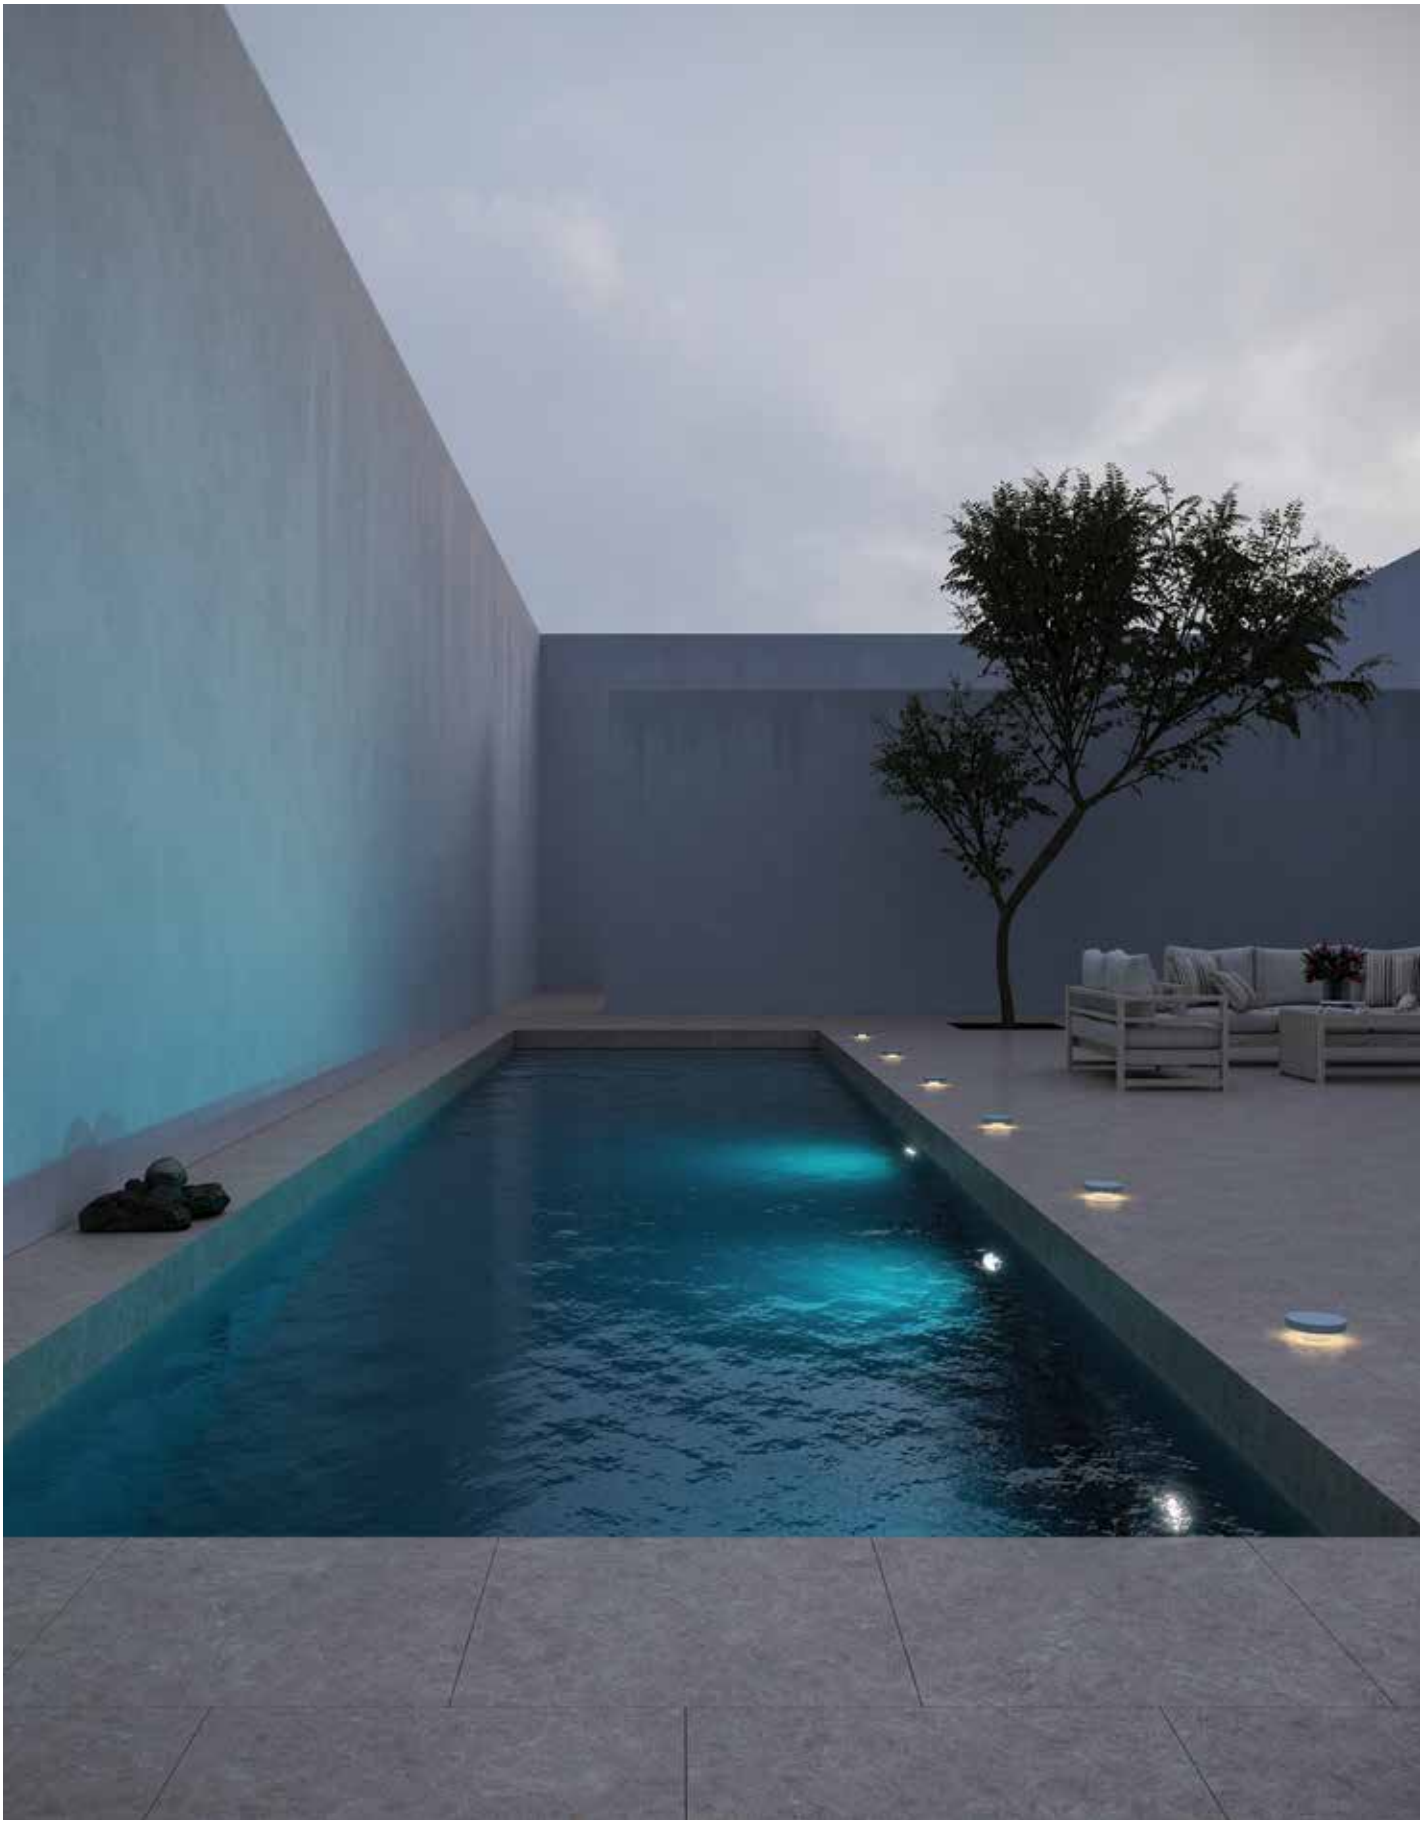

Rubi




VK/02100/AN/65



VK/02100/AN/40

VK/02100


Code	Model	Box
75169-327694	**VK/02100/AN/65/W** ● **Anthracite.** 3000K. 317lm. 4W. 70°. CRI>84. Height (L) **65cm.**	**8pcs**
75169-326694	**VK/02100/AN/40/W** ● **Anthracite.** 3000K. 317lm. 4W. 70°. CRI>84. Height (L) **40cm.**	**12pcs**

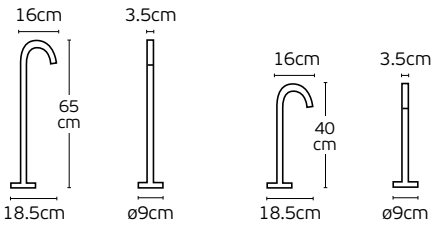

Details

AC Driver **Voltage 100-240V (Included)**.
Beam Angle **70°**.
Type of Led **CREE 1340**.
Working temperature **-20 ~ 45°C**.

Dimmable **No**.
Material **Aluminium**.
Lifetime **50.000hrs.**
Guarantee **2 years**.




IP65




Mat




VK/02135/AN




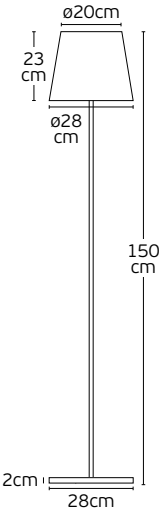



VK/02134/AN/W





VK/02135

Code	Model	Box
75169-367694	**VK/02135/W** ○ **White.** E27x3. Max 3x20W (LED).	**1pc**
75169-368694	**VK/02135/AN** ● **Anthracite.** E27x3. Max 3x20W (LED).	**1pc**

Details

Included lampholder **3xE27**.
Match also with lamps: E27.

Material **Aluminium diecast.**
Cable **2.5m.**

IP54

VK/02134

Code	Model	Box
75169-365694	**VK/02134/W/W** ○ **White.** 3000K. 565lm. 7W. CRI>84	**4pcs**
75169-366694	**VK/02134/AN/W** ● **Anthracite.** 3000K. 565lm. 7W. CRI>84	**4pcs**

Details

AC Driver **Voltage 220-240V (Included)**.
Beam Angle **47°**.
Type of Led **CREE**.
Working temperature **-20 ~ 50°C**.

Dimmable **No**.
Material **Aluminium diecast**.
Lifetime **30.000hrs.**
Guarantee **2 years**.

IP65





City



VK/01085/AN

VK/01085


Code	Model	Box
75169-330694	**VK/01085/AN** ● Anthracite. E27. Max 20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27.

Material **Aluminium.**


IP54



City




VK/01091/G/75





VK/01091/G/35



VK/01091/75

Code	Model	Box
75169-299997	**VK/01091/W/75** ○ **White.** E27. Max 20W (LED).	**4pcs**
75169-300997	**VK/01091/AN/75** ● **Anthracite.** E27. Max 20W (LED).	**4pcs**
75169-301997	**VK/01091/G/75** ● **Grey.** E27. Max 20W (LED).	**4pcs**
75169-302997	**VK/01091/BR/75** ● **Rust Brown.** E27. Max 20W (LED).	**4pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Alu diecast/Glass.**

IP54

VK/01091/35


Code	Model	Box
75169-295997	**VK/01091/W/35** ○ **White.** E27. Max 20W (LED).	**6pcs**
75169-296997	**VK/01091/AN/35** ● **Anthracite.** E27. Max 20W (LED).	**6pcs**
75169-297997	**VK/01091/G/35** ● **Grey.** E27. Max 20W (LED).	**6pcs**
75169-298997	**VK/01091/BR/35** ● **Rust Brown.** E27. Max 20W (LED).	**6pcs**

Details

Included lampholder **E27**.
Match also with lamps: E27/A60.

Material **Alu diecast/Glass.**

IP54

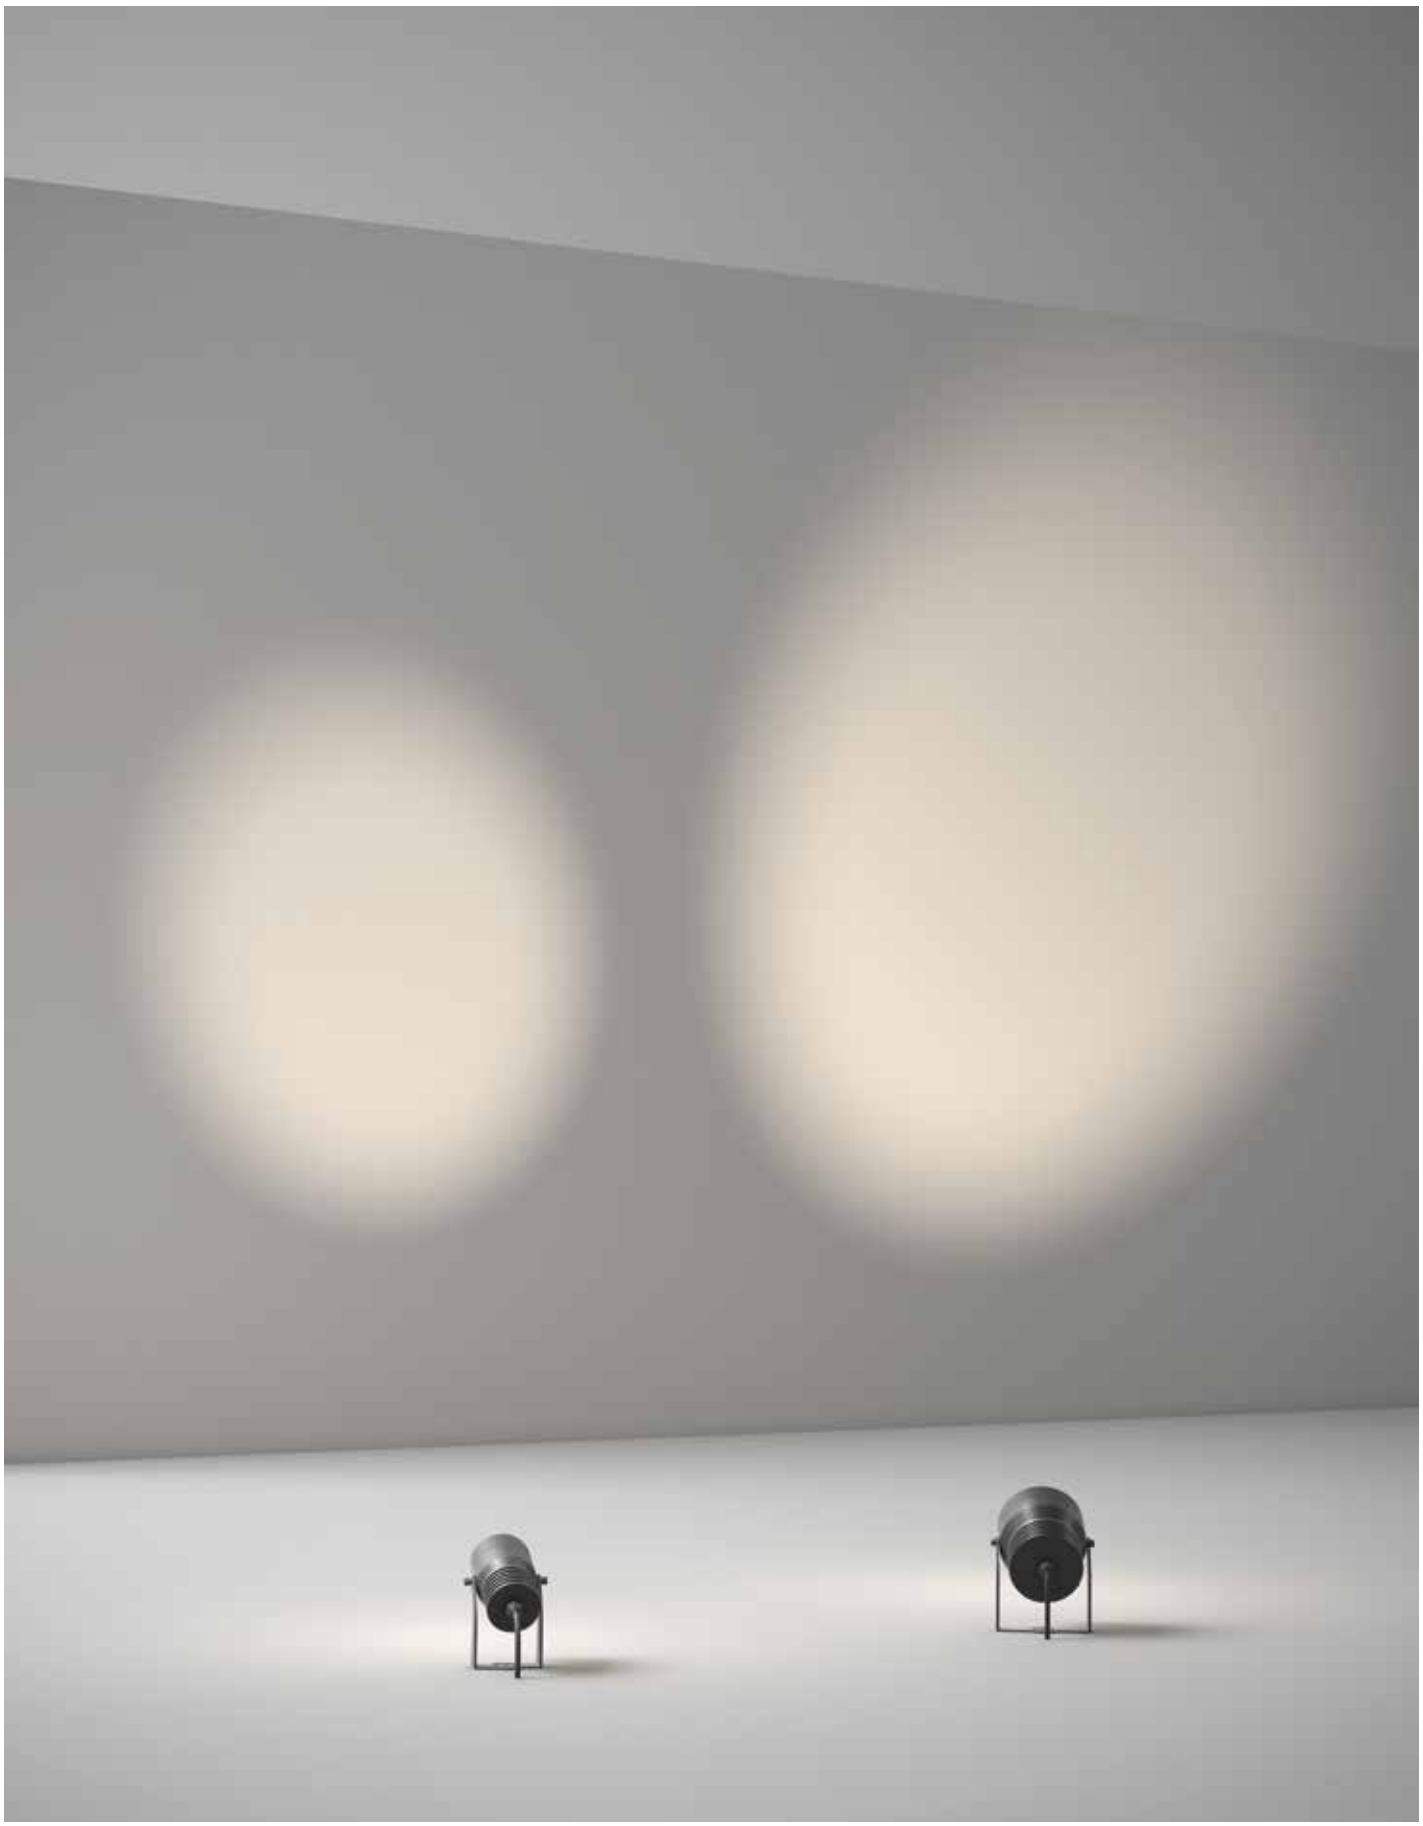



Outdoor garden lights


Logi




VK/02170/B

VK/02170


Code	Model	Box
75169-129721	**VK/02170/B/W/125** ● **Black sand.** 3000K. 5W. 274lm. CRI>80	**20pcs**
75169-130721	**VK/02170/B/C/125** ● **Black sand.** 4000K. 5W. 274lm. CRI>80	**20pcs**
75169-131721	**VK/02170/B/W/137** ● **Black sand.** 3000K. 9W. 563lm. CRI>80	**20pcs**
75169-132721	**VK/02170/B/C/137** ● **Black sand.** 4000K. 9W. 563lm. CRI>80	**20pcs**
75169-133721	**VK/02170/B/W/185** ● **Black sand.** 3000K. 19W. 801lm. CRI>80	**10pcs**
75169-134721	**VK/02170/B/C/185** ● **Black sand.** 4000K. 18W. 801lm. CRI>80	**10pcs**



VK/02170/B/125



VK/02170/B/137



VK/02170/B/185

Details

5W: Input Voltage **100-240VAC 50/60Hz, Driver: 9VDC 450mA**.
9W: Input current **85-265VAC 50/60Hz, Driver: 36VDC 250mA**.
19W, 18W: Input Voltage **220-240VAC 50/60Hz. Driver: 36VDC 500mA**.
Type of Led **CREE**.
Angle **38º**.

No Dimmable.
Lifetime **20.000 hrs**.
With honeycomb cover.
Working temperature **-20ºC~45ºC**.
Material **Aluminium**.
Installation **Ground**.
Guarantee **3 years**.


Adjustable

IP65




Bel





VK/02114/AN/W





VK/02113/AN/W

VK/02114

Code	Model	Box
75169-345694	**VK/02114/AN/W** ● **Anthracite.** 3000K. 745lm. 10W. CRI>82	**6pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **41°.**
Type of Led **COB SHINING ON**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

Adjustable **IP65**

VK/02113

Code	Model	Box
75169-344694	**VK/02113/AN/W** ● **Anthracite.** 3000K. 745lm. 10W. CRI>82	**8pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **41°.**
Type of Led **COB SHINING ON**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

Adjustable **IP65**




Fix



VK/02042/AN

VK/02042

Code	Model	Box
75169-293692	**VK/02042/AN/W** ● **Anthracite.** 3000K. 585lm. 7W. CRI>80	**10pcs**
75169-294692	**VK/02042/AN/C** ● **Anthracite.** 4000K. 585lm. 7W. CRI>80	**10pcs**
75169-295692	**VK/02042/W/W** ○ **White.** 3000K. 585lm. 7W. CRI>80	**10pcs**
75169-296692	**VK/02042/W/C** ○ **White.** 4000K. 585lm. 7W. CRI>80	**10pcs**



Details

AC Driver **220-240V (Included)**.
Beam Angle **25°.**
Type of Led **COB**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.





IP65




Olei



VK/02223/AN

VK/02223

Code	Model	Box
75169-673772	**VK/02223/AN/W** ● **Anthracite.** 3000K. 18W. 1972lm. CRI>80	**6pcs**
75169-674772	**VK/02223/W/W** ○ **Matt White.** 3000K. 18W. 1972lm. CRI>80	**6pcs**




Details

Material **Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**
Beam angle **60°**

Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **No**
Guarantee **3 years**




IP65

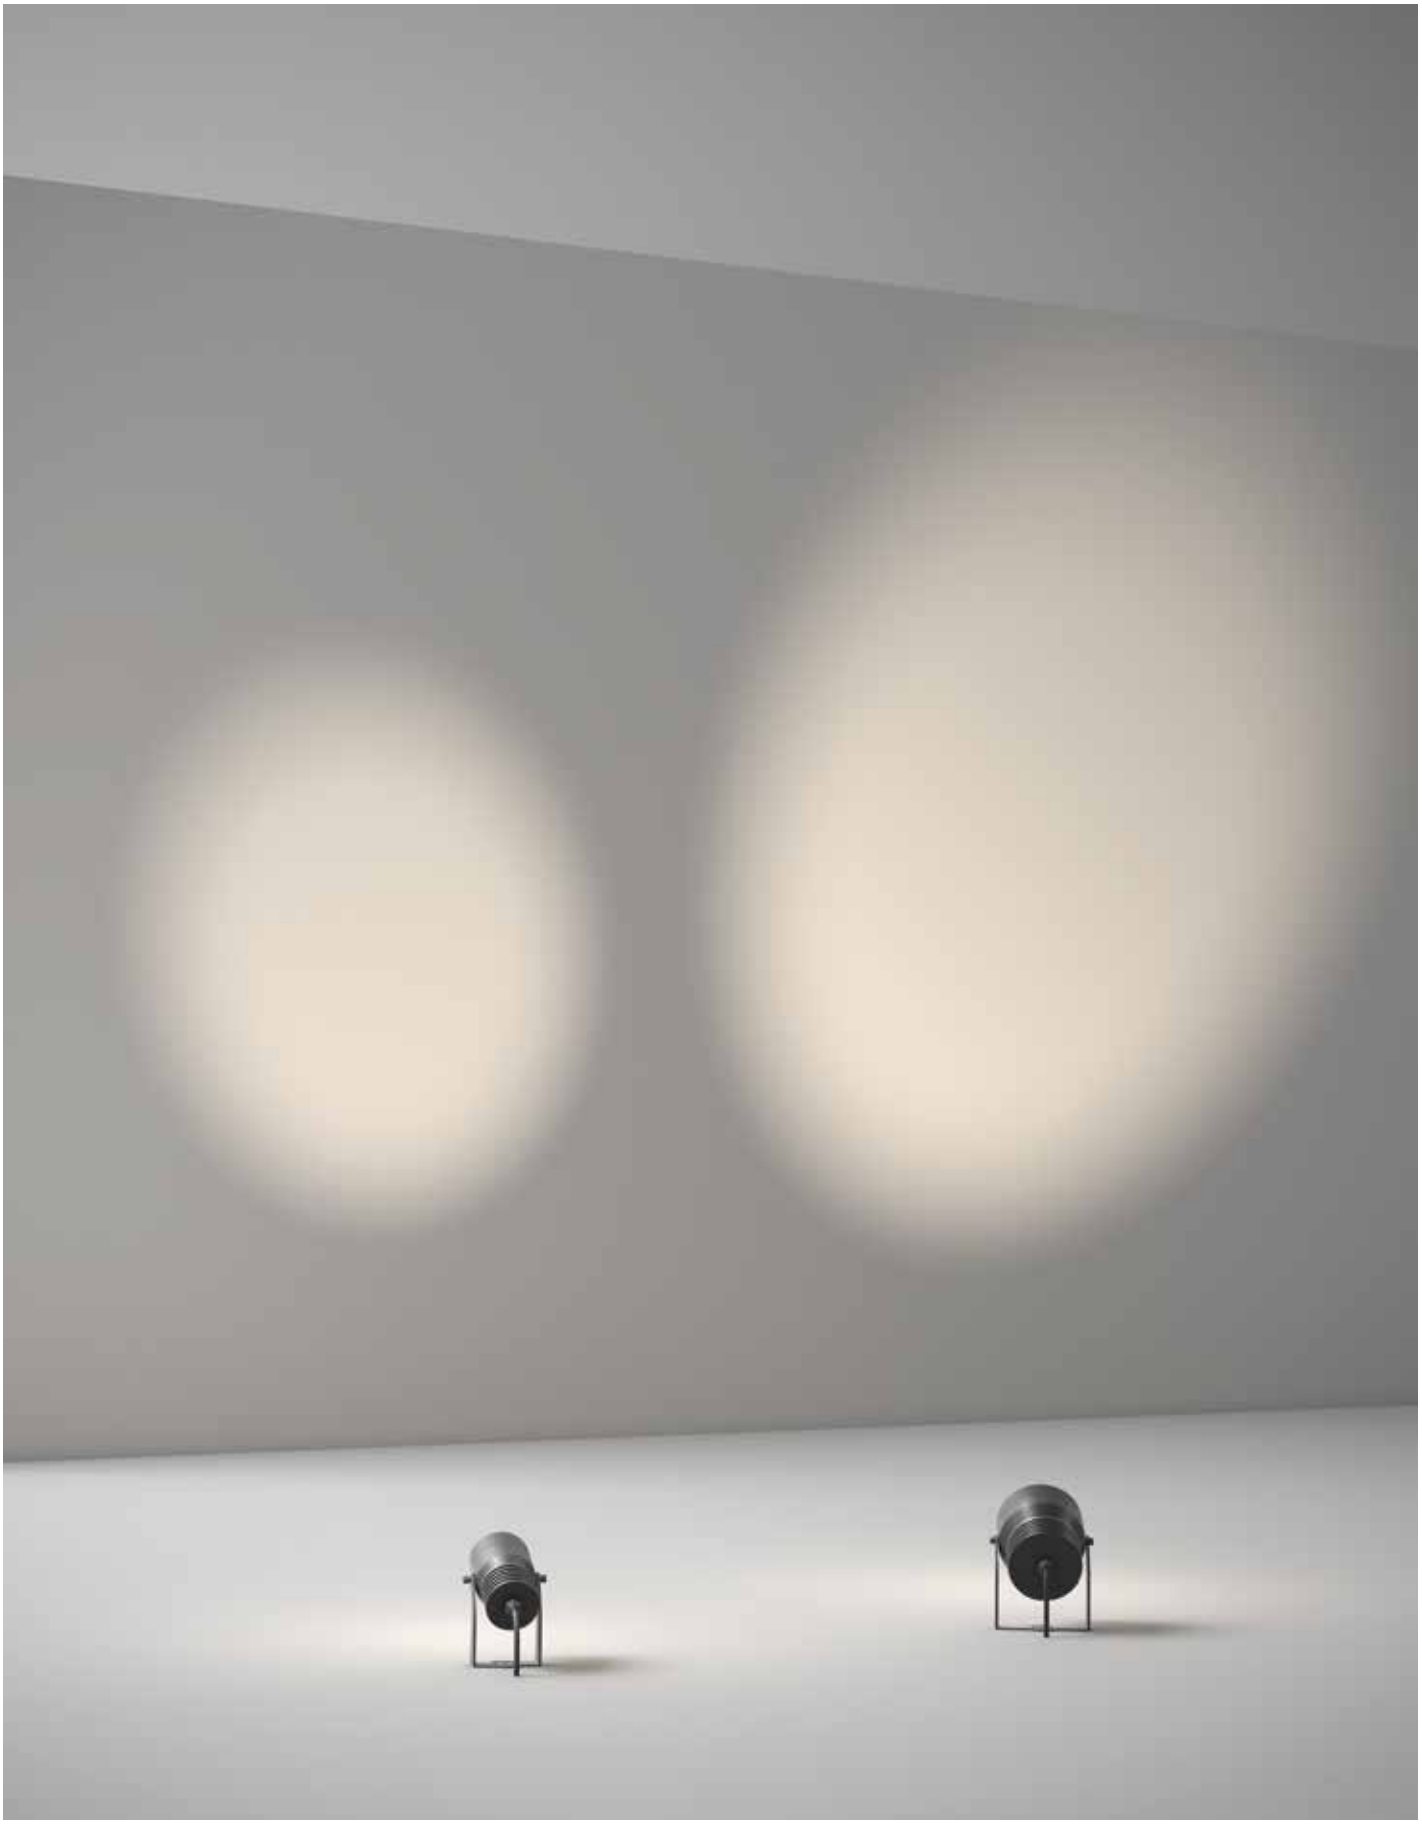

Beke



VK/02130/AN/46

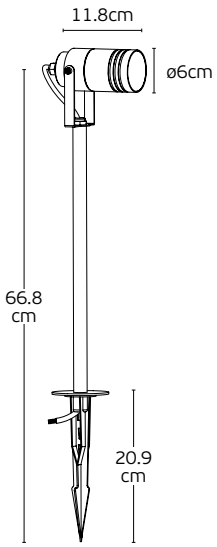

VK/02130/.../46


Code	Model	Box
75169-359997	**VK/02130/AN/46** ● **Anthracite.** GU10. Max 12W (LED).	**1pc**
75169-360997	**VK/02130/W/46** ○ **White.** GU10. Max 12W (LED).	**1pc**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.
IK Rating **IK08**
Location **Ground**
Working temperature **-20°C~40°C**

Input voltage **220-240V**
Material **Die cast aluminium body + Glass diffuser, plastic spike.**
Guarantee **2 years**.

IP54

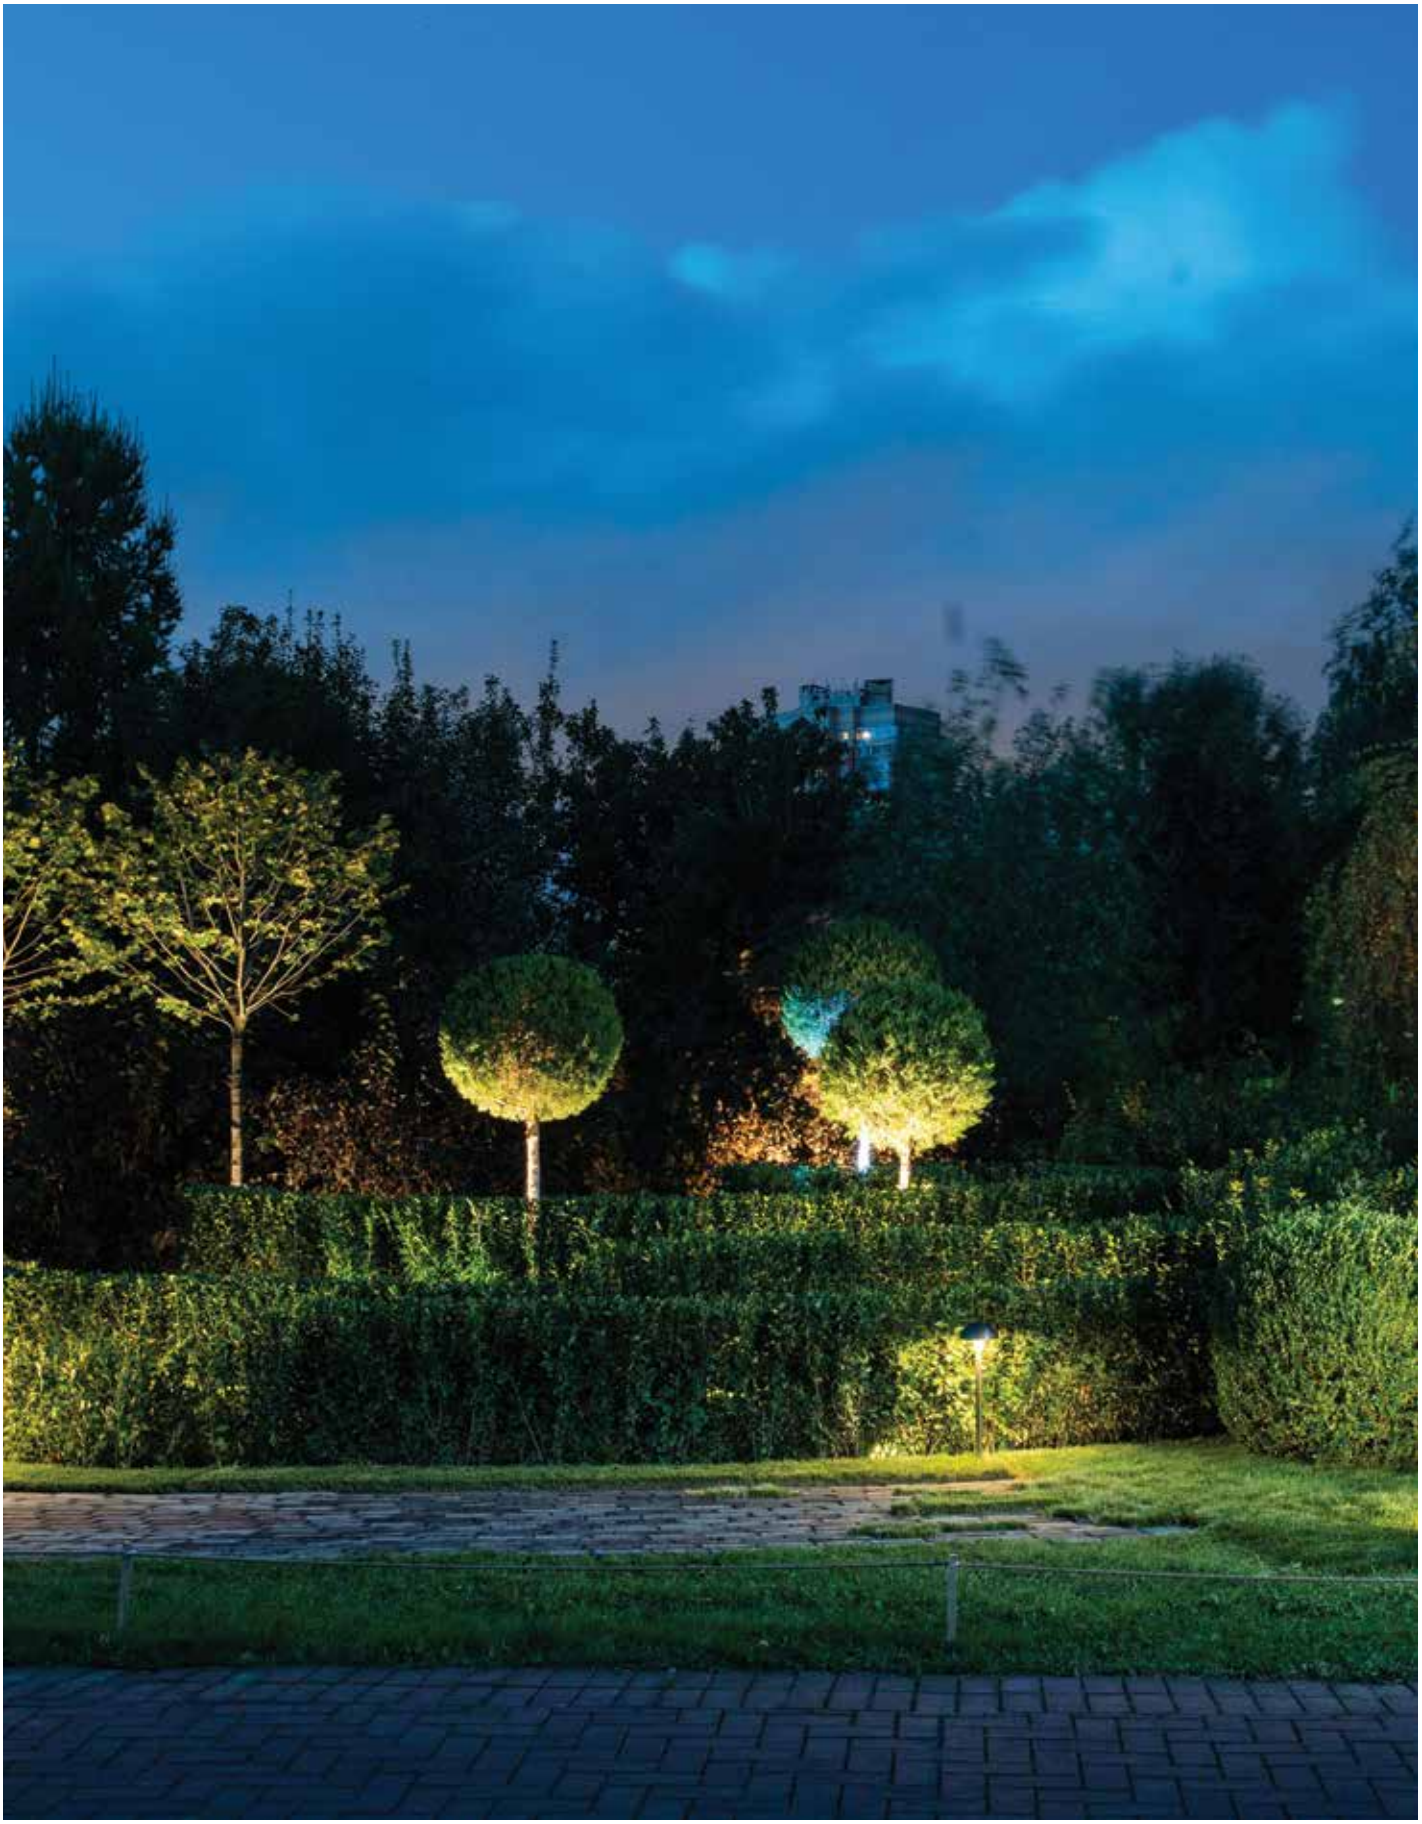

Bee





VK/02174/B



VK/02174

Code	Model	Box
75169-075721	**VK/02174/W/W** ○ **White sand.** 3000K. 2W. 170lm. CRI>80	**50pcs**
75169-076721	**VK/02174/W/C** ○ **White sand.** 4000K. 2W. 170lm. CRI>80	**50pcs**
75169-077721	**VK/02174/B/W** ● **Black sand.** 3000K. 2W. 170lm. CRI>80	**50pcs**
75169-078721	**VK/02174/B/C** ● **Black sand.** 4000K. 2W. 170lm. CRI>80	**50pcs**
75169-079721	**VK/02174/BR/W** ● **Brown.** 3000K. 2W. 170lm. CRI>80	**50pcs**
75169-080721	**VK/02174/BR/C** ● **Brown.** 4000K. 2W. 170lm. CRI>80	**50pcs**





Details

Input Voltage **24VDC 50/60Hz.**
Driver: 3VDC 700mA 2W.
Type of Led **CREE SMD.**
Angle **15°.**
No Dimmable.
Lifetime **20.000 hrs.**

Clicks **50.000 clicks.**
Working temperature **-20°C~45°C.**
Material **Aluminium.**
Installation **Ground.**
Guarantee **3 years.**


IP65



Divo




VK/02128/AN/W





VK/02123/AN/W



VK/02128

Code	Model	Box
75169-358694	**VK/02128/AN/W** ● **Anthracite.** 3000K. 90lm. 1W. CRI>82	**36pcs**
75169-359694	**VK/02128/G/W** ● **Grey.** 3000K. 90lm. 1W. CRI>82	**36pcs**

Details

AC Driver **12-24V (Required, NOT included)**.
Beam Angle **28º.**
Type of Led **CREE**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Die-cast Aluminium**.
Guarantee **2 years**.



IP65

VK/02123

Code	Model	Box
75169-352694	**VK/02123/AN/W** ● **Anthracite.** 3000K. 656lm. 10W. 26o. CRI>83	**4pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **26º.**
Type of Led **COB**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Die-cast Aluminium**.
Guarantee **2 years**.



IP65

VK/SPIKE/B

Code	Model	Box
75169-363997	**VK/SPIKE/B** ● **Black.** Plastic	**1pc**

Details

Material **Plastic**.



VK/SPIKE/B






Bit



VK/02177/B

VK/02177

Code	Model	Box
75169-089721	**VK/02177/W/W** ○ **White sand.** 3000K. 5W. 601lm. CRI>80	**50pcs**
75169-090721	**VK/02177/W/C** ○ **White sand.** 4000K. 5W. 614lm. CRI>80	**50pcs**
75169-091721	**VK/02177/B/W** ● **Black sand.** 3000K. 5W. 601lm. CRI>80	**50pcs**
75169-092721	**VK/02177/B/C** ● **Black sand.** 4000K. 5W. 614lm. CRI>80	**50pcs**



Details

Input Voltage **200-240VAC 50/60Hz.**
Driver: 200-240VAC 5W.
Type of Led EPISTAR.
Angle **38º.**
No Dimmable.
Lifetime **20.000 hrs.**

Clicks **50.000 clicks.**
Working temperature **-20ºC~45ºC.**
Material **Aluminium.**
Installation **Ceiling/Wall/Ground.**
Guarantee **3 years.**




IP65



All




VK/02171/B




VK/02172/B

VK/02171, VK/02172

Code	Model	Box
75169-135721	VK/02171/B/W/90 ● Black sand. **3000K. 2W.** 119lm. **CRI>80**	24pcs
75169-136721	VK/02171/B/C/90 ● Black sand. **4000K. 2W.** 119lm. **CRI>80**	24pcs
75169-137721	VK/02172/B/W/124 ● Black sand. **3000K. 3x1W.** 245lm. **CRI>80**	12pcs
75169-138721	VK/02172/B/C/124 ● Black sand. **4000K. 3x1W.** 245lm. **CRI>80**	12pcs






Details

2W: Input Voltage **650mA,** Input Voltage **DC 3V.**
Driver: 100-240V 50/60Hz, Output DC 2.5-4V 650mA.
Type of Led **SMD CREE**.
Angle **30º.**
Lifetime **50.000 hrs**.
3x1W: Input Voltage **100-240VAC 50/60Hz.**
Driver: 9VDC 350mA.
Type of Led **SMD CREE**.
Angle **25º**.
Lifetime **20.000 hrs**.
No Dimmable.
Working temperature **-20ºC~45ºC**.
Material **Aluminium**.
Installation **Ground**.
Guarantee **3 years**.





IP65

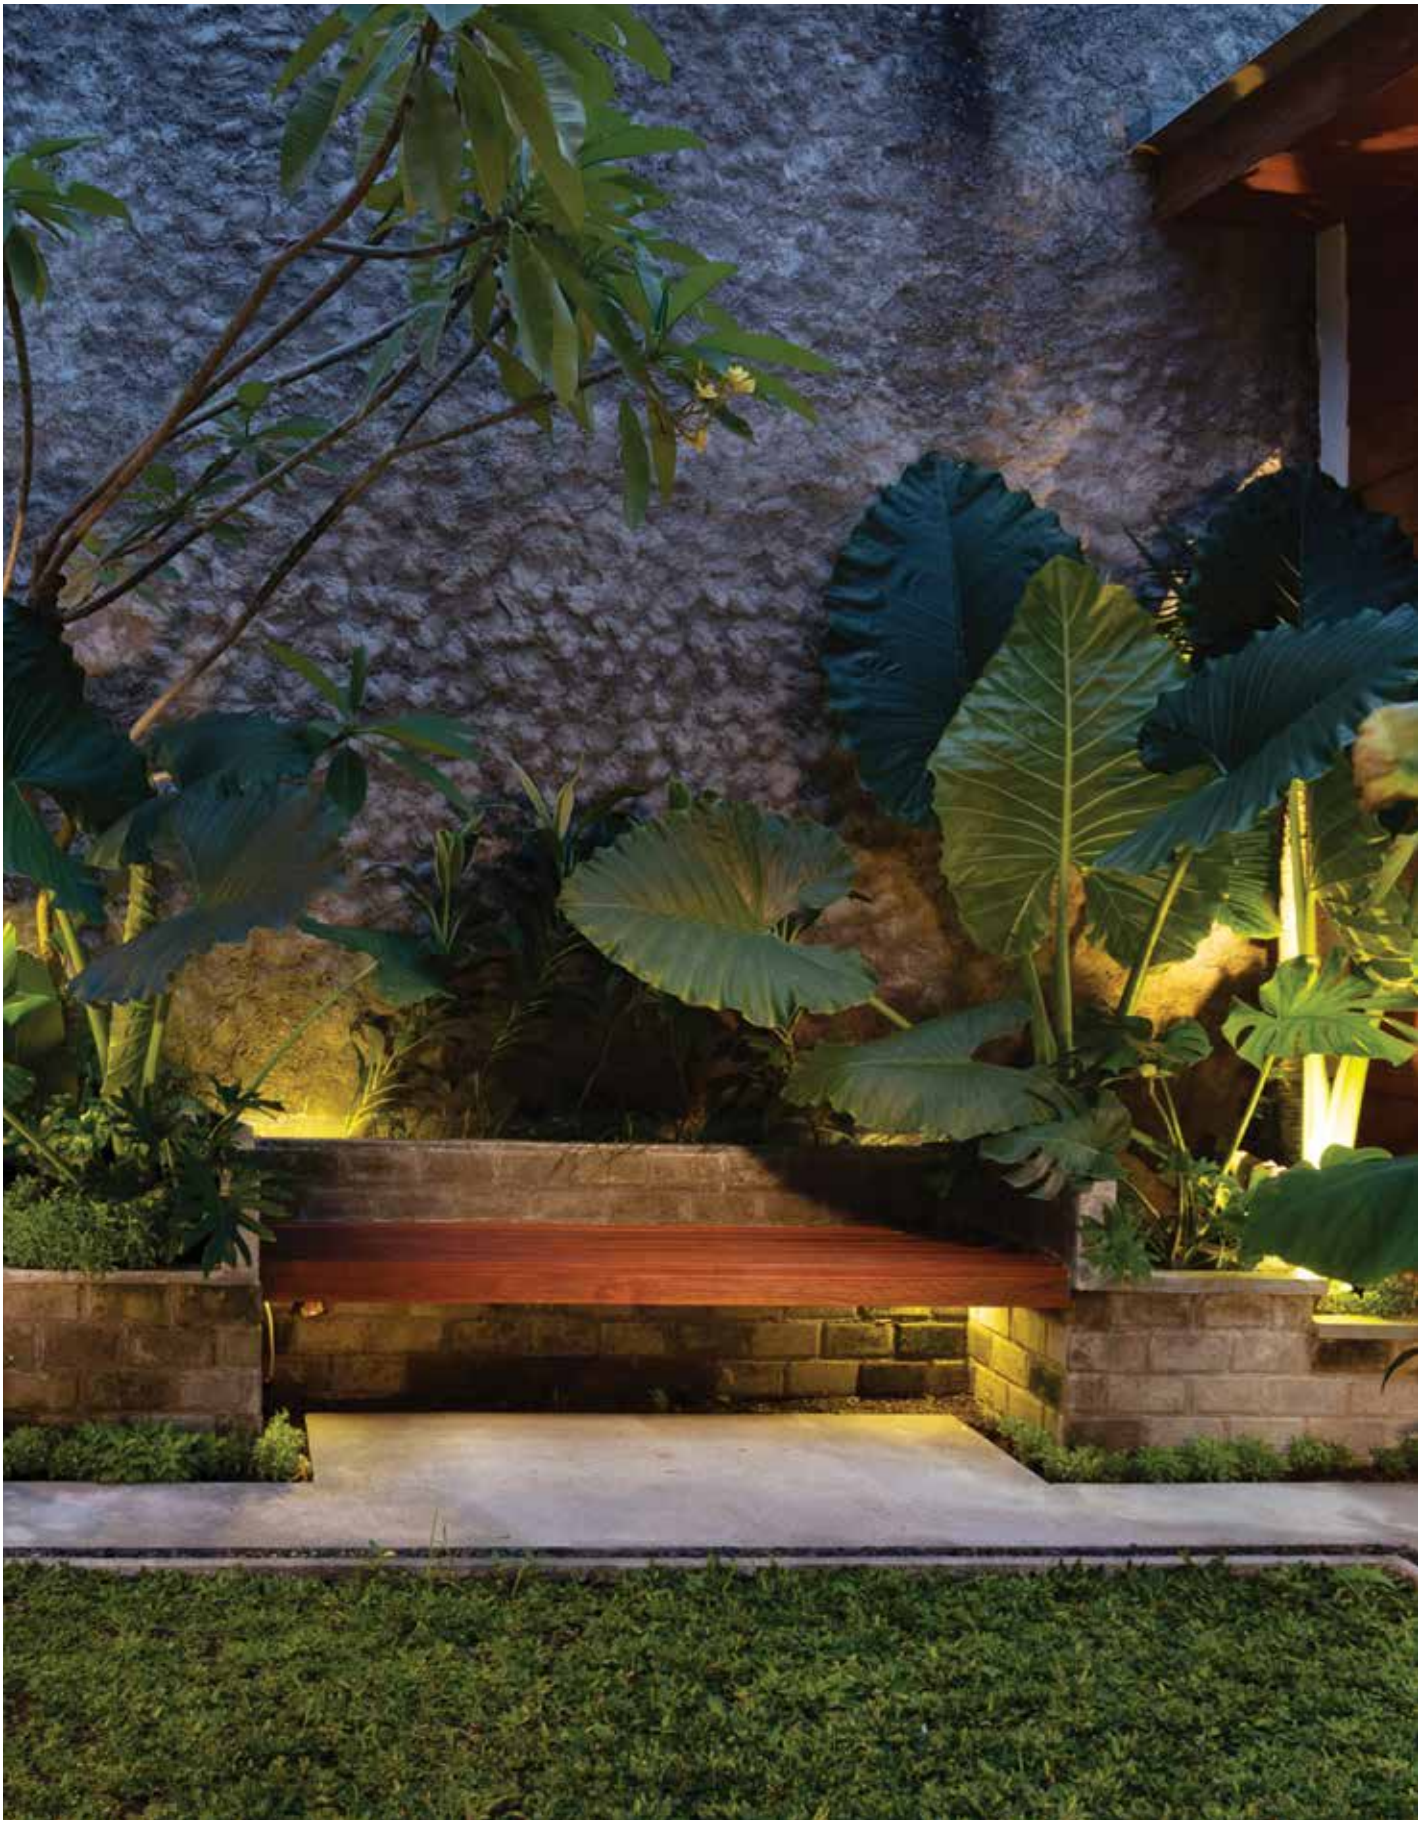

Mim



VK/02096/AN



VK/02096

Code	Model	Box
75169-322694	**VK/02096/AN/W** ● **Anthracite.** 3000K. 467lm. 6W. CRI>81	**6pcs**

Details

AC Driver **100-240V (Included)**.
Beam Angle **36°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium.**
Guarantee **2 years**.

IP54




Joe



VK/02130/AN

VK/02130

Code	Model	Box
75169-278997	**VK/02130/AN** ● **Anthracite.** GU10. Max 12W (LED).	**20pcs**
75169-358997	**VK/02130/W** ○ **White.** GU10. Max 12W (LED).	**20pcs**



Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.

Material **Stainless steel**.



IP54



Included spike



Solar




VK/02136/AN

solar

» Automatically light up at night Work time >7
» Plastic spike included

VK/02136


Code	Model	Box
75169-370694	**VK/02136/AN/W** ● **Anthracite.** 3000K. 110lm. 1.3W. CRI>79	**12pcs**
75169-369694	**VK/02136/W/W** ○ **White.** 3000K. 110lm. 1.3W. CRI>79	**12pcs**



Details


AC Driver **DC 3.7V (Included)**.
Beam Angle **28°.**
Type of Led **CREE**.
Panel **Solar 2 Watt.**
Battery **1x2200mAh lithium**
Charge **6-8 hours (sunshine).**

Lifetime **30.000hrs**.
Working temperature **-20°C→45°C**.
Dimmable No.
Material **Aluminium diecast. Glass.**
Guarantee **2 years**.



IP65



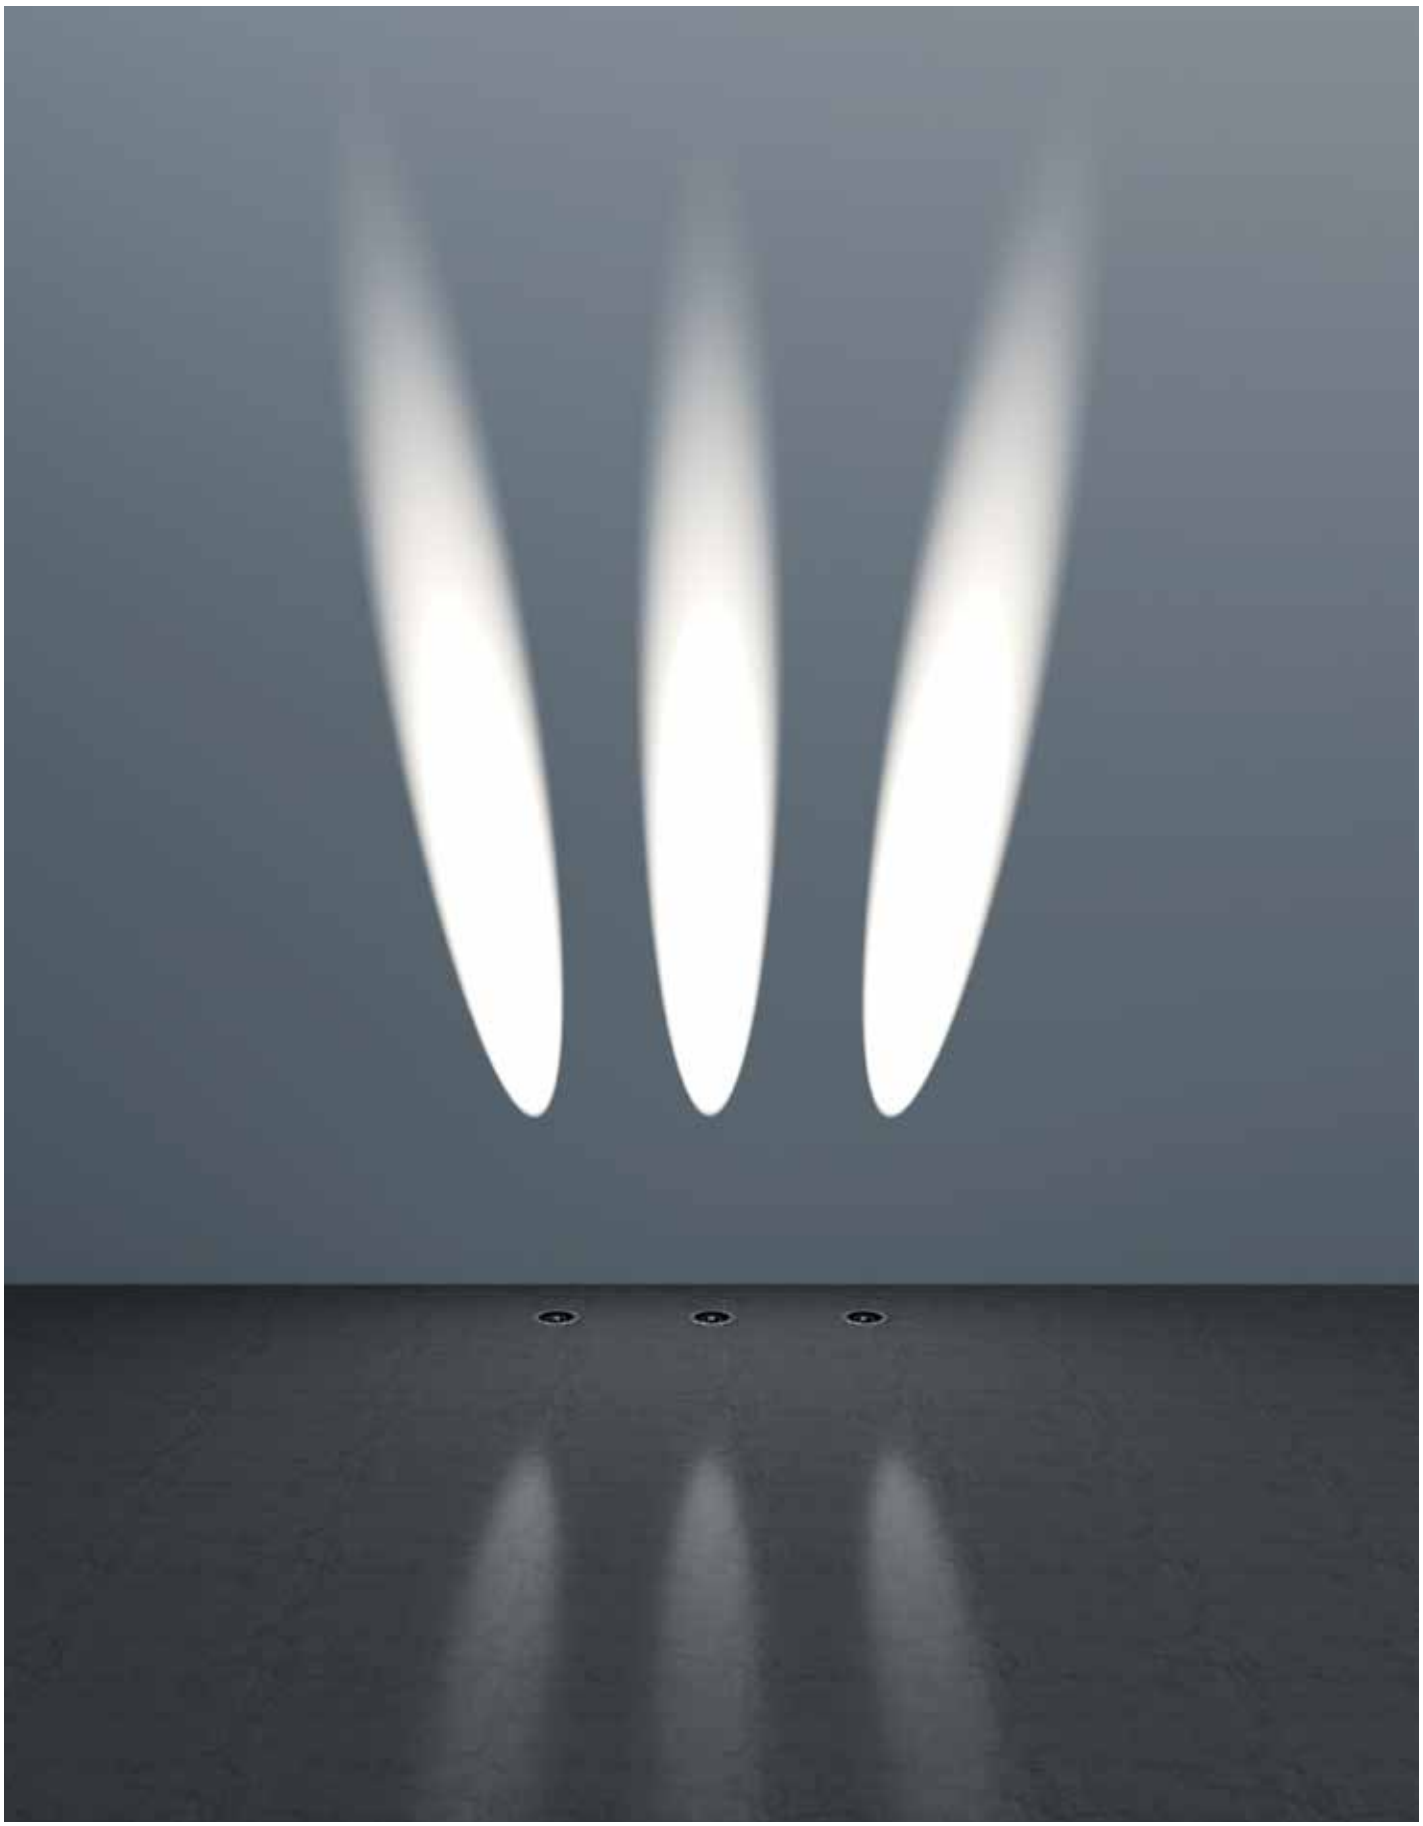



Outdoor inground lights

Moom



VK/02225/MC/W




VK/02225

Code	Model	Box
75169-677772	**VK/02225/MC/W**	**2pcs**
	● **Nickel Matt.** 3000K. 15W. 1516lm. CRI>80	

Details

Material **Stainless steel / Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**

Beam angle **15°**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **yes**
Guarantee **3 years**





IP67



Moom



VK/02226/MC/W




VK/02226

Code	Model	Box
75169-678772	**VK/02226/MC/W**	**2pcs**
	● **Nickel Matt.** 3000K. 20W. 1985lm. CRI>80	

Details


Material **Stainless steel / Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**

Beam angle **18°**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **yes**
Guarantee **3 years**





IP67

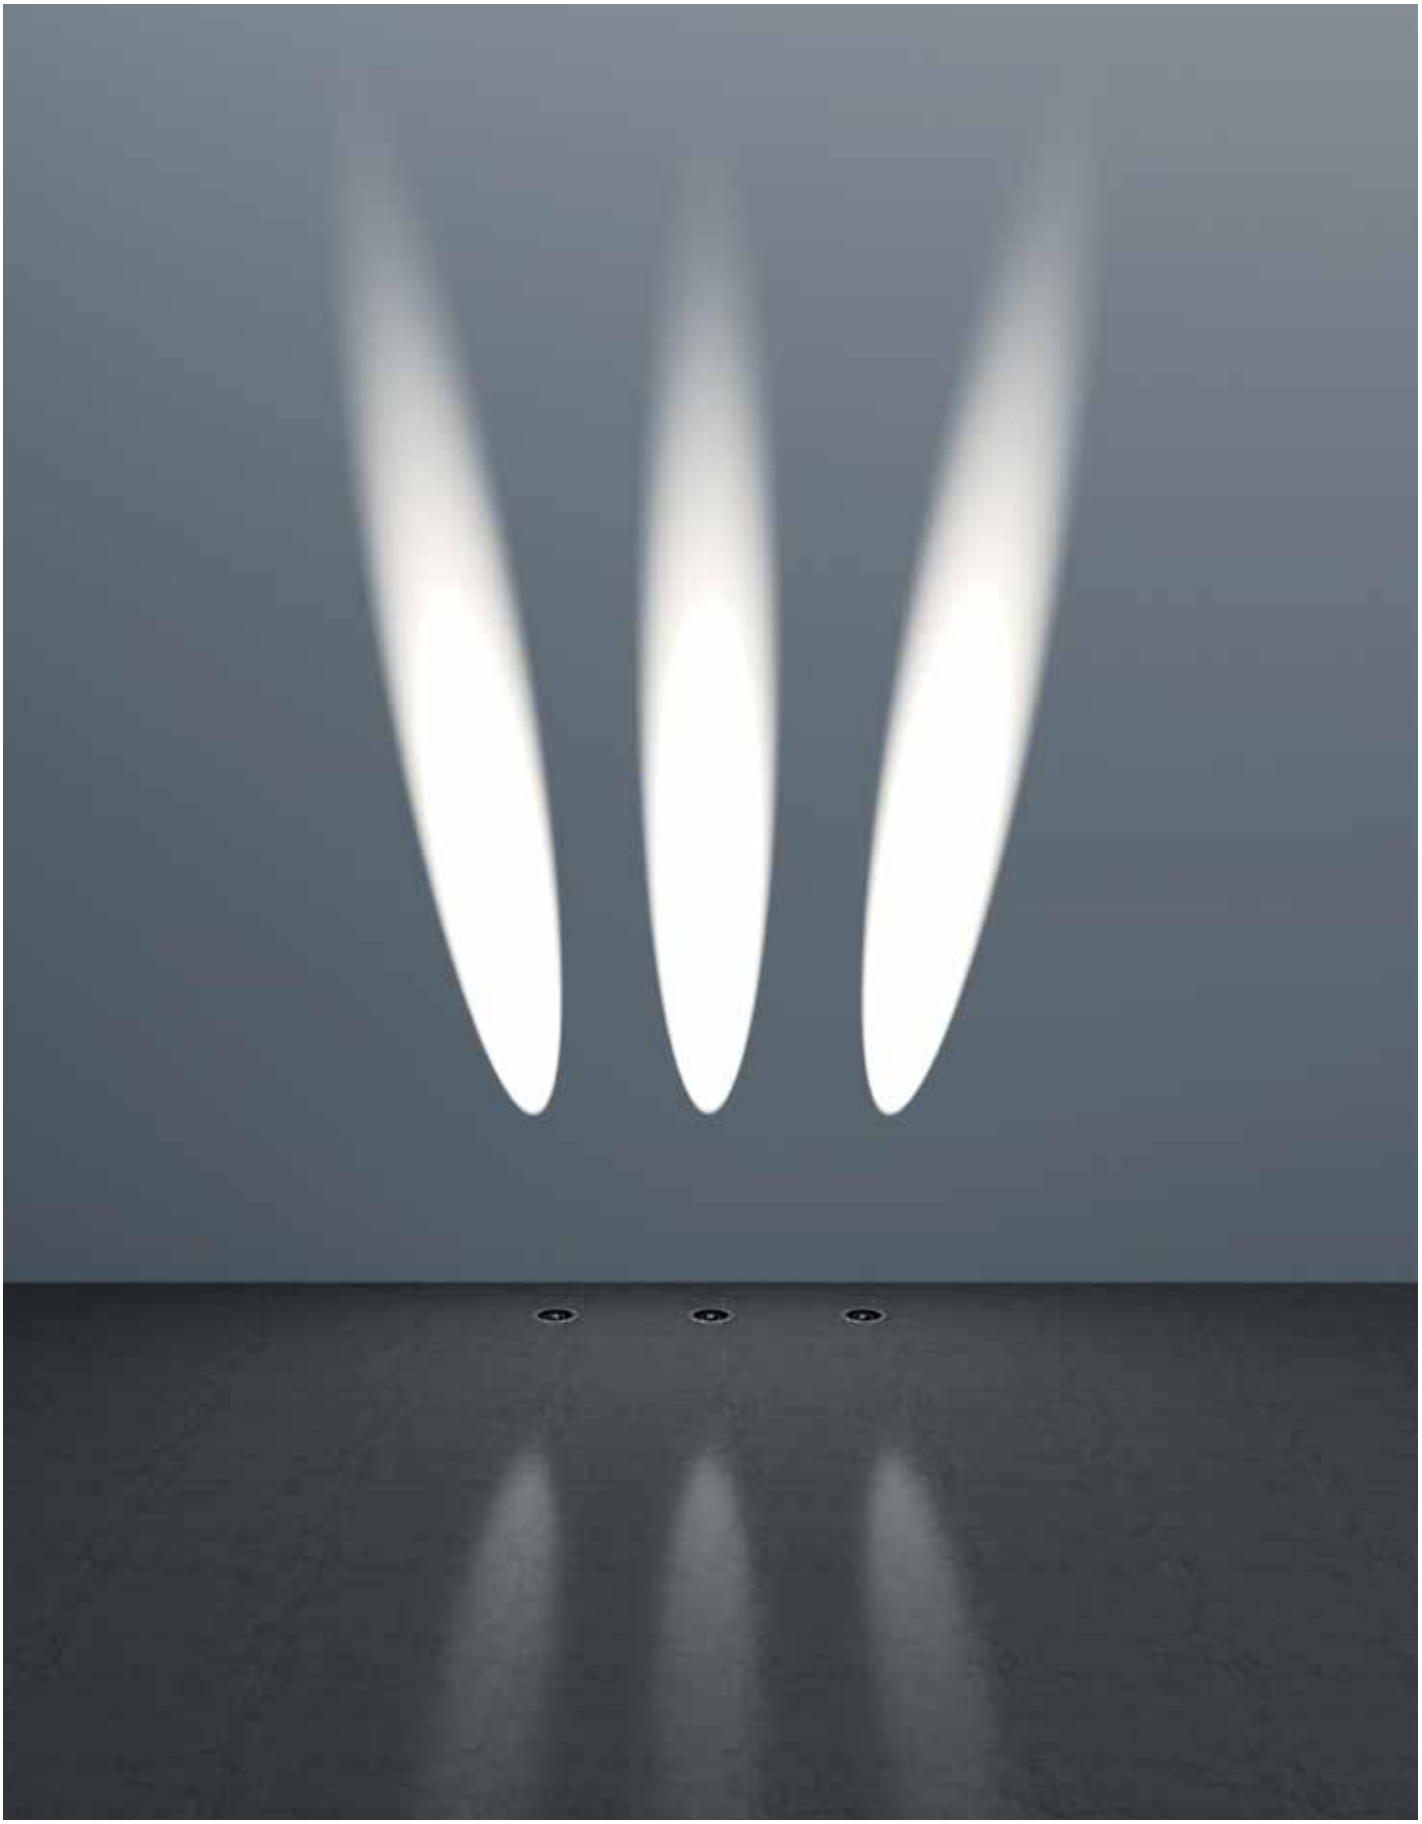

Moom



VK/02227/MC/W




VK/02227


Code	Model	Box
75169-679772	**VK/02227/MC/W**	**2pcs**
	● **Nickel Matt.** 3000K. 14W. 1493lm. CRI>80	

Details


Material **Stainless steel / Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**

Beam angle **50°**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **no**
Guarantee **3 years**





IP67

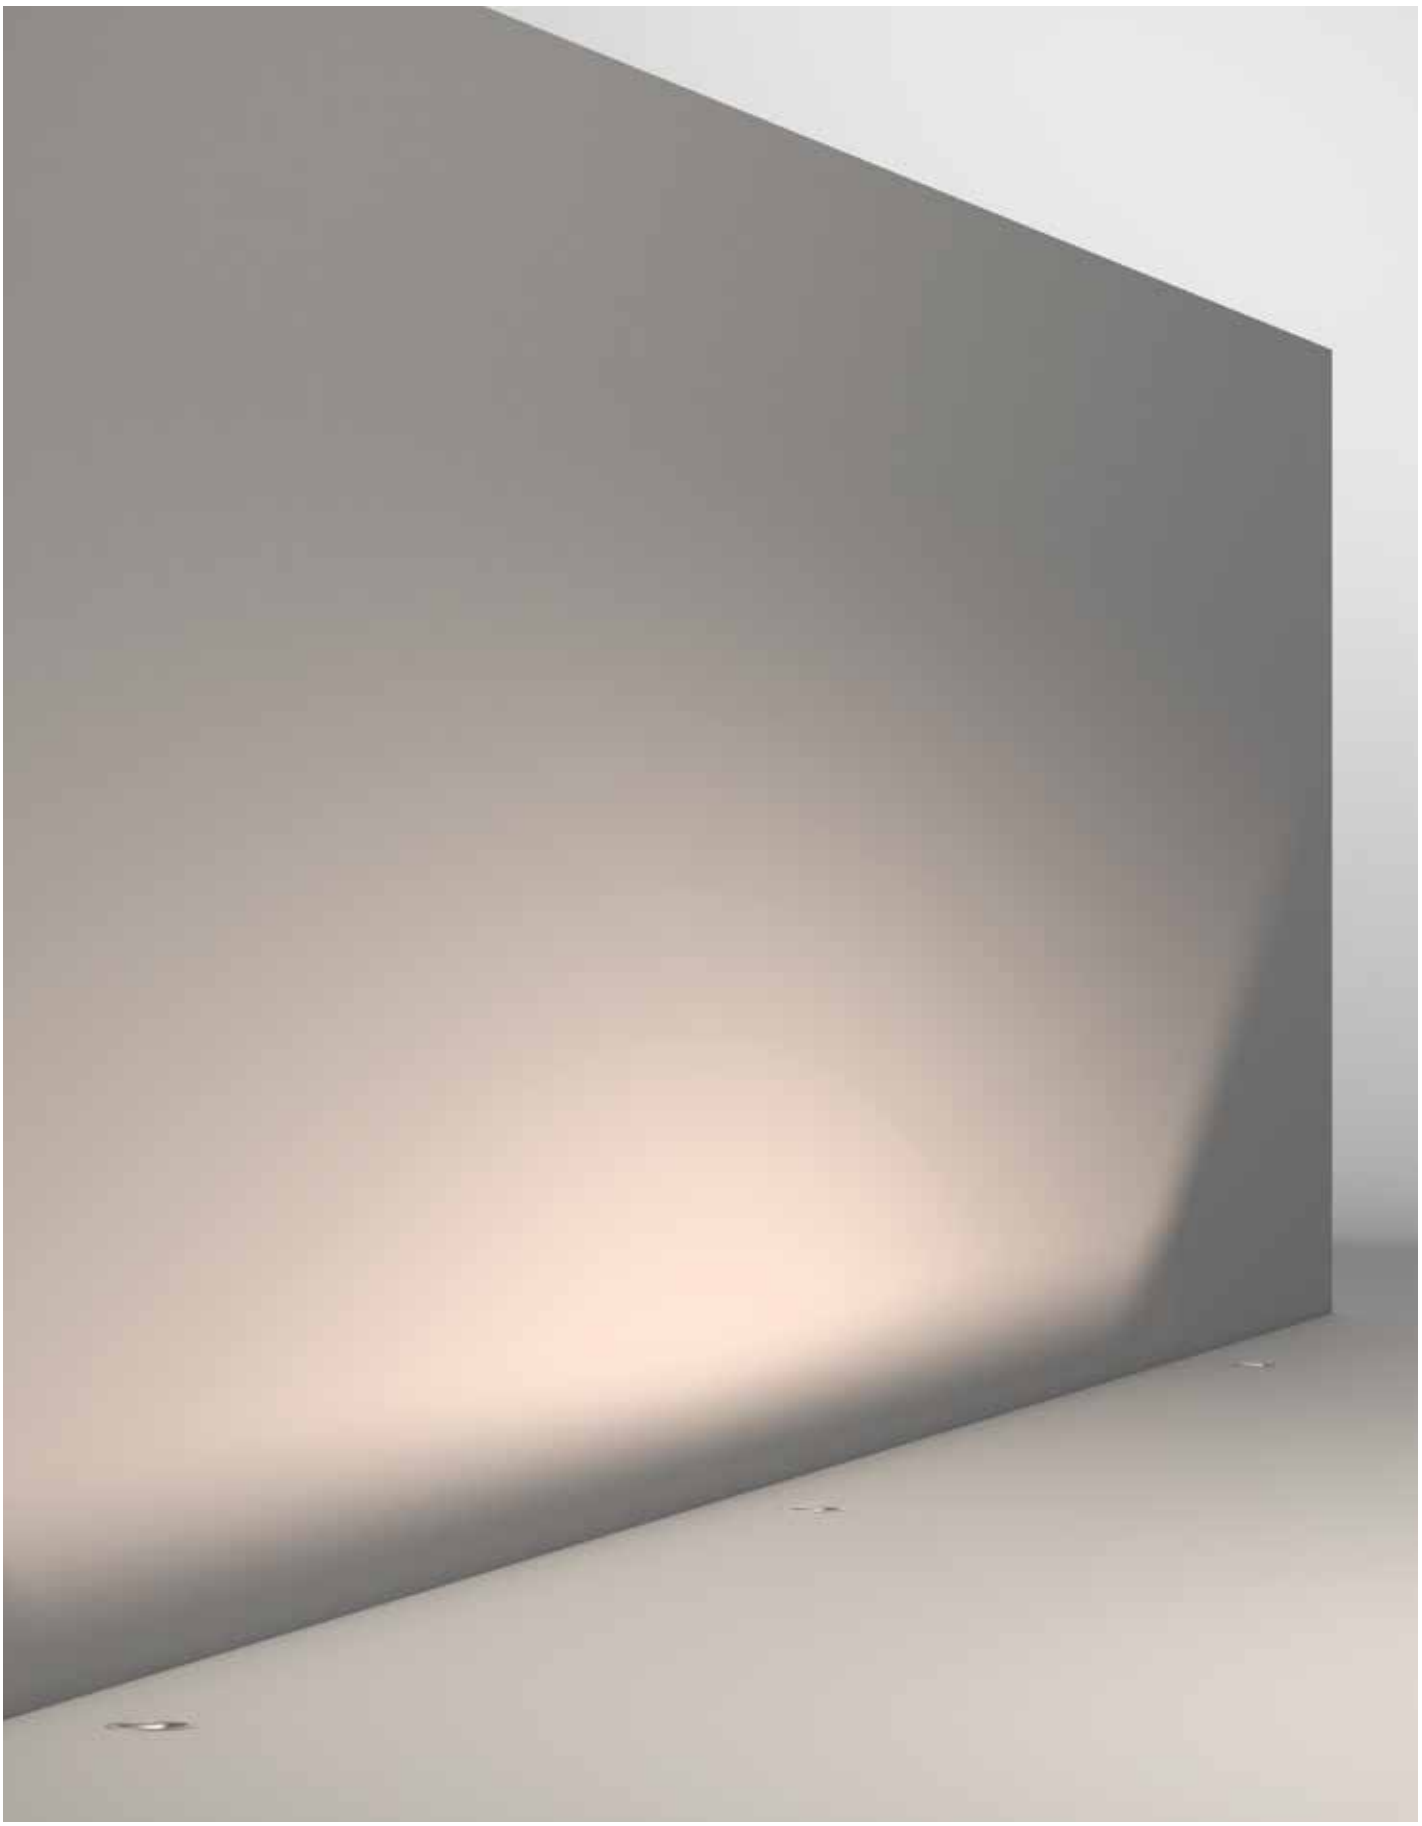

Moom



VK/02228/MC/W




VK/02228

Code	Model	Box
75169-680772	**VK/02228/MC/W**	**2pcs**
	● **Nickel Matt.** 3000K. 18W. 2127lm. CRI>80	

Details

Material **Stainless steel / Die-casting aluminum alloy**
Type of Led **COB**
Voltage **AC220-240V**
Location **Outdoor**

Beam angle **50°**
Working temperature **-20°C - 40°C**
Lifetime **25.000hrs**
Dimmable **no**
Guarantee **3 years**



IP67



Rout




VK/02129/AN/1/W





VK/02129/AN/2/W



VK/02129/AN/4/W







VK/02129/1

Code	Model	Box
75169-360694	**VK/02129/AN/1/W** ● **Anthracite.** 3000K. 92lm. 9W. CRI>84	**8pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **110°**.
Type of Led **CREE**.
Lifetime **30.000hrs**.
Dimmable No.

Material **Aluminium diecast**.
Static weight **500kg allowed**.
Included Recessed **Plastic Box**.
Guarantee **2 years**.

IP67

VK/02129/2

Code	Model	Box
75169-361694	**VK/02129/AN/2/W** ● **Anthracite.** 3000K. 156lm. 9W. CRI>84	**8pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **99°.**
Type of Led **CREE**.
Lifetime **30.000hrs**.
Dimmable No.

Material **Aluminium diecast.**
Static weight **500kg allowed.**
Included Recessed **Plastic Box**.
Guarantee **2 years**.

IP67



VK/02129/4

Code	Model	Box
75169-362694	**VK/02129/AN/4/W**	**8pcs**
	● **Anthracite.** 3000K. 227lm. 9W. CRI>84	

Details

AC Driver **200-240V (Included)**.
Beam Angle **70°.**
Type of Led **CREE**.
Lifetime **30.000hrs**.
Dimmable No.

Material **Aluminium diecast.**
Static weight **500kg allowed.**
Included Recessed **Plastic Box**.
Guarantee **2 years**.

IP67



Blak




VK/02117





VK/02118



VK/02118/RGB

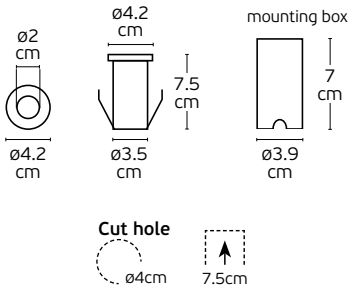

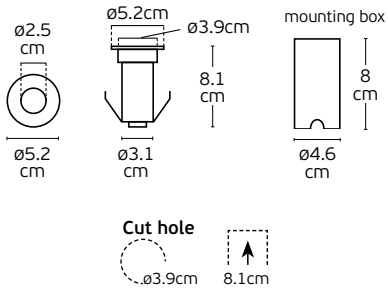

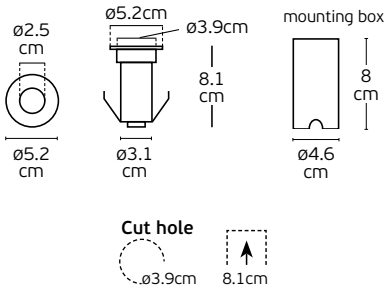

VK/02117

Code	Model	Box
74168-234704	**VK/02117/W/10** ● **Steel.** 3000K. 180lm. 1W. **10°**. CRI>80	**54pcs**
74168-235704	**VK/02117/W/60** ● **Steel.** 3000K. 180lm. 1W. **60°**. CRI>80	**54pcs**

Details

AC Driver **100-240V (Included)**.
Type of Led **EPISTAR**.
Lifetime **50.000hrs**.
Working temperature **-20°C→45°C**.
Dimmable **No**.

Material **Stainless steel.**
Location **Ground/Pool.**
Included **Recessed plastic box ø3.9cm.**
Guarantee **2 years**.

IP68

VK/02118

Code	Model	Box
74168-236704	**VK/02118/W/10** ● **Steel.** 3000K. 200lm. 3W. **10°**. CRI>80	**54pcs**
74168-237704	**VK/02118/W/60** ● **Steel.** 3000K. 200lm. 3W. **60°**. CRI>80	**54pcs**

Details

AC Driver **100-240V (Included)**.
Type of Led **EPISTAR**.
Lifetime **50.000hrs**.
Working temperature **-20°C→45°C**.
Dimmable **No**.

Material **Stainless steel.**
Location **Ground/Pool.**
Included **Recessed plastic box ø4.6cm.**
Guarantee **2 years**.

IP68



VK/02118/RGB

Code	Model	Box
74168-238704	**VK/02118/RGB/10** ● **Steel.** RGB. 200lm. 3W. **10°**. CRI>80	**54pcs**
74168-239704	**VK/02118/RGB/60** ● **Steel.** RGB. 200lm. 3W. **60°**. CRI>80	**54pcs**

Details

3x350mA (**driver not included**).
Type of Led **EPISTAR**.
Lifetime **50.000hrs**.
Working temperature **-20°C→45°C**.
Dimmable **yes**.


Material **Stainless steel.**
Location **Ground/Pool.**
Included **Recessed plastic box ø4.6cm.**
Guarantee **2 years**.

IP68

Blak




VK/01096/MC





VK/01097/MC



VK/01096

Code	Model	Box
74168-264997	**VK/01096/MC** ● **Nickel Mat.** GU10. Max 12W (LED).	**1pc**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.

Material **Die casting aluminium + glass.**
Use **In ground.**

IP67

VK/01097

Code	Model	Box
74168-265997	**VK/01097/MC** ● **Nickel Mat.** GU10. Max 12W (LED).	**1pc**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.

Material **Die casting aluminium + glass.**
Use **In ground.**


IP67



Blak




VK/01052/MC

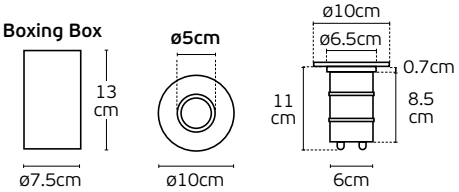




VK/01054/MC






VK/01054/70/MC







Mini lamp MR11-GU10 is placed, not included

VK/01052

Code	Model	Box
74168-170677	**VK/01052/304/MC**	**1pc**
	● **Brushed Chrome.** GU10 Max 12W (LED). **Ring Stainless 304.**	
74168-277677	**VK/01052/316/MC**	**1pc**
	● **Brushed Chrome.** GU10 Max 12W (LED). **Ring Stainless 316.**	

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.

Body material **Aluminium.**
Body ring **Stainless.**

IP65

VK/01054

Code	Model	Box
74168-146677	**VK/01054/304/MC**	**10pcs**
	● **Brushed Chrome.** Module Led. **Ring Stainless 304.**	
74168-283677	**VK/01054/316/MC**	**10pcs**
	● **Brushed Chrome.** Module Led. **Ring Stainless 316.**	

Details

Voltage **350mA-700mA**.
Module Led **max 5W** (**NOT included**).

Body material **Aluminium.**
Body ring **Stainless.**

IP65



VK/01054/70

Code	Model	Box
74168-240677	**VK/01054/70/304/MC**	**10pcs**
	● **Brushed Chrome.** GU10 Max 6W (LED). **Ring Stainless 304.**	
74168-284677	**VK/01054/70/316/MC**	**10pcs**
	● **Brushed Chrome.** GU10 Max 6W (LED). **ing Stainless 316.**	


Details

Included lampholder **GU10**.
Lamps **GU10 (MR11) max 6W.**

Body material **Aluminium.**
Body ring **Stainless.**

IP65

Blak

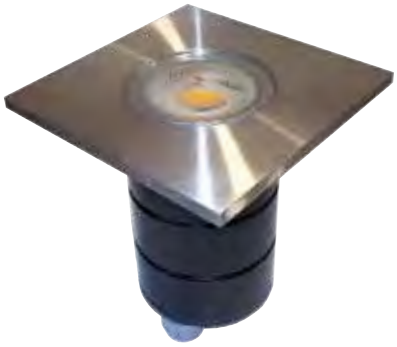


VK/01053/MC





VK/01055/MC



VK/01055/70/MC









Mini lamp MR11-GU10 is placed, not included

VK/01053

Code	Model	Box
74168-141677	**VK/01053/304/MC** ● **Brushed Chrome.** GU10 Max 12W (LED). **Ring Stainless 304.**	**1pc**
74168-285677	**VK/01053/316/MC** ● **Brushed Chrome.** GU10 Max 12W (LED). **Ring Stainless 316.**	**1pc**

Details

Included lampholder **GU10**.
Match also with lamps: **GU10/50**, **Par16**.

Body material **Aluminium.**
Body ring **Stainless.**

IP65

VK/01055

Code	Model	Box
74168-143677	**VK/01055/304/MC** ● **Brushed Chrome.** Module Led. **Ring Stainless 304.**	**10pcs**
74168-286677	**VK/01055/316/MC** ● **Brushed Chrome.** Module Led. **Ring Stainless 316.**	**10pcs**

Details

Voltage **350mA-700mA**.
Module Led **max 5W** (**NOT included**).

Body material **Aluminium.**
Body ring **Stainless.**

IP65



VK/01055/70


Code	Model	Box
74168-241677	**VK/01055/70/304/MC**	**10pcs**
	● **Brushed Chrome.** GU10 Max 6W (LED). **Ring Stainless 304.**	
74168-287677	**VK/01055/70/316/MC**	**10pcs**
	● **Brushed Chrome.** GU10 Max 6W (LED). **Ring Stainless 316.**	

Details

Included lampholder **GU10**.
Lamps **GU10 (MR11) max 6W.**

Body material **Aluminium.**
Body ring **Stainless.**

IP65

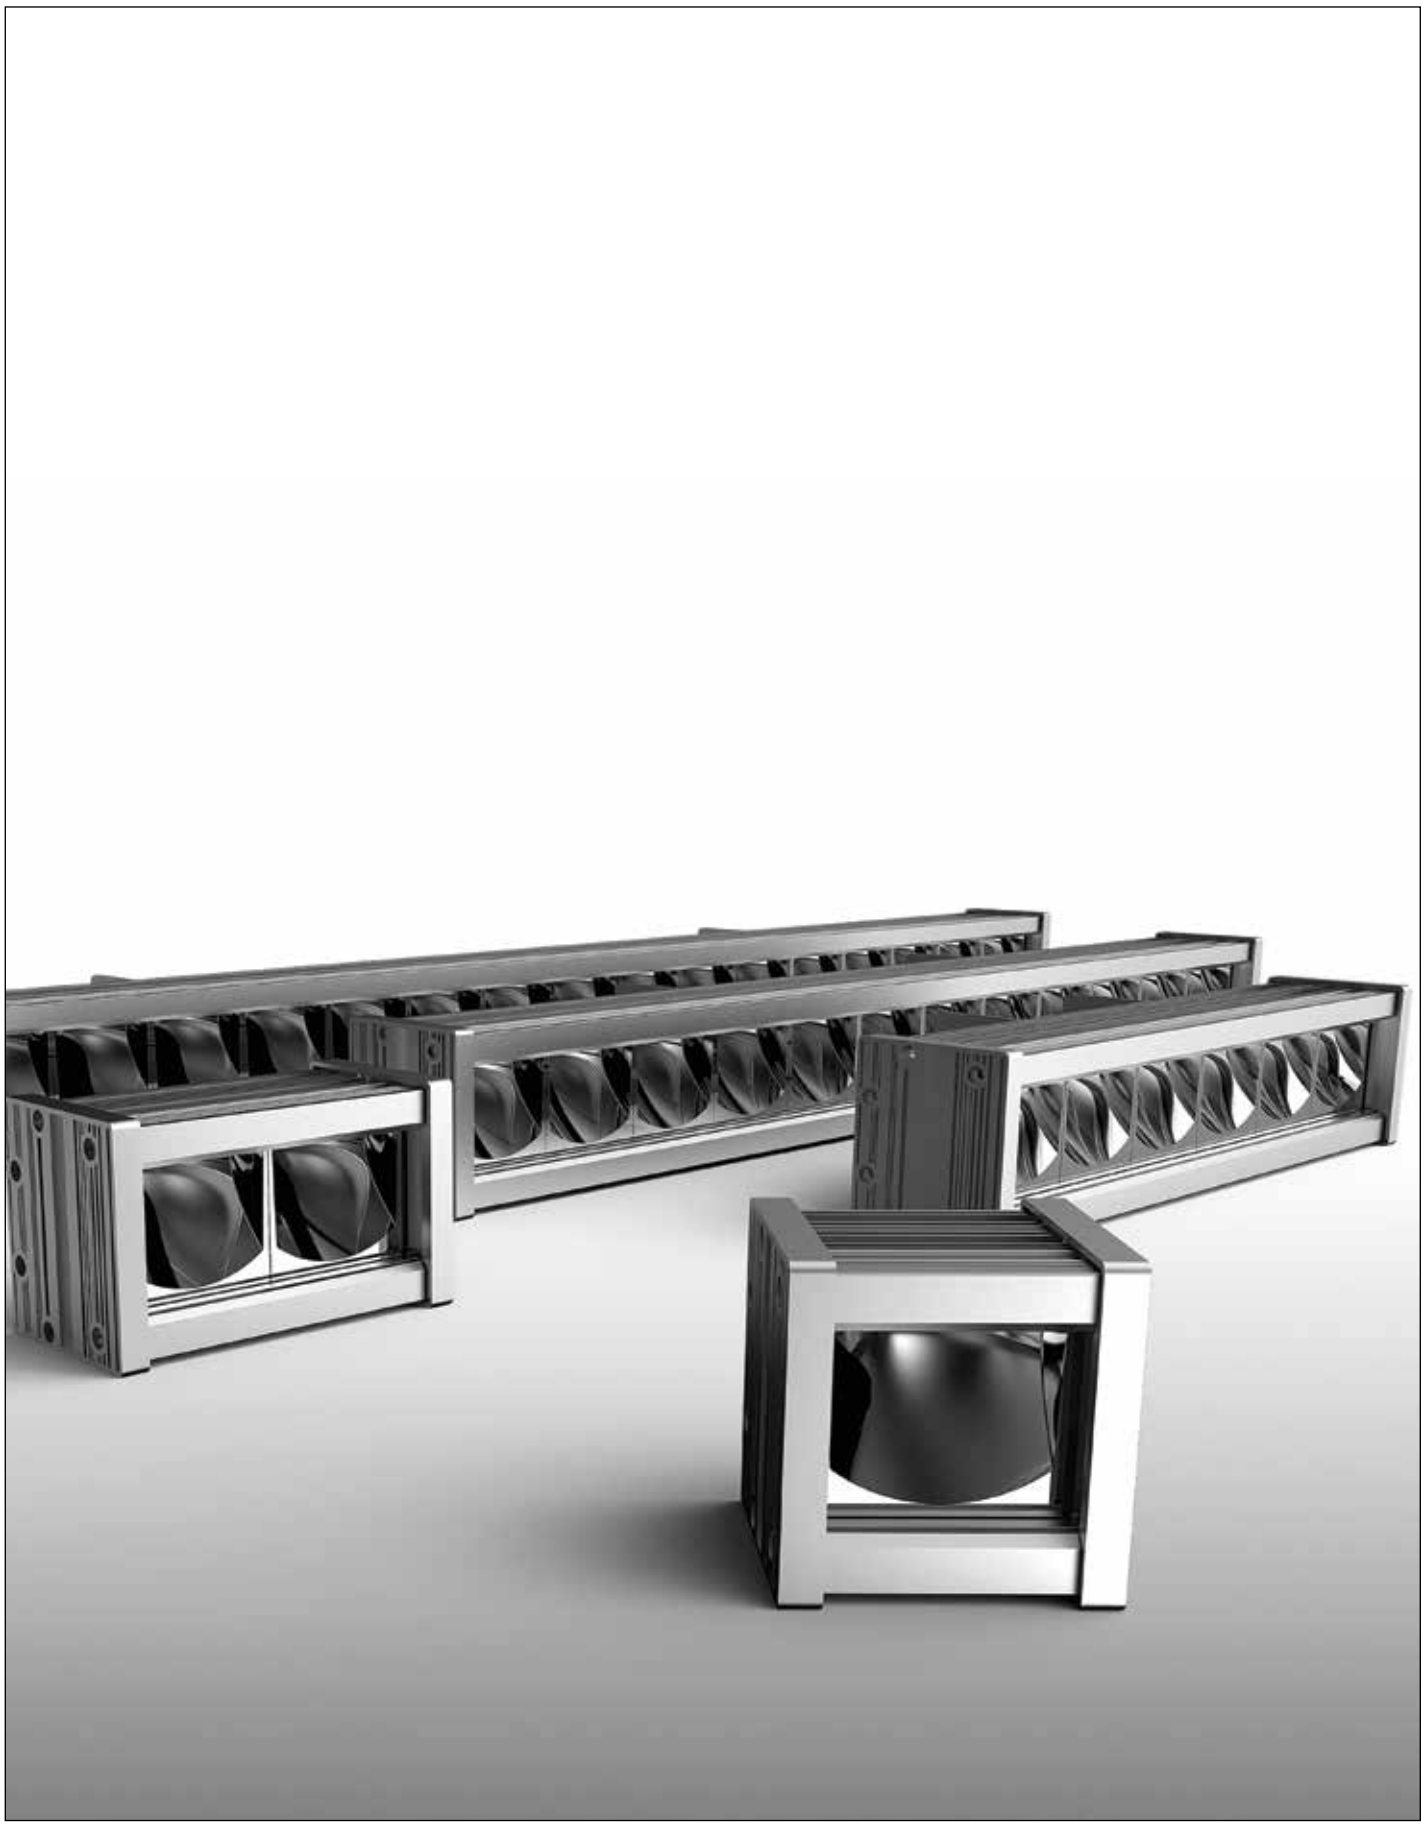



Outdoor Wall washers LED


Outdoor Wall washers LED




VK/02167/S/W/8



VK/02167/S/W/14

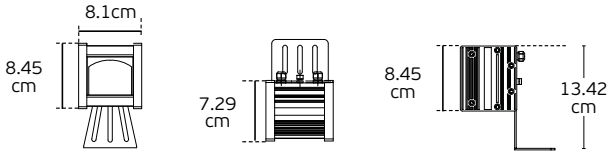

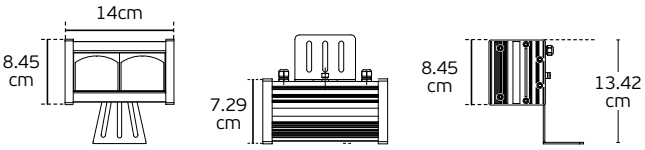

VK/02167/S/.../8

Code	Model	Box
63158-002115	**VK/02167/S/W/8** ● **Silver.** 3000K. 176lm. 3W. 1 reflector. CRI>80	**1pc**
63158-003115	**VK/02167/S/C/8** ● **Silver.** 4000K. 196lm. 3W. 1 reflector. CRI>80	**1pc**

Details

Led light with 1 reflector.
Voltage **24V**.
Beam angle **5.3º**.
Type of Led **CREE XPG-3**.
Dimmable **No**.

Lifetime **20.000 hrs**.
Working temperature **-40º ~ 50ºC**.
Material **Aluminium**. **Driver JS.**
Guarantee **3-5 years**.

Adjustable

IP66

VK/02167/S/.../14

Code	Model	Box
63158-004115	**VK/02167/S/W/14** ● **Silver.** 3000K. 445lm. 4W. 2 reflectors. CRI>80	**1pc**
63158-005115	**VK/02167/S/C/14** ● **Silver.** 4000K. 445lm. 4W. 2 reflectors. CRI>80	**1pc**

Details

Led light with 2 reflectors.
Voltage **110-240V**.
Beam angle **5.3º**.
Type of Led **CREE XPG-3**.
Dimmable **No**.


Lifetime **20.000 hrs**.
Working temperature **-40º ~ 50ºC**.
Material **Aluminium**. **Driver JS.**
Guarantee **3-5 years**.

Adjustable


IP66



Outdoor Wall washers LED

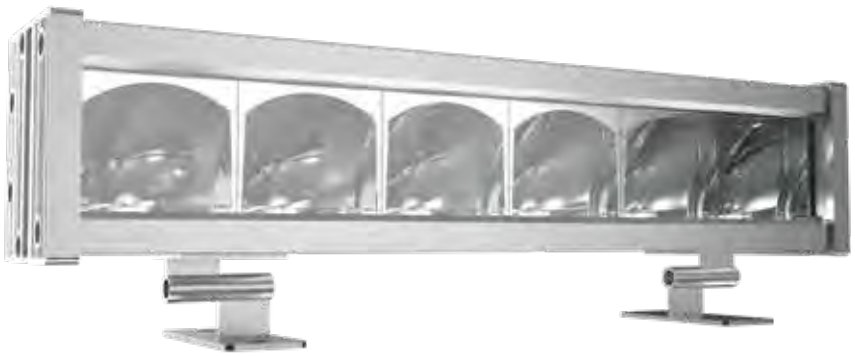

VK/02167/S/38

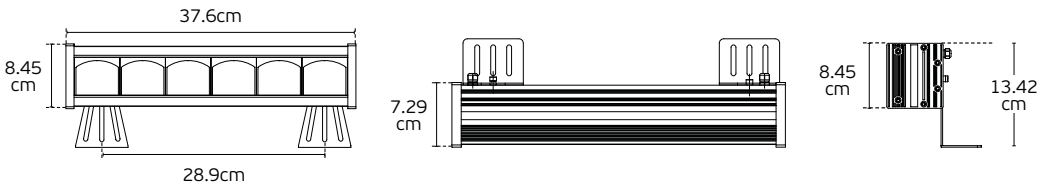

VK/02167/S/.../38

Code	Model	Box
63158-006115	**VK/02167/S/W/38** ● **Silver.** 3000K. 1.320lm. 12W. 6 reflectors. CRI>80.	**1pc**
63158-007115	**VK/02167/S/C/38** ● **Silver.** 4000K. 1.320lm. 12W. 6 reflectors CRI>80.	**1pc**

Details

Led light with 6 reflectors.
Voltage **110-240V**.
Beam angle **5.3º**.
Type of Led **CREE XPG-3**.
Dimmable **No**.

Lifetime **20.000 hrs**.
Working temperature **-40º ~ 50ºC**.
Material **Aluminium**.
Driver Meanwell.
Guarantee **3-5 years**.

Adjustable


IP66



Outdoor Wall washers LED



VK/02167/S/W/73

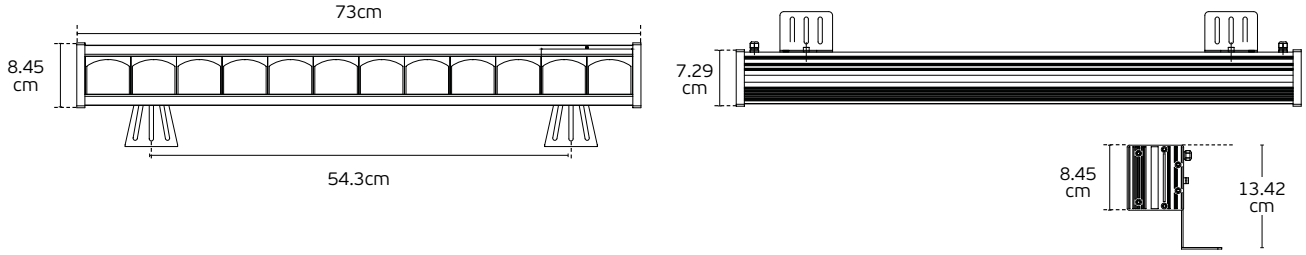

VK/02167/S/.../73

Code	Model	Box
63158-008115	**VK/02167/S/W/73** ● **Silver.** 3000K. 2.608lm. 24W. 12 reflectors	**1pc**
63158-009115	**VK/02167/S/C/73** ● **Silver.** 4000K. 2.608lm. 24W. 12 reflectors	**1pc**

Details

Led light with 12 reflectors.
Voltage **110-240V**.
Beam angle **5.3º**.
Type of Led **CREE XPG-3**.
Dimmable **No**.


Lifetime **20.000 hrs**.
Working temperature **-40º ~ 50ºC**.
Material **Aluminium**.
Driver Meanwell.
Guarantee **3-5 years**.

Adjustable

IP66



VK/02167/S/W/108

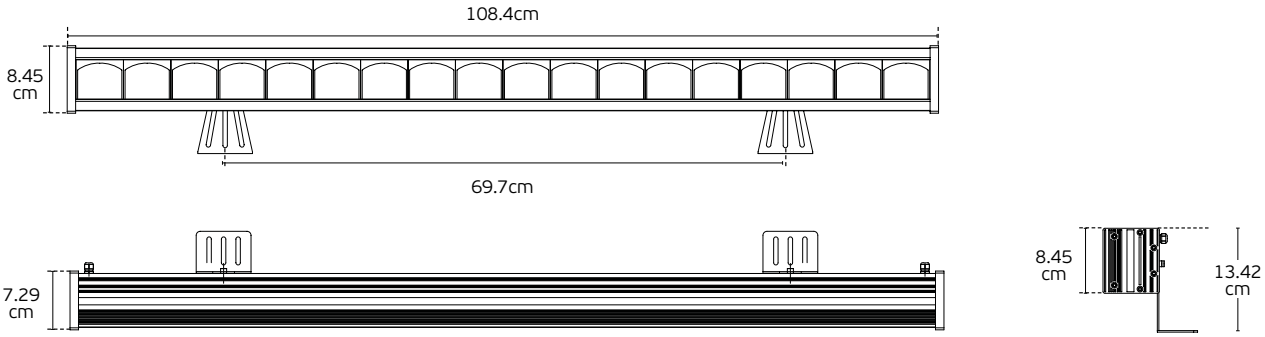

VK/02167/S/.../108

Code	Model	Box
63158-010115	**VK/02167/S/W/108** ● **Silver**. 3000K. 3.920lm. 54W. 18 reflectors	**1pc**
63158-011115	**VK/02167/S/C/108** ● **Silver**. 4000K. 3.920lm. 54W. 18 reflectors	**1pc**

Details

Led light with 18 reflectors.
Voltage **110-240V**.
Beam angle **5.3º**.
Type of Led **CREE XPG-3**.
Dimmable **No**.

Lifetime **20.000 hrs**.
Working temperature **-40º ~ 50ºC**.
Material **Aluminium**.
Driver Meanwell.
Guarantee **3-5 years**.

Adjustable

IP66


Outdoor Wall washers LED




VK/02008/15



VK/02009/30





VK/02008

Code	Model	Box
63158-107736	**VK/02008/W/15** ● **Anthracite.** 3000K. 340lm. 4W. CRI>80	**1pc**
63158-108736	**VK/02008/C/15** ● **Anthracite.** 4000K. 360lm. 4W. CRI>80	**1pc**
63158-105736	**VK/02008/BL/15** ● **Anthracite.** BLUE. 340lm. 4W. CRI>80	**1pc**

Details

Driver **85-256V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High 4pcs**.
Dimmable **No.**
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium**.
Guarantee **2 years.**

Adjustable **IP65**

VK/02009

Code	Model	Box
63158-109736	**VK/02009/W/30** ● **Anthracite.** 3000K. 800lm. 9W. CRI>80	**1pc**
63158-104736	**VK/02009/C/30** ● **Anthracite.** 4000K. 820lm. 9W. CRI>80	**1pc**
63158-106736	**VK/02009/BL/30** ● **Anthracite.** BLUE. 800lm. 9W. CRI>80	**1pc**

Details

Driver **85-256V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High 9pcs**.
Dimmable **No**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium**.
Guarantee **2 years.**

Adjustable **IP65**




Outdoor Wall washers LED



VK/02010/50

VK/02010

Code	Model	Box
63158-101736	**VK/02010/W/50** ● **Anthracite.** 3000K. 1.580lm. 18W. 85-265V.	**1pc**
63158-180736	**VK/02010/D/W/50** ● **Anthracite.** 3000K. 1.580lm. 18W. 85-265V.	**1pc**
63158-110736	**VK/02010/C/50** ● **Anthracite.** 4000K. 1.600lm. 18W. 85-265V.	**1pc**
63158-111736	**VK/02010/BL/50** ● **Anthracite.** BLUE. 1.580lm. 18W. 85-265V.	**1pc**
63158-178736	**VK/02010/AMB/50** ● **Anthracite.** AMBER. 1.580lm. 18W. 85-265V.	**1pc**
63158-162736	**VK/02010/RGB/50** ● **Anthracite.** RGB. 1.580lm. 18W. 24V.	**1pc**




Details

Driver **85-256V/24V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable


IP65

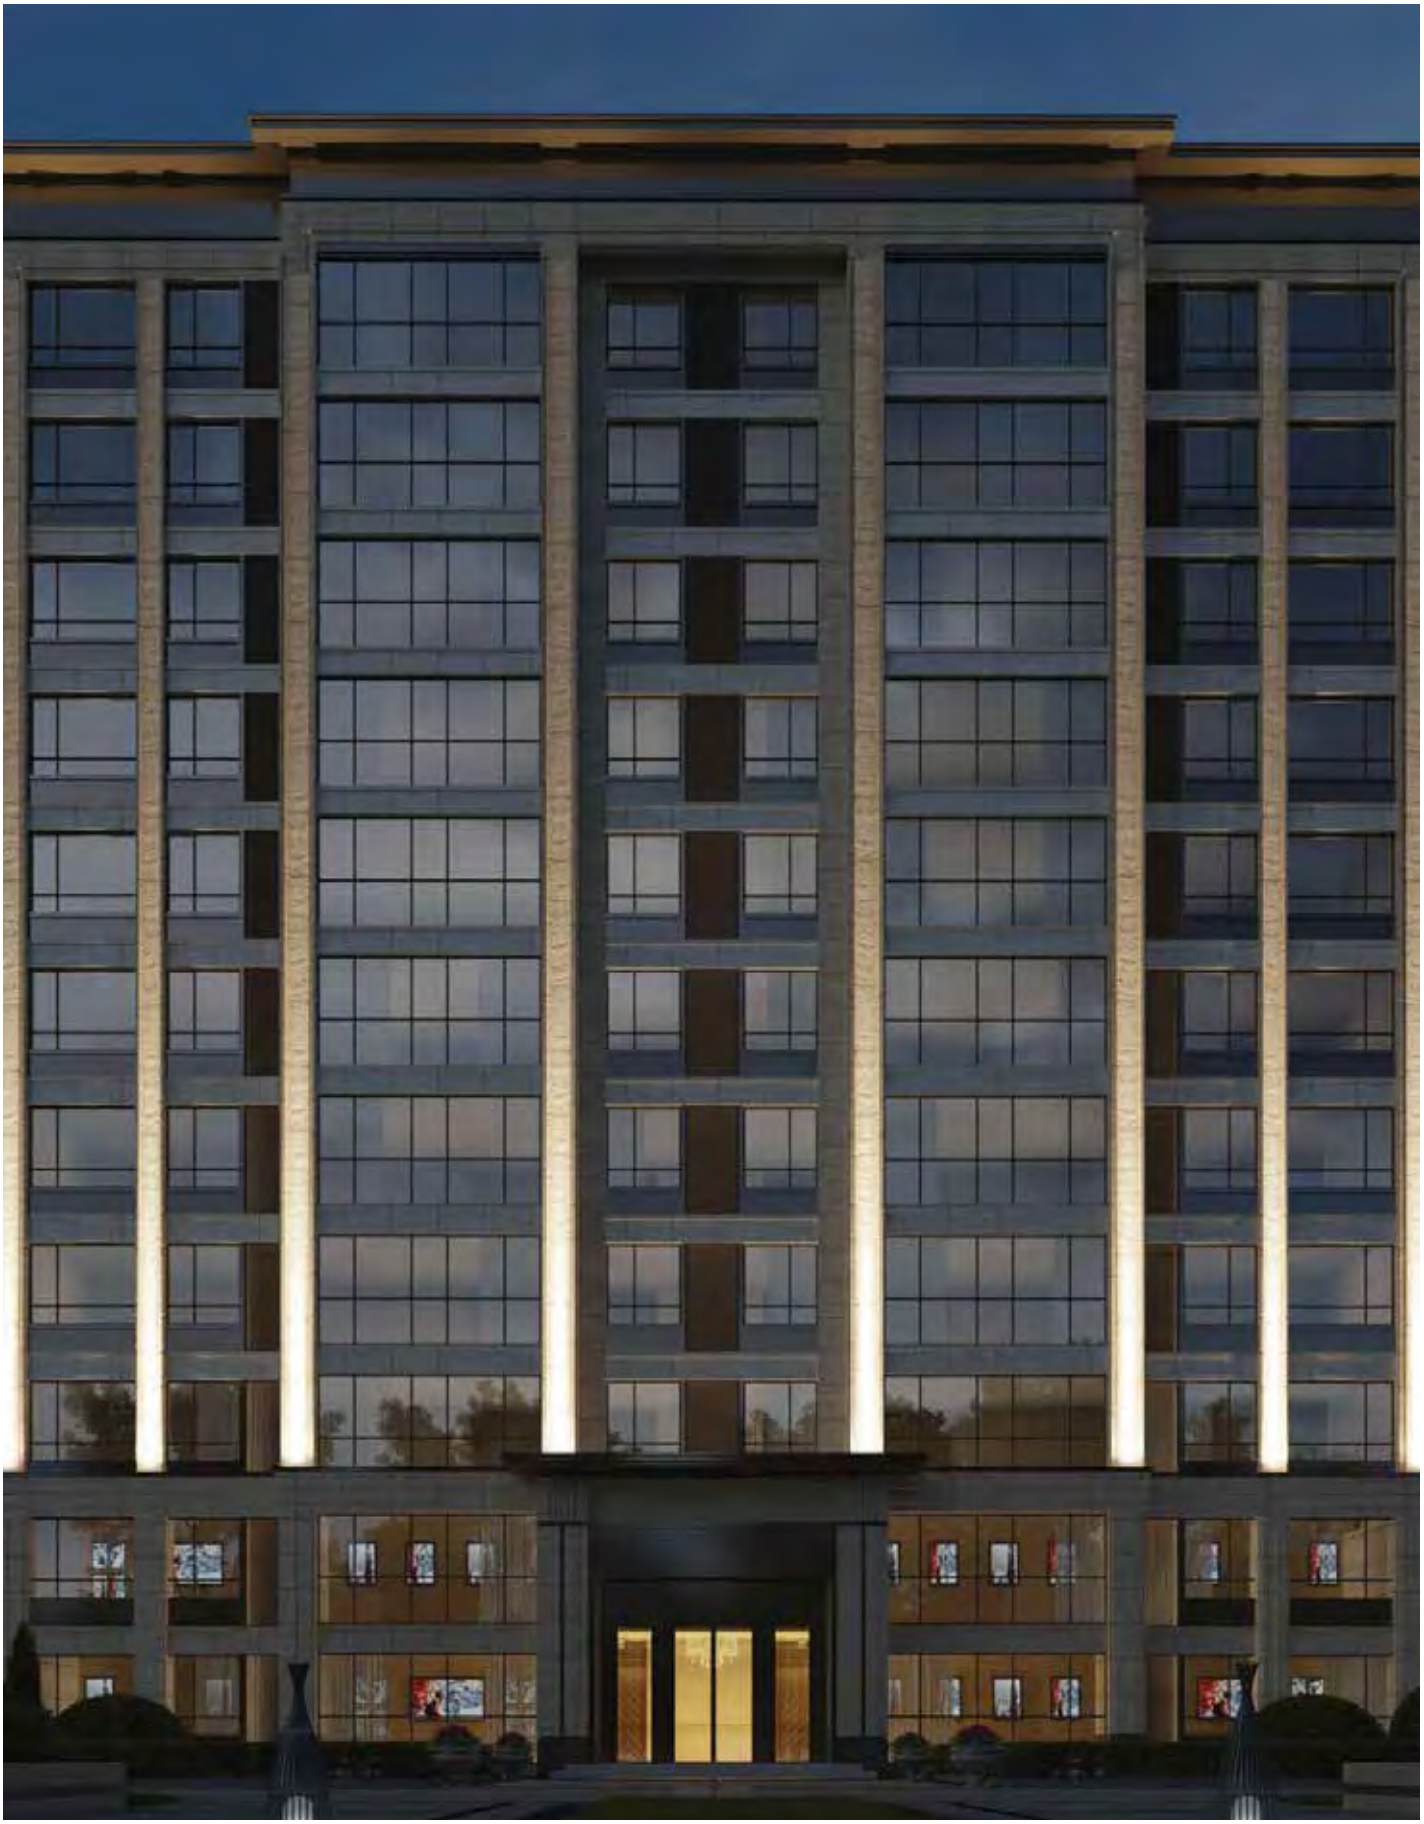

Outdoor Wall washers LED



VK/02011



VK/02011

Code	Model	Box
63158-102736	**VK/02011/W/100** ● **Anthracite.** 3000K. 3.180lm. 36W. 85-265V.	**1pc**
63158-177736	**VK/02011/D/W/100** ● **Anthracite.** 3000K. 3.180lm. 36W. 85-265V.	**1pc**
63158-112736	**VK/02011/C/100** ● **Anthracite.** 4000K. 3.200lm. 36W. 85-265V.	**1pc**
63158-114736	**VK/02011/BL/100** ● **Anthracite.** BLUE. 3.200lm. 36W. 85-265V.	**1pc**
63158-179736	**VK/02011/AMB/100** ● **Anthracite.** AMBER. 3.200lm. 36W. 85-265V.	**1pc**
63158-122736	**VK/02011/RGB/100** ● **Anthracite.** RGB. 3.180lm. 36W. 24V.	**1pc**

Details

Driver **85-256V/24V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable

IP65


DOLC
VIT


Outdoor Wall washers LED




VK/02014R/W/30



VK/02015R/W/50



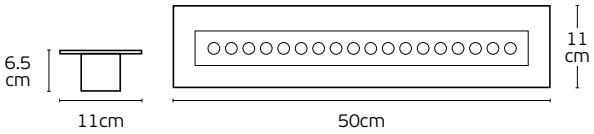

VK/02014R

Code	Model	Box
63158-164736	**VK/02014R/W/30** ● **Light Grey.** 3000K. 800lm. 9W. CRI>80.	**1pc**
63158-165736	**VK/02014R/C/30** ● **Light Grey.** 4000K. 820lm. 9W. CRI>80.	**1pc**

Details

Driver **85-256V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High 9pcs**.
Dimmable **No**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Steel, glass**.
Guarantee **2 years**.

IP67

VK/02015R

Code	Model	Box
63158-166736	**VK/02015R/W/50** ● **Light Grey.** 3000K. 1.060lm. 12W. CRI>80. **85-265V**.	**1pc**
63158-167736	**VK/02015R/C/50** ● **Light Grey.** 4000K. 1.080lm. 12W. CRI>80. **85-265V**.	**1pc**
63158-168736	**VK/02015R/RGB/50** ● **Light Grey.** RGB. 1.060lm. 12W. CRI>80. **24V**.	**1pc**

Details


Driver **85-256V/24V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High 12pcs**.
Dimmable **No**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Steel, glass**.
Guarantee **2 years**.


IP67



Outdoor Wall washers LED

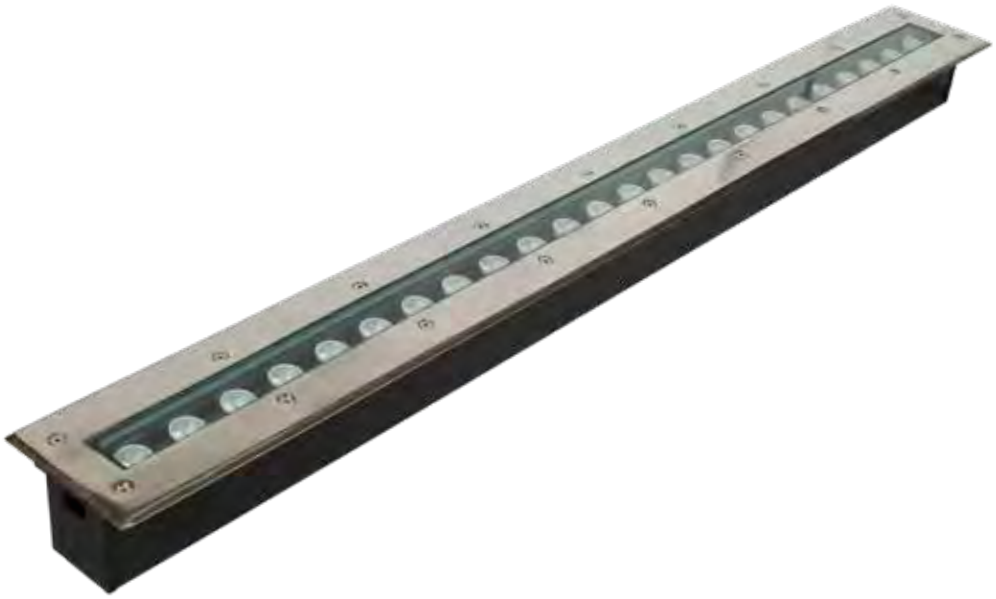

VK/02016R/W/100

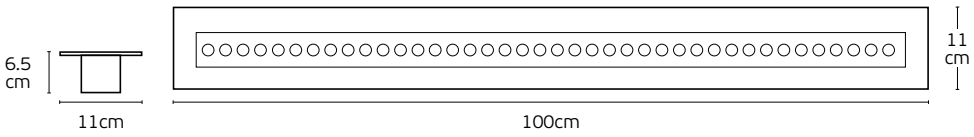

VK/02016R


Code	Model	Box
63158-169736	**VK/02016R/W/100** ● **Light Grey.** 3000K. 2.130lm. 24W. **85-265V**	**1pc**
63158-170736	**VK/02016R/C/100** ● **Light Grey.** 4000K. 2.150lm. 24W. **85-265V**	**1pc**
63158-171736	**VK/02016R/RGB/100** ● **Light Grey.** RGB. 2.130lm. 24W. **24V**	**1pc**

Details

Driver **85-256V/24V (Included)**.
Beam Angle **8°-10°.**
LED **CREE High 24pcs**.
Dimmable **No**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Steel**, **glass**.
Guarantee **2 years**.


IP67

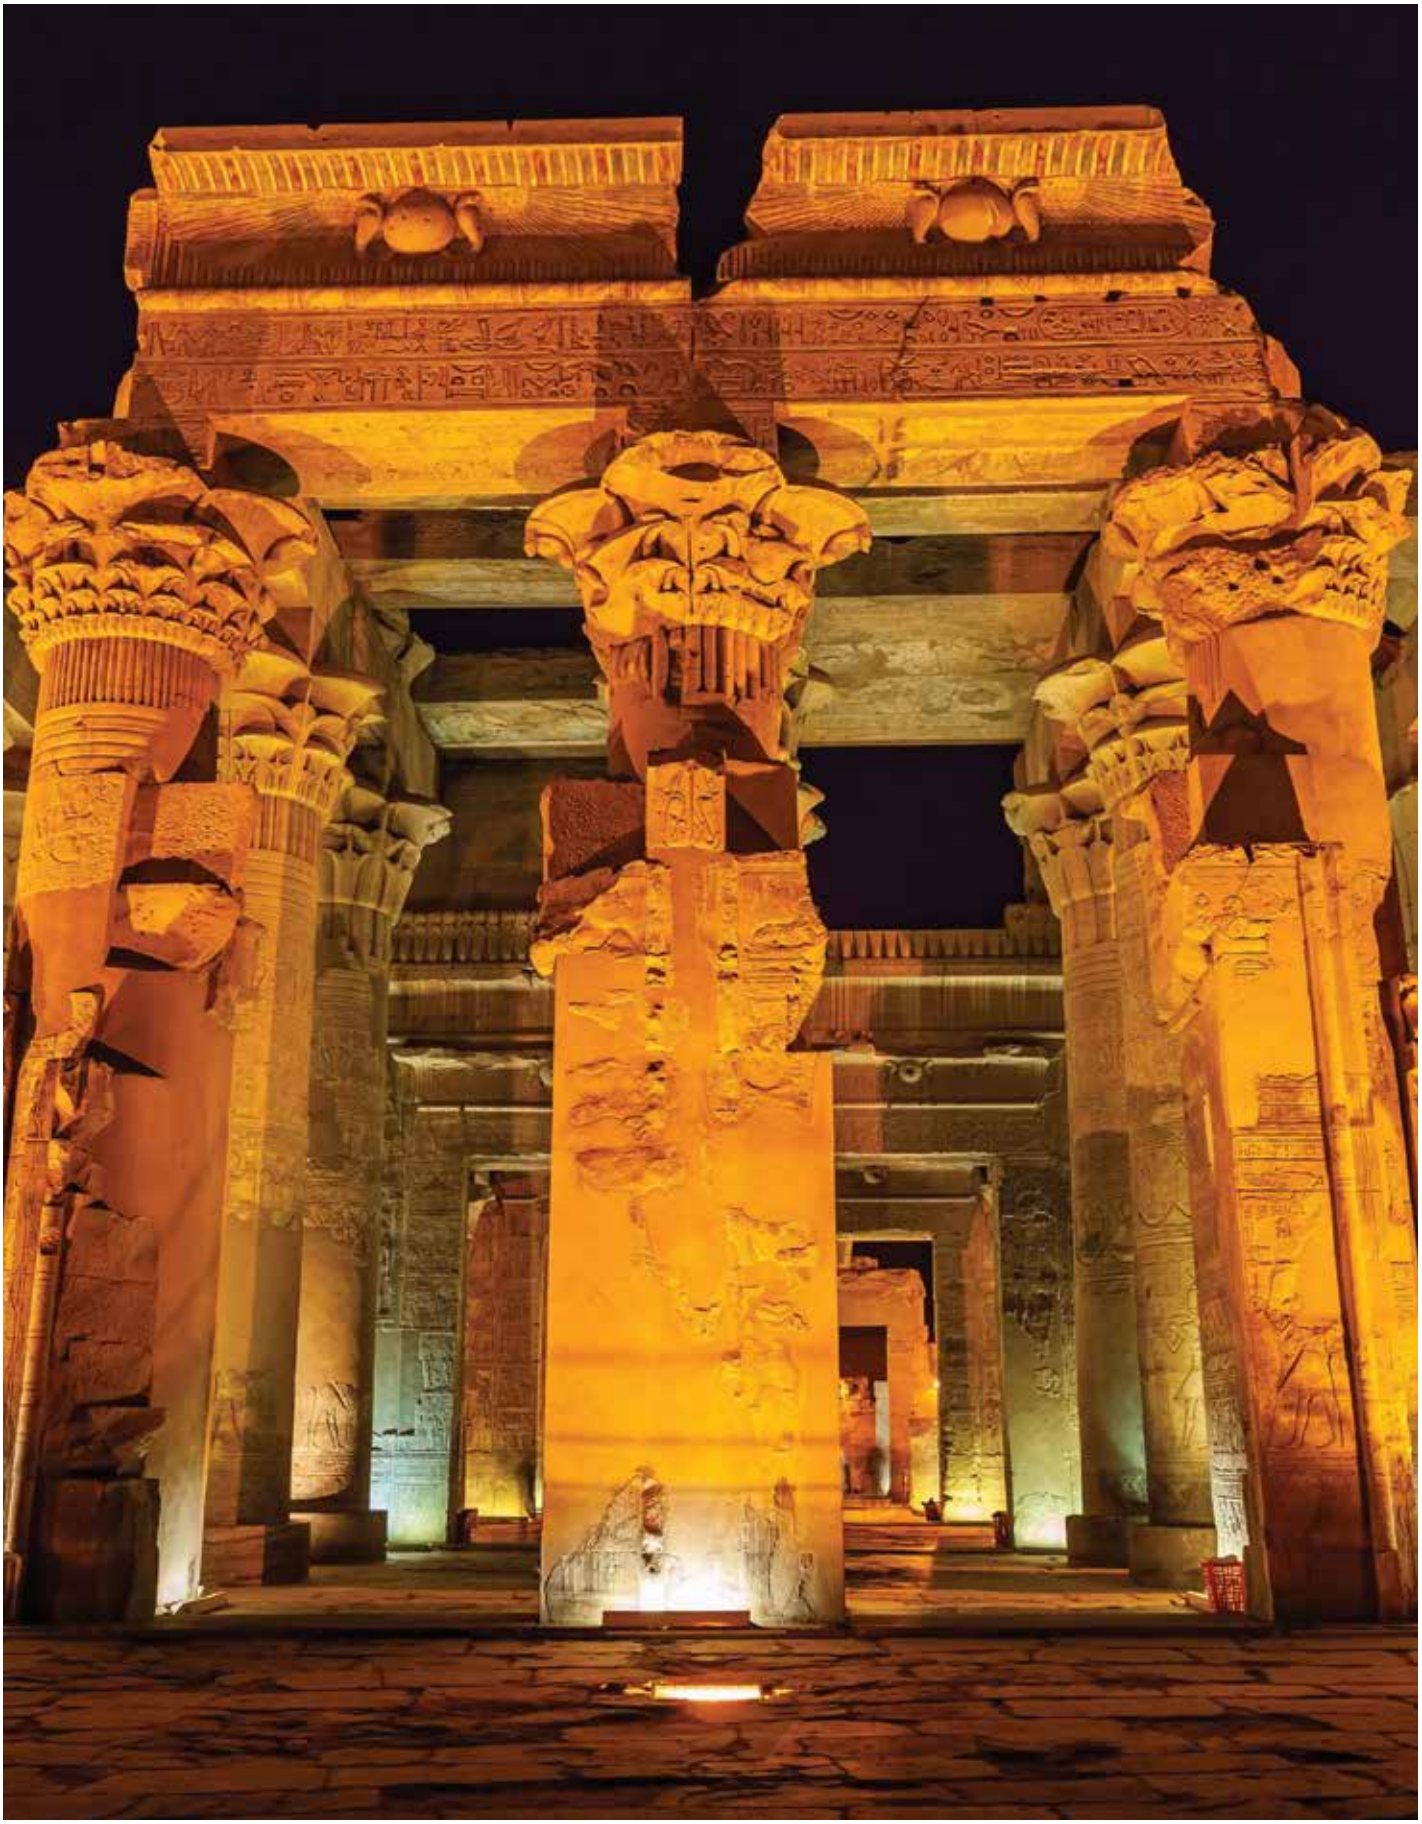


Outdoor Slim Wall washers LED




VK/02137/G/W/30

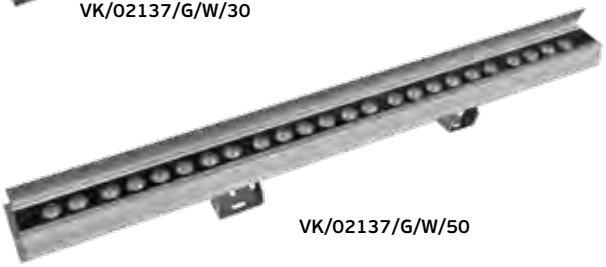


VK/02137/G/W/50

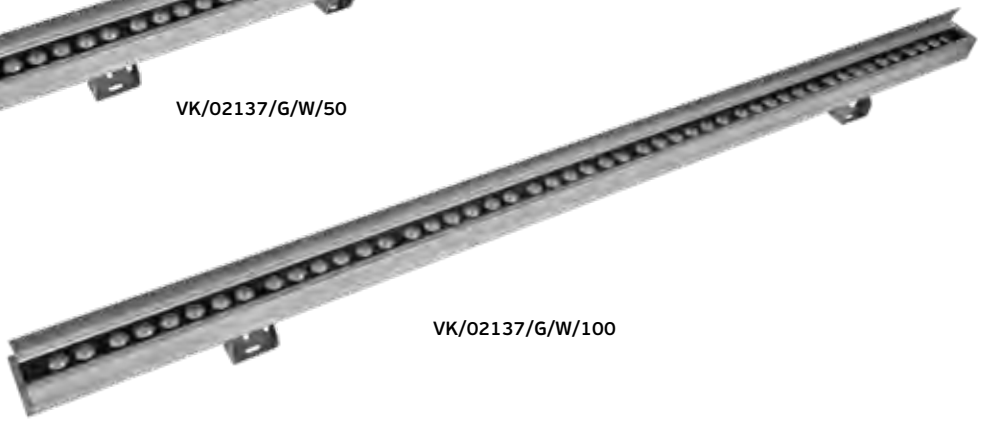

VK/02137/G/W/100





VK/02137/30

Code	Model	Box
63158-239126	**VK/02137/G/W/30** ● **Anthracite.** 3000K. 600lm. 6W. CRI>80	**1pc**
63158-242126	**VK/02137/G/C/30** ● **Anthracite**. 4000K. 600lm. 6W. CRI>80	**1pc**
63158-245126	**VK/02137/G/RGB/30** ● **Anthracite**. RGB. 600lm. 6W. CRI>80	**1pc**

Details

DC **24V (Included)**.
Beam Angle **10º-60º.**
LED **High Power LED**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Working temperature **-40°C→60°C**.
Dimmable **No**.
Material **Aluminium**.
Guarantee **2 years**.

IP65

VK/02137/50

Code	Model	Box
63158-240126	**VK/02137/G/W/50** ● **Anthracite**. 3000K. 1.200lm. 12W. CRI>80	**1pc**
63158-243126	**VK/02137/G/C/50** ● **Anthracite**. 4000K. 1.200lm. 12W. CRI>80	**1pc**
63158-246126	**VK/02137/G/RGB/50** ● **Anthracite**. RGB. 1.200lm. 12W. CRI>80	**1pc**

Details

DC **24V (Included)**.
Beam Angle **10º-60º.**
LED **High Power LED**.
Lifetime **50.000hrs**.
Clicks **50.000**.


Working temperature **-40°C→60°C**.
Dimmable **No**.
Material **Aluminium**.
Guarantee **2 years**.

IP65



VK/02137/100

Code	Model	Box
63158-241126	**VK/02137/G/W/100** ● **Anthracite.** 3000K. 2.400lm. 24W.	**1pc**
63158-244126	**VK/02137/G/C/100** ● **Anthracite.** 4000K. 2.400lm. 24W.	**1pc**
63158-247126	**VK/02137/G/RGB/100** ● **Anthracite.** RGB. 2.400lm. 24W.	**1pc**



Details

DC **24V (Included)**.
Beam Angle **10º-60º.**
LED **High Power LED**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium**.
Guarantee **2 years**.

IP65


Outdoor Wall washers LED



VK/02120/W





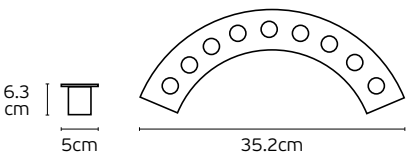


VK/02120

Code	Model	Box
63158-181736	**VK/02120/W** ● **Light Grey.** 3000K. 900lm. 9W. CRI>80.	**1pc**
63158-182736	**VK/02120/C** ● **Light Grey.** 4000K. 900lm. 9W. CRI>80.	**1pc**




Included 2 x spikes



Details

Driver **85-256V (Included)**.
Beam Angle **5°-8°.**
LED **CREE High 9pcs**.
Dimmable **No**.
Lifetime **50.000hrs**.

Clicks **50.000**.
Working temperature **-40°C→60°C**.
Material **Aluminium, glass**.
Guarantee **2 years.**



IP65




Outdoor Wall washers LED




VK/02084/AN



VK/02122/AN





VK/02084

Code	Model	Box
75169-297694	**VK/02084/AN/W** ● **Anthracite.** 3000K. 2.360lm. 33W. CRI>84	**4pcs**
75169-298694	**VK/02084/W/W** ○ **White.** 3000K. 2.360lm. 33W. CRI>84	**4pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **28°.**
Type of Led **CREE XBD**.
Lifetime **30.000hrs**.

Dimmable **No**.
Working temperature **-20°C→45°C.**
Material **Aluminium.**
Guarantee **2 years**.

Adjustable **IP65**

VK/02122

Code	Model	Box
75169-351694	**VK/02122/AN/W** ● **Anthracite.** 3000K. 1.001lm. 16W. CRI>82	**4pcs**

Details

AC Driver **200-240V (Included)**.
Beam Angle **45°.**
Type of Led **CREE**.
Lifetime **30.000hrs**.

Dimmable **No**.
Working temperature **-20°C→45°C.**
Material **Aluminium diecast.**
Guarantee **2 years**.

Adjustable **IP65**




Outdoor Wall washers LED




VK/02138/G/RGB



VK/02139/G/RGB





VK/02138/G/RGB

Code	Model	Box
63158-248126	**VK/02138/G/RGB** ● **Anthracite.** RGB. 2.400lm. 24W. CRI>80	**1pc**

Details

DC Driver **24V (Included)**.
Beam Angle **10°.**
Type of Led **High Power LED/CREE**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Working temperature **-40°C→60°C**.
Dimmable **yes**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable **IP65**

VK/02139/G/RGB


Code	Model	Box
63158-249126	**VK/02139/G/RGB** ● **Anthracite.** RGB. 4.800lm. 48W. CRI>80	**1pc**

Details

DC Driver **24V (Included)**.
Beam Angle **10°.**
Type of Led **High Power LED/CREE**.
Lifetime **50.000hrs**.
Clicks **50.000**.

Working temperature **-40°C→60°C**.
Dimmable **yes**.
Material **Aluminium**.
Guarantee **2 years**.

Adjustable **IP65**

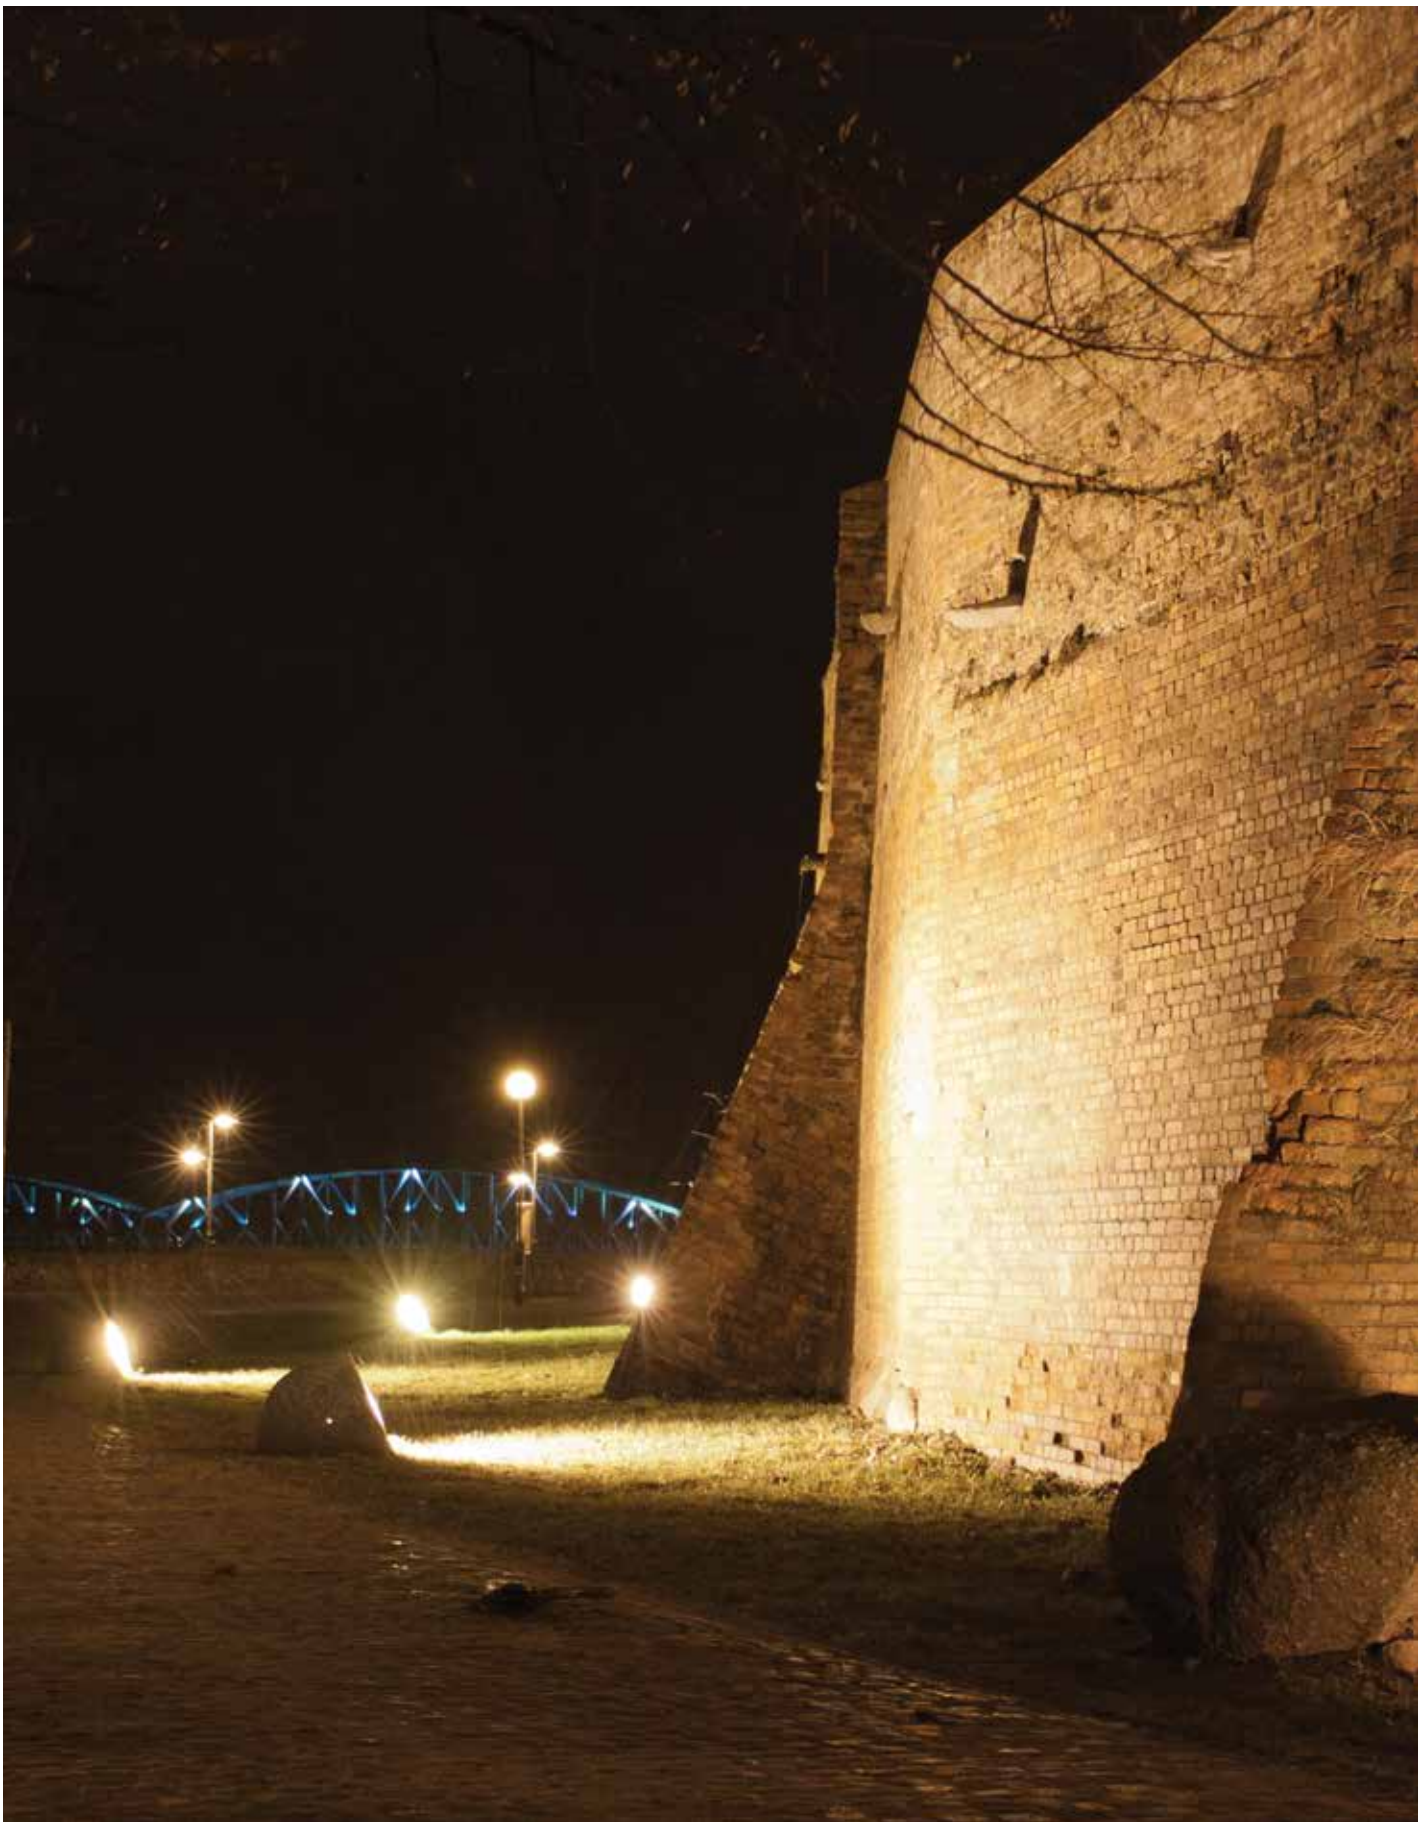


Outdoor Wall washers LED



VK/02160/B

VK/02160

Code	Model	Box
75169-242115	**VK/02160/B/W** ● **Black.** 3000K. 1360lm. 18W. **8°-10°**. CRI>90	**1pc**
75169-243115	**VK/02160/B/C** ● **Black.** 4000K. 1404lm. 18W. **8°-10°**. CRI>90	**1pc**

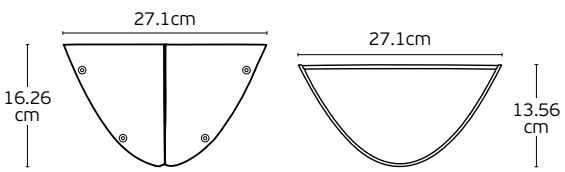

Details

Voltage **110-240V**.
Type of Led **CREE XHP-50**.
Dimmable **No**.
Lifetime **20.000 hrs**.

Working temperature **-40 ~ 50ºC**.
Material **Aluminium**.
Driver **Meanwell.**
Guarantee **3-5 years**.

IP66


hotel



HIRO



Hiro



VK/02166/B/D

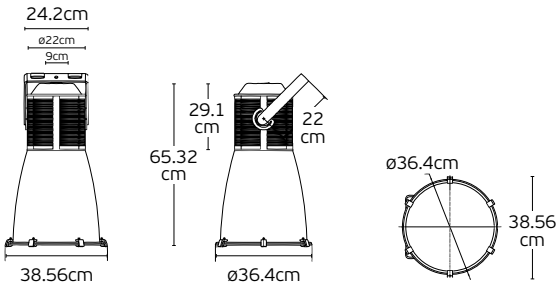

VK/02166

Code	Model	Box
63158-001115	**VK/02166/B/D** ● **Black.** 5000K. 17.000lm. 200W. CRI>80	**1pc**

Details

Led Focus Light. Voltage **110-240V**.
Type of Led **Citizen048-2818C4**.
Dimmable **No**.
Lifetime **20.000 hrs.**

Working temperature **-40 ~ 50ºC**.
Material **Aluminium**. **Driver MOSO.**
Guarantee **2 years.**

Adjustable

IP66



CCT Pendant Light LED

Arma




VK/02247/CCT

3000K **4500K** **6500K**

VK/02247/CCT

Code	Model	Box
64174-636742	**VK/02247/CCT**	**1pc**
	● **Black.** 150W-200W-240W. 25.000lm. CRI Ra>80	





Details

Material **Aluminum+PC**
Location **Pendant**
Voltage **AC100-240V**
Beam Angle **120°**
Color Led choice **3000K**, **4500K**, **6500K** **(CCT)**, Type of Led **SMD 2835**

Power **150W-200W-240W**
Hours **30.000hrs**
Working Temperature **-35°C → 35°C**
Clicks **20.000**
Cable 2x1.5mm, 30cm
Guarantee **3 years.**



IP65



CCT Pendant Light LED

Arma



VK/02246/CCT

3000K **4500K** **6500K**

VK/02246/CCT

Code	Model	Box
64174-635742	**VK/02246/CCT** ● **Black.** 60W-80W-100W. 11.000lm. CRI Ra>80	**1pc**



Details

Material **Aluminum+PC**
Location **Pendant**
Voltage **AC100-240V**
Beam Angle **120°**
Color Led choice **3000K**, **4500K**, **6500K** **(CCT)**, Type of Led **SMD 2835**


Power **60W-80W-100W**
Hours **30.000hrs**
Working Temperature **-35°C → 35°C**
Clicks **20.000**
Cable 2x1.5mm, 30cm
Guarantee **3 years.**

IP65



Artes






CCT SWITCH
3000K-4500K-
6500K


VK/02242/B/CCT

VK/02240/B/CCT, VK/02241/B/CCT, VK/02242/B/CCT

Code	Model	Box
63158-160742	VK/02240/B/CCT ● **Black.** 10W. **900lm-1.000lm**. 3000K-4500K-6500K	50pcs
63158-161742	VK/02241/B/CCT ● **Black.** 30W. **2.700lm-3.000lm**. 3000K-4500K-6500K	30pcs
63158-162742	VK/02242/B/CCT ● **Black.** 50W. **4.500lm-5.000lm**. 3000K-4500K-6500K	20pcs



VK/02240 - VK/02241



VK/02242

Details

10W: **3000K → 900lm** **4500K → 1.000lm** **6500K → 900lm**	30W: **3000K → 2.700lm** **4500K → 3.000lm** **6500K → 2.700lm**	50W: **3000K → 4.500lm** **4500K → 5.000lm** **6500K → 4.500lm**


Material **Aluminum+Glass**
Voltage **AC100-240V**
Beam Angle **120°**

PF>0.9
CRI>80
Guarantee **3 years**

IP65

Artes





VK/02244/B/CCT

VK/02243/B/CCT, VK/02244/B/CCT, VK/02245/B/CCT

Code	Model	Box
63158-163742	VK/02243/B/CCT ● **Black.** 100W. **9.000lm-10.000lm**. 3000K-4500K-6500K	10pcs
63158-164742	VK/02244/B/CCT ● **Black.** 150W. **13.500lm-15.000lm**. 3000K-4500K-6500K	10pcs
63158-165742	VK/02245/B/CCT ● **Black.** 200W. **18.000lm-20.000lm**. 3000K-4500K-6500K	5pcs


Details

100W: **3000K** → **9.000lm**	150W: **3000K** → **13.500lm**	200W: **3000K** → **18.000lm**
4500K → **10.000lm**	**4500K** → **15.000lm**	**4500K** → **20.000lm**
6500K → **9.000lm**	**6500K** → **13.500lm**	**6500K** → **18.000lm**


Material **Aluminum+Glass**
Voltage **AC100-240V**
Beam Angle **120°**

PF>0.9
CRI>80
Guarantee **3 years**


IP65



VK/02243



VK/02244

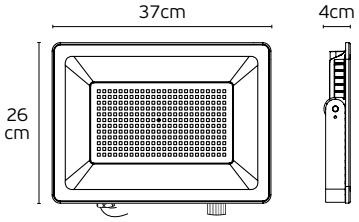

VK/02245

Artes







VK/02250/B/D/MS

VK/02251/B/D/MS

VK/02250/B/D/MS with Motion sensor
VK/02251/B/D/MS with Motion sensor


Code	Model	Box
63158-166742	**VK/02250/B/D/MS** ● **Black.** 30W. **2.700lm**. 6500K. CRI>80	**50pcs**
63158-167742	**VK/02251/B/D/MS** ● **Black.** 50W. **4.500lm**. 6500K. CRI>80	**20pcs**

Details


Material **Aluminum+Glass**
Voltage **AC100-240V**
Beam Angle **120°**
Type of Led **SMD 2835**

Hours **30.000hrs**
Working Temperature **-35°C → 35°C**
Clicks **20.000**
Guarantee **3 years**

IP65

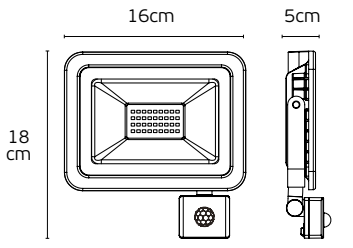

VK/02250

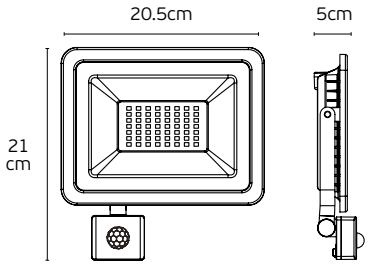

VK/02251

Artes



VK/02252/B/D/S




VK/02253/B/D/S




VK/02252/B/D/S with Day/Night sensor
VK/02253/B/D/S with Day/Night sensor

Code	Model	Box
63158-168742	**VK/02252/B/D/S** ● **Black.** 30W. **2.700lm**. 6500K. CRI>80	**50pcs**
63158-169742	**VK/02253/B/D/S** ● **Black.** 50W. **4.500lm**. 6500K. CRI>80	**20pcs**



VK/02252



VK/02253

Details

Material **Aluminum+Glass**
Voltage **AC100-240V**
Beam Angle **120°**
Type of Led **SMD 2835**

Hours **30.000hrs**
Working Temperature **-35°C → 35°C**
Clicks **20.000**
Guarantee **3 years**



IP65


Artes



VK/02254/B/RGB

VK/02254/B/RGB

Code	Model	Box
63158-170742	**VK/02254/B/RGB** ● **Black.** 50W. CRI>80	**50pcs**



Details

Material **Aluminum+Glass**
Voltage **AC100-240V**
Beam Angle **120°**
Type of Led **SMD 2835**

Hours **30.000hrs**
Working Temperature **-35°C → 35°C**
Clicks **20.000**
Guarantee **3 years**

IP65



Pilo




VK/02237



VK/02238





VK/02239





VK/02237, VK/02238, VK/02239

Code	Model	Box
57610-170774	**VK/02237/C** ○ **White.** 18W. 1800lm. 4000K. CRI Ra>80	**40pcs**
57610-171774	**VK/02237/D** ○ **White.** 18W. 1800lm. 6000K. CRI Ra>80	**40pcs**
57610-172774	**VK/02238/C** ○ **White.** 36W. 3600lm. 4000K. CRI Ra>80	**80pcs**
57610-173774	**VK/02238/D** ○ **White.** 36W. 3600lm. 6000K. CRI Ra>80	**80pcs**
57610-174774	**VK/02239/C** ○ **White.** 45W. 4500lm. 4000K. CRI Ra>80	**80pcs**
57610-175774	**VK/02239/D** ○ **White.** 45W. 4500lm. 6000K. CRI Ra>80	**80pcs**









Details

Material **Plastic+Alu+PC**
Voltage **AC175-265V**
Beam Angle **220°**
Type of Led **SMD 2835**

Hours **230.000hrs**
Working Temperature **-25°C → 45°C**
Clicks **100.000**
Guarantee **2 years**



IP65



Pool Lights LED




VK/02012/D





VK/02012/RGB



VK/05016/D







VK/02012

Code	Model	Box
62159-093106	**VK/02012/D** ○ **White.** 6500K. 2.200lm. 18W.	**10pcs**
62159-094106	**VK/02012/BL** ○ **White.** BLUE. 250lm. 18W.	**10pcs**

Details

AC Driver **12V (Included)**.
Beam Angle **120°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.
Working temperature **-20°C→40°C**.

Dimmable **No**.
Material **Plastic.**
Included **Cable 2m hrnf 07 - 2x1.5mm.**
Guarantee **2 years.**

IP68

VK/02012/RGB

Code	Model	Box
62159-095106	**VK/02012/RGB** ○ **White.** RGB. 500lm. 18W.	**10pcs**

Details

AC Driver **12V (Included)**.
Beam Angle **120°.**
Type of Led **SMD 2835**.
Lifetime **30.000hrs**.
Working temperature **-20°C→40°C**.

Dimmable **No**.
Material **Plastic.**
Included **Cable 2m hrnf 07 - 2x1.5mm & remote control.**
Guarantee **2 years.**

IP68



VK/05016

Code	Model	Box
01026-015106	**VK/05016/D** ● **Grey.** 6500K. 1.700lm. 18W. CRI>80	**10pcs**
01026-017106	**VK/05016/BL** ● **Grey.** BLUE. 250lm. 18W. CRI>80	**10pcs**
01026-016106	**VK/05016/RGB** ● **Grey.** RGB. 500lm. 18W. CRI>80	**10pcs**

Details

AC Driver **12V (Included)**.
Beam Angle **120°.**
Type of Led **SMD 2835.**
Lampholder **G53/PAR56**.
Lifetime **30.000hrs**.
Clicks **100.000**.

Working temperature **-40°C→40°C**.
Dimmable **No**.
Material **Glass.**
Included **Remote control for RGB color.**
Guarantee **2 years.**

IP68

LED Linear Lights **IP67**



VK/04420

Code	Model	Kelvin	Power	Lumen	Length	Box
75169-427271	**VK/04420/60/12/830**	3000K	12W	2.000lm	**60cm**	1pc
75169-428271	**VK/04420/60/12/840**	4000K	12W	2.000lm	**60cm**	1pc
75169-429271	**VK/04420/60/12/850**	5000K	12W	2.000lm	**60cm**	1pc
75169-430271	**VK/04420/60/24/830**	3000K	24W	4.210lm	**60cm**	1pc
75169-431271	**VK/04420/60/24/840**	4000K	24W	4.210lm	**60cm**	1pc
75169-432271	**VK/04420/60/24/850**	5000K	24W	4.210lm	**60cm**	1pc
75169-433271	**VK/04420/115/23/830**	3000K	23W	4.200lm	**115cm**	1pc
75169-434271	**VK/04420/115/23/840**	4000K	23W	4.200lm	**115cm**	1pc
75169-435271	**VK/04420/115/23/850**	5000K	23W	4.200lm	**115cm**	1pc
75169-436271	**VK/04420/115/48/830**	3000K	48W	8.400lm	**115cm**	1pc
75169-437271	**VK/04420/115/48/840**	4000K	48W	8.400lm	**115cm**	1pc
75169-438271	**VK/04420/115/48/850**	5000K	48W	8.400lm	**115cm**	1pc
75169-439271	**VK/04420/200/40/830**	3000K	40W	7.000lm	**200cm**	1pc
75169-440271	**VK/04420/200/40/840**	4000K	40W	7.000lm	**200cm**	1pc
75169-441271	**VK/04420/200/40/850**	5000K	40W	7.000lm	**200cm**	1pc
75169-442271	**VK/04420/200/84/830**	3000K	84W	14.800lm	**200cm**	1pc
75169-443271	**VK/04420/200/84/840**	4000K	84W	14.800lm	**200cm**	1pc
75169-444271	**VK/04420/200/84/850**	5000K	84W	14.800lm	**200cm**	1pc

Details


Voltage **220-240V**.
Type of LED TRIDONIC.
Power factor **0.95**.
Beam angle **40°-120°.**
Body **IK09**.
IP Rating **CRI>80**.
Clicks **50.000.**

» TRIDONIC LLE-G2
» TRIDONIC LED driver

Working temperature **-30°C→ 50°C**.
Lifetime **50.000hrs**.
Material **Anodized aluminium.**


No dimmable but can be dimmable after contact with our headquarter sales department.

5 **years guarantee**



IP67

VK/04420/40º




VK/04420/60º



VK/04420/90º



VK/04420/120º







VK/04420/WA (Wall)
VK/04420/SRK (Pendant)


Code	Model	Box
75169-446271	**VK/04420/WA** ● **Aluminium accessories for wall (Set of 2 pieces)**	**1pc**
75169-445271	**VK/04420/SRK** ● **Aluminium**	**1.5m**


Details

Material **Aluminium.**













Solar street lights LED

Solar Street Lights LED



VK/02168

Code	Model	Capacity Li-io battery	Color Temp	Lumen	Install Height	S. Power/F. Power*	S. ch. time**	Box
63158-304752	**VK/02168/20/D**	14.8V 153.92WH 2.6AH/PCS	5700K	4750lm	3m - 10m	25W/20W	6hours	1pc
63158-305752	**VK/02168/40/D**	14.8V 269.36WH 2.6AH/PCS	5700K	7125lm	4m - 15m	37.5W/40W	7hours	1pc
63158-306752	**VK/02168/60/D**	14.8V 423.28WH 2.6AH/PCS	5700K	11400lm	6m - 22m	60W/60W	7hours	1pc
63158-307752	**VK/02168/80/D**	14.8V 577.2WH 2.6AH/PCS	5700K	14250lm	8m - 28m	75W/80W	8hours	1pc


Details

PIR **120°, >5m.**
Type of Led **SMD 3030 OSRAM**.
CRI>70+.
Lighting time **7 nights +**.
Control mode **Button switch, ON/OFF Long Press 1.5s.**
Lighting mode **M1: red light, M2: green light M3: orange light (press the button to switch between M1 (red) / M2 (green) / M3 (orange); 5S after mode indicates is power indicator Capacity indication Green: ≥70% ; Orange: 30%,~70% ; Red: <30%.**


Core technology **ALS 2.3/TCS 1.0 Technology for all night lighting even in cloudy or rainy day.**
Working temperature **-20°C → 60°C**.
Lithium power battery with long lifespan and high security **1500 life cycles**.
Dimmable No.
Material/Color **Aluminium alloy + tempered glass/ Aluminium.**
IK Class **IK10.**
Guarantee **3 years**.

*** S. Power/F. Power: Solar Power/Fixture Power**
**** S. ch. time: Solar Charging time**


IP65

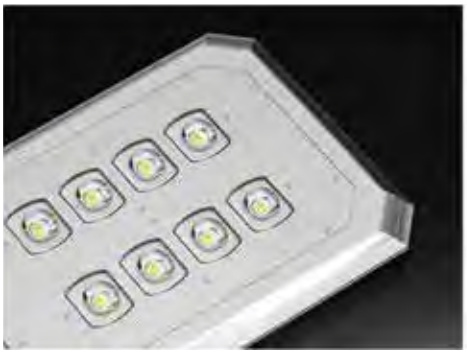

High lumen LEDs
190lm/w

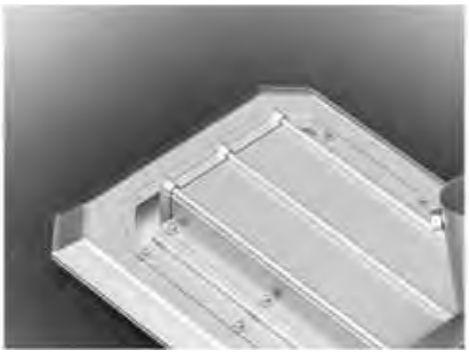

Battery Pack
Easy to maintain

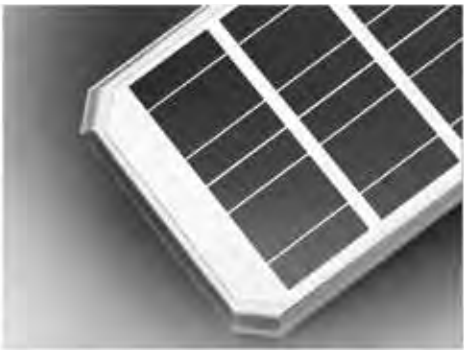


Monocrystalline
Solar charging efficiency:>21%



High lumen LEDs
190lm/w




Bracket
Double Protection for rust-proof

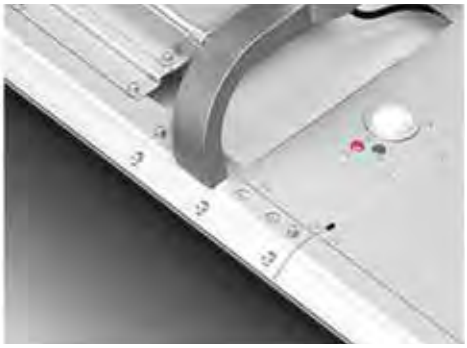


High Sensitivity PIR Sensor

Luminance distribution




VK/02168/20/D
VK/02168/40/D




VK/02168/60/D
VK/02168/80/D


Dimensions

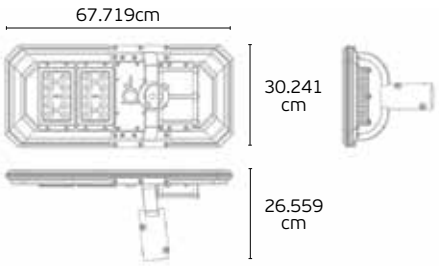


VK/02168/20/D

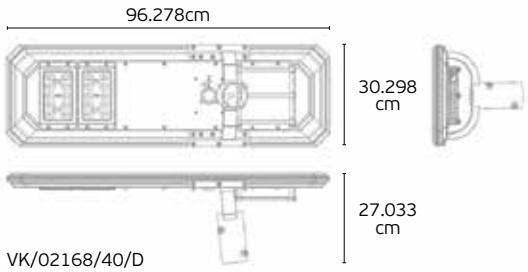

VK/02168/40/D

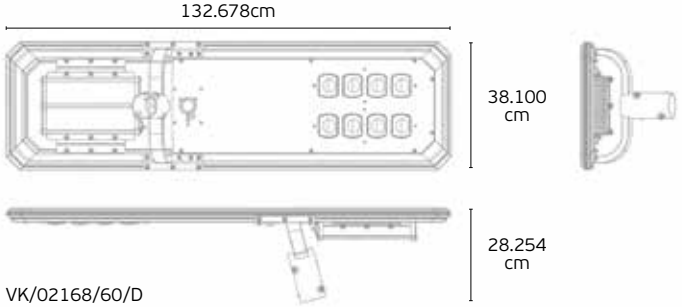

VK/02168/60/D

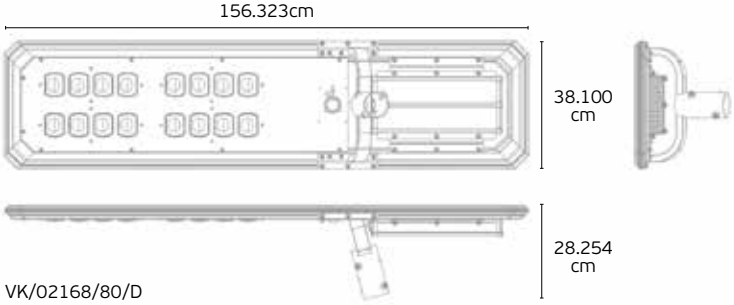

VK/02168/80/D



SINCE 1979
CASOMA LIGHT



Led Lamps

Led lamps E27. Spiral. Filament.



VK/05169 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-001733	**VK/05169/D/E/TM/WW**	E27	**3W**		2200K	50lm	1

Voltage 220-240	Filament Spiral	330°	CRI Ra>90	25k hrs	15kclks	-20°C 45°C	Glass	Alu	3W› 10W	IP20	2



168 mm

140 mm

VK/05170 Dark Grey



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-002733	**VK/05170/D/E/TM/WW**	E27	**4W**		2700K	120lm	1

Voltage 220-240	Filament Deco	330°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Glass	Alu	4W› 10W	IP20	2



160 mm

190 mm

VK/05171 Dark Grey



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-003733	**VK/05171/D/E/TM/WW**	E27	**4W**		2700K	120lm	1

Voltage 220-240	Filament Deco	330°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Glass	Alu	4W› 10W	IP20	2




165 mm

190 mm

VK/05172 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-004733	**VK/05172/D/E/TM/WW**	E27	**5W**		2700K	200lm	1

Voltage	Filament	330°	CRI	25k hrs	15k clks	-20°C 45°C	Glass	Alu	5W › 20W	IP20	2
220-240	Deco		Ra>90								






VK/05173 Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-005733	**VK/05173/D/E/A/WW**	E27	**3W**		2200K	140lm	1

Voltage	Filament	330°	CRI	25k hrs	15k clks	-20°C 45°C	Glass	Alu	3W › 15W	IP20	2
220-240	Spiral		Ra>90								






VK/05174 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-006733	**VK/05174/D/E/TM/WW**	E27	**3W**		2200K	60lm	1


Voltage	Filament	330°	CRI	25k hrs	15k clks	-20°C 45°C	Glass	Alu	3W › 10W	IP20	2
220-240	Spiral		Ra>90								





Led lamps E27. Spiral. Filament.






VK/05155 Amber A60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-228664	**VK/05155/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 28W	IP20	2





VK/05160 Amber T45

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-233664	**VK/05160/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 25W	IP20	2





VK/05156 Amber ST64

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-229664	**VK/05156/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 28W	IP20	2

VK/05157 Amber G80

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-230664	**VK/05157/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 27W	IP20	2



VK/05158 Amber G95

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-231664	**VK/05158/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 28W	IP20	2



VK/05159 Amber G125

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-232664	**VK/05159/D/E/SP/A**	E27	**4.5W**		2200K	330lm	50

Voltage 220-240	Filament Spiral	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 28W	IP20	2



Led lamps E27-A60. Classic Filament.



VK/05103 VK/05124 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-168664	**VK/05103/E/CL/W**	E27	**6.5W**		2700K	806lm	50
03045-208664	**VK/05124/D/E/CL/W**	E27	**8.5W**		2700K	1.055lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	6.5W › 60W 7.5W › 70W	IP20	2



VK/05103 VK/05122 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-169664	**VK/05103/E/MK/W**	E27	**6.5W**		2700K	806lm	50
03045-170664	**VK/05103/E/MK/D**	E27	**6.5W**		6500K	700lm	50
03045-196664	**VK/05122/E/MK/W**	E27	**9W**		2700K	1050lm	50
03045-197664	**VK/05122/E/MK/D**	E27	**8W**		6500K	820lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	6.5W › 54W 8W › 61W	IP20	2



VK/05122 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-207664	**VK/05122/D/E/ST/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



VK/05122 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-224664	**VK/05122/D/E/PCT/W**	E27	**7W**		2700K	650lm	50


Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2

VK/05104 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-171664	**VK/05104/EI/CL/W**	E14	**4.3W**		2700K	470lm	50
03045-172664	**VK/05104/EI/CL/D**	E14	**4.3W**		6500K	470lm	50

Voltage 220-240	COB 1016	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4.3W › 40W	IP20	2





VK/05120 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-202664	**VK/05120/D/EI/CL/W**	E14	**5W**		2700K	470lm	50

Voltage 220-240	COB 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	5W › 40W	IP20	2

VK/05104 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-173664	**VK/05104/EI/MK/W**	E14	**4W**		2700K	470lm	50
03045-174664	**VK/05104/EI/MK/D**	E14	**3.5W**		6500K	350lm	50

Voltage 220-240	COB 1016	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	3.5W › 32W	IP20	2





VK/05120 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-190664	**VK/05120/EI/MK/W**	E14	**4W**		2700K	470lm	50
03045-191664	**VK/05120/EI/MK/D**	E14	**4W**		6500K	420lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W › 40W 4.5W › 40W	IP20	2

Led lamps E14-G45. Mini globe Filament.

VK/05105 VK/05121 Clear



75 mm

45 mm

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-175664	**VK/05105/EI/CL/W**	E14	**4.3W**		2700K	470lm	50
03045-176664	**VK/05105/EI/CL/D**	E14	**4.3W**		6500K	470lm	50
03045-203664	**VK/05121/D/EI/CL/W**	E14	**5W**		2700K	470lm	50

Voltage 220-240	COB 1016/ 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W › 40W 4.5W › 40W 5W › 40W	IP20	2

VK/05105 VK/05121 Milky



80 mm

45 mm

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-177664	**VK/05105/EI/MK/W**	E14	**4W**		2700K	470lm	50
03045-178664	**VK/05105/EI/MK/D**	E14	**3.5W**		6500K	350lm	50
03045-192664	**VK/05121/EI/MK/W**	E14	**4W**		2700K	400lm	50
03045-193664	**VK/05121/EI/MK/D**	E14	**4W**		6500K	470lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	3.5W › 39W 4W › 39W	IP20	2

VK/05121 Silver



75 mm

45 mm

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-204664	**VK/05121/D/EI/ST/W**	E14	**4.5W**		2700K	330lm	50

Voltage 220-240	COB 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W › 32W	IP20	2

VK/05121 Pink Copper



80 mm

45 mm

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-222664	**VK/05121/D/EI/PCT/W**	E14	**4.5W**		2700K	330lm	50

Voltage 220-240	COB 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W › 32W	IP20	2

Led lamps E27-G45. Mini globe Filament.

VK/05106 VK/05121 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-179664	**VK/05106/E/CL/W**	E27	**4.3W**		2700K	470lm	50
03045-180664	**VK/05106/E/CL/D**	E27	**4.3W**		6500K	470lm	50
03045-206664	**VK/05121/D/E/CL/W**	E27	**4.5W**		2700K	450lm	50

Voltage 220-240	COB 1016/ 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 40W 4.5W› 40W 5W› 40W	IP20	2



VK/05106 VK/05121 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-181664	**VK/05106/E/MK/W**	E27	**4W**		2700K	470lm	50
03045-182664	**VK/05106/E/MK/D**	E27	**4W**		6500K	490lm	50
03045-194664	**VK/05121/E/MK/W**	E27	**4W**		2700K	470lm	50
03045-195664	**VK/05121/E/MK/D**	E27	**4W**		6500K	420lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 40W	IP20	2



VK/05121 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-205664	**VK/05121/D/E/ST/W**	E27	**4.5W**		2700K	330lm	50

Voltage 220-240	COB 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 32W	IP20	2



VK/05121 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-223664	**VK/05121/D/E/PCT/W**	E27	**4.5W**		2700K	330lm	50

Voltage 220-240	COB 1018	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 32W	IP20	2



Led lamps E27-ST64 Filament.



VK/05107 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-183664	**VK/05107/E/CL/W**	E27	**6.5W**		2700K	806lm	50
03045-215664	**VK/05107/D/E/CL/W**	E27	**7W**		2700K	806lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	6.5W › 60W 7W › 60W	IP20	2



VK/05126 Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-225664	**VK/05126/D/E/A/W**	E27	**7W**		2200K	720lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	8W › 60W	IP20	2

VK/05109 VK/05110 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-187664	**VK/05109/E/CL/W**	E27	**4.3W**		2700K	470lm	50
03045-209664	**VK/05110/D/E/CL/W**	E27	**7W**		2700K	806lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 39W 7W› 60W	IP20	2



117 mm

80 mm

VK/05110 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-188664	**VK/05110/E/MK/W**	E27	**6.5W**		2700K	680lm	50
03045-198664	**VK/05110/E/MK/D**	E27	**7W**		6500K	670lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W› 52W	IP20	2



117 mm

80 mm

VK/05109 VK/05110 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-189664	**VK/05109/E/ST/W**	E27	**4W**		2700K	350lm	50
03045-210664	**VK/05110/D/E/ST/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W› 32W 7W› 51W	IP20	2



117 mm

80 mm

Led lamps E27-G95 Globo Filament.



VK/05123 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-211664	**VK/05123/D/E/CL/W**	E27	**7W**		2700K	806lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	8W › 60W	IP20	2



VK/05123 Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-217664	**VK/05123/D/E/A/W**	E27	**7W**		2200K	720lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



VK/05123 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-218664	**VK/05123/D/E/DG/W**	E27	**7W**		2700K	200lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	8W › 24W	IP20	2

VK/05123 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-199664	**VK/05123/E/MK/W**	E27	**6.5W**		2700K	806lm	50
03045-200664	**VK/05123/E/MK/D**	E27	**7W**		6500K	826lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W› 60W	IP20	2



VK/05123 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-212664	**VK/05123/D/E/ST/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W› 51W	IP20	2



VK/05123 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-216664	**VK/05123/D/E/PCT/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W› 51W	IP20	2



Led lamps E27-G125 Globo Filament.



VK/05108 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-184664	**VK/05108/E/CL/W**	E27	**6.5W**		2700K	806lm	50
03045-213664	**VK/05108/D/E/CL/W**	E27	**7W**		2700K	806lm	50

Voltage 220-240	COB 1016/ 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	6.5W › 60W 8W › 60W	IP20	2



VK/05108 Amber

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-220664	**VK/05108/D/E/A/W**	E27	**7W**		2200K	720lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



VK/05108 Dark Grey

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-221664	**VK/05108/D/E/DG/W**	E27	**7W**		2700K	200lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W › 21W	IP20	2

VK/05108 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-185664	**VK/05108/E/MK/W**	E27	**6.5W**		2700K	806lm	50
03045-201664	**VK/05108/E/MK/D**	E27	**7W**		6500K	670lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



VK/05108 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-214664	**VK/05108/D/E/ST/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



VK/05108 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-219664	**VK/05108/D/E/PCT/W**	E27	**7W**		2700K	650lm	50

Voltage 220-240	COB 1030	360°	CRI Ra>80	15k hrs	30k clks	-20°C 40°C	Glass	Alu	7W › 51W	IP20	2



Led lamps E14-C37 Candle Plastic



104 mm

37 mm

VK/05177

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-134742	**VK/05177/EI/W**	E14	**9W**		3000K	810lm	100
03045-135742	**VK/05177/EI/C**	E14	**9W**		4000K	810lm	100
03045-136742	**VK/05177/EI/D**	E14	**9W**		6000K	810lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Plastic	Alu	9W› 60W	IP20	2



109 mm

38 mm

VK/05177-VK/05168

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-146742	**VK/05177/D/EI/W**	E14	**9W**		3000K	806lm	100
03045-147742	**VK/05177/D/EI/C**	E14	**9W**		4000K	806lm	100
03045-148742	**VK/05177/D/EI/D**	E14	**9W**		6000K	806lm	100
03045-699126	**VK/05168/D/EI/W**	E14	**7W**		3000K	600lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Plastic	Alu	9W› 90W	IP20	2



98 mm

37 mm

VK/05083

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-044742	**VK/05083/EI/W**	E14	**6W**		3000K	540lm	100
03045-045742	**VK/05083/EI/C**	E14	**6W**		4000K	540lm	100
03045-046742	**VK/05083/EI/D**	E14	**6W**		6000K	540lm	100

Voltage 180-250	SMD 2835	180°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	6W› 35W	IP20	2

VK/05178

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-137742	**VK/05178/EI/W**	E14	**9W**		3000K	810lm	100
03045-138742	**VK/05178/EI/C**	E14	**9W**		4000K	810lm	100
03045-139742	**VK/05178/EI/D**	E14	**9W**		6500K	810lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Plastic	Alu	9W› 60W	IP20	2



VK/05178/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-149742	**VK/05178/D/EI/W**	E14	**9W**		3000K	810lm	100
03045-150742	**VK/05178/D/EI/C**	E14	**9W**		4000K	810lm	100
03045-151742	**VK/05178/D/EI/D**	E14	**9W**		6000K	806lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15kclks	-20°C 45°C	Plastic	Alu	9W› 90W	IP20	2



VK/05084

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-047742	**VK/05084/EI/W**	E14	**6W**		3000K	540lm	100
03045-048742	**VK/05084/EI/C**	E14	**6W**		4000K	540lm	100
03045-049742	**VK/05084/EI/D**	E14	**6W**		6000K	540lm	100

Voltage 180-250	SMD 2835	160°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	6W› 35W	IP20	2



Led lamps E27-G45 Mini globe Plastic



88 mm

45 mm

VK/05179

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-140742	**VK/05179/E/W**	E27	**9W**		3000K	810lm	100
03045-141742	**VK/05179/E/C**	E27	**9W**		4000K	810lm	100
03045-142742	**VK/05179/E/D**	E27	**9W**		6000K	810lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15k clks	-20°C 45°C	Plastic	Alu	9W › 60W	IP20	2



88 mm

45 mm

VK/05179/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-152742	**VK/05179/D/E/W**	E27	**9W**		3000K	810lm	100
03045-153742	**VK/05179/D/E/C**	E27	**9W**		4000K	810lm	100
03045-154742	**VK/05179/D/E/D**	E27	**9W**		6000K	810lm	100

Voltage 175-265	SMD 2835	200°	CRI Ra>80	25k hrs	15k clks	-20°C 45°C	Plastic	Alu	9W › 60W	IP20	2



83 mm

45 mm

VK/05085

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-050742	**VK/05085/E/W**	E27	**6W**		3000K	540lm	100
03045-051742	**VK/05085/E/C**	E27	**6W**		4000K	540lm	100
03045-052742	**VK/05085/E/D**	E27	**6W**		6000K	540lm	100

Voltage 180-250	SMD 2835	160°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	6W › 40W	IP20	2

VK/05088

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-059742	**VK/05088/E/W**	E27	**9W**		3000K	810lm	50
03045-060742	**VK/05088/E/C**	E27	**9W**		4000K	780lm	50
03045-061742	**VK/05088/E/D**	E27	**9W**		6000K	780lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	9W > 90W 11W > 100W	IP20	2



VK/05054

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-017742	**VK/05054/E/W**	E27	**11W**		3000K	1.055lm	50
03045-039742	**VK/05054/E/C**	E27	**11W**		4000K	1.050lm	50
03045-018742	**VK/05054/E/D**	E27	**11W**		6000K	1.050lm	50
03045-687140	**VK/05054/D/E/W**	E27	**11W**		3000K	1.050lm	50
03045-688140	**VK/05054/D/E/C**	E27	**11W**		4000K	1.050lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	9W > 90W 11W > 100W	IP20	2



VK/05054/B

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-105742	**VK/05054/B/W**	B22	**11W**		3000K	1.055lm	50
03045-106742	**VK/05054/B/C**	B22	**11W**		4000K	1.055lm	50
03045-107742	**VK/05054/B/D**	B22	**11W**		6000K	1.050lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	11W > 100W	IP20	2



Led lamps E27 Classic Plastic






VK/05111 - A60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-092742	**VK/05111/E/W**	E27	**15W**		3000K	1.450lm	50
03045-093742	**VK/05111/E/C**	E27	**15W**		4000K	1.450lm	50
03045-094742	**VK/05111/E/D**	E27	**15W**		6000K	1.450lm	50

Voltage 180-250	SMD 2835/ 3030	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	15W › 150W	IP20	2





VK/05125 - A65

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-682140	**VK/05125/E/W**	E27	**18W**		3000K	1.800lm	50
03045-111742	**VK/05125/E/C**	E27	**18W**		4000K	1.800lm	50
03045-683140	**VK/05125/E/D**	E27	**18W**		6000K	1.800lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	18W › 130W	IP20	2





VK/05132 - A70

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-108742	**VK/05132/E/W**	E27	**20W**		3000K	2.000lm	50
03045-109742	**VK/05132/E/C**	E27	**20W**		4000K	2.000lm	50
03045-110742	**VK/05132/E/D**	E27	**20W**		6500K	2.000lm	50

Voltage 180-250	SMD 2835	200°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	Alu	20W › 150W	IP20	2

VK/05113 With Sensor Day-Night

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-646140	**VK/05113/S/W**	E27	**11W**		3000K	1.050lm	50
03045-648140	**VK/05113/S/C**	E27	**11W**		4000K	1.050lm	50
03045-647140	**VK/05113/S/D**	E27	**11W**		6000K	1.050lm	50

Voltage 220-240	SMD 2835	270°	CRI Ra>80	25k hrs	25kclks	-20°C 45°C	Plastic	Alu	12W› 75W	IP20	Sensor Day Night	2



VK/05062 (One lamp with 3 different Volts 12, 24 & 42V)

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-275126	**VK/05062/W**	E27	**10W**		3000K	850lm	10
03045-274126	**VK/05062/D**	E27	**10W**		6500K	900lm	10

Voltage 12,24,42	SMD 5730	200°	CRI Ra>80	30k hrs	25kclks	-40°C 60°C	Plastic	Alu	10W› 100W	IP20	2



VK/05055 RGB

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-019742	**VK/05055/E/RGB**	E27	**4W**		RGB	N/A	50

Voltage 85-265	SMD 5050	270°	CRI Ra>80	30k hrs	25kclks	-20°C 40°C	Plastic	Alu	4W› 40W	IP20	2





Led lamps E27 G95/G120 Globo Plastic



VK/05051

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-007742	**VK/05051/E/W**	E27	**12W**		3000K	1.050lm	10
03045-008742	**VK/05051/E/D**	E27	**12W**		6000K	1.050lm	10

Voltage 220-240	SMD 2835	270°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	12W › 120W	IP20	2



VK/05052

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-009742	**VK/05052/E/W**	E27	**15W**		3000K	1.450lm	50
03045-010742	**VK/05052/E/D**	E27	**15W**		6000K	1.450lm	50

Voltage 180-250	SMD 2835	270°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	15W › 150W	IP20	2



VK/05139D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-670140	**VK/05139D/E/W**	E27	**20W**		3000K	1.800lm	50
03045-671140	**VK/05139D/E/D**	E27	**20W**		6000K	1.800lm	50

Voltage 180-250	SMD 2835	180°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	PC Shell	Alu	20W › 200W	IP20	2

VK/05073/EI

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-290140	**VK/05073/EI/W/120**	E14	**7W**		2700K	600lm	50
03045-291140	**VK/05073/EI/D/120**	E14	**7W**		6500K	600lm	50

Voltage 100-250	SMD 2835	300°	CRI Ra>80	25k hrs	15kclks	-20°C 50°C	Plastic	Alu	7W› 70W	IP20	2






VK/05073/E

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-288140	**VK/05073/E/W/120**	E27	**7W**		2700K	630lm	50
03045-289140	**VK/05073/E/D/120**	E27	**7W**		6500K	630lm	50

Voltage 180-250	SMD 2835	270°	CRI Ra>80	25k hrs	15kclks	-20°C 50°C	Plastic	Alu	7W› 70W	IP20	2






VK/05074

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-292140	**VK/05074/E/W/138**	E27	**12W**		2700K	1.160lm	50
03045-293140	**VK/05074/E/D/138**	E27	**12W**		6500K	1.000lm	50


Voltage 100-250	SMD 2835	300°	CRI Ra>80	25k hrs	15kclks	-20°C 50°C	Plastic	Alu	12W› 120W	IP20	2





Led lamps E27. Prismatic





VK/05096

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-617140	**VK/05096/D**	E27	**15W**		6000K	1.600lm

Voltage 175-265	SMD	300º	CRI Ra>80	25k hrs	15kclks	-20ºC 45ºC	Plastic	15W›100W	IP44	2	Box 50





VK/05016

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Color
01026-015106	**VK/05016/D**	G53	**18W**		6500K	2.200lm	Grey
01026-017106	**VK/05016/BL**	G53	**18W**		Blue	250lm	Grey
01026-016106	**VK/05016/RGB**	G53	**18W**		RGB	500lm	Grey

Voltage 12	SMD 2835	120°	CRI Ra>80	30k hrs	30k clks	-40°C 40°C	Glass	40W › 70W	IP68	2	Box 10









Included Remote control for RGB color



Led lamps E27. Classic Plastic Color



110 mm

60 mm

VK/05063

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-276126	**VK/05063/BL**	E27	**9W**		Blue	N/A
03045-277126	**VK/05063/R**	E27	**9W**		Red	N/A
03045-278126	**VK/05063/GR**	E27	**9W**		Green	N/A
03045-279126	**VK/05063/Y**	E27	**9W**		Yellow	N/A

Voltage	SMD		CRI									Box
220-240	2835	230°	Ra>70	30k hrs	30kclks	-40°C 60°C	Plastic	Alu	9W› 90W	IP20	2	10



108 mm

55 mm

VK/05133/MSQ Mosquito lamp

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-665140	**VK/05133/MSQ/Y**	E27	**7W**		1700K Yellow	N/A

Voltage	SMD		CRI									Box
180-250	2835	270°	Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	7W› 50W	IP20	2	50



110 mm

60 mm

VK/05147

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-686140	**VK/05147/D/R**	E27	**5W**		Red	N/A

Voltage	SMD		CRI									Box
180-250	2835	270°	Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	5W› 40W	IP20	2	10

VK/05064

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-280126	**VK/05064/D**	E27	**1.3W**		6500K	N/A
03045-281126	**VK/05064/A**	E27	**1.3W**		Amber	N/A
03045-282126	**VK/05064/BL**	E27	**1.3W**		Blue	N/A
03045-283126	**VK/05064/R**	E27	**1.3W**		Red	N/A
03045-285126	**VK/05064/GR**	E27	**1.3W**		Green	N/A
03045-284126	**VK/05064/Y**	E27	**1.3W**		Yellow	N/A

Voltage 220-240	SMD 2835	270°	CRI Ra>80	25k hrs	25k clks	-20°C 45°C	Plastic	Alu	1.3W › 13W	IP20	2	Box 10



69 mm

45 mm

VK/05077

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-288126	**VK/05077/EI/D**	E14	**0.5W**		6500K	N/A
03045-289126	**VK/05077/EI/BL**	E14	**0.5W**		Blue	N/A
03045-290126	**VK/05077/EI/R**	E14	**0.5W**		Red	N/A
03045-292126	**VK/05077/EI/GR**	E14	**0.5W**		Green	N/A
03045-291126	**VK/05077/EI/Y**	E14	**0.5W**		Yellow	N/A

Voltage 220-240	SMD 2835	270°	CRI N/A	25k hrs	25k clks	-20°C 40°C	Plastic	Alu	0.5W › 5W	IP20	2	Box 10



59 mm

26 mm

VK/05138 Refrigerator

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-669140	**VK/05138/D**	E14	**2W**		6500K	130lm

Voltage 220-240	SMD 2835	300°	CRI Ra>80	25k hrs	15k clks	-20°C 50°C	Plastic	Alu	2W › 15W	IP20	2	Box 50



50 mm

23 mm

VK/05095 Hood

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-616140	**VK/05095/W**	E14	**2W**		3000K	200lm

Voltage 220-240	SMD 2835	270°	CRI Ra>80	25k hrs	15k clks	-20°C 45°C	Plastic	Alu	2W › 15W	IP20	2	Box 50



60 mm

18 mm

Led lamps G9. 240V





70 mm


20 mm

VK/05165

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-674685	**VK/05165/W**	G9	**8W**		3000K	760lm	350º	100
03045-680685	**VK/05165/C**	G9	**8W**		4000K	760lm	350º	100

Voltage 220-240	SMD 2835	350º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Ceramic	Plastic	8W › 70W	IP20	2





54 mm


17 mm

VK/05127

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-661685	**VK/05127/W**	G9	**5W**		2700K	400lm	350º	100
03045-678685	**VK/05127/C**	G9	**5W**		4000K	400lm	350º	100
03045-662685	**VK/05127/D**	G9	**5W**		6000K	420lm	350º	100

Voltage 200-250	SMD 2835	350º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Ceramic	Plastic	5W › 50W	IP20	2





54 mm

17 mm

VK/05127/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-651685	**VK/05127/D/W**	G9	**5W**		2700K	350lm	350º	100
03045-679685	**VK/05127/D/C**	G9	**5W**		4000K	350lm	350º	100
03045-652685	**VK/05127/D/D**	G9	**5W**		6000K	370lm	350º	100

Voltage 200-250	SMD 2835	350º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Ceramic	Plastic	5W › 45W	IP20	2





50 mm

14 mm

VK/05011


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-149664	**VK/05011/W**	G9	**3W**		3000K	190lm	270º	100
03045-150664	**VK/05011/D**	G9	**3W**		6000K	230lm	270º	100

Voltage 220-240	SMD 2835	270º	CRI Ra>80	25k hrs	15k clks	-20ºC 45ºC	Silicon	3W › 30W	IP20	2

VK/05067

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-029742	**VK/05067/W**	G9	**3W**		3000K	220lm	180º	100
03045-030742	**VK/05067/D**	G9	**3W**		6000K	220lm	180º	100


Voltage 220-240	SMD 3030	180º	CRI Ra>80	25k hrs	15kclks	-20ºC 45ºC	Plastic	3W › 30W	IP20	2



VK/05066

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-025742	**VK/05066/W**	G9	**3.5W**		3000K	280lm	270º	100
03045-026742	**VK/05066/D**	G9	**3.5W**		6000K	340lm	270º	100


Voltage 220-240	SMD 2835	270º	CRI Ra>80	25k hrs	15kclks	-20ºC 45ºC	Plastic	3.5W › 35W	IP20	2



VK/05066/D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-027742	**VK/05066/D/W**	G9	**3W**		3000K	220lm	270º	100
03045-028742	**VK/05066/D/D**	G9	**3W**		6000K	250lm	270º	100


Voltage 220-240	SMD 2835	270º	CRI Ra>80	25k hrs	15kclks	-20ºC 45ºC	Plastic	3W › 30W	IP20	2



VK/05128

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-653685	**VK/05128/D/W**	G9	**2W**		2700K	210lm	350º	100
03045-654685	**VK/05128/D/D**	G9	**2W**		6000K	230lm	320º	100

Voltage 200-250	Filament	320º	CRI Ra>80	25k hrs	12.5kclks	-20ºC 45ºC	Ceramic	Plastic	2W › 20W	IP20	2



Led lamps G4. 12V





VK/05129

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-655685	**VK/05129/W**	G4	**3W**		2700K	270lm	350º	50
03045-656685	**VK/05129/D**	G4	**3W**		6000K	290lm	350º	50

Voltage 12	SMD 2835	350º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Glass	3W › 25W	IP20	2





VK/05034

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-155664	**VK/05034/W**	G4	**1.5W**		2700K	90lm	360º	50
03045-156664	**VK/05034/D**	G4	**1.5W**		6000K	100lm	360º	50

Voltage 12	SMD 3014	360º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Silicon	1.5W › 15W	IP20	2





VK/05018

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-068664	**VK/05018/WW**	G4	**3.5W**		2700K	180lm	360º	50
03045-069664	**VK/05018/DL**	G4	**3.5W**		6000K	180lm	360º	50

Voltage 12	SMD 5050	360º	CRI Ra>80	25k hrs	10k clks	-20ºC 60ºC	Plastic	3.5W › 35W	IP20	2





VK/05019


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-087664	**VK/05019/WW**	G4	**1.5W**		2700K	90lm	360º	50
03045-088664	**VK/05019/DL**	G4	**1.5W**		6500K	90lm	360º	50

Voltage 12	SMD 5050	360º	CRI Ra>80	25k hrs	10k clks	-20ºC 60ºC	Plastic	1.5W › 15W	IP20	2

VK/05130

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-657685	**VK/05130/W**	G4	**2W**		2700K	200lm	330º	50
03045-658685	**VK/05130/D**	G4	**2W**		6000K	210lm	330º	50


Voltage 12	SMD 3020	330º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Silicon	2W › 20W	IP20	2



VK/05131

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-659685	**VK/05131/D/W**	G4	**2W**		2700K	160lm	330º	50
03045-660685	**VK/05131/D/D**	G4	**2W**		6000K	210lm	330º	50


Voltage 12	COB	330º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Silicon	2W › 15W	IP20	2



VK/05166

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-675685	**VK/05166/W**	G4	**1W**		3000K	120lm	330º	50
03045-676685	**VK/05166/D**	G4	**1W**		6000K	130lm	330º	50


Voltage 12	COB	330º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Silicon	1W › 15W	IP20	2



VK/05020

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-060719	**VK/05020/WW**	G4	**1.5W**		3000K	105lm	360º	50
03045-061719	**VK/05020/DL**	G4	**1.5W**		6000K	105lm	360º	50

Voltage 12	SMD 5050	360º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Alu	Plastic	1.5W › 15W	IP20	2




Led lamps G4. 12V.

VK/05021




Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-027664	**VK/05021/W**	G4	**0.5W**		2700K	35lm	120º
03045-015664	**VK/05021/D**	G4	**0.5W**		6500K	35lm	120º
03045-028664	**VK/05021/BL**	G4	**0.5W**		Blue	35lm	120º

Voltage	FLUX	120º	CRI	25k hrs	12.5k clks	-20ºC 45ºC	Plastic	0.5W › 5W	IP20	2	Box
12			Ra>80								50




VK/05167




Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-677685	**VK/05167/W**	G4	**3W**		3000K	270lm	180º

Voltage	SMD	180º	CRI	25k hrs	12.5k clks	-20ºC 40ºC	Plastic	3W › 25W	IP20	2	Box
12	2835		Ra>80								50




VK/05022



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-021664	**VK/05022/W**	G4	**1.8W**		3000K	100lm	120º
03045-022664	**VK/05022/D**	G4	**1.8W**		6500K	100lm	120º

Voltage	SMD	120º	CRI	25k hrs	12.5k clks	-20ºC 40ºC	Plastic	1.8W › 18W	IP20	2	Box
10-30DC	5050		Ra>80								50



VK/05181/78

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-684685	**VK/05181/78/W**	R7S	**5W**		3000K	650lm	360º
03045-685685	**VK/05181/78/D**	R7S	**5W**		6000K	650lm	360º


Voltage 220-240	COB	360º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Glass cover	5W › 60W	IP20	2	Box 50



VK/05182/118

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-686685	**VK/05182/118/W**	R7S	**10W**		3000K	1.200lm	360º
03045-687685	**VK/05182/118/D**	R7S	**10W**		6000K	1.200lm	360º

Voltage 220-240	COB	360º	CRI Ra>80	25k hrs	12.5k clks	-20ºC 45ºC	Glass cover	10W › 100W	IP20	2	Box 50

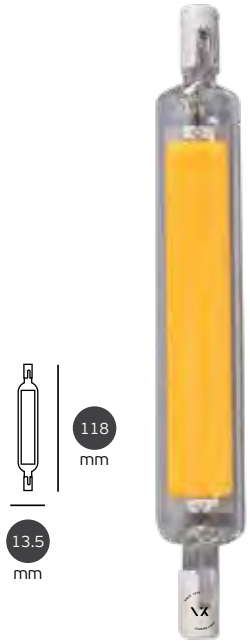







Led lamps GU10





58 mm

50 mm

VK/05180/G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-143742	**VK/05180/G/W**	GU10	**9W**		3000K	810lm	110º	50
03045-144742	**VK/05180/G/C**	GU10	**9W**		4000K	810lm	110º	50
03045-145742	**VK/05180/G/D**	GU10	**9W**		6000K	810lm	110º	50
03045-171742	**VK/05180/G/D/W**	GU10	**9W**		3000K	810lm	110º	50
03045-172742	**VK/05180/G/D/C**	GU10	**9W**		4000K	810lm	110º	50
03045-173742	**VK/05180/G/D/D**	GU10	**9W**		6000K	810lm	110º	50

Voltage 175-265	SMD 2835	110º	CRI Ra>80	25k hrs	15kclks	-20ºC 45ºC	Plastic	9W › 90W	IP20	2



58 mm

50 mm

VK/05119G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-100742	**VK/05119G/W**	GU10	**6W**		3000K	540lm	120º	50
03045-104742	**VK/05119G/C**	GU10	**6W**		4000K	540lm	120º	50
03045-101742	**VK/05119G/D**	GU10	**6W**		6000K	540lm	120º	50
03045-125742	**VK/05119G/BL**	GU10	**6W**		Blue	N/A	120º	50
03045-126742	**VK/05119G/GR**	GU10	**6W**		Green	N/A	120º	50
03045-127742	**VK/05119G/Y**	GU10	**6W**		Yellow	N/A	120º	50
03045-128742	**VK/05119G/R**	GU10	**6W**		Red	N/A	120º	50

Voltage 220-240	SMD 2835	120º	CRI Ra>80	20k hrs	20kclks	-40ºC 60ºC	Plastic	6W › 35W	IP20	2

VK/05065G





Code	Model	Base	Watt	Dimm	Kelvin	Lumen	CRI & Angle	Box
03045-116742	**VK/05065G/WW/38**	GU10	**7W**		2700K	530lm	RA>80, 38º	50
03045-181742	**VK/05065G/WW/90/38**	GU10	**7W**		2700K	530lm	RA>90, 38º	50
03045-082742	**VK/05065G/W/38**	GU10	**7W**		3000K	530lm	RA>80, 38º	50
03045-182742	**VK/05065G/W/90/38**	GU10	**7W**		3000K	530lm	RA>90, 38º	50
03045-083742	**VK/05065G/C/38**	GU10	**7W**		4000K	530lm	RA>80, 38º	50
03045-084742	**VK/05065G/D/38**	GU10	**7W**		6000K	530lm	RA>80, 38º	50
03045-123742	**VK/05065G/WW/24**	GU10	**7W**		2700K	530lm	RA>80, 24º	50
03045-085742	**VK/05065G/W/24**	GU10	**7W**		3000K	530lm	RA>80, 24º	50
03045-129742	**VK/05065G/C/24**	GU10	**7W**		4000K	530lm	RA>80, 24º	50
03045-130742	**VK/05065G/D/24**	GU10	**7W**		6000K	530lm	RA>80, 24º	50

Voltage 220-240	COB	38º & 24º	CRI Ra>80	CRI Ra>90	25k hrs	15kclks	-20ºC 45ºC	Glass	Alu	7W› 50W	IP20	2




VK/05065G/D





Code	Model	Base	Watt	Dimm	Kelvin	Lumen	CRI & Angle	Box
03045-117742	**VK/05065G/D/WW/38**	GU10	**7W**		2700K	530lm	RA>80, 38º	50
03045-183742	**VK/05065G/D/WW/90/38**	GU10	**7W**		2700K	530lm	RA>90, 38º	50
03045-022742	**VK/05065G/D/W/38**	GU10	**7W**		3000K	530lm	RA>80, 38º	50
03045-184742	**VK/05065G/D/W/90/38**	GU10	**7W**		3000K	530lm	RA>90, 38º	50
03045-023742	**VK/05065G/D/C/38**	GU10	**7W**		4000K	530lm	RA>80, 38º	50
03045-024742	**VK/05065G/D/D/38**	GU10	**7W**		6000K	530lm	RA>80, 38º	50
03045-124742	**VK/05065G/D/WW/24**	GU10	**7W**		2700K	530lm	RA>80, 24º	50
03045-118742	**VK/05065G/D/W/24**	GU10	**7W**		3000K	530lm	RA>80, 24º	50
03045-131742	**VK/05065G/D/C/24**	GU10	**7W**		4000K	530lm	RA>80, 24º	50
03045-132742	**VK/05065G/D/D/24**	GU10	**7W**		6000K	530lm	RA>80, 24º	50

Voltage 220-240	COB	38º & 24º	CRI Ra>80	CRI Ra>90	25k hrs	15kclks	-20ºC 45ºC	Glass	Alu	7W› 70W	IP20	2



Led lamps GU10






VK/05094G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-303126	**VK/05094G/W/5**	GU10	**4W**		3000K	200lm	5º	50
03045-304126	**VK/05094G/D/5**	GU10	**4W**		6000K	200lm	5º	50

Voltage 220-240	Cree	5º	CRI Ra>85	50k hrs	15kclks	-30ºC 45ºC	Plastic	Alu	4W › 40W	IP20	2








VK/05148G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-133742	**VK/05148G/DT/WW/36**	GU10	**5.5W**		1700-2700K	345lm	36º	50

Voltage 220-240	SMD 2835	36º	CRI Ra>90	15k hrs	50k clks	-20ºC 40ºC	Glass	Alu	5.5W › 50W	IP20	2



1700K < Dimmable > 2700K

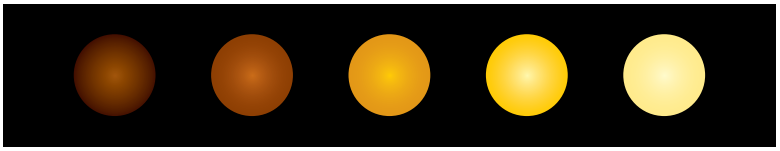





VK/05161G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-689140	**VK/05161G/D/W/15**	GU10	**7W**		2700K	540lm	15º	50
03045-690140	**VK/05161G/D/C/15**	GU10	**7W**		4000K	540lm	15º	50

Voltage 180-250	COB Sharp	15º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Plastic	7W › 60W	IP20	2





VK/05162G


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-691140	**VK/05162G/D/W/38**	GU10	**5W**		2700K	400lm	38º	50
03045-692140	**VK/05162G/D/C/38**	GU10	**5W**		4000K	400lm	38º	50

Voltage 180-250	SMD 2835	38º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Plastic	5W › 50W	IP20	2





Led lamps GU10.



VK/05093G With 3 different Volts (12V, 24V & 42V)

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-301126	**VK/05093G/W**	GU10	**6W**		3000K	500lm	38º
03045-302126	**VK/05093G/D**	GU10	**6W**		6000K	500lm	38º

Voltage 12,24,42	SMD 2835	38º	CRI Ra>80	50k hrs	15kclks	-30ºC 45ºC	Plastic	6W › 60W	IP20	2	Box 50



54 mm

50 mm



VK/05092G 24V

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-299126	**VK/05092G/W/38**	GU10	**6W**		3000K	600lm	38º
03045-300126	**VK/05092G/D/38**	GU10	**6W**		6000K	600lm	38º

Voltage 24	COB	38º	CRI Ra>80	50k hrs	50kclks	-20ºC 45ºC	Plastic	3.5W › 35W	IP20	2	Box 50



56 mm

50 mm



VK/05075G RGB

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
03045-041742	**VK/05075G/RGB**	GU10	**3W**		RGB	N/A	45º

Voltage 220-240	SMD 5050	45º	CRI Ra>80	30k hrs	20kclks	-20ºC 40ºC	Plastic	3W › 30W	IP20	2	Box 50



60 mm

50 mm



With remote control

VK/05097G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-618140	**VK/05097G/W/60**	GU10	**4W**		2700K	300lm	60º	50
03045-619140	**VK/05097G/D/60**	GU10	**4W**		6500K	300lm	60º	50

Voltage 220-240	SMD 2835	60º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Plastic	4W› 40W	IP20	2





VK/05184G

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-001147	**VK/05184G/W/24**	GU10	**3W**		3000K	260lm	24°	100
03045-002147	**VK/05184G/C/24**	GU10	**3W**		4000K	270lm	24°	100
03045-003147	**VK/05184G/D/24**	GU10	**3W**		6000K	280lm	24°	100

Voltage 220-240	SMD	24º	CRI Ra>80	15k hrs	15kclks	-20ºC 40ºC	Glass	3W› 30W	IP20	3





VK/05184

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-004147	**VK/05184/W/24**	GU5.3	**3W**		3000K	260lm	24°	100
03045-005147	**VK/05184/C/24**	GU5.3	**3W**		4000K	270lm	24°	100
03045-006147	**VK/05184/D/24**	GU5.3	**3W**		6000K	280lm	24°	100

Voltage 12	SMD	24º	CRI Ra>80	15k hrs	15kclks	-20ºC 40ºC	Glass	3W› 30W	IP20	3





VK/05162 VK/05163

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-693140	**VK/05162/D/W/38**	GU5.3	**5W**		2700K	400lm	38º	100
03045-694140	**VK/05162/D/C/38**	GU5.3	**5W**		4000K	400lm	38º	100
03045-701140	**VK/05162/W/38**	GU5.3	**5W**		2700K	400lm	38º	100
03045-695140	**VK/05163/W/38**	GU5.3	**7W**		2700K	600lm	38º	100
03045-696140	**VK/05163/C/38**	GU5.3	**7.5W**		4000K	600lm	38º	100

Voltage 12	SMD 2835	38º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Plastic	5W› 50W 7.5W› 60W	IP20	2







Led lamps GU10. ES111

VK/05112G



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-632140	**VK/05112G/W/10º**	GU10	**12W**		2700K	1.000lm	**10º**	10
03045-633140	**VK/05112G/C/10º**	GU10	**12W**		4000K	1.000lm	**10º**	10

Voltage 220-240	COB	10º	CRI Ra>80	25k hrs	25k clks	-20ºC 45ºC	Alu	14W › 75W	IP20	2





Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-628140	**VK/05112G/W/24º**	GU10	**12W**		2700K	1.000lm	**24º**	10
03045-630140	**VK/05112G/C/24º**	GU10	**12W**		4000K	1.000lm	**24º**	10
03045-629140	**VK/05112G/W/45º**	GU10	**12W**		2700K	1.000lm	**45º**	10
03045-631140	**VK/05112G/C/45º**	GU10	**12W**		4000K	1.000lm	**45º**	10

Voltage 220-240	SMD 2835	24º & 45º	CRI Ra>80	25k hrs	25k clks	-20ºC 45ºC	Alu	14W › 75W	IP20	2


VK/05112GD



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-644140	**VK/05112GD/W/10º**	GU10	**12W**		2700K	1.000lm	**10º**	10
03045-645140	**VK/05112GD/C/10º**	GU10	**12W**		4000K	1.000lm	**10º**	10

Voltage 220-240	COB	10º	CRI Ra>80	25k hrs	25k clks	-20ºC 45ºC	Alu	14W › 75W	IP20	2





Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-640140	**VK/05112GD/W/24º**	GU10	**12W**		2700K	1.000lm	**24º**	10
03045-642140	**VK/05112GD/C/24º**	GU10	**12W**		4000K	1.000lm	**24º**	10
03045-641140	**VK/05112GD/W/45º**	GU10	**12W**		2700K	1.000lm	**45º**	10
03045-643140	**VK/05112GD/C/45º**	GU10	**12W**		4000K	1.000lm	**45º**	10

Voltage 220-240	SMD 2835	24º & 45º	CRI Ra>80	25k hrs	25k clks	-20ºC 45ºC	Alu	14W › 75W	IP20	2

VK/05112D

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-634140	**VK/05112D/W/10º**	G53	**14W**		2700K	700lm	**10º**	10
03045-637140	**VK/05112D/C/10º**	G53	**14W**		4000K	700lm	**10º**	10


Voltage 12	COB	10º	CRI Ra>80	25k hrs	25kclks	-20ºC 45ºC	Alu	14W› 75W	IP20	2



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-635140	**VK/05112D/W/24º**	G53	**14W**		2700K	800lm	**24º**	10
03045-638140	**VK/05112D/C/24º**	G53	**14W**		4000K	800lm	**24º**	10
03045-636140	**VK/05112D/W/45º**	G53	**14W**		2700K	850lm	**45º**	10
03045-639140	**VK/05112D/C/45º**	G53	**14W**		4000K	850lm	**45º**	10

Voltage 12	SMD 2835	24º & 45º	CRI Ra>80	25k hrs	25kclks	-20ºC 45ºC	Alu	14W› 75W	IP20	2






VK/LVD1215 Using with lamps VK/05112D

Code	Model	Power	Input	Dimm	Output	Box
78000-684140	**VK/LVD1215**	**1-15W**	AC220-240V 50/60Hz		12V 1250mA	10

Alu	14W› 75W	2






Led lamps GU10. ES111. E27 Par30.

VK/05146G



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-688126	**VK/05146G/W/W**	GU10	**15W**		3000K	1.160lm	**38º**	40
03045-689126	**VK/05146G/W/C**	GU10	**15W**		4000K	1.185lm	**38º**	40
03045-690126	**VK/05146G/D/W/W**	GU10	**15W**		3000K	1.160lm	**38º**	40
03045-691126	**VK/05146G/D/W/C**	GU10	**15W**		4000K	1.185lm	**38º**	40

Voltage 220-240	SMD High Power	38°	CRI Ra>80	25k hrs	25kclks	-40ºC 60ºC	Plastic	15W›150W	IP20	2






VK/05145/E Par30



Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-684126	**VK/05145/E/W/W**	E27	**12W**		3000K	936lm	40
03045-685126	**VK/05145/E/W/C**	E27	**12W**		4000K	950lm	40
03045-686126	**VK/05145/E/D/W/W**	E27	**12W**		3000K	936lm	40
03045-687126	**VK/05145/E/D/W/C**	E27	**12W**		4000K	950lm	40

Voltage 220-240	HIGH Power	38°	CRI Ra>80	25k hrs	25kclks	-40ºC 60ºC	Plastic	Alu	14W › 140W	IP20	2





VK/05140/E 42V

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-672140	**VK/05140/E/W**	E27	**10W**		3000K	1.000lm	50
03045-673140	**VK/05140/E/D**	E27	**10W**		6000K	1.000lm	50
03045-674140	**VK/05140/E/GR**	E27	**10W**		Green	N/A	50

Voltage 42	**SMD** 2835	30°	**CRI** Ra>80	25k hrs	100kclks	-20°C 40°C	PC Shell	Alu	10W › 100W	IP65	2





121
mm

VK/05141/E 240V

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-675140	**VK/05141/E/W**	E27	**15W**		3000K	1.370lm	50
03045-676140	**VK/05141/E/D**	E27	**15W**		6000K	1.350lm	50
03045-677140	**VK/05141/E/R**	E27	**15W**		Red	N/A	50
03045-678140	**VK/05141/E/Y**	E27	**15W**		Yellow	N/A	50
03045-684140	**VK/05141/E/BL**	E27	**15W**		Blue	N/A	50
03045-685140	**VK/05141/E/GR**	E27	**15W**		Green	N/A	50

Voltage 180-250	**SMD** 2835	30°	**CRI** Ra>80	25k hrs	100kclks	-20°C 40°C	PC Shell	Alu	15W › 150W	IP65	2





121
mm

Led lamps E14. E27. R50. R63. R80.



VK/05089 R50

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-062742	**VK/05089/EI/W**	E14	**6W**		3000K	534lm
03045-063742	**VK/05089/EI/D**	E14	**6W**		6000K	573lm

Voltage 180-250	SMD 2835	120°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	6W› 60W	IP20	2	Box 50



VK/05090 R63

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-064742	**VK/05090/E/W**	E27	**8W**		3000K	710lm
03045-065742	**VK/05090/E/D**	E27	**8W**		6000K	710lm

Voltage 180-250	SMD 2835	120°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	8W› 80W	IP20	2	Box 50



VK/05091 R80

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-066742	**VK/05091/E/W**	E27	**10W**		3000K	967lm
03045-067742	**VK/05091/E/D**	E27	**10W**		6000K	1012lm

Voltage 180-250	SMD 2835	120°	CRI Ra>80	25k hrs	100kclks	-20°C 40°C	Plastic	Alu	10W› 85W	IP20	2	Box 50

VK/05164 VK/05098

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-699140	**VK/05164/W**	GX53	**4W**		3000K	300lm	50
03045-700140	**VK/05164/D**	GX53	**4W**		6000K	300lm	50
03045-620140	**VK/05098/W**	GX53	**7W**		2700K	600lm	50
03045-621140	**VK/05098/D**	GX53	**7W**		6000K	600lm	50


Voltage 220-240	SMD 2835	100°	CRI Ra>80	25k hrs	100k clks	-20°C 40°C	Plastic	4W› 40W 7W› 70W	IP20	2





Led lamps Linestra


VK/05059/1, VK/05060/1

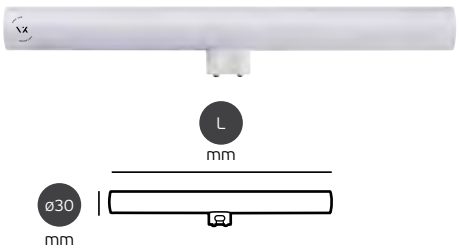

Code	Model	Base	Watt	Dimm	Kelvin	Length (L)	Lumen
03045-269127	**VK/05059/30/1/W**	S14d	**6W**		2700K	**300mm**	**600lm**
03045-271127	**VK/05060/50/1/W**	S14d	**8W**		2700K	**500mm**	**800lm**

Voltage 230	SMD	270°	CRI Ra>80	40k hrs	100k clks	-25°C 45°C	Polyca/te	IP20	2	Box 10

VK/05059/2, VK/05060/2, VK/05061/2

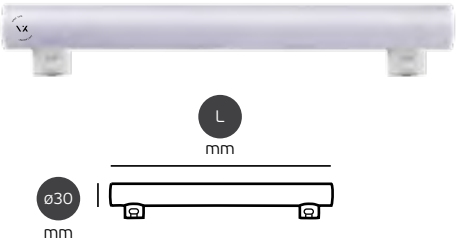

Code	Model	Base	Watt	Dimm	Kelvin	Length (L)	Lumen
03045-270127	**VK/05059/30/2/W**	S14s	**6W**		2700K	**300mm**	**600lm**
03045-272127	**VK/05060/50/2/W**	S14s	**8W**		2700K	**500mm**	**800lm**
03045-273127	**VK/05061/100/2/W**	S14s	**16W**		2700K	**1.000mm**	**1.600lm**

Voltage 230	SMD	270°	CRI Ra>80	40k hrs	100k clks	-25°C 45°C	Polyca/te	IP20	2	Box 10

VK/S14D




VK/S14D/BS




VK/S14D/COP

Code	22101-004639	22101-005639	22101-006639
Model	VK/S14D/W	VK/S14D/ABS	VK/S14D/BS
AC Voltage	250/500V~50Hz	250/500V~50Hz	250/500V~50Hz
Base	S14d Single Nº6	S14d Single Nº6	S14d Single Nº6
Material	PC	PC	PC
Color	WHITE	ANTIQUE BRASS	BRASS

Code	22101-007639	22101-008639	22101-009639
Model	VK/S14D/COP	VK/S14D/MC	VK/S14D/CR
AC Voltage	250/500V~50Hz	250/500V~50Hz	250/500V~50Hz
Base	S14d Single Nº6	S14d Single Nº6	S14d Single Nº6
Material	PC	PC	PC
Color	COPPER	BRUSHED CHROME	CHROME



VK/S14D/W




VK/S14D/ALL COLORS

IP20	Box 20pcs

VK/S14S



Code	22101-010639	22101-011639
Model	VK/S14S/W	VK/S14S/G
AC Voltage	250/500V~50Hz	250/500V~50Hz
Base	S14s	S14s
Material	PC	PC
Color	WHITE	GREY
Descriction	Double no7	Double no7




1000mm


IP20	Box 10pcs

VK/05099

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-622140	**VK/05099/W**	G10Q	**14W**		2700K	1.400lm
03045-623140	**VK/05099/D**	G10Q	**14W**		6500K	1.400lm

Voltage 220-240	SMD 2835	180°	CRI Ra>80	25k hrs	15kclks	-25°C 45°C	Glass	15W >22W	IP20	2	Box 10

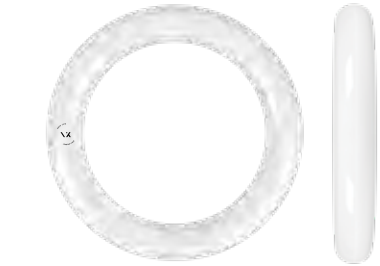





VK/05100

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-624140	**VK/05100/W**	G10Q	**18W**		2700K	1.830lm
03045-625140	**VK/05100/D**	G10Q	**18W**		6500K	1.830lm

Voltage 220-240	SMD 2835	180°	CRI Ra>80	25k hrs	15kclks	-25°C 45°C	Glass	20W >32W	IP20	2	Box 10

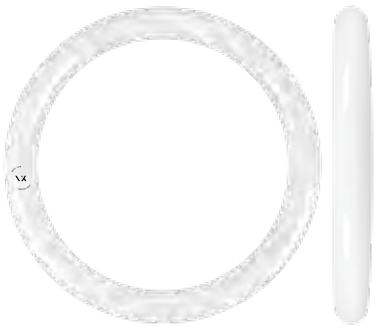





VK/05101

Code	Model	Base	Watt	Dimm	Kelvin	Lumen
03045-626140	**VK/05101/W**	G10Q	**30W**		2700K	3.180lm
03045-627140	**VK/05101/D**	G10Q	**30W**		6500K	3.180lm

Voltage 220-240	SMD 2835	180°	CRI Ra>80	25k hrs	15kclks	-25°C 45°C	Glass	32W >40W	IP20	2	Box 10

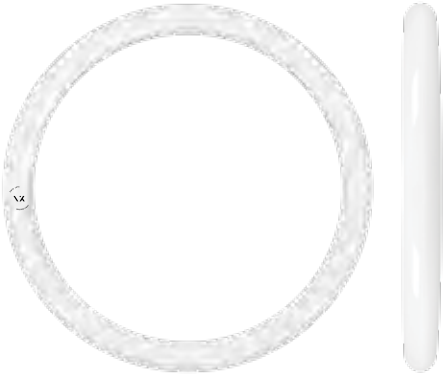



Led lamps G13. 240V.



VK/05134/60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-209140	**VK/05134/60/W**	G13	**10W**		3000K	1.000lm	220º
50058-210140	**VK/05134/60/C**	G13	**10W**		4000K	1.000lm	220º
50058-211140	**VK/05134/60/D**	G13	**10W**		6000K	1.000lm	220º

600 mm

29 mm ø26mm

Voltage 180-250	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Glass	PC	10W › 80W	IP20	2	Box 10

VK/05135/90

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-218140	**VK/05135/90/W**	G13	**14W**		3000K	1.400lm	220º
50058-219140	**VK/05135/90/C**	G13	**14W**		4000K	1.400lm	220º
50058-212140	**VK/05135/90/D**	G13	**14W**		6000K	1.400lm	220º

900 mm

29 mm ø26mm

Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Glass	PC	14W › 120W	IP20	2	Box 10

VK/05136/120

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-213140	**VK/05136/120/W**	G13	**18W**		3000K	1.800lm	220º
50058-214140	**VK/05136/120/C**	G13	**18W**		4000K	1.800lm	220º
50058-215140	**VK/05136/120/D**	G13	**18W**		6000K	1.800lm	220º

1200 mm

29 mm ø26mm

Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Glass	PC	20W › 180W	IP20	2	Box 50

VK/05137/150

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-216140	**VK/05137/150/W**	G13	**25W**		3000K	2.500lm	220º
50058-217140	**VK/05137/150/C**	G13	**25W**		4000K	2.500lm	220º
50058-220140	**VK/05137/150/D**	G13	**25W**		6000K	2.500lm	220º

1500 mm

29 mm ø26mm

Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Glass	PC	25W › 200W	IP20	2	Box 10


Led lamps T8. G13. 240V. Double End Power Input.



VK/05134/60/2 Double End power input

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-221140	**VK/05134/60/W/2**	G13	**10W**		3000K	1.000lm	220º
50058-222140	**VK/05134/60/C/2**	G13	**10W**		4000K	1.000lm	220º
50058-223140	**VK/05134/60/D/2**	G13	**10W**		6000K	1.000lm	220º


Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Glass	PC	10W › 80W	IP20	2	Box 10



VK/05135/90/2 Double End power input

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-230140	**VK/05135/90/W/2**	G13	**14W**		3000K	1.400lm	220º
50058-231140	**VK/05135/90/C/2**	G13	**14W**		4000K	1.400lm	220º
50058-232140	**VK/05135/90/D/2**	G13	**14W**		6000K	1.400lm	220º


Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Glass	PC	14W › 120W	IP20	2	Box 10



VK/05136/120/2 Double End power input

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-224140	**VK/05136/120/W/2**	G13	**18W**		3000K	1.800lm	220º
50058-225140	**VK/05136/120/C/2**	G13	**18W**		4000K	1.800lm	220º
50058-226140	**VK/05136/120/D/2**	G13	**18W**		6000K	1.800lm	220º


Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Glass	PC	18W › 170W	IP20	2	Box 10



VK/05137/150/2 Double End power input

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-227140	**VK/05137/150/W/2**	G13	**25W**		3000K	2.500lm	220º
50058-228140	**VK/05137/150/C/2**	G13	**25W**		4000K	2.500lm	220º
50058-229140	**VK/05137/150/D/2**	G13	**25W**		6000K	2.500lm	220º

Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100kclks	-20ºC 40ºC	Glass	PC	23W › 190W	IP20	2	Box 10




Led lamps G13. 240V. Plastic



VK/T8 PINK


Code	Model	Base	Watt	Dimm	Kelvin	Length	Lumen
50058-192123	**VK/05056/60/P**	G13	**10W**		Pink	600mm	680lm
50058-196123	**VK/05114/90/P**	G13	**12W**		Pink	900mm	810lm
50058-203123	**VK/05057/120/P**	G13	**18W**		Pink	1.200mm	1.350lm
50058-207123	**VK/05058/150/P**	G13	**22W**		Pink	1.500mm	1.750lm



Voltage	SMD	200°	CRI	50k hrs	100kclks	-25°C 45°C	Alu	Plastic	IP20	2	Box
85-265	2835		Ra>80								10

1 New Installation Steps


1. Switch off the power.
2. Snap in the two lamp holders into the two ends of the bracket.
3. Mount the bracket onto the intended location.
4. Install the LED T8 tube onto the bracket.
5. Connect the wire to power source.
6. Switch on the power.




2 Replacement Installation Steps

1. Switch off the power.
2. Take off the fluorescent tube.
3. Take off the cover of bracket.
4. Check what ballast was used inside, Magnetic ballast or Electronic ballast. (Note: magnetic ballast usually works with a starter on the bracket)
5. According to the ballast type, refer to one of the following wiring schematics.

Re-wiring with Magnetic Ballast

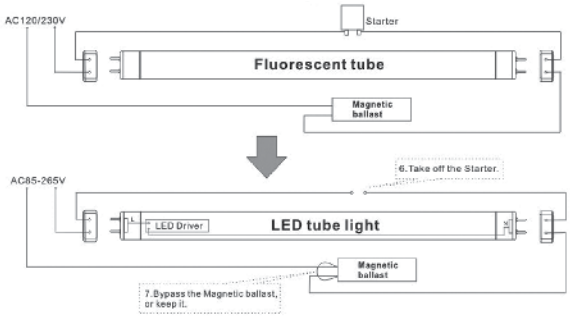

Re-wiring with Electronic Ballast

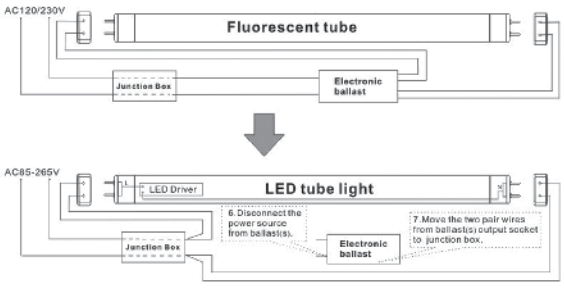


Led lamps T5 G5. 240V. Double End Power Input.



VK/05143/60

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-221698	**VK/05143/60/W/GL**	G5	**8W**		3000K	800lm	220º
50058-222698	**VK/05143/60/C/GL**	G5	**8W**		4000K	800lm	220º
50058-223698	**VK/05143/60/D/GL**	G5	**8W**		6000K	800lm	220º


Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Alu	Plastic	IP20	2	Box 10



VK/05144/120

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-224698	**VK/05144/120/W/GL**	G5	**16W**		3000K	1.800lm	220º
50058-225698	**VK/05144/120/C/GL**	G5	**16W**		4000K	1.800lm	220º
50058-226698	**VK/05144/120/D/GL**	G5	**16W**		6000K	1.800lm	220º


Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Alu	Plastic	IP20	2	Box 10



VK/05183/150

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Beam Angle
50058-227698	**VK/05183/150/W/GL**	G5	**20W**		3000K	3.000lm	180º
50058-228698	**VK/05183/150/C/GL**	G5	**20W**		4000K	2.050lm	180º
50058-229698	**VK/05183/150/D/GL**	G5	**20W**		6000K	3.000lm	180º

Voltage 185-265	SMD 2835	220º	CRI Ra>80	25k hrs	100k clks	-20ºC 40ºC	Alu	Plastic	IP20	2	Box 10




OSRAM




Modules-drivers

Led lamps Modules 35







VK/PL-CN35-COB 600 G2 OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-394019	**VK/PL-CN35-COB 600-927-24D-G2**	**5.9W**		2700K	561lm	**24º**	20
03045-395019	**VK/PL-CN35-COB 600-930-24D-G2**	**5.9W**		3000K	590lm	**24º**	20
03045-396019	**VK/PL-CN35-COB 600-940-24D-G2**	**5.9W**		4000K	620lm	**24º**	20
03045-388019	**VK/PL-CN35-COB 600-927-36D-G2**	**5.9W**		2700K	596lm	**36º**	20
03045-389019	**VK/PL-CN35-COB 600-930-36D-G2**	**5.9W**		3000K	627lm	**36º**	20
03045-390019	**VK/PL-CN35-COB 600-940-36D-G2**	**5.9W**		4000K	659lm	**36º**	20

Voltage 32.6V DC/50Hz	COB OSRAM	24º & 36º	CRI Ra>90	50k hrs	15kclks	-25ºC 40ºC	Alu	5.9W >60W	IP20	5



VK/OT FIT 8/180 CS I MINI

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-511019 4052899587946	**VK/OT FIT 8/220-240/180 CS I MINI**	**2.7-7.6W**	198-264 AC		90/120/150/ 180mA DC	20

LED	Voltage					
ON-OFF OSRAM	30-42V	IP20	Plastic	50k hrs	-25°C 55°C	5





VK/OT FIT 8/180 CS PC

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-753019 4062172007535	**VK/OT FIT 8/220-240/180 CS PC**	**7.2W**	198-264 AC		100/120/155/ 180mA DC	20

LED	Voltage					
TRIAC OSRAM	27-40V	IP20	Plastic	50k hrs	-20°C 50°C	5






VK/OTi DALI 10/700 NFC DIM

OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-754019 4062172143899	**VK/OTi DALI 10/220-240/700 NFC DIM**	**10W**	198-264 AC		150- 700mA DC	20

LED	Voltage					
DALI OSRAM	2.5-45V	IP20	Plastic	50-100k hrs	-20°C 50°C	5





Led lamps Modules 50



PL-CN50-COB 1.400 G2 CRI>80 OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-398019 4052899621237	**PL-CN50-COB-1400-827-24D-G2**	**12.5W**		2700K	1150lm	**24º**	20
03045-333019 4052899621244	**PL-CN50-COB-1400-830-24D-G2**	**12.6W**		3000K	1200lm	**24º**	20
03045-197019 4052899621251	**PL-CN50-COB-1400-840-24D-G2**	**12.5W**		4000K	1250lm	**24º**	20
03045-399019 4052899621336	**PL-CN50-COB-1400-827-40D-G2**	**12.4W**		2700K	1200lm	**40º**	20
03045-198019 4052899621343	**PL-CN50-COB-1400-830-40D-G2**	**12.8W**		3000K	1250lm	**40º**	20
03045-199019 4052899621350	**PL-CN50-COB-1400-840-40D-G2**	**12.5W**		4000K	1300lm	**40º**	20

Voltage 35.2V DC/50Hz	COB OSRAM	24º & 40º	CRI Ra>80	50k hrs	100k clks	-20°C 40°C	Alu	12.5W >50W	IP20	5



PL-CN50-COB 1.400 G2 CRI>90 OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-459019 4052899621190	**PL-CN50-COB-1400-927-24D-G2**	**12.6W**		2700K	1000lm	**24º**	20
03045-440019 4052899621206	**PL-CN50-COB-1400-930-24D-G2**	**12.4W**		3000K	1050lm	**24º**	20
03045-407019 4052899621213	**PL-CN50-COB- 1400-935-24D-G2**	**12.5W**		3500K	1100lm	**24º**	20
03045-465019 4052899621220	**PL-CN50-COB- 1400-940-24D-G2**	**12.5W**		4000K	1100lm	**24º**	20
03045-439019 4052899621299	**PL-CN50-COB- 1400-927-40D-G2**	**12.5W**		2700K	1000lm	**40º**	20
03045-430019 4052899621305	**PL-CN50-COB- 1400-930-40D-G2**	**12.5W**		3000K	1050lm	**40º**	20
03045-408019 4052899621312	**PL-CN50-COB- 1400-935-40D-G2**	**12.5W**		3500K	1100lm	**40º**	20
03045-466019 4052899621329	**PL-CN50-COB- 1400-940-40D-G2**	**12.5W**		4000K	1100lm	**40º**	20

Voltage 36.5V DC/50Hz	COB OSRAM	24º & 40º	CRI Ra>90	50k hrs	15k clks	-20°C 40°C	Alu	12.5W >50W	IP20	5







BLACK COVER FOR COIN 50 COB G2 OSRAM

Code	Model	Diameter	Color	Box
03045-426019 4062172251808	**BLACK COVER FOR COIN50 COB G2**	ø41.6mm	Black	1

IP20	Plastic	-20°C 50°C

VK/ELEMENT 12/220-240/300 G3 OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-755019 4062172167451	**VK/ELEMENT 12/ 220-240/300 G3**	**7.2-12.6W**	198-264 AC		300mA DC	20

LED ON-OFF OSRAM	Voltage 24-42V	IP20	Plastic	30-50k hrs	-20°C 50°C	5





VK/ELEMENT 15/220-240/350 G3 OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-530019 4062172167475	**VK/ELEMENT 15/ 220-240/350 G3**	**8.4-14.7W**	198-264 AC		350mA DC	20

LED ON-OFF OSRAM	Voltage 24-42V	IP20	Plastic	30-50k hrs	-20°C 50°C	5





VK/OT FIT 18/220-240/450 CS PC OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-756019 4062172007559	**VK/OT FIT 18/220-240/450 CS PC**	**18W**	198-264 AC		225/325/350/ 450mA DC	20

LED Triac OSRAM	Voltage 27-40V	IP20	Plastic	30-50k hrs	-20°C 50°C	5





IT DALI 12/220...240/300 CS OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-785019 4062172306218	**IT DALI 12/220...240/300 CS**	**12.6W**	198-264V		90/100/120/150/180 /200/250/300mA	20

LED DALI-2 OSRAM	Voltage 9-42V	IP20	Plastic	30-50k hrs	-20°C 50°C	5






VK/OTi DALI 15/220-240/1A0 NFC OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-531019 4062172061766	**VK/OTi DALI 15/220-240/1A0 NFC**	**18W**	198-264 AC		150-1050mA DC	20

LED DALI-NFC OSRAM	Voltage 7.5-54V	IP20	Plastic	50-100k hrs	-20°C 50°C	5





Led lamps Modules 111

PL-CN111DC-COB-2800-G2 CRI>80 OSRAM



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-431019 4052899621664	**PL-CN111-COB- 2800-830-15D-G2**	**25.5W**		3000K	2800lm	**15º**	12
03045-467019 4052899621671	**PL-CN111-COB- 2800-840-15D-G2**	**25.4W**		4000K	2900lm	**15º**	12
03045-412019 4052899621756	**PL-CN111-COB- 2800-830-24D-G2**	**25.5W**		3000K	2700lm	**24º**	12
03045-432019 4052899621763	**PL-CN111-COB- 2800-840-24D-G2**	**25.4W**		4000K	2800lm	**24º**	12
03045-413019 4052899620995	**PL-CN111-COB- 2800-830-40D-G2**	**25.5W**		3000K	2560lm	**40º**	12
03045-438019 4052899621008	**PL-CN111-COB- 2800-840-40D-G2**	**25.4W**		4000K	2650lm	**40º**	12


Voltage 35.6V DC/50Hz	COB OSRAM	15º, 24º, 40º	CRI Ra>80	50k hrs	100k clks	-25ºC 40ºC	Alu	IP20	5

PL-CN111-COB-2800-G2 CRI>90 OSRAM



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-468019 4052899621701	**PL-CN111-COB- 2800-930-15D-G2**	**25.7W**		3000K	2350lm	**15º**	12
03045-401019 4052899621718	**PL-CN111-COB- 2800-935-15D-G2**	**25.4W**		3500K	2450lm	**15º**	12
03045-469019 4052899621725	**PL-CN111-COB- 2800-940-15D-G2**	**25.6W**		4000K	2500lm	**15º**	12
03045-436019 4052899621794	**PL-CN111-COB- 2800-930-24D-G2**	**25.5W**		3000K	2250lm	**24º**	12
03045-402019 4052899621800	**PL-CN111-COB- 2800-935-24D-G2**	**25.3W**		3500K	2300lm	**24º**	12
03045-470019 4052899621817	**PL-CN111-COB- 2800-940-24D-G2**	**25.5W**		4000K	2400lm	**24º**	12
03045-452019 4052899621039	**PL-CN111-COB- 2800-930-40D-G2**	**25.3W**		3000K	2150lm	**40º**	12
03045-403019 4052899621046	**PL-CN111-COB- 2800-935-40D-G2**	**25.2W**		3500K	2200lm	**40º**	12
03045-471019 4052899621053	**PL-CN111-COB- 2800-940-40D-G2**	**25.4W**		4000K	2300lm	**40º**	12

Voltage 36.2V DC/50Hz	COB OSRAM	15, 24º, 40º	CRI Ra>90	5k hrs	15k clks	-25ºC 40ºC	Alu	IP20	5



VK/ELEMENT 28/220-240/700 G3 OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-751019 4062172167536	**VK/ELEMENT 28/ 220-240/700 G3**	**14.7-28W**	198-264 AC		700mA DC	20

LED ON/OFF OSRAM	Voltage 21-40V	IP20	Plastic	30-50k hrs	-20°C 50°C	5





VK/OT FIT 30/220-240/700 CS PC OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-757019 4052899617308	**VK/OT FIT 30/220-240/700 CS PC**	**13.5-28W**	198-264 AC		500/ 700mA DC	20

LED Triac OSRAM	Voltage 27-40V	IP20	Plastic	35-50k hrs	-20°C 50°C	5







IT DALI 30/220...240/700 CS OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-783019 4062172306232	**IT DALI 30/220...240/700 CS**	**29.4W**	198...264 V		350 / 400 / 450 / 500 / 550 / 600 / 650 / 700 mA	20

LED DALI-NFC OSRAM	Voltage 15-54V	IP20	Metal	50-100k hrs	-25°C 60°C	5






VK/OTi DALI 25/220-240/700 NFC L OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-758019 4062172017909	**VK/OTi DALI 25/220-240/700 NFC L**	**2-28W**	198-264 AC		180-700mA DC	20

LED DALI-NFC OSRAM	Voltage 15-54V	IP20	Metal	50-100k hrs	-25°C 60°C	5



Led lamps Modules 111

PL-CN111-COB-4300-G2 CRI>80 OSRAM




Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-433019 4052899621398	**PL-CN111-COB- 4300-830-24D-G2**	**36.6W**		3000K	4150lm	**24º**	12
03045-446019 4052899621404	**PL-CN111-COB- 4300-840-24D-G2**	**36.8W**		4000K	4350lm	**24º**	12
03045-434019 4052899621480	**PL-CN111-COB- 4300-830-40D-G2**	**36.9W**		3000K	4000lm	**40º**	12
03045-414019 4052899621497	**PL-CN111-COB- 4300-840-40D-G2**	**37.1W**		4000K	4090lm	**40º**	12
03045-415019 4052899621572	**PL-CN111-COB- 4300-830-60D-G2**	**36.9W**		3000K	3700lm	**60º**	12
03045-435019 4052899621589	**PL-CN111-COB- 4300-840-60D-G2**	**37.2W**		4000K	3900lm	**60º**	12

Voltage 35.8V DC/50Hz	COB OSRAM	24º, 40º, 60º	CRI Ra>80	50k hrs	100k clks	-25ºC 40ºC	Alu	IP20	5



PL-CN111-COB-4300-G2 CRI>90 OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-437019 4052899621435	**PL-CN111-COB- 4300-930-24D-G2**	**36.9W**		3000K	3450	**24º**	12
03045-404019 4052899621442	**PL-CN111-COB- 4300-935-24D-G2**	**36.6W**		3500K	3600	**24º**	12
03045-472019 4052899621459	**PL-CN111-COB- 4300-940-24D-G2**	**37.7W**		4000K	3800	**24º**	12
03045-410019 4052899621527	**PL-CN111-COB- 4300-930-40D-G2**	**36.7W**		3000K	3350	**40º**	12
03045-405019 4052899621534	**PL-CN111-COB- 4300-935-40D-G2**	**36.8W**		3500K	3400	**40º**	12
03045-473019 4052899621541	**PL-CN111-COB- 4300-940-40D-G2**	**36.7W**		4000K	3550	**40º**	12
03045-474019 4052899621619	**PL-CN111-COB- 4300-930-60D-G2**	**36.8W**		3000K	3150	**60º**	12
03045-406019 4052899621626	**PL-CN111-COB- 4300-935-60D-G2**	**36.9W**		3500K	3300	**60º**	12
03045-475019 4052899621633	**PL-CN111-COB- 4300-940-60D-G2**	**36.8W**		4000K	3450	**60º**	12



Voltage 35V DC/50Hz	COB OSRAM	24º, 40º, 60º	CRI Ra>90	5k hrs	15k clks	-25ºC 40ºC	Alu	36.7W >100W	IP20	5

BLACK COVER FOR COIN50 COB G2 OSRAM



Code	Model	Diameter	Color	Box
78000-771019 4062172251822	**BLACK COVER FOR COIN 111 COB G2**	ø75mm	Black	1

IP20	Plastic	-20ºC 50ºC

VK/ELEMENT 42/220-240/1050 G3 OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-759019 4062172167611	**VK/ELEMENT 42/ 220-240/1050 G3**	**22-42W**	198-264 AC		1.050mA DC	20

LED ON/OFF OSRAM | Voltage 21-40V | IP20 | Plastic | 30-50k hrs | -20°C 50°C | 5





VK/OT FIT 40/220-240/1A0 PC SC OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-760019 4052899617261	**VK/OT FIT 40/220-240/1A0 PC CS**	**21.6-42W**	198-264 AC		800/900/950 1050mA DC	20

LED Triac OSRAM | Voltage 27-40V | IP20 | Plastic | 35-50k hrs | -20°C 50°C | 5





IT DALI 42/220...240/1A0 CS OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-784019 4062172306256	**IT DALI 42/ 220...240/1A0 CS**	**42W**	198...264 AC		700/750/800/850/900/ 950/1000/1050 mA	20

LED DALI OSRAM | Voltage 27-40V | IP20 | Plastic | 35-50k hrs | -20°C 50°C | 5






VK/OTi DALI 35/220-240/1A0 NFC TW OSRAM

Code	Model	Power	Input	Dimm	Output	Box
78000-761019 4062172017923	**VK/OTi DALI 35/220-240/1A0 NFC TW**	**38W**	198-264 AC		350-1050mA DC	20

LED DALI-NFC OSRAM | Voltage 15-54V | IP20 | Metal | 50-100k hrs | -25°C 60°C | 5





Led lamps Modules 50



0299 With PWM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-001702	**029908**	**3W**		RGB	N/A	**6º**	50
03045-002702	**029907**	**3W**		RGB	N/A	**30º**	50
03045-003702	**029917**	**12W**		RGB	N/A	**30º**	50

LED MODULE	6º & 30º	CRI Ra>80	Electric Current 350mA	35k hrs	100k clks	-20ºC 40ºC	IP20	2

50 mm
50 mm

40 mm
50 mm





XR-E54

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
78000-360618	**XR-E544785/40**	**3.8/7.6W**		**2700K**	-	**40º**	50
78000-361618	**XR-E54540401/20**	**3.8/7.6W**		**2700K**	-	**20º**	50
78000-363618	**XR-E546114/40**	**3.8/7.6W**		**RGB**	N/A	**40º**	50
78000-362618	**XR-E546113/20**	**3.8/7.6W**		**RGB**	N/A	**20º**	50

20º & 40º	CRI Ra>80	Electric Current 350 & 700mA	35k hrs	100k clks	-20ºC 40ºC	IP20	2

50 mm
50 mm

55 mm
50 mm

Led linear accessories

LED Linear Strips

VK/Fortimo/0.5FT/.../G6



Code	Model	Box
78000-802112 929002939606	**VK/Fortimo/0.5FT/830/HV6/G6** 3000K. 2.94W. 518lm. **CRI>80**.	**66pcs**
78000-803112 929002939706	**VK/Fortimo/0.5FT/840/HV6/G6** 4000K. 2.94W. 518lm. **CRI>80**.	**66pcs**
78000-804112 929002939806	**VK/Fortimo/0.5FT/930/HV6/G6** 3000K. 3.15W. 513lm. **CRI>90**.	**66pcs**
78000-805112 929002939906	**VK/Fortimo/0.5FT/940/HV6/G6** 4000K. 3.15W. 513lm. **CRI>90**.	**66pcs**

Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle **120°**. Working temperature **-40°C → 70°C**. Lifetime **72.000hrs**. Number of modules in series per chain **Max 29.** Dimensions **140x20x1.6mm.**

IP20.

5 years guarantee

VK/Fortimo/1FT/.../G6



Code	Model	Box
78000-806112 929002941206	**VK/Fortimo/1FT/830/HV6/G6** **3000K.** 5.9W. 1.036lm. **CRI>80.**	**168pcs**
78000-807112 929002941406	**VK/Fortimo/1FT/840/HV6/G6** **4000K.** 5.9W. 1.100lm. **CRI>80.**	**168pcs**
78000-808112 929002941806	**VK/Fortimo/1FT/930/HV6/G6** **3000K.** 6.3W. 1.027lm. **CRI>90.**	**168pcs**
78000-809112 929002942006	**VK/Fortimo/1FT/940/HV6/G6** **4000K.** 6.33W. 1.100lm. **CRI>90.**	**168pcs**

Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle **120°**. Working temperature **-40°C → 70°C**. Lifetime **72.000hrs**. Number of modules in series per chain **Max 11.** Dimensions **280x20x1.6mm.**

IP20.

5 years guarantee

VK/Fortimo/2FT/.../G6



Code	Model	Box
78000-810112 929002944606	**VK/Fortimo/2FT/830/HV6/G6** **3000K.** 11.8W. 2.072lm. **CRI>80.**	**84pcs**
78000-811112 929002944806	**VK/Fortimo/2FT/840/HV6/G6** **4000K.** 11.8W. 2.200lm. **CRI>80.**	**84pcs**
78000-812112 929002945106	**VK/Fortimo/2FT/930/HV6/G6** **3000K.** 12.58W. 2.054lm. **CRI>90.**	**84pcs**
78000-813112 929002945306	**VK/Fortimo/2FT/940/HV6/G6** **4000K.** 12.58W. 2.200lm. **CRI>90.**	**84pcs**

Details

Led type **Fortimo LED strip by PHILIPS**. Beam Angle **120°**. Working temperature **-40°C → 70°C**. Lifetime **72.000hrs**. Number of modules in series per chain **Max 5.**
Dimensions **560x20x1.6mm.**

IP20.

5 years guarantee

VK/8183/56



Code	Model	Box
78000-718183	**VK/8183/12/830/56** 50.2V. **3000K.** 9-12W. 1312-1725lm. **CRI>80.**	**56pcs**
78000-715183	**VK/8183/12/840/56** 50.2V. **4000K.** 9-12W. 1312-1725lm. **CRI>80.**	**56pcs**

Details

Led type **Edison 2835.** Beam Angle **120º**. Current 480mA. Working temperature **-25°C → 45°C**. Storage temperature **-25°C → 60°C**. Lifetime **50.000hrs**. Number of modules in series per chain **Max 4.** Dimensions **55.95x1.4x0.16cm. 2 years** guarantee.

IP20.

VK/7183/111



Code	Model	Box
78000-717183	**VK/7183/12/830/111** 45.3V. **3000K.** 18-24W. 2.624-3.450lm. **CRI>80.**	**56pcs**
78000-716183	**VK/7183/12/840/111** 45.3V. **4000K.** 18-24W. 2.624-3.450lm. **CRI>80.**	**56pcs**

Details

Led type **Edison 2835.** Beam Angle **120º**. Current 480mA. Working temperature **-25°C → 45°C**. Storage temperature **-25°C → 60°C**. Lifetime **50.000hrs**. Number of modules in series per chain **Max 2.** Dimensions **111.70x1.4x0.16cm. 2 years** guarantee.

IP20.

LED Linear Drivers

VK/XITANIUM/35W




Code	Model	Box
78000-793112	**VK/XITANIUM/35W**	**24pcs**
929001694306	0.08-0.35A **35W. 220V.**	

Details

Voltage Input **186-250V**. Output voltage **50-220V.** Watt **35W**. Driver Xitanium PHILIPS non-isolated Single current (two output). Working temperature **-20°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/60W



Code	Model	Box
78000-814112	**VK/XITANIUM/60W**	**24pcs**
929001694506	0.15-0.5A **60W. 220V.**	

Details

Voltage Input **220-240V**. Output voltage **50-220V.** Watt **60W**. Driver Xitanium PHILIPS linear HV non-isolated. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/100W




Code	Model	Box
78000-815112	**VK/XITANIUM/100W**	**24pcs**
929001613406	0.25/0.7A. **100W. 50-220V.**	

Details

Voltage Input **168-275V**. Output voltage **50-220V.** Watt **100W**. Driver Xitanium PHILIPS LED linear drivers – non-isolated. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **50.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/150W




Code	Model	Box
78000-732112	**VK/XITANIUM/150W**	**50pcs**
929001506706	0.2/0.7A. **150W. 300V.**	

Details

Voltage Input **202-254V**. Output voltage **100-300V.** Watt **150W**. Driver Xitanium PHILIPS linear HV non-isolated iXt. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/35W/DALI/DIM



Code	Model	Box
78000-816112	**VK/XITANIUM/35W/DALI/DIM**	**24pcs**
929001681406	0.08/0.35A. **35W. 50-220V.**	

Details

Voltage Input **186-250V**. Output voltage **50-220V.** Watt **35W**. Driver Xitanium PHILIPS linear drivers non-isolated. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **50.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/60W/DALI/DIM



Code	Model	Box
78000-784112	**VK/XITANIUM/60W/DALI/DIM**	**24pcs**
929001681606	0.15/0.5A. **60W. 50-220V.**	

Details

Voltage Input **220-240V**. Output voltage **50-220V.** Watt **60W**. Driver Xitanium PHILIPS non-iso DALI dimmable & programmable (TD16 SimpleSet). Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/100W/DALI/DIM




Code	Model	Box
78000-711112	**VK/XITANIUM/100W/DALI/DIM**	24pcs
929001547306	0.25/0.7A. **100W. 50-220V.**	

Details

Voltage Input **220-240V**. Output voltage **50-220V.** Watt **100W**. Driver Xitanium PHILIPS linear HV non-isolated. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





VK/XITANIUM/150W/DALI/DIM





Code	Model	Box
78000-817112	**VK/XITANIUM/150W/DALI/DIM**	**24pcs**
929001685706	0.20/0.7A. **150W. 100-300V.**	

Details

Voltage Input **220-240V**. Output voltage **100-300V.** Watt **150W**. Driver Xitanium PHILIPS non-iso DALI dimmable & programmable. Working temperature **-25°C → 50°C**. Storage temperature **-25°C → 85°C**. Lifetime **100.000hrs** Material **Metal. 2 years** guarantee.

IP20.





LED Linear Accessories


VK/COV/14/56




Code	Model	Box
77161-597640	**VK/COV/14/56**	**1pc**
31.930.431.89	Diffusor for 14 mm LED-System. (1)	

Details

Transmission **92%**. Full width at half maximum (FWHM) **130°**. Material **PMMA.** Length **56.5cm.**





VK/END/14/TR







Code	Model	Box
77161-598640	**VK/END/14/TR**	**250pcs**
31.930.313.89	End cap for 14 mm LED-System. (2)	

Details

Mounting method **Push through mount**. Material **PC.** Color **Transparent.**





VK/HOLD/14/W








Code	Model	Box
77161-599640	**VK/HOLD/14/W**	**500pcs**
31.930.321.51	Diffusor holder for 14 mm LED-System. (3)	

Details

Mounting method **Snap-in mounting**. Material **PC.** Color **White.**








VK/FIXEL/P2F



Code	Model	Box
77161-600640	**VK/FIXEL/P2F**	**5000pcs**
28.901.U166.10	P2F - Push to Fix - Fixing element for PCBs.	

Details

Mounting method **Push-in fixing for mounting PCBs**. Material **CrNi with silicone insulating ring.** Color **Blue.**

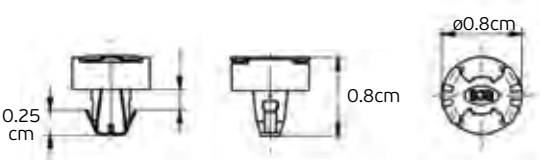

product finder

Product finder

CODE	PAGE
01026-015106	1013, 1045
01026-016106	1013, 1045
01026-017106	1013, 1045
03045-001147	1059
03045-001702	1082
03045-001733	1022
03045-002147	1059
03045-002702	1082
03045-002733	1022
03045-003147	1059
03045-003702	1082
03045-003733	1022
03045-004147	1059
03045-004733	1023
03045-005147	1059
03045-005733	1023
03045-006147	1059
03045-006733	1023
03045-007742	1042
03045-008742	1042
03045-009742	1042
03045-010742	1042
03045-015664	1052
03045-017742	1039
03045-018742	1039
03045-019742	1041
03045-021664	1052
03045-022664	1052
03045-022742	1055
03045-023742	1055
03045-024742	1055
03045-025742	1049
03045-026742	1049
03045-027664	1052
03045-027742	1049
03045-028664	1052
03045-028742	1049
03045-029742	1049
03045-030742	1049
03045-039742	1039
03045-041742	1058
03045-044742	1036
03045-045742	1036
03045-046742	1036
03045-047742	1037
03045-048742	1037
03045-049742	1037
03045-050742	1038
03045-051742	1038
03045-052742	1038
03045-059742	1039
03045-060719	1051
03045-060742	1039
03045-061719	1051
03045-061742	1039
03045-062742	1064
03045-063742	1064
03045-064742	1064
03045-065742	1064
03045-066742	1064
03045-067742	1064
03045-068664	1050
03045-069664	1050
03045-082742	1055
03045-083742	1055
03045-084742	1055
03045-085742	1055
03045-087664	1050
03045-088664	1050
03045-092742	1040
03045-093742	1040
03045-094742	1040
03045-100742	1054
03045-101742	1054
03045-104742	1054
03045-105742	1039
03045-106742	1039
03045-107742	1039
03045-108742	1040
03045-109742	1040
03045-110742	1040
03045-111742	1040
03045-116742	1055
03045-117742	1055
03045-118742	1055
03045-123742	1055
03045-124742	1055
03045-125742	1054
03045-126742	1054
03045-127742	1054
03045-128742	1054
03045-129742	1055
03045-130742	1055
03045-131742	1055
03045-132742	1055
03045-133742	1057
03045-134742	1036
03045-135742	1036
03045-136742	1036
03045-137742	1037
03045-138742	1037
03045-139742	1037
03045-140742	1038
03045-141742	1038
03045-142742	1038
03045-143742	1054
03045-144742	1054
03045-145742	1054
03045-146742	1036
03045-147742	1036
03045-148742	1036
03045-149664	1048
03045-149742	1037
03045-150664	1048
03045-150742	1037
03045-151742	1037
03045-152742	1038
03045-153742	1038
03045-154742	1038
03045-155664	1050
03045-156664	1050
03045-168664	1026
03045-169664	1026
03045-170664	1026
03045-171664	1027
03045-171742	1054
03045-172664	1027
03045-172742	1054
03045-173664	1027
03045-173742	1054
03045-174664	1027
03045-175664	1028
03045-176664	1028
03045-177664	1028
03045-178664	1028
03045-179664	1029
03045-180664	1029
03045-181664	1029
03045-181742	1055
03045-182664	1029
03045-182742	1055
03045-183664	1030
03045-183742	1055
03045-184664	1034
03045-184742	1055
03045-185664	1035
03045-187664	1031
03045-188664	1031
03045-189664	1031
03045-190664	1027
03045-191664	1027
03045-192664	1028
03045-193664	1028
03045-194664	1029
03045-195664	1029
03045-196664	1026
03045-197019	1076
03045-197664	1026
03045-198019	1076
03045-198664	1031

CODE	PAGE
03045-199019	1076
03045-199664	1033
03045-200664	1033
03045-201664	1035
03045-202664	1027
03045-203664	1028
03045-204664	1028
03045-205664	1029
03045-206664	1029
03045-207664	1026
03045-208664	1026
03045-209664	1031
03045-210664	1031
03045-211664	1032
03045-212664	1033
03045-213664	1034
03045-214664	1035
03045-215664	1030
03045-216664	1033
03045-217664	1032
03045-218664	1032
03045-219664	1035
03045-220664	1034
03045-221664	1034
03045-222664	1028
03045-223664	1029
03045-224664	1026
03045-225664	1030
03045-228664	1024
03045-229664	1024
03045-230664	1025
03045-231664	1025
03045-232664	1025
03045-233664	1024
03045-269127	1066
03045-270127	1066
03045-271127	1066
03045-272127	1066
03045-273127	1066
03045-274126	1041

CODE	PAGE
03045-275126	1041
03045-276126	1046
03045-277126	1046
03045-278126	1046
03045-279126	1046
03045-280126	1047
03045-281126	1047
03045-282126	1047
03045-283126	1047
03045-284126	1047
03045-285126	1047
03045-288126	1047
03045-288140	1043
03045-289126	1047
03045-289140	1043
03045-290126	1047
03045-290140	1043
03045-291126	1047
03045-291140	1043
03045-292126	1047
03045-292140	1043
03045-293140	1043
03045-299126	1058
03045-300126	1058
03045-301126	1058
03045-302126	1058
03045-303126	1056
03045-304126	1056
03045-333019	1076
03045-388019	1074
03045-389019	1074
03045-390019	1074
03045-394019	1074
03045-395019	1074
03045-396019	1074
03045-398019	1076
03045-399019	1076
03045-401019	1078
03045-402019	1078
03045-403019	1078

CODE	PAGE
03045-404019	1080
03045-405019	1080
03045-406019	1080
03045-407019	1076
03045-408019	1076
03045-410019	1080
03045-412019	1078
03045-413019	1078
03045-414019	1080
03045-415019	1080
03045-426019	1076
03045-430019	1076
03045-431019	1078
03045-432019	1078
03045-433019	1080
03045-434019	1080
03045-435019	1080
03045-436019	1078
03045-437019	1080
03045-438019	1078
03045-439019	1076
03045-440019	1076
03045-446019	1080
03045-452019	1078
03045-459019	1076
03045-465019	1076
03045-466019	1076
03045-467019	1078
03045-468019	1078
03045-469019	1078
03045-470019	1078
03045-471019	1078
03045-472019	1080
03045-473019	1080
03045-474019	1080
03045-475019	1080
03045-616140	1047
03045-617140	1044
03045-618140	1059
03045-619140	1059

CODE	PAGE
03045-620140	1065
03045-621140	1065
03045-622140	1067
03045-623140	1067
03045-624140	1067
03045-625140	1067
03045-626140	1067
03045-627140	1067
03045-628140	1060
03045-629140	1060
03045-630140	1060
03045-631140	1060
03045-632140	1060
03045-633140	1060
03045-634140	1061
03045-635140	1061
03045-636140	1061
03045-637140	1061
03045-638140	1061
03045-639140	1061
03045-640140	1060
03045-641140	1060
03045-642140	1060
03045-643140	1060
03045-644140	1060
03045-645140	1060
03045-646140	1041
03045-647140	1041
03045-648140	1041
03045-651685	1048
03045-652685	1048
03045-653685	1049
03045-654685	1049
03045-655685	1050
03045-656685	1050
03045-657685	1051
03045-658685	1051
03045-659685	1051
03045-660685	1051
03045-661685	1048

Product finder

CODE	PAGE
03045-662685	1048
03045-665140	1046
03045-669140	1047
03045-670140	1042
03045-671140	1042
03045-672140	1063
03045-673140	1063
03045-674140	1063
03045-674685	1048
03045-675140	1063
03045-675685	1051
03045-676140	1063
03045-676685	1051
03045-677140	1063
03045-677685	1052
03045-678140	1063
03045-678685	1048
03045-679685	1048
03045-680685	1048
03045-682140	1040
03045-683140	1040
03045-684126	1062
03045-684140	1063
03045-684685	1053
03045-685126	1062
03045-685140	1063
03045-685685	1053
03045-686126	1062
03045-686140	1046
03045-686685	1053
03045-687126	1062
03045-687140	1039
03045-687685	1053
03045-688126	1062
03045-688140	1039
03045-689126	1062
03045-689140	1057
03045-690126	1062
03045-690140	1057
03045-691126	1062

CODE	PAGE
03045-691140	1057
03045-692140	1057
03045-693140	1059
03045-694140	1059
03045-695140	1059
03045-696140	1059
03045-699126	1036
03045-699140	1065
03045-700140	1065
03045-701140	1059
12083-919002	148
12083-920002	148
12083-921002	148
12084-020019	149
12084-023016	162
12084-027338	148
14184-116170	149
22101-004639	1066
22101-005639	1066
22101-006639	1066
22101-007639	1066
22101-008639	1066
22101-009639	1066
22101-010639	1066
22101-011639	1066
50058-192123	1070
50058-196123	1070
50058-203123	1070
50058-207123	1070
50058-209140	1068
50058-210140	1068
50058-211140	1068
50058-212140	1068
50058-213140	1068
50058-214140	1068
50058-215140	1068
50058-216140	1068
50058-217140	1068
50058-218140	1068
50058-219140	1068

CODE	PAGE
50058-220140	1068
50058-221140	1069
50058-221698	1071
50058-222140	1069
50058-222698	1071
50058-223140	1069
50058-223698	1071
50058-224140	1069
50058-224698	1071
50058-225140	1069
50058-225698	1071
50058-226140	1069
50058-226698	1071
50058-227140	1069
50058-227698	1071
50058-228140	1069
50058-228698	1071
50058-229140	1069
50058-229698	1071
50058-230140	1069
50058-231140	1069
50058-232140	1069
57610-170774	1010
57610-171774	1010
57610-172774	1010
57610-173774	1010
57610-174774	1010
57610-175774	1010
61171-237694	730
61171-238694	730
61171-239694	730
61171-240694	742
61171-241694	742
61171-242694	742
61171-243694	738
61171-244694	738
61171-245694	738
61171-246694	738
61171-247694	746
61171-248694	746

CODE	PAGE
61171-249694	744
61171-250694	744
61171-251694	728
61171-252694	728
61171-253694	728
61171-254694	732
61171-255694	732
61171-256694	732
61171-257694	732
61171-263772	720
61171-264772	720
61171-265772	720
61171-266772	720
61171-267772	720
61171-268772	720
61171-269772	724
61171-270772	724
61171-271772	724
61171-272772	724
61171-273772	724
61171-274772	724
61171-275772	722
61171-276772	722
61171-277772	722
61171-278772	722
61171-279772	722
61171-280772	722
61171-281772	726
61171-282772	726
61171-283772	726
61171-284772	726
61171-285772	726
61171-286772	726
61171-287772	740
61171-288772	740
61171-289772	740
61171-290772	740
61171-291772	740
62159-093106	1012
62159-094106	1012

CODE	PAGE
62159-095106	1012
63158-001115	998
63158-002115	970
63158-003115	970
63158-004115	970
63158-005115	970
63158-006115	972
63158-007115	972
63158-008115	974
63158-009115	974
63158-010115	975
63158-011115	975
63158-101736	978
63158-102736	980
63158-104736	976
63158-105736	976
63158-106736	976
63158-107736	976
63158-108736	976
63158-109736	976
63158-110736	978
63158-111736	978
63158-112736	980
63158-114736	980
63158-122736	980
63158-160742	1004
63158-161742	1004
63158-162736	978
63158-162742	1004
63158-163742	1005
63158-164736	982
63158-164742	1005
63158-165736	982
63158-165742	1005
63158-166736	982
63158-166742	1006
63158-167736	982
63158-167742	1006
63158-168736	982
63158-168742	1007
63158-169736	984
63158-169742	1007
63158-170736	984
63158-170742	1008
63158-171736	984
63158-177736	980
63158-178736	978
63158-179736	980
63158-180736	978
63158-181736	988
63158-182736	988
63158-212123	304
63158-213123	304
63158-214123	304
63158-215123	306
63158-216123	306
63158-217123	306
63158-218123	314
63158-219123	304
63158-220123	314
63158-221123	315
63158-222123	315
63158-223123	305
63158-224123	306
63158-225123	306
63158-226123	306
63158-239126	986
63158-240126	986
63158-241126	987
63158-242126	986
63158-243126	986
63158-244126	987
63158-245126	986
63158-246126	986
63158-247126	987
63158-248126	992
63158-249126	992
63158-260727	310
63158-261727	310
63158-262727	310
63158-263727	310
63158-291123	312
63158-291164	324
63158-292123	312
63158-292164	324
63158-293123	314
63158-293164	322
63158-294164	322
63158-295164	326
63158-296123	308
63158-296164	326
63158-297123	308
63158-297164	326
63158-298123	312
63158-298164	326
63158-299123	312
63158-299164	322
63158-300123	313
63158-300164	322
63158-301123	311
63158-301164	324
63158-302164	324
63158-303164	328
63158-304164	328
63158-304752	1018
63158-305164	328
63158-305752	1018
63158-306164	328
63158-306752	1018
63158-307752	1018
64171-043126	232
64171-044126	232
64171-057738	216
64171-058738	216
64171-074126	232
64171-298741	836
64171-299741	836
64173-017121	287
64173-018121	287
64173-019121	287
64173-020121	287
64173-022121	268
64173-023121	252
64173-024121	252
64173-025121	252
64173-026121	253
64173-027121	253
64173-028121	253
64173-029121	253
64173-030121	253
64173-031121	253
64173-032121	286
64173-033121	286
64173-034121	288
64173-035121	268
64173-037115	316
64173-038115	316
64173-039115	316
64173-040115	318
64173-041115	318
64173-042115	318
64173-043115	316
64173-044115	316
64173-045115	316
64173-046115	318
64173-047115	318
64173-047121	253
64173-048115	318
64173-048121	253
64173-049121	252
64173-049123	316
64173-050121	252
64173-050123	316
64173-051121	252
64173-051123	316
64173-052121	252
64173-052123	316
64173-053121	268
64173-053123	316
64173-054121	268

Product finder

CODE	PAGE
64173-054123	316
64173-055121	264
64173-055123	316
64173-056121	264
64173-056123	316
64173-057121	264
64173-057123	316
64173-058121	264
64173-058123	316
64173-059121	264
64173-059123	316
64173-060121	264
64173-060123	316
64173-061121	265
64173-061123	316
64173-062121	265
64173-062123	316
64173-063121	265
64173-063123	318
64173-064121	265
64173-064123	318
64173-065121	265
64173-065123	318
64173-066121	265
64173-066123	318
64173-067121	287
64173-067123	318
64173-068121	286
64173-068123	318
64173-069121	288
64173-069123	318
64173-070123	318
64173-071123	318
64173-072123	318
64173-073123	318
64173-074121	267
64173-074123	318
64173-075121	267
64173-075123	318
64173-076121	266

CODE	PAGE
64173-076123	318
64173-077121	266
64173-078121	266
64173-079121	266
64173-080121	280
64173-081121	280
64173-082121	280
64173-083121	280
64173-084121	281
64173-085121	281
64173-085123	316
64173-086121	281
64173-086123	316
64173-087121	281
64173-087123	316
64173-089121	270
64173-090121	270
64173-091121	270
64173-092121	270
64173-093121	274
64173-094121	274
64173-095121	274
64173-096121	274
64173-097121	286
64173-098121	286
64173-099121	289
64173-100121	289
64173-101121	289
64173-102121	288
64173-103121	289
64173-104121	288
64173-109121	285
64173-110121	285
64173-111121	284
64173-112121	284
64173-113121	276
64173-114121	276
64173-115121	275
64173-116121	275
64173-117121	276

CODE	PAGE
64173-118121	276
64173-119121	276
64173-120121	276
64173-121121	256
64173-122121	256
64173-123121	256
64173-124121	256
64173-125121	256
64173-126121	272
64173-127121	272
64173-128121	272
64173-129121	272
64173-130121	269
64173-131121	269
64173-132121	288
64173-133121	288
64174-001700	235
64174-001776	190
64174-002700	235
64174-002776	192
64174-003700	234
64174-003776	176
64174-004700	234
64174-004776	176
64174-005700	234
64174-005776	176
64174-006700	234
64174-006776	176
64174-007108	646
64174-007700	231
64174-007776	176
64174-008108	646
64174-008126	238
64174-008700	231
64174-008776	176
64174-009108	370
64174-009126	238
64174-009700	231
64174-009776	177
64174-010108	370

CODE	PAGE
64174-010126	238
64174-010700	231
64174-010776	177
64174-011700	230
64174-011776	177
64174-012108	373
64174-012700	230
64174-012776	177
64174-013108	636
64174-013700	230
64174-013776	177
64174-014108	636
64174-014700	230
64174-014776	177
64174-015700	232
64174-015776	178
64174-016108	645
64174-016126	180
64174-016700	232
64174-016776	178
64174-017108	645
64174-017126	180
64174-017700	232
64174-017776	178
64174-018126	180
64174-018700	232
64174-018776	178
64174-019126	180
64174-019700	254
64174-019776	178
64174-020126	180
64174-020700	254
64174-020776	178
64174-021700	254
64174-021776	242
64174-022700	254
64174-022776	242
64174-023700	255
64174-023776	242
64174-024108	645

CODE	PAGE
64174-024700	255
64174-024776	242
64174-025108	645
64174-025700	255
64174-025776	246
64174-026108	376
64174-026700	255
64174-026776	246
64174-027108	376
64174-027700	278
64174-027776	246
64174-028700	278
64174-028776	246
64174-029700	278
64174-029776	188
64174-030700	278
64174-030776	188
64174-031776	188
64174-032776	188
64174-033108	258
64174-033776	226
64174-034108	258
64174-034721	202
64174-034776	226
64174-035108	260
64174-035721	202
64174-035776	226
64174-036108	260
64174-036721	203
64174-036776	226
64174-037108	262
64174-037721	203
64174-037776	227
64174-038108	262
64174-038721	216
64174-038776	227
64174-039108	262
64174-039721	206
64174-039776	227
64174-040721	206

CODE	PAGE
64174-040776	227
64174-041721	206
64174-041776	227
64174-042721	206
64174-042776	227
64174-043721	211
64174-044721	211
64174-045721	211
64174-046721	211
64174-047721	210
64174-048721	210
64174-049721	210
64174-049776	610
64174-050721	210
64174-050776	610
64174-051721	208
64174-051776	610
64174-052721	208
64174-052776	610
64174-053721	208
64174-053776	610
64174-054721	208
64174-054776	610
64174-055721	204
64174-055776	610
64174-056721	204
64174-056776	610
64174-057721	204
64174-057776	610
64174-058721	204
64174-058776	610
64174-059721	220
64174-060721	220
64174-061721	220
64174-062721	220
64174-063721	220
64174-064721	220
64174-065721	220
64174-066721	220
64174-067721	221

CODE	PAGE
64174-068721	221
64174-069721	221
64174-070721	221
64174-071721	604
64174-072721	604
64174-073721	604
64174-074721	604
64174-075721	604
64174-076721	604
64174-077721	604
64174-078721	604
64174-079721	856
64174-080721	856
64174-081721	856
64174-082721	856
64174-083721	856
64174-084721	856
64174-085721	856
64174-086721	856
64174-087721	200
64174-088721	200
64174-089721	200
64174-090721	200
64174-091721	200
64174-092721	200
64174-093721	200
64174-094721	200
64174-095721	608
64174-096721	608
64174-097721	608
64174-098721	608
64174-099721	600
64174-100721	600
64174-101721	600
64174-102721	600
64174-103721	602
64174-104721	602
64174-105721	602
64174-106721	602
64174-107721	600

CODE	PAGE
64174-108721	600
64174-109721	600
64174-110721	600
64174-111721	602
64174-112721	602
64174-113721	602
64174-114721	602
64174-117721	186
64174-118721	186
64174-119721	186
64174-120721	186
64174-121721	186
64174-122721	186
64174-123721	186
64174-124721	186
64174-125721	184
64174-126721	184
64174-127721	184
64174-128721	184
64174-129721	184
64174-130721	184
64174-131721	185
64174-132721	185
64174-133721	185
64174-134721	185
64174-135721	185
64174-136721	185
64174-137721	334
64174-138721	334
64174-139721	334
64174-140721	334
64174-141721	334
64174-142721	334
64174-143721	335
64174-144721	335
64174-145721	335
64174-146721	335
64174-147721	336
64174-148721	336
64174-149721	336

Product finder

CODE	PAGE
64174-150721	336
64174-151721	336
64174-152721	336
64174-159721	214
64174-161721	244
64174-162721	244
64174-163721	244
64174-164721	244
64174-165721	244
64174-166721	244
64174-167721	244
64174-168721	244
64174-169721	245
64174-170721	245
64174-171721	245
64174-172721	245
64174-173721	212
64174-174721	212
64174-175721	212
64174-176721	212
64174-177721	212
64174-178721	212
64174-179721	212
64174-180721	212
64174-181721	212
64174-182721	212
64174-183721	212
64174-184721	212
64174-185721	213
64174-186721	213
64174-187721	213
64174-188721	213
64174-189721	194
64174-190721	194
64174-191721	194
64174-192721	194
64174-193721	194
64174-194721	194
64174-195721	224
64174-196721	224

CODE	PAGE
64174-197721	224
64174-198721	224
64174-199128	358
64174-199721	224
64174-200128	358
64174-200721	224
64174-201128	358
64174-201721	224
64174-202128	358
64174-202721	224
64174-203128	358
64174-203721	224
64174-204128	358
64174-204721	224
64174-205128	359
64174-205721	224
64174-206128	359
64174-206721	224
64174-207128	359
64174-207721	225
64174-208128	359
64174-208721	225
64174-209128	359
64174-209721	225
64174-210128	359
64174-210721	225
64174-211128	360
64174-211721	225
64174-212128	360
64174-212721	225
64174-213128	360
64174-213721	214
64174-214128	360
64174-215128	360
64174-215721	214
64174-216128	360
64174-216721	214
64174-217128	377
64174-217721	214
64174-218128	377

CODE	PAGE
64174-218721	214
64174-219128	377
64174-219721	195
64174-220128	363
64174-220131	293
64174-220721	195
64174-221128	363
64174-221131	292
64174-221721	195
64174-222128	363
64174-222131	293
64174-222721	195
64174-223128	363
64174-223131	292
64174-223721	195
64174-224128	365
64174-224131	296
64174-224721	195
64174-225128	365
64174-225131	293
64174-225721	196
64174-226128	237
64174-226131	298
64174-226721	196
64174-227128	237
64174-227131	298
64174-227721	196
64174-228128	237
64174-228131	299
64174-228721	196
64174-229128	237
64174-229721	196
64174-230721	196
64174-231128	363
64174-231721	198
64174-232128	362
64174-232721	198
64174-233128	362
64174-233721	198
64174-234128	362

CODE	PAGE
64174-234721	198
64174-235128	362
64174-235721	244
64174-236128	361
64174-236721	244
64174-237128	361
64174-237721	244
64174-238128	361
64174-238721	244
64174-239128	361
64174-239721	194
64174-240128	361
64174-240721	194
64174-241128	361
64174-241721	194
64174-242128	361
64174-242721	194
64174-243128	361
64174-243721	194
64174-244128	354
64174-244721	194
64174-245128	354
64174-245721	195
64174-246128	354
64174-246721	195
64174-247128	354
64174-247721	195
64174-248128	354
64174-248131	292
64174-248721	195
64174-249128	354
64174-249131	299
64174-249721	195
64174-250128	354
64174-250131	301
64174-250721	195
64174-251128	354
64174-251131	301
64174-252128	355
64174-252131	301

CODE	PAGE
64174-253128	355
64174-253131	125
64174-254128	355
64174-255128	355
64174-255131	612
64174-256128	355
64174-256131	612
64174-257128	355
64174-257131	612
64174-258128	355
64174-258131	614
64174-259128	355
64174-260128	356
64174-261128	356
64174-262128	356
64174-263128	356
64174-264128	356
64174-265128	356
64174-266128	356
64174-267128	356
64174-268128	357
64174-269128	357
64174-270128	362
64174-271128	362
64174-272128	357
64174-273128	344
64174-274128	344
64174-276128	363
64174-281128	357
64174-282128	357
64174-283128	357
64174-284128	357
64174-285128	363
64174-286128	363
64174-286131	614
64174-289131	297
64174-290131	297
64174-291131	297
64174-298269	372
64174-299269	372

CODE	PAGE
64174-300269	372
64174-302131	614
64174-307131	294
64174-310131	295
64174-311131	181
64174-312131	181
64174-315131	300
64174-316269	375
64174-317131	298
64174-317269	381
64174-318131	300
64174-318269	375
64174-319131	300
64174-319269	375
64174-320131	630
64174-320269	375
64174-321131	630
64174-321269	375
64174-322131	630
64174-322269	375
64174-323131	630
64174-323269	375
64174-324131	369
64174-324269	375
64174-325131	369
64174-325269	375
64174-326131	369
64174-326269	375
64174-327131	369
64174-327269	374
64174-328131	630
64174-328269	374
64174-329131	630
64174-330131	630
64174-330269	374
64174-331131	630
64174-331269	374
64174-332269	646
64174-333269	646
64174-334269	646

CODE	PAGE
64174-335269	646
64174-336269	646
64174-337269	625
64174-338269	625
64174-339269	625
64174-340269	625
64174-341269	625
64174-342269	625
64174-343269	625
64174-344269	625
64174-345269	625
64174-346269	625
64174-348269	381
64174-349269	381
64174-350269	381
64174-351269	381
64174-352269	379
64174-353131	299
64174-353269	379
64174-354269	379
64174-355269	379
64174-356269	379
64174-357269	644
64174-358269	644
64174-359269	644
64174-360269	644
64174-361269	644
64174-362269	644
64174-363269	644
64174-364269	644
64174-365269	644
64174-366269	644
64174-373269	379
64174-374269	379
64174-375269	379
64174-376269	379
64174-377269	379
64174-378269	624
64174-379269	624
64174-380269	624

CODE	PAGE
64174-381269	624
64174-382269	376
64174-383269	376
64174-384269	380
64174-385269	380
64174-386269	374
64174-390269	381
64174-391269	381
64174-392269	380
64174-393269	380
64174-394269	374
64174-420269	647
64174-421269	647
64174-422269	647
64174-423269	647
64174-424269	647
64174-496269	386
64174-497269	386
64174-498269	387
64174-499269	384
64174-500269	384
64174-501269	385
64174-511269	647
64174-512269	648
64174-513269	648
64174-514269	388
64174-515269	388
64174-516269	389
64174-517269	390
64174-518269	390
64174-519269	391
64174-542269	384
64174-543269	384
64174-544269	384
64174-545269	384
64174-546269	384
64174-547269	384
64174-548269	384
64174-549269	384
64174-550269	384

Product finder

CODE	PAGE
64174-551269	384
64174-552269	384
64174-553269	384
64174-554269	384
64174-555269	384
64174-556269	384
64174-557269	384
64174-558269	385
64174-559269	385
64174-561269	385
64174-562269	385
64174-563269	385
64174-564269	385
64174-565269	385
64174-566269	385
64174-567269	386
64174-568269	386
64174-569269	386
64174-570269	386
64174-571269	386
64174-572269	386
64174-573269	386
64174-574269	386
64174-575269	386
64174-576269	386
64174-577269	386
64174-578269	386
64174-579269	386
64174-580269	386
64174-581269	386
64174-582269	386
64174-583269	387
64174-584269	387
64174-585269	387
64174-586269	387
64174-587269	387
64174-588269	387
64174-589269	387
64174-590269	387
64174-591269	388

CODE	PAGE
64174-592269	388
64174-593269	388
64174-594269	388
64174-595269	388
64174-596269	388
64174-597269	388
64174-598269	388
64174-599269	388
64174-600269	388
64174-601269	388
64174-602269	388
64174-603269	388
64174-604269	389
64174-605269	389
64174-606269	389
64174-607269	389
64174-608269	389
64174-609269	389
64174-610269	389
64174-611269	389
64174-612269	389
64174-613269	389
64174-614269	389
64174-615269	390
64174-616269	390
64174-617269	390
64174-618269	390
64174-619269	390
64174-620269	390
64174-621269	390
64174-622269	390
64174-623269	390
64174-624269	390
64174-625269	390
64174-626269	390
64174-627269	390
64174-628269	391
64174-629269	391
64174-630269	391
64174-631269	391

CODE	PAGE
64174-632269	391
64174-633269	391
64174-634269	391
64174-635269	391
64174-635742	1002
64174-636269	391
64174-636742	1000
64174-637269	391
64174-638269	391
64174-639269	392
64174-640269	392
64174-641269	392
64174-642269	392
64174-643269	392
64174-644269	392
64174-645269	392
64174-646269	392
64174-647269	392
64174-648269	392
64174-649269	392
64174-650269	392
64174-651269	392
64174-652269	392
64174-653269	392
64174-654269	392
64174-655269	392
64174-656269	392
64174-657269	393
64174-658269	393
64174-659269	393
64174-661269	393
64174-662269	393
64174-663269	393
64174-665269	393
64174-666269	393
64174-667269	393
64174-669269	394
64174-670269	394
64174-671269	394
64174-672269	394

CODE	PAGE
64174-673269	394
64174-674269	394
64174-675269	394
64174-676269	394
64174-677269	394
64174-678269	394
64174-679269	394
64174-680269	394
64174-681269	394
64174-682269	394
64174-683269	394
64174-684269	394
64174-685269	394
64174-686269	394
64174-687269	395
64174-688269	395
64174-689269	395
64174-691269	395
64174-692269	395
64174-693269	395
64174-695269	395
64174-696269	395
64174-697269	395
64174-699269	372
64174-700269	372
64174-701269	372
64174-703269	648
64174-704269	648
64174-705269	648
64174-706269	648
64174-707269	647
64174-708269	647
64174-733269	384
64174-734269	384
64174-735269	384
64174-736269	384
64174-737269	384
64174-738269	384
64174-739269	385
64174-740269	385

CODE	PAGE
64174-741269	385
64174-742269	653
64174-743269	386
64174-744269	386
64174-745269	386
64174-746269	386
64174-747269	386
64174-748269	386
64174-749269	387
64174-750269	387
64174-751269	387
64174-752269	388
64174-753269	388
64174-754269	388
64174-755269	388
64174-756269	388
64174-757269	388
64174-758269	388
64174-759269	388
64174-760269	388
64174-761269	388
64174-762269	389
64174-763269	389
64174-764269	389
64174-765269	389
64174-766269	389
64174-767269	389
64174-768269	389
64174-769269	389
64174-770269	657
64174-771269	390
64174-772269	390
64174-773269	390
64174-774269	390
64174-775269	390
64174-776269	390
64174-777269	390
64174-778269	390
64174-779269	390
64174-780269	390

CODE	PAGE
64174-781269	391
64174-782269	391
64174-783269	391
64174-784269	391
64174-785269	391
64174-786269	391
64174-787269	391
64174-788269	391
64174-789269	392
64174-790269	392
64174-791269	392
64174-792269	392
64174-793269	392
64174-794269	392
64174-795269	393
64174-796269	393
64174-797269	393
64174-798269	661
64174-800269	394
64174-801269	394
64174-802269	394
64174-803269	394
64174-804269	394
64174-805269	395
64174-806269	395
64174-876147	234
64174-877147	234
64174-878147	234
64174-879147	234
64174-886111	367
64174-887111	367
64174-888111	367
64174-889111	367
64174-890111	367
64174-891111	367
64174-892111	367
64174-893111	367
64174-896703	248
64174-897703	248
64174-898703	248

CODE	PAGE
64174-899703	248
64174-900703	248
64174-901703	248
64174-902739	606
64174-903739	606
64174-904739	606
64174-905739	606
64174-906739	607
64174-907739	607
64174-908739	607
64174-909739	607
64174-910739	607
64174-911739	607
64174-912739	607
64174-913739	607
64174-934739	350
64174-935739	350
64174-938121	631
64174-939121	631
64174-940121	631
64174-941121	631
64174-942121	371
64174-943121	371
64174-944121	377
64174-945121	377
64174-945128	370
64174-946121	371
64174-946128	370
64174-947121	371
64174-947128	370
64174-948128	373
64174-949128	373
64174-950121	371
64174-950128	373
64174-951121	627
64174-951128	378
64174-951724	236
64174-952121	628
64174-952128	378
64174-952724	236

CODE	PAGE
64174-953121	631
64174-953128	378
64174-953724	236
64174-954121	382
64174-954128	378
64174-954724	236
64174-955121	382
64174-955128	378
64174-955724	236
64174-956121	649
64174-956724	236
64174-957121	649
64174-957128	352
64174-958128	352
64174-959128	352
64174-960128	352
64174-969121	371
64174-970121	634
64174-971121	634
64174-972121	368
64174-973121	368
64175-029269	652
64175-030269	652
64175-031269	652
64175-032269	652
64175-033269	652
64175-034269	652
64175-035269	652
64175-036269	652
64175-037269	652
64175-038269	652
64175-039269	652
64175-040269	652
64175-041269	652
64175-042269	652
64175-043269	652
64175-044269	652
64175-045269	652
64175-046269	652
64175-047269	652

Product finder

CODE	PAGE
64175-048269	652
64175-049269	652
64175-050269	652
64175-051269	652
64175-052269	652
64175-053269	653
64175-054269	653
64175-055269	653
64175-056269	653
64175-057269	653
64175-058269	653
64175-059269	653
64175-060269	653
64175-061269	653
64175-062269	653
64175-063269	653
64175-064269	653
64175-065269	654
64175-066269	654
64175-067269	654
64175-068269	654
64175-069269	654
64175-070269	654
64175-071269	654
64175-072269	654
64175-073269	654
64175-074269	654
64175-075269	654
64175-076269	654
64175-077269	654
64175-078269	654
64175-079269	654
64175-080269	654
64175-081269	654
64175-082269	654
64175-083269	654
64175-084269	654
64175-085269	654
64175-086269	654
64175-087269	654

CODE	PAGE
64175-088269	654
64175-089269	655
64175-090269	655
64175-091269	655
64175-092269	655
64175-093269	655
64175-094269	655
64175-095269	655
64175-096269	655
64175-097269	655
64175-098269	655
64175-099269	655
64175-100269	655
64175-101269	656
64175-102269	656
64175-103269	656
64175-104269	656
64175-105269	656
64175-106269	656
64175-107269	656
64175-108269	656
64175-109269	656
64175-110269	656
64175-111269	656
64175-112269	656
64175-113269	656
64175-114269	656
64175-115269	656
64175-116269	656
64175-117269	656
64175-118269	656
64175-119269	656
64175-120269	656
64175-121269	656
64175-122269	656
64175-123269	656
64175-124269	656
64175-125269	656
64175-126269	657
64175-127269	657

CODE	PAGE
64175-128269	657
64175-129269	657
64175-130269	657
64175-131269	657
64175-132269	657
64175-133269	657
64175-134269	657
64175-135269	657
64175-136269	657
64175-137269	657
64175-138269	657
64175-139269	657
64175-140269	657
64175-141269	657
64175-142269	657
64175-143269	657
64175-144269	657
64175-145269	657
64175-146269	658
64175-147269	658
64175-148269	658
64175-149269	658
64175-150269	658
64175-151269	658
64175-152269	658
64175-153269	658
64175-154269	658
64175-155269	658
64175-156269	658
64175-157269	658
64175-158269	658
64175-159269	658
64175-160269	658
64175-161269	658
64175-162269	658
64175-163269	658
64175-164269	658
64175-165269	658
64175-166269	658
64175-167269	658

CODE	PAGE
64175-168269	658
64175-169269	658
64175-170269	658
64175-171269	659
64175-172269	659
64175-173269	659
64175-174269	659
64175-175269	659
64175-176269	659
64175-177269	659
64175-178269	659
64175-179269	659
64175-180269	659
64175-181269	659
64175-182269	659
64175-183269	659
64175-184269	659
64175-185269	659
64175-186269	659
64175-187269	659
64175-188269	659
64175-189269	659
64175-190269	659
64175-191269	660
64175-192269	660
64175-193269	660
64175-194269	660
64175-195269	660
64175-196269	660
64175-197269	660
64175-198269	660
64175-199269	660
64175-200269	660
64175-201269	660
64175-202269	660
64175-203269	660
64175-204269	660
64175-205269	660
64175-206269	660
64175-207269	660

CODE	PAGE
64175-208269	660
64175-209269	660
64175-210269	660
64175-211269	660
64175-212269	660
64175-213269	660
64175-214269	660
64175-215269	661
64175-216269	661
64175-217269	661
64175-218269	661
64175-219269	661
64175-220269	661
64175-221269	661
64175-222269	661
64175-223269	661
64175-224269	661
64175-225269	661
64175-226269	661
64175-227269	662
64175-228269	662
64175-229269	662
64175-230269	662
64175-231269	662
64175-232269	662
64175-233269	662
64175-234269	662
64175-235269	662
64175-236269	662
64175-237269	662
64175-238269	662
64175-239269	662
64175-240269	662
64175-241269	662
64175-242269	662
64175-243269	662
64175-244269	662
64175-245269	662
64175-246269	662
64175-247269	662

CODE	PAGE
64175-248269	662
64175-249269	662
64175-250269	662
64175-251269	663
64175-252269	663
64175-253269	663
64175-254269	663
64175-255269	663
64175-256269	663
64175-257269	663
64175-258269	663
64175-259269	663
64175-260269	663
64175-261269	663
64175-262269	663
64175-263269	664
64175-264269	664
64175-265269	664
64175-266269	664
64175-267269	664
64175-268269	664
64175-269269	664
64175-270269	664
64175-271269	664
64175-272269	664
64175-273269	664
64175-274269	664
64175-275269	664
64175-276269	664
64175-277269	664
64175-278269	664
64175-279269	664
64175-280269	664
64175-281269	664
64175-282269	664
64175-283269	664
64175-284269	664
64175-285269	664
64175-286269	664
64175-287269	665

CODE	PAGE
64175-288269	665
64175-289269	665
64175-290269	665
64175-291269	665
64175-292269	665
64175-293269	665
64175-294269	665
64175-295269	665
64175-296269	665
64175-297269	665
64175-298269	665
64175-299269	666
64175-300269	666
64175-301269	666
64175-302269	666
64175-303269	666
64175-304269	666
64175-305269	666
64175-306269	666
64175-307269	666
64175-308269	666
64175-309269	666
64175-310269	666
64175-311269	666
64175-312269	666
64175-313269	666
64175-314269	666
64175-315269	666
64175-316269	666
64175-317269	666
64175-318269	666
64175-319269	666
64175-320269	666
64175-321269	666
64175-322269	666
64175-323269	667
64175-324269	667
64175-325269	667
64175-326269	667
64175-327269	667

CODE	PAGE
64175-328269	667
64175-329269	667
64175-330269	667
64175-331269	667
64175-332269	667
64175-333269	667
64175-334269	667
64175-335269	668
64175-336269	668
64175-337269	668
64175-338269	668
64175-339269	668
64175-340269	668
64175-341269	668
64175-342269	668
64175-343269	668
64175-344269	668
64175-345269	668
64175-346269	668
64175-347269	668
64175-348269	668
64175-349269	668
64175-350269	668
64175-351269	668
64175-352269	668
64175-353269	668
64175-354269	668
64175-355269	668
64175-356269	668
64175-357269	668
64175-358269	668
64175-359269	668
64175-360269	669
64175-361269	669
64175-362269	669
64175-363269	669
64175-364269	669
64175-365269	669
64175-366269	669
64175-367269	669

Product finder

CODE	PAGE
64175-368269	669
64175-369269	669
64175-370269	669
64175-371269	669
64175-372269	669
64175-373269	669
64175-374269	669
64175-375269	669
64175-376269	669
64175-377269	669
64175-378269	669
64175-379269	669
64175-380269	670
64175-381269	670
64175-382269	670
64175-383269	670
64175-384269	670
64175-385269	670
64175-386269	670
64175-387269	670
64175-388269	670
64175-389269	670
64175-390269	670
64175-391269	670
64175-392269	670
64175-393269	670
64175-394269	670
64175-395269	670
64175-396269	670
64175-397269	670
64175-398269	670
64175-399269	670
64175-400269	670
64175-401269	670
64175-402269	670
64175-403269	670
64175-404269	670
64175-405269	671
64175-406269	671
64175-407269	671

CODE	PAGE
64175-408269	671
64175-409269	671
64175-410269	671
64175-411269	671
64175-412269	671
64175-413269	671
64175-414269	671
64175-415269	671
64175-416269	671
64175-417269	671
64175-418269	671
64175-419269	671
64175-420269	671
64175-421269	671
64175-422269	671
64175-423269	671
64175-424269	671
64175-425269	394
64175-426269	395
64175-510727	330
64175-511727	330
64175-512727	330
64175-513727	330
64175-514727	330
64175-515727	330
64175-516727	330
64175-517727	330
64175-518727	330
64175-519727	330
71164-001111	340
71164-001122	320
71164-001721	524
71164-001804	348
71164-002111	340
71164-002122	320
71164-002126	345
71164-002721	524
71164-002804	348
71164-003111	340
71164-003122	320

CODE	PAGE
71164-003126	345
71164-003721	524
71164-003804	348
71164-004111	342
71164-004122	320
71164-004721	524
71164-004804	348
71164-005111	342
71164-005122	320
71164-005721	524
71164-005804	348
71164-006111	342
71164-006122	320
71164-006721	524
71164-006804	348
71164-007111	343
71164-007721	529
71164-007776	424
71164-007804	348
71164-008111	343
71164-008126	346
71164-008721	534
71164-008776	424
71164-008804	348
71164-009111	343
71164-009115	490
71164-009126	346
71164-009721	534
71164-009776	424
71164-009804	348
71164-010111	341
71164-010115	490
71164-010721	534
71164-010776	424
71164-010804	348
71164-011111	341
71164-011115	491
71164-011126	345
71164-011721	535
71164-011776	424

CODE	PAGE
71164-011804	348
71164-012111	341
71164-012115	491
71164-012126	345
71164-012721	535
71164-012776	424
71164-012804	348
71164-013111	342
71164-013115	491
71164-013721	532
71164-013776	428
71164-013804	348
71164-014111	342
71164-014115	491
71164-014721	532
71164-014776	428
71164-014804	348
71164-015111	342
71164-015115	491
71164-015721	532
71164-015776	428
71164-015804	348
71164-016111	344
71164-016115	491
71164-016721	536
71164-016776	428
71164-016804	348
71164-017111	344
71164-017115	492
71164-017126	346
71164-017721	536
71164-017776	424
71164-017804	348
71164-018111	344
71164-018115	492
71164-018126	346
71164-018721	536
71164-018776	424
71164-018804	348
71164-019111	340

CODE	PAGE
71164-019115	492
71164-019721	537
71164-019776	424
71164-019804	348
71164-020111	340
71164-020115	492
71164-020126	346
71164-020721	538
71164-020776	424
71164-020804	348
71164-021111	340
71164-021115	492
71164-021126	346
71164-021721	538
71164-021776	424
71164-021804	348
71164-022111	341
71164-022115	492
71164-022721	527
71164-022776	424
71164-022804	349
71164-023111	341
71164-023126	345
71164-023721	527
71164-023776	428
71164-023804	349
71164-024111	341
71164-024126	345
71164-024721	527
71164-024804	349
71164-025111	342
71164-025776	428
71164-025804	349
71164-026111	342
71164-026126	345
71164-026721	526
71164-026776	428
71164-026804	349
71164-027111	342
71164-027126	345

CODE	PAGE
71164-027721	526
71164-027776	428
71164-027804	349
71164-028111	342
71164-028721	526
71164-028776	424
71164-028804	349
71164-029111	342
71164-029115	494
71164-029126	346
71164-029776	424
71164-029804	349
71164-030111	342
71164-030115	494
71164-030126	346
71164-030721	528
71164-030776	424
71164-030804	349
71164-031111	343
71164-031115	490
71164-031721	528
71164-031776	424
71164-031804	349
71164-032111	343
71164-032115	490
71164-032721	528
71164-032776	424
71164-032804	349
71164-033111	343
71164-033115	490
71164-033721	529
71164-033776	424
71164-033804	349
71164-034115	490
71164-034776	429
71164-034804	349
71164-035115	494
71164-035776	429
71164-035804	349
71164-036115	494

CODE	PAGE
71164-036776	429
71164-036804	349
71164-037776	429
71164-037804	349
71164-038721	536
71164-038776	429
71164-038804	349
71164-039721	535
71164-039776	429
71164-039804	349
71164-040111	344
71164-040721	532
71164-040776	429
71164-040804	349
71164-041111	344
71164-041721	532
71164-041776	429
71164-041804	349
71164-042111	344
71164-042721	532
71164-042776	430
71164-042804	349
71164-043111	343
71164-043721	534
71164-043776	430
71164-043804	349
71164-044111	343
71164-044721	534
71164-044776	431
71164-044804	349
71164-045111	343
71164-045721	535
71164-045776	430
71164-045804	349
71164-046111	341
71164-046721	534
71164-046776	430
71164-047111	341
71164-047721	536
71164-047776	430

CODE	PAGE
71164-048111	341
71164-048721	536
71164-048776	430
71164-049111	341
71164-049721	537
71164-049776	430
71164-050111	341
71164-050721	538
71164-050776	430
71164-051111	341
71164-051721	538
71164-051776	426
71164-052111	340
71164-052721	222
71164-052776	426
71164-053111	340
71164-053721	222
71164-053776	426
71164-054111	340
71164-054721	222
71164-054776	426
71164-055111	343
71164-055721	222
71164-055776	432
71164-056721	222
71164-056776	432
71164-057721	222
71164-057776	432
71164-058721	222
71164-058776	432
71164-059721	222
71164-059776	432
71164-060776	432
71164-061721	598
71164-061776	434
71164-062721	598
71164-062776	434
71164-063721	596
71164-063776	434
71164-064721	596

Product finder

CODE	PAGE
71164-064776	434
71164-065721	598
71164-065776	436
71164-066721	598
71164-066776	436
71164-067721	596
71164-067776	436
71164-068721	596
71164-068776	436
71164-069721	332
71164-069776	438
71164-070721	332
71164-070776	438
71164-071721	332
71164-071776	440
71164-072721	332
71164-072776	440
71164-073721	332
71164-073776	440
71164-074721	332
71164-074776	440
71164-075721	456
71164-075776	442
71164-076721	456
71164-076776	443
71164-077721	456
71164-077776	443
71164-078721	456
71164-078776	443
71164-079721	456
71164-079776	443
71164-080721	456
71164-080776	442
71164-081721	462
71164-081776	443
71164-082721	461
71164-082776	443
71164-083721	463
71164-083776	443
71164-084721	463

CODE	PAGE
71164-084776	443
71164-085721	463
71164-085776	444
71164-086721	459
71164-086776	444
71164-087721	459
71164-087776	444
71164-088721	459
71164-088776	444
71164-089721	458
71164-089776	446
71164-090721	458
71164-090776	446
71164-091721	458
71164-091776	448
71164-092721	461
71164-092776	448
71164-093721	461
71164-093776	448
71164-094721	462
71164-094776	448
71164-095721	464
71164-095776	450
71164-096721	464
71164-096776	450
71164-097721	464
71164-097776	450
71164-098721	466
71164-098776	450
71164-099721	466
71164-100721	468
71164-101721	468
71164-102721	468
71164-103721	469
71164-104721	470
71164-105721	470
71164-106721	472
71164-107721	472
71164-108721	466
71164-109721	474

CODE	PAGE
71164-110721	474
71164-111721	474
71164-112721	475
71164-113721	476
71164-114721	476
71164-115721	476
71164-116721	478
71164-117721	478
71164-118721	478
71164-119721	479
71164-120721	482
71164-127721	480
71164-128721	366
71164-129721	366
71164-130721	366
71164-131721	366
71164-132721	364
71164-133721	364
71164-134721	496
71164-135721	496
71164-136721	498
71164-137721	498
71164-138721	500
71164-139721	500
71164-140721	502
71164-141721	502
71164-142721	504
71164-143721	504
71164-144721	506
71164-145721	506
71164-146721	510
71164-147721	510
71164-148721	510
71164-149721	510
71164-150721	511
71164-151721	511
71164-152721	511
71164-153721	511
71164-154721	512
71164-155721	512

CODE	PAGE
71164-156721	513
71164-157721	513
71164-158721	514
71164-159721	514
71164-160721	514
71164-161721	514
71164-162721	515
71164-163721	515
71164-166721	516
71164-167721	516
71164-168721	518
71164-169721	518
71164-170721	520
71164-171721	520
71164-172721	512
71164-173721	512
71164-174721	515
71164-175721	515
71164-176721	493
71164-177721	493
71164-187721	456
71164-188721	456
71164-189721	456
71164-190721	464
71164-191721	464
71164-192721	464
71164-193721	466
71164-194721	466
71164-195721	466
71164-196721	468
71164-197721	468
71164-198721	468
71164-199721	469
71164-200721	470
71164-201721	470
71164-202721	472
71164-203721	472
71164-204721	474
71164-205721	474
71164-206721	474

CODE	PAGE
71164-207721	475
71164-208721	476
71164-209721	476
71164-210721	476
71164-211721	478
71164-212721	478
71164-213721	478
71164-214721	479
71164-215721	482
71164-217721	460
71164-218721	460
71164-219721	460
71165-001777	398
71165-002777	398
71165-003777	398
71165-004777	398
71165-005777	398
71165-006777	398
71165-007777	400
71165-008777	400
71165-009777	400
71165-010777	400
71165-011777	400
71165-012777	400
71165-013777	404
71165-014777	404
71165-015777	404
71165-017777	404
71165-018777	404
71165-019777	406
71165-020777	406
71165-021777	406
71165-022777	406
71165-023777	406
71165-024777	406
71165-025777	408
71165-026777	408
71165-027777	408
71165-028777	408
71165-029777	408

CODE	PAGE
71165-030777	408
71165-031777	410
71165-032777	410
71165-033777	410
71165-034777	410
71165-035777	410
71165-036777	410
71165-037777	412
71165-038777	412
71165-039777	412
71165-040777	412
71165-041777	412
71165-042777	412
71165-043777	414
71165-044777	414
71165-045777	414
71165-046777	414
71165-047777	414
71165-048777	414
71165-049777	416
71165-050777	416
71165-051777	416
71165-052777	416
71165-053777	416
71165-054777	416
71165-055777	418
71165-056777	418
71165-057777	418
71165-058777	418
71165-059777	418
71165-060777	418
71165-061777	420
71165-062777	420
71165-063777	420
71165-064777	420
71165-065777	420
71165-066777	420
71165-067777	402
71165-068777	402
71165-069777	402

CODE	PAGE
71165-070777	402
71165-071777	402
71165-072777	402
74168-141677	966
74168-143677	966
74168-146677	964
74168-170677	964
74168-234704	960
74168-235704	960
74168-236704	960
74168-237704	960
74168-238704	961
74168-239704	961
74168-240677	965
74168-241677	967
74168-264997	962
74168-265997	962
74168-277677	964
74168-283677	964
74168-284677	965
74168-285677	966
74168-286677	966
74168-287677	967
75165-001724	44
75165-002724	44
75165-003724	44
75165-004724	45
75165-005724	45
75165-006724	45
75165-007724	45
75165-008724	112
75165-009724	112
75165-010724	112
75165-011724	112
75165-012724	113
75165-013724	113
75165-014724	113
75165-015724	113
75165-016724	111
75165-017724	111

CODE	PAGE
75165-018724	111
75165-019724	111
75165-020724	111
75165-021724	111
75165-022724	111
75165-023724	111
75165-024724	110
75165-025724	110
75165-026724	110
75165-027724	110
75165-028724	110
75165-029724	110
75165-030724	115
75165-031724	115
75165-032724	115
75165-033724	115
75165-034724	115
75165-035724	115
75165-036724	116
75165-037724	116
75165-038724	113
75165-039264	123,127
75165-039724	113
75165-040724	113
75165-041724	113
75165-042724	116
75165-043724	116
75165-044724	118
75165-045724	118
75165-046724	118
75165-047724	118
75165-048724	118
75165-049724	117
75165-050724	117
75165-051724	117
75165-052724	117
75165-053724	117
75165-062264	123, 127
75165-130210	576
75165-132210	576

Product finder

CODE	PAGE
75165-137210	576
75165-137264	120
75165-144210	576
75165-161264	122
75165-162264	120
75165-164264	123
75165-165264	122
75165-166264	122
75165-167264	121
75165-168264	121
75165-173264	122
75165-176210	568
75165-177210	568, 583
75165-189210	576
75165-195264	123
75165-198210	568, 583
75165-199210	576
75165-212264	122
75165-215264	120
75165-216264	123
75165-217264	123
75165-223264	125
75165-224264	124
75165-225264	124
75165-229264	125
75165-233264	124
75165-236264	124
75165-241264	123
75165-242264	127
75165-246264	126
75165-247264	126
75165-261264	51
75165-262264	50
75165-263210	576
75165-263264	124
75165-269264	114
75165-270264	114
75165-271264	114
75165-272264	114
75165-295264	123

CODE	PAGE
75165-311210	576
75165-322210	568, 583
75165-335210	568, 583
75165-362210	580
75165-363210	580
75165-364210	580
75165-365210	580
75165-383210	574
75165-384210	574
75165-385210	574
75165-386210	574
75165-387210	574
75165-388210	574
75165-389210	574
75165-390210	574
75165-391210	574
75165-392210	574
75165-393210	574
75165-394210	574
75165-395210	575
75165-396210	575
75165-397210	575
75165-398210	575
75165-399210	575
75165-400210	575
75165-401210	574
75165-402210	574
75165-403210	574
75165-404210	574
75165-405210	574
75165-406210	574
75165-407210	574
75165-408210	574
75165-409210	574
75165-410210	574
75165-411210	574
75165-412210	574
75165-413210	575
75165-414210	575
75165-415210	575

CODE	PAGE
75165-416210	575
75165-417210	575
75165-418210	575
75165-420210	576
75165-421210	576
75165-423210	566
75165-424210	566
75165-425210	566
75165-426210	566
75165-427210	566
75165-428210	566
75165-429210	566
75165-430210	566
75165-431210	566
75165-432210	566
75165-433210	566
75165-434210	566
75165-435210	567
75165-436210	567
75165-437210	567
75165-438210	567
75165-439210	567
75165-440210	567
75165-441210	566
75165-442210	566
75165-443210	566
75165-444210	566
75165-445210	566
75165-446210	566
75165-447210	566
75165-448210	566
75165-449210	566
75165-450210	566
75165-451210	566
75165-452210	566
75165-453210	567
75165-454210	567
75165-455210	567
75165-456210	567
75165-457210	567

CODE	PAGE
75165-458210	567
75165-459210	578
75165-460210	578
75165-461210	578
75165-462210	578
75165-463210	578
75165-464210	578
75165-465210	578
75165-466210	578
75165-467210	578
75165-468210	578
75165-469210	578
75165-470210	578
75165-471210	579
75165-472210	579
75165-473210	579
75165-474210	579
75165-475210	579
75165-476210	579
75165-477210	578
75165-478210	578
75165-479210	578
75165-480210	578
75165-481210	578
75165-482210	578
75165-483210	578
75165-484210	578
75165-485210	578
75165-486210	578
75165-487210	578
75165-488210	578
75165-489210	579
75165-490210	579
75165-491210	579
75165-492210	579
75165-493210	579
75165-494210	579
75165-495210	586
75165-496210	586
75165-497210	586

CODE	PAGE
75165-498210	586
75165-499210	586
75165-500210	586
75165-501210	586
75165-502210	586
75165-503210	586
75165-504210	586
75165-505210	586
75165-506210	586
75165-507210	587
75165-508210	587
75165-509210	587
75165-510210	587
75165-511210	587
75165-512210	587
75165-513210	586
75165-514210	586
75165-515210	586
75165-516210	586
75165-517210	586
75165-518210	586
75165-519210	586
75165-520210	586
75165-521210	586
75165-522210	586
75165-523210	586
75165-524210	586
75165-525210	587
75165-526210	587
75165-527210	587
75165-528210	587
75165-529210	587
75165-530210	587
75165-531210	592
75165-532210	592
75165-533210	592
75165-534210	592
75165-535210	592
75165-536210	592
75165-537210	592

CODE	PAGE
75165-538210	592
75165-539210	592
75165-540210	592
75165-541210	592
75165-542210	592
75165-543210	568, 583
75165-544210	568
75165-545210	568, 583
75165-546210	568, 583
75165-547210	568
75165-548210	580
75165-549210	580
75165-550210	580
75165-551210	580
75165-552210	580
75165-553210	580
75167-023210	590
75167-024210	590
75167-025210	590
75167-026210	590
75167-027210	590
75167-028210	590
75167-029210	590
75167-030210	590
75167-031210	590
75167-032210	590
75167-033210	590
75167-034210	590
75167-035210	590
75167-036210	590
75167-037210	562
75167-038210	562
75167-039210	562
75167-040210	562
75167-041210	562
75167-042210	562
75167-043210	562
75167-044210	562
75167-045210	562
75167-046210	562

CODE	PAGE
75167-047210	562
75167-048210	562
75167-049210	562
75167-050210	562
75167-051210	562
75167-052210	562
75167-053210	562
75167-054210	562
75167-055210	562
75167-056210	562
75167-057210	570
75167-058210	570
75167-059210	570
75167-060210	570
75167-061210	570
75167-062210	570
75167-063210	570
75167-064210	570
75167-065210	570
75167-066210	570
75167-067210	570
75167-068210	570
75167-069210	570
75167-070210	570
75167-071210	570
75167-072210	570
75167-073210	570
75167-074210	570
75167-075210	570
75167-076210	570
75167-077210	570
75167-078210	570
75167-079210	570
75167-080210	570
75168-108773	548
75168-109773	548
75168-110773	548
75168-111773	548
75168-112773	550
75168-113773	550

CODE	PAGE
75168-114773	550
75168-115773	550
75168-116773	554
75168-117773	554
75168-118773	558
75168-119773	558
75168-120773	558
75168-121773	558
75168-188210	582
75168-189210	582
75168-190210	582
75168-191210	582
75168-192210	582
75168-193210	582
75168-194210	582
75168-195210	582
75168-196210	582
75168-197210	582
75168-198210	582
75168-199210	582
75168-200210	582
75168-201210	582
75168-202210	582
75168-203210	582
75168-204210	583
75168-205210	583
75168-206210	583
75168-207210	583
75169-001997	851
75169-002997	851
75169-055721	854
75169-056721	854
75169-057721	854
75169-058721	854
75169-059721	854
75169-060721	854
75169-061721	854
75169-062721	854
75169-063721	855
75169-064721	855

Product finder

CODE	PAGE
75169-065721	855
75169-066721	855
75169-067721	914
75169-068721	914
75169-069721	914
75169-070721	914
75169-071721	914
75169-072721	914
75169-073721	914
75169-074721	914
75169-075721	934
75169-076721	934
75169-077721	934
75169-078721	934
75169-079721	934
75169-080721	934
75169-081721	808
75169-082721	808
75169-083721	806
75169-084721	806
75169-085721	806
75169-086721	806
75169-087721	806
75169-088721	806
75169-089721	938
75169-090721	938
75169-091721	938
75169-092721	938
75169-093721	858
75169-094721	858
75169-095721	858
75169-096721	858
75169-108721	758
75169-109721	758
75169-110721	758
75169-111721	758
75169-112721	758
75169-113721	912
75169-114721	912
75169-115721	912

CODE	PAGE
75169-116721	912
75169-117721	912
75169-118721	912
75169-119721	912
75169-120721	912
75169-129721	924
75169-130721	924
75169-131721	924
75169-132721	924
75169-133721	924
75169-134721	924
75169-135721	940
75169-136721	940
75169-137721	940
75169-138721	940
75169-163997	834
75169-164997	834
75169-165997	834
75169-173997	849
75169-174997	849
75169-177997	834
75169-178997	834
75169-179997	834
75169-180997	842
75169-181997	842
75169-182997	842
75169-183997	842
75169-184997	842
75169-185997	842
75169-186997	842
75169-187997	842
75169-188997	844
75169-189997	844
75169-190997	844
75169-191108	626
75169-191997	844
75169-192108	622
75169-192997	844
75169-193997	844
75169-194997	844

CODE	PAGE
75169-195997	844
75169-196997	881
75169-197997	881
75169-198997	881
75169-199997	881
75169-200997	881
75169-201997	881
75169-202997	881
75169-203997	881
75169-204997	845
75169-205108	626
75169-205997	845
75169-206108	626
75169-206997	845
75169-207108	622
75169-207997	845
75169-208108	622
75169-208997	845
75169-209997	845
75169-210997	845
75169-211108	627
75169-211997	845
75169-212108	627
75169-212997	884
75169-213108	628
75169-213997	884
75169-214108	628
75169-214997	884
75169-215108	624
75169-215997	884
75169-216108	624
75169-216997	843
75169-217108	629
75169-217997	843
75169-218108	629
75169-218997	843
75169-219997	843
75169-220997	843
75169-221997	843
75169-222997	843

CODE	PAGE
75169-223997	843
75169-224997	884
75169-225997	884
75169-226997	884
75169-227108	626
75169-227997	884
75169-228108	627
75169-228997	826
75169-229108	629
75169-229997	826
75169-230108	622
75169-230997	826
75169-231997	826
75169-232997	826
75169-233108	616
75169-233997	826
75169-234108	616
75169-234997	826
75169-235108	616
75169-235997	826
75169-236108	616
75169-236997	827
75169-237108	616
75169-237997	827
75169-238108	616
75169-238997	827
75169-239108	616
75169-239997	827
75169-240108	616
75169-240997	828
75169-241108	616
75169-241997	828
75169-242108	632
75169-242115	994
75169-242997	828
75169-243108	632
75169-243115	994
75169-243997	828
75169-244108	632
75169-244997	828

CODE	PAGE
75169-245108	618
75169-245997	828
75169-246108	618
75169-246997	828
75169-247108	618
75169-247997	828
75169-248108	618
75169-248997	829
75169-249997	829
75169-250997	829
75169-251115	756
75169-251997	829
75169-252115	756
75169-252997	829
75169-253115	756
75169-253997	829
75169-254997	829
75169-255997	829
75169-256997	830
75169-257997	830
75169-258997	830
75169-259997	830
75169-260108	642
75169-260997	830
75169-261108	642
75169-261997	830
75169-262108	642
75169-262997	830
75169-263108	642
75169-263997	830
75169-264108	643
75169-264997	831
75169-265108	643
75169-265997	831
75169-266108	637
75169-266997	831
75169-267108	637
75169-267997	831
75169-268108	632
75169-268997	824

CODE	PAGE
75169-269108	640
75169-269997	824
75169-270108	640
75169-270997	824
75169-271108	640
75169-271997	824
75169-272108	640
75169-272997	764
75169-273108	641
75169-273997	764
75169-274108	641
75169-274997	764
75169-275997	764
75169-276997	764
75169-277997	764
75169-278997	944
75169-279997	881
75169-280997	884
75169-281997	881
75169-282997	884
75169-283694	878
75169-283997	843
75169-284694	878
75169-284997	843
75169-285694	874
75169-285997	845
75169-286108	638
75169-286692	876
75169-286694	874
75169-286997	845
75169-287108	638
75169-287692	876
75169-287694	873
75169-287997	842
75169-288692	876
75169-288694	873
75169-288997	842
75169-289692	876
75169-289694	776
75169-289997	844

CODE	PAGE
75169-290692	846
75169-290694	776
75169-290997	844
75169-291692	846
75169-291694	772
75169-291997	847
75169-292692	846
75169-292694	772
75169-292997	847
75169-293692	928
75169-293694	772
75169-293997	847
75169-294692	928
75169-294694	772
75169-294997	847
75169-295692	928
75169-295694	768
75169-295997	921
75169-296692	928
75169-296694	768
75169-296997	921
75169-297694	990
75169-297997	921
75169-298692	816
75169-298694	990
75169-298997	921
75169-299692	816
75169-299694	776
75169-299997	921
75169-300692	811
75169-300694	776
75169-300997	921
75169-301692	811
75169-301694	851
75169-301997	921
75169-302692	810
75169-302694	850
75169-302997	921
75169-303692	810
75169-303694	794

CODE	PAGE
75169-303997	826
75169-304692	792
75169-304694	780
75169-304997	827
75169-305692	792
75169-305694	780
75169-305997	824
75169-306692	772
75169-306694	787
75169-306997	829
75169-307692	772
75169-307694	787
75169-307997	829
75169-308692	772
75169-308694	782
75169-308997	828
75169-309692	772
75169-309694	782
75169-309997	828
75169-310692	784
75169-310694	782
75169-310997	823
75169-311692	784
75169-311694	782
75169-311997	823
75169-312692	814
75169-312694	786
75169-312997	823
75169-313692	814
75169-313694	786
75169-313997	823
75169-314692	786
75169-314694	780
75169-314997	823
75169-315692	786
75169-315694	780
75169-315997	823
75169-316131	714
75169-316694	812
75169-316997	822

Product finder

CODE	PAGE
75169-317131	714
75169-317692	789
75169-317694	812
75169-317997	822
75169-318131	712
75169-318692	788
75169-318694	818
75169-318997	822
75169-319131	712
75169-319692	754
75169-319694	818
75169-319997	838
75169-320131	710
75169-320692	754
75169-320694	788
75169-320997	838
75169-321131	710
75169-321692	821
75169-321694	788
75169-321997	838
75169-322692	821
75169-322694	942
75169-322997	760
75169-323692	818
75169-323694	896
75169-323997	760
75169-324694	896
75169-324997	826
75169-325694	892
75169-325997	831
75169-326692	872
75169-326694	916
75169-326997	830
75169-327131	698
75169-327692	872
75169-327694	916
75169-327997	830
75169-328131	699
75169-328692	870
75169-328694	899

CODE	PAGE
75169-328997	820
75169-329131	699
75169-329692	870
75169-329694	898
75169-329997	820
75169-330131	704
75169-330692	870
75169-330694	920
75169-330997	820
75169-331131	704
75169-331692	868
75169-331694	902
75169-331997	820
75169-332131	702
75169-332692	868
75169-332694	900
75169-332997	838
75169-333131	702
75169-333692	832
75169-333694	768
75169-334131	706
75169-334692	832
75169-334694	762
75169-335131	706
75169-335692	833
75169-335694	766
75169-336131	706
75169-336692	833
75169-336694	752
75169-337131	708
75169-337692	833
75169-337694	752
75169-338131	708
75169-338692	833
75169-338694	750
75169-339131	696
75169-339692	850
75169-339694	750
75169-340131	696
75169-340694	750

CODE	PAGE
75169-341131	700
75169-341694	750
75169-342131	700
75169-342694	760
75169-343131	700
75169-343694	778
75169-343997	880
75169-344131	716
75169-344694	926
75169-344997	880
75169-345131	716
75169-345692	790
75169-345694	926
75169-346131	716
75169-346692	814
75169-346694	784
75169-347131	698
75169-347692	816
75169-347694	812
75169-348131	296
75169-348692	850
75169-348694	848
75169-349692	850
75169-349694	848
75169-350694	786
75169-351694	990
75169-352694	936
75169-353694	894
75169-354694	894
75169-355694	798
75169-355695	810
75169-356694	800
75169-357694	798
75169-358694	936
75169-358997	944
75169-359694	936
75169-359695	810
75169-359997	932
75169-360694	958
75169-360997	932

CODE	PAGE
75169-361694	958
75169-361997	773
75169-362694	959
75169-362997	773
75169-363694	804
75169-363997	936
75169-364694	804
75169-364997	841
75169-365694	918
75169-365997	841
75169-366694	918
75169-366997	841
75169-367694	918
75169-367997	841
75169-368694	918
75169-368997	840
75169-369694	946
75169-369997	840
75169-370694	946
75169-370997	840
75169-371694	812
75169-371997	840
75169-372694	782
75169-373694	910
75169-374694	794
75169-381121	621
75169-382121	621
75169-383121	621
75169-384121	620
75169-385121	620
75169-386121	620
75169-387121	882
75169-388121	882
75169-389121	882
75169-390121	882
75169-396694	734
75169-397694	736
75169-398694	734
75169-399694	736
75169-400694	796

CODE	PAGE
75169-401694	796
75169-402694	796
75169-403694	796
75169-404694	688
75169-405694	686
75169-406694	684
75169-407694	682
75169-408694	690
75169-409694	690
75169-410694	678
75169-411694	680
75169-412694	680
75169-413694	674
75169-414694	674
75169-415694	676
75169-416694	676
75169-417694	692
75169-418694	774
75169-427271	1014
75169-428271	1014
75169-429271	1014
75169-430271	1014
75169-431271	1014
75169-432271	1014
75169-433271	1014
75169-434271	1014
75169-435271	1014
75169-436271	1014
75169-437271	1014
75169-438271	1014
75169-439271	1014
75169-440271	1014
75169-441271	1014
75169-442271	1014
75169-443271	1014
75169-444271	1014
75169-445271	1015
75169-446271	1015
75169-665772	866
75169-666772	866

CODE	PAGE
75169-667772	864
75169-668772	864
75169-669772	862
75169-670772	862
75169-671772	860
75169-672772	860
75169-673772	930
75169-674772	930
75169-675772	802
75169-676772	802
75169-677772	950
75169-678772	952
75169-679772	954
75169-680772	956
75169-681772	904
75169-682772	904
75169-683772	906
75169-684772	906
75169-685772	908
75169-686772	908
75169-687772	890
75169-688772	890
75169-689772	888
75169-690772	888
77161-128164	307, 313
77161-131164	307
77161-133164	305, 311
77161-135164	307
77161-147164	307
77161-597640	1090
77161-598640	1090
77161-599640	1090
77161-600640	1090
78000-001724	170
78000-002724	170
78000-360618	1082
78000-361618	1082
78000-362618	1082
78000-363618	1082
78000-364016	134

CODE	PAGE
78000-365016	135
78000-366016	134
78000-367016	134
78000-368016	144
78000-369016	144
78000-370016	144
78000-371016	134
78000-372016	135
78000-378016	135
78000-381016	144
78000-382016	144
78000-383016	135
78000-384016	135
78000-385016	134
78000-386016	134
78000-388016	134
78000-389016	134
78000-410663	166
78000-420016	166
78000-421016	166
78000-424019	314
78000-425016	166
78000-470663	160
78000-472019	164
78000-473019	164
78000-476019	164
78000-504019	164
78000-511019	1075
78000-515016	145
78000-516016	135
78000-528016	166
78000-529016	135
78000-530016	144
78000-530019	1077
78000-531016	135
78000-531019	1077
78000-532016	144
78000-532663	160
78000-533016	145
78000-536016	167

CODE	PAGE
78000-539016	167
78000-541016	167
78000-542016	163
78000-543016	167
78000-557663	166
78000-562719	132
78000-564719	132
78000-565719	133
78000-566719	133
78000-567719	133
78000-568719	133
78000-569719	133
78000-570719	133
78000-588016	167
78000-589016	144
78000-589719	140
78000-590016	167
78000-590719	140
78000-591016	167
78000-591719	140
78000-592719	140
78000-593719	141
78000-594719	141
78000-595016	167
78000-595663	139, 530
78000-595719	141
78000-596016	167
78000-597663	165
78000-598663	163
78000-599663	146
78000-605719	140
78000-606719	140
78000-607719	140
78000-608719	140
78000-609719	141
78000-610719	141
78000-611719	141
78000-614719	132
78000-615719	133
78000-616719	133

Product finder

CODE	PAGE
78000-617719	132
78000-618719	132
78000-619719	132
78000-620719	132
78000-621719	132
78000-623719	132
78000-624719	132
78000-625719	132
78000-626719	132
78000-627719	132
78000-628719	133
78000-629719	133
78000-633734	131
78000-634255	139
78000-634734	130
78000-635255	139, 530
78000-637734	130
78000-639117	132
78000-646126	149
78000-646255	139
78000-647126	105
78000-653255	130
78000-660255	139, 530
78000-662255	130
78000-666255	146
78000-667255	146
78000-668255	138
78000-669255	138
78000-670255	138
78000-671255	138
78000-672255	139
78000-673255	130
78000-674255	130
78000-675255	130
78000-676255	131
78000-677255	131
78000-678255	130
78000-679255	131
78000-683255	138
78000-684140	1061

CODE	PAGE
78000-684255	138
78000-685255	138
78000-686255	138
78000-693255	168
78000-694255	168
78000-695255	168
78000-696255	168
78000-697255	162
78000-698255	162
78000-699255	168
78000-700255	169
78000-703255	169
78000-711112	1089
78000-715183	1087
78000-716183	1087
78000-717183	1087
78000-718183	1087
78000-722126	154
78000-723126	154
78000-732112	1088
78000-739719	143
78000-740719	143
78000-741719	143
78000-741720	165
78000-742719	143
78000-742720	161
78000-743719	143
78000-743720	161
78000-744719	143
78000-744720	145
78000-745719	143
78000-745720	145
78000-746719	143
78000-746720	163
78000-748719	143
78000-749719	143
78000-751019	1079
78000-753019	1075
78000-754019	1075
78000-755019	1077

CODE	PAGE
78000-756019	1077
78000-757019	1079
78000-758019	1079
78000-759019	1081
78000-760019	1081
78000-761019	1081
78000-762019	164
78000-763019	145
78000-771019	1080
78000-783019	1079
78000-784019	1081
78000-784112	1089
78000-785019	1077
78000-790019	165
78000-793112	1088
78000-797112	309
78000-798112	309
78000-802112	1086
78000-803112	1086
78000-804112	1086
78000-805112	1086
78000-806112	1086
78000-807112	1086
78000-808112	1086
78000-809112	1086
78000-810112	1086
78000-811112	1086
78000-811741	136
78000-812112	1086
78000-812741	137
78000-813112	1086
78000-813741	136
78000-814112	1088
78000-814741	137
78000-815112	1088
78000-815741	136
78000-816112	1089
78000-816741	137
78000-817112	1089
78000-817741	136

CODE	PAGE
78000-818741	137
78001-033719	68
78001-034719	68
78001-037719	74
78001-038719	74
78001-039719	99
78001-040719	78
78001-041719	78
78001-042719	80
78001-043719	80
78001-044719	87
78001-045719	87
78001-046719	99
78001-047719	98
78001-048719	98
78001-049719	78
78001-050719	80
78001-051719	69
78001-052719	69
78001-053719	75
78001-056719	75
78001-057719	79
78001-058719	79
78001-059719	80
78001-060719	86
78001-061719	86
78001-067719	84
78001-072719	72
78001-074719	84
78001-075719	84
78001-076719	99
78001-079719	73
78001-080719	73
78001-081719	98
78001-082719	98
78001-083719	99
78001-098719	82
78001-099719	71
78001-100719	87
78001-101719	72

CODE	PAGE
78001-102719	84
78001-103719	84
78001-104719	68
78001-105719	68
78001-106719	68
78001-107719	68
78001-109719	70
78001-110719	70
78001-111719	71
78001-112719	74
78001-113719	74
78001-114719	74
78001-115719	74
78001-116719	78
78001-117719	78
78001-118719	78
78001-119719	82
78001-120719	82
78001-121719	82
78001-122719	87
78001-123719	87
78001-124719	87
78001-145719	70
78001-147719	71
78001-155719	82
78001-156719	82
78001-161719	70
78001-162719	72
78001-163719	72
78001-164719	73
78001-165719	82
78001-166719	82
78001-167719	84
78001-168719	84
78001-169719	84
78001-228123	88
78001-229123	88
78001-230123	88
78001-231123	88
78001-232123	94

CODE	PAGE
78001-233123	94
78001-234123	94
78001-235123	94
78001-236123	99
78001-237123	71
78001-238123	69
78001-239123	75
78001-240123	73
78001-241123	88
78001-242123	94
78001-243123	68
78001-244123	68
78001-245123	69
78001-246123	74
78001-247123	74
78001-248123	75
78001-249123	68
78001-250123	68
78001-251123	74
78001-252123	74
78001-253123	78
78001-254123	78
78001-255123	78
78001-256123	78
78001-257123	79
78001-258123	79
78001-259123	87
78001-260123	87
78001-261123	87
78001-262123	87
78001-263123	86
78001-264123	86
78001-265123	88
78001-266123	88
78001-267123	94
78001-268123	94
78001-269123	102
78001-269126	104
78001-270126	104
78001-274123	88

CODE	PAGE
78001-275123	88
78001-276123	88
78001-277123	88
78001-278123	88
78001-279123	94
78001-280123	94
78001-281123	94
78001-282123	94
78001-283123	94
78001-284123	90
78001-285123	90
78001-286123	90
78001-287123	90
78001-288123	90
78001-289123	92
78001-290123	92
78001-291123	92
78001-292123	92
78001-293123	92
78001-294123	99
78001-306019	106
78001-307019	106
78001-308019	106
78001-309019	106
78001-310019	106
78001-311019	106
78001-600719	80
78001-606719	73
78001-607719	75
78001-611719	70
78001-622126	76
78001-623126	76
78001-624126	76
78001-625126	76
78001-626126	69
78001-627126	77
78001-631734	157
78001-634126	102
78001-635126	46
78001-636126	46

CODE	PAGE
78001-637126	46
78001-638126	47
78001-639126	47
78001-640126	47
78001-641126	48
78001-642126	48
78001-643126	48
78001-644126	48
78001-645126	48
78001-646126	71
78001-647126	72
78001-648126	73
78001-649126	75
78001-650126	77
78001-651126	79
78001-652126	82
78001-653126	82
78001-654126	84
78001-655126	84
78001-656126	86
78001-657126	91
78001-658126	91
78001-659126	91
78001-660126	91
78001-661126	91
78001-662126	93
78001-663126	93
78001-664126	93
78001-665126	93
78001-666126	93
78001-670126	77
78001-682734	158
78001-693724	96
78001-694115	53
78001-694724	96
78001-695115	52
78001-695724	60
78001-696115	53
78001-696724	60
78001-697115	53

Product finder

CODE	PAGE
78001-697724	60
78001-698115	53
78001-698724	61
78001-699115	52
78001-699724	61
78001-700115	53
78001-700724	61
78001-701724	62
78001-702724	62
78001-703724	62
78001-704724	63
78001-705724	63
78001-706724	63
78001-710724	64
78001-711724	64
78001-712724	64
78001-713724	65
78001-714724	65
78001-715724	65
78001-716724	66
78001-717724	66
78001-718724	66
78001-719724	67
78001-720724	67
78001-721724	67
78001-725724	100
78001-726724	100
78001-727724	40
78001-728724	40
78001-729724	41
78001-730724	41
78001-731724	41
78001-732724	42
78001-733724	42
78001-734724	42
78001-735724	43
78001-736724	43
78001-737724	43
78001-738724	58
78001-739724	58

CODE	PAGE
78001-740724	58
78001-741724	59
78001-742724	59
78001-743724	59
78001-744724	56
78001-745724	56
78001-746724	56
78001-747724	56
78001-748724	57
78001-749724	57
78001-750724	57
78001-751724	57
78001-752724	57
90004-029126	105
90004-029698	156
90004-030126	105
90004-031698	156
90004-032698	152
90004-033698	153
90004-034698	156
90004-037698	97, 152
90004-039698	97, 152
90004-043698	157

Q-CERT

ΠΙΣΤΟΠΟΙΗΤΙΚΟ/CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 9001 quality management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

VK Hellas Electric S.A. - Vaios Karakostas S.A.

8, ARISTOTELOUS STR., GR-17778,
TAVROS, ATHENS, GREECE

with a scope of:

Elaboration of Illumination Studies. Wholesale & Retail Sale of Illumination & Electrical Equipment.

has established a quality management system that is in conformance with the International Standard

EN ISO 9001:2015

June 20th, 2019	**June 21st, 2016**
Certification Period Ending	**Initial Certification Date**
June 21st, 2016	
Certification Date	**IAF/EA Subsector: 29.3, 34.1**
	For the QMSCERT Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.
For information concerning the validity of the certificate, you can visit the site www.qmscert.com

Q CERT
Inspection - Certification

IAF

ESYD

QMSCERT® N. 210616-1 Rev.1

MS Certification Cert. No. 110-6

Q-CERT

ΠΙΣΤΟΠΟΙΗΤΙΚΟ/CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 14001 environmental management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

VK Hellas Electric S.A. - Vaios Karakostas S.A.

8, ARISTOTELOUS STR., GR-17778,
TAVROS, ATHENS, GREECE

with a scope of:

Elaboration of Illumination Studies. Wholesale & Retail Sale of Illumination & Electrical Equipment.

has established an environmental management system that is in conformance with the International Standard

EN ISO 14001:2015

September 11th, 2020	**September 12th, 2017**
Certification Period Ending	**Initial Certification Date**
September 12th, 2017	
Certification Date	**For the QMSCERT Board**

NACE code: 46.69, 71.12

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.
For information concerning the validity of the certificate, you can visit the site www.qmscert.com

CERT
Inspection - Certification

IAF

ESYD

QMSCERT® No 120917-6 Rev.1

MS Certification Cert. No. 110-6

CERTIFICATE
Q-CERT

Q-CERT, an accredited provider of third-party system certification attests that:

VK LEADING LIGHT - VAIOS I. KARAKOSTAS S.A.

8, ARISTOTELOUS STR., GR-17778, TAVROS, ATHENS, GREECE

with a scope of:

Elaboration of Illumination Studies. Wholesale & Retail Sale of Illumination & Electrical Equipment

has established an
OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM
that is in conformance with the requirements of the International Standard

ISO 45001:2018

August 31, 2023	**September 01, 2020**
Certification Period Ending	**Initial Certification Date**
September 01, 2020	
Certification Date	**For Q-CERT's Board**

IAF/EA Sector: 29, 34

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.
For information concerning the validity of the certificate, you can visit the site www.qmscert.com

Certificate No: 010920-3

MS Certification Cert. No. 110-6

QMSCERT Ltd 26th OCTOBER Str.90 – GR 546 27 – THESSALONIKI - HELLAS

Q-CERT

VK Leading Light *2024 2025* TECHNICAL OUTDOOR + LED LAMPS

Inside this vessel there are creatures of light living and breathing, while travelling the world. This space is a field of practising the art of imagination, so take the time to test your skills. There are single travellers, couples, and entire families travelling all together, creating little communities, and awaiting for you to meet them. They come in all shapes and sizes and are all available and open for discussion with you, about the wonders you can achieve together.

A 8 Aristotelous St, Tavros, 177 78 Athens, Greece **T** +30 210 99 69 610-11 +30 210 34 58 072
+30 210 34 58 075 **F** +30 210 99 58 374 **E** info@vkleadinglight.gr
W vkleadinglight.gr